









SLOSE44A - OCTOBER 2019-REVISED MARCH 2020

**AFE7700** 

# AFE7700 Quad-Channel General Purpose RF Transceiver

#### 1 Features

- Quad transmitters based on direct up-conversion architecture:
  - Up to 600 MHz of RF transmitted bandwidth per chain
- Quad receivers based on 0-IF down-conversion architecture:
  - Up to 200 MHz of RF received bandwidth per chain
- · Feedback chain based on RF sampling ADC:
  - Up to 600 MHz of RF received bandwidth
- RF frequency range: 600 MHz to 6 GHz
- Four wideband fractional-N PLL, VCO for TX and RX LO
- Dedicated integer-N PLL, VCO for data converters clock generation
- JESD204B and JESD204C SerDes interface support:
  - 8 SerDes transceivers up to 29.5 Gbps
  - 8b/10b and 64b/66b encoding
  - 16-bit, 12-bit, 24-bit and 32-bit formatting
  - Subclass 1 multi-device synchronization
- Package: 17-mm x 17-mm FCBGA, 0.8-mm pitch

# 2 Applications

- Phased Array Radar
- Defense Radio
- Wireless Communications Test
- Vector Signal Transceiver (VST)
- Electronic Warfare

# 3 Description

The AFE7700 device is a high-performance, multichannel transceiver, integrating four direct upconversion transmitter chains, four direct downconversion receiver chains, and two wideband RF sampling digitizing auxiliary chains (feedback paths). The high dynamic range of the transmitter and receiver chains enables high performance wireless transceiver systems.


The low power dissipation and large channel integration of the AFE7700 allows the device to address the power and size constraints of multi-antenna and phased array systems. The wideband and high dynamic range feedback path can assist the Digital Pre-Distortion (DPD) of power amplifiers and IQ correction in the transmitter chain. The fast SerDes speed can reduce the number of lanes required to transfer the data in and out.

#### Device Information<sup>(1)</sup>

PART NUMBER	PACKAGE	BODY SIZE (NOM)				
AFE7700	FCBGA (400)	17.00 mm × 17.00 mm				

For all available packages, see the orderable addendum at the end of the data sheet.

# AFE7700 Block Diagram





# 4 Description (continued)

Each receiver chain of the AFE7700 includes a 28-dB range digital step attenuator (DSA), followed by a wideband passive IQ demodulator, and a baseband amplifier with integrated programmable antialiasing low pass filters, driving a continuous-time sigma-delta ADC. The RX chain can receive an instantaneous bandwidth (IBW) up to 200 MHz. Each receiver channel has two analog peak power detectors and various digital power detectors to assist an external or internal autonomous AGC control for receiver channels, and a RF overload detector for device reliability protection. The integrated QMC (quadrature mismatch compensation) algorithm is capable to continuously monitor and correct for the RX chain I and Q imbalance mismatch without the need to inject any specific signals or perform offline calibration.

Each transmitter chain includes two 14-bit, 3-Gsps IQ DACs, followed by a programmable reconstruction and DAC image rejection filter, an IQ modulator driving a wideband RF amplifier with 39-dB range gain control. The TX chain integrated QMC and LO leakage cancellation algorithms, leveraging the FB path can constantly track and correct for the TX chain IQ mismatch and LO leakage.

Each FB path is based on RF sampling architecture, and includes an input RF DSA driving a 14-bit, 3-Gsps RF ADC. The direct sampling architecture provides an inherently wideband receiver chain and simplifies the calibration of the TX chains impairments. The FB path integrates two independent NCO that allows a fast switching between two observed RF input bands.

The synthesizer section integrates four fractional-N RF PLL that can generate four different RF LO, allowing the device to support up to two different bands, each one configured as two transmitters, two receivers and one feedback paths.

### 5 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

#### Changes from Original (October 2019) to Revision A

Page

Changed the device status From: Advanced Information To: Production Data

Product Folder Links: AFE7700



# 6 Device and Documentation Support

# 6.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 6.2 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

#### 6.3 Trademarks

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

### 6.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

#### 6.5 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

# 7 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Product Folder Links: AFE7700

www.ti.com 29-May-2025

#### PACKAGING INFORMATION

Orderable part number	Status (1)	Material type	Package   Pins	Package qty   Carrier	<b>RoHS</b> (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
AFE7700IABJ	Active	Production	FCBGA (ABJ)   400	90   JEDEC TRAY (5+1)	Yes	SNAGCU   SNAGCU	Level-3-260C-168 HR	-40 to 85	AFE7700
AFE7700IABJ.B	Active	Production	FCBGA (ABJ)   400	90   JEDEC TRAY (5+1)	Yes	SNAGCU	Level-3-260C-168 HR	-40 to 85	AFE7700
AFE7700IALK	Active	Production	FCBGA (ALK)   400	90   JEDEC TRAY (10+1)	No	Call TI	Level-3-220C-168 HR	-40 to 85	AFE7700 SNPB
AFE7700IALK.B	Active	Production	FCBGA (ALK)   400	90   JEDEC TRAY (10+1)	No	Call TI	Level-3-220C-168 HR	-40 to 85	AFE7700 SNPB

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.




# **PACKAGE OPTION ADDENDUM**

www.ti.com 29-May-2025



www.ti.com 23-May-2025

# **TRAY**

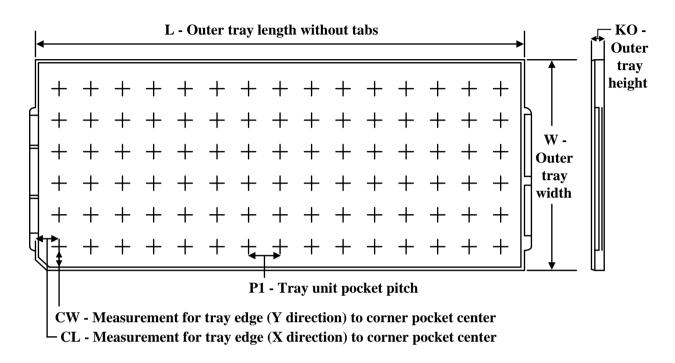


Chamfer on Tray corner indicates Pin 1 orientation of packed units.

#### \*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	Unit array matrix	Max temperature (°C)	L (mm)	W (mm)	Κ0 (μm)	P1 (mm)	CL (mm)	CW (mm)
AFE7700IABJ	ABJ	FCBGA	400	90	6 x 15	150	315	135.9	7620	19.5	21	19.2
AFE7700IABJ.B	ABJ	FCBGA	400	90	6 x 15	150	315	135.9	7620	19.5	21	19.2
AFE7700IALK	ALK	FCBGA	400	90	6 x 15	150	315	135.9	7620	19.5	21	19.2
AFE7700IALK.B	ALK	FCBGA	400	90	6 x 15	150	315	135.9	7620	19.5	21	19.2




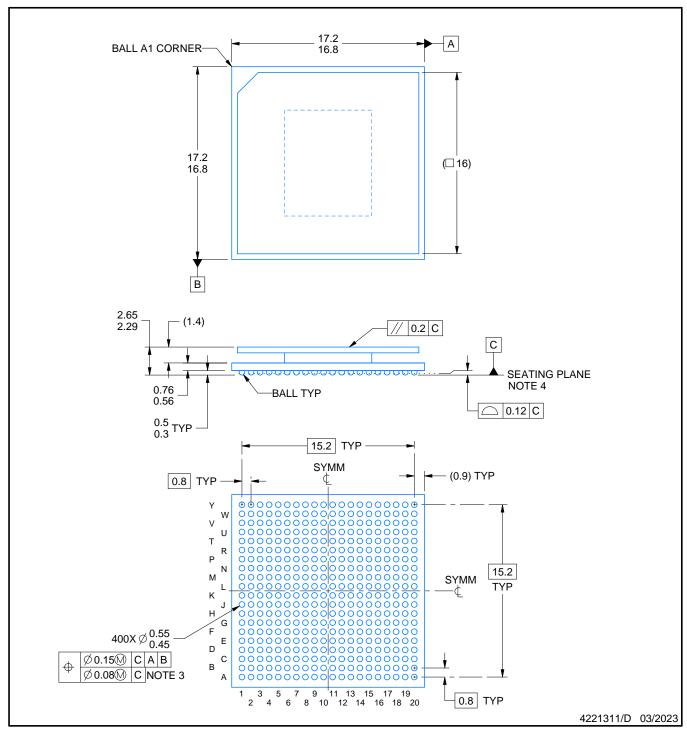

#### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. Dimension is measured at the maximum solder ball diameter, parallel to primary datum C.
- 4. Primary datum C and seating plane are defined by the spherical crowns of the solder balls.
- 5. The lids are electrically floating (e.g. not tied to GND).




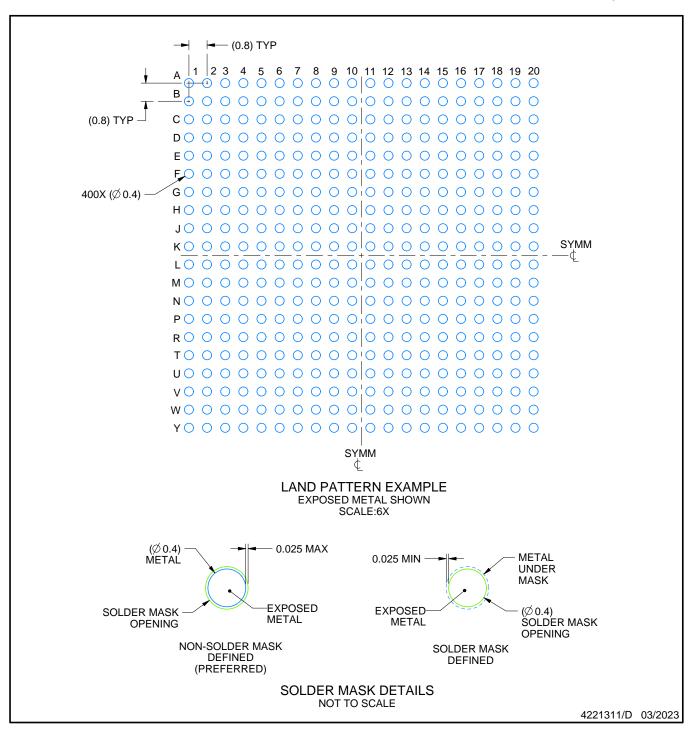

NOTES: (continued)

Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints.For more information, see Texas Instruments literature number SPRU811 (www.ti.com/lit/spru811).



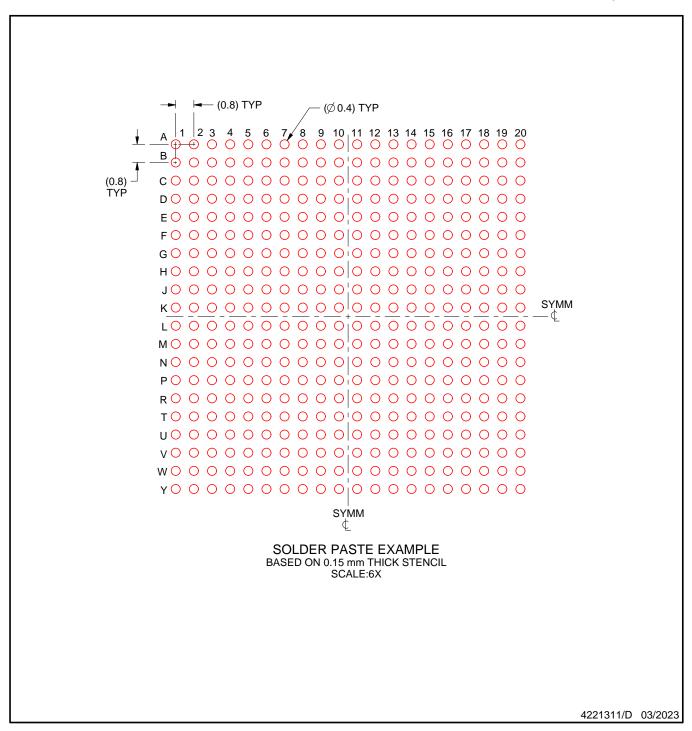


NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.






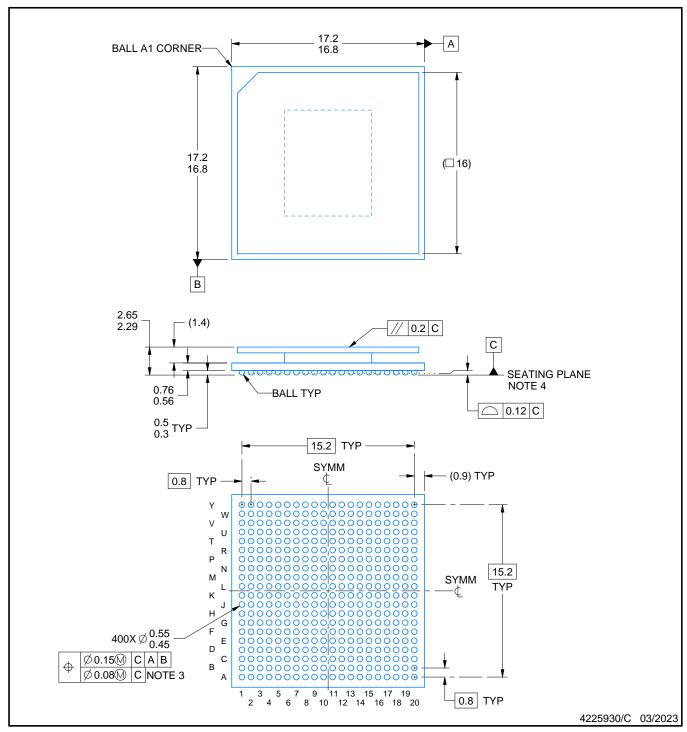

#### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. Dimension is measured at the maximum solder ball diameter, parallel to primary datum C.
- 4. Primary datum C and seating plane are defined by the spherical crowns of the solder balls.
- 5. Pb-Free die bump and SnPb solder ball.
- 6. The lids are electrically floating (e.g. not tied to GND).




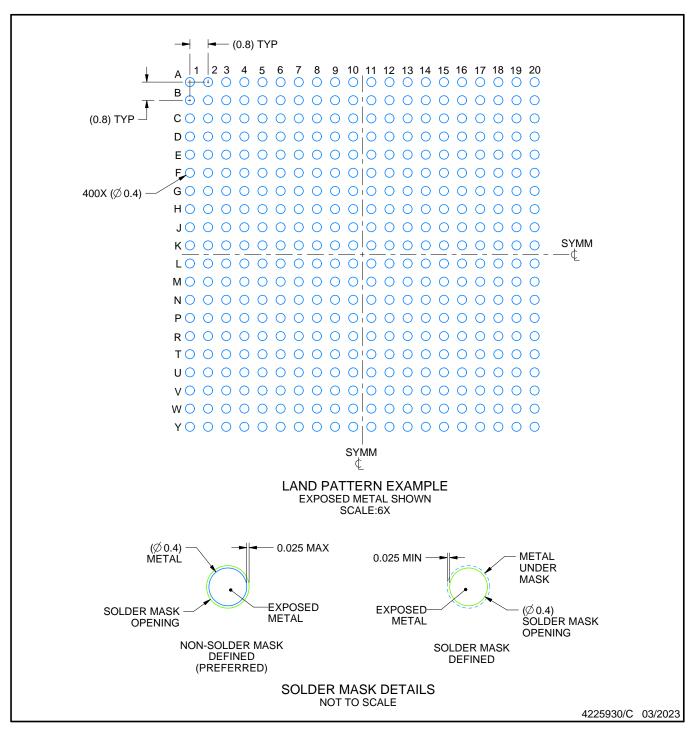

NOTES: (continued)

Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints.For more information, see Texas Instruments literature number SPRU811 (www.ti.com/lit/spru811).



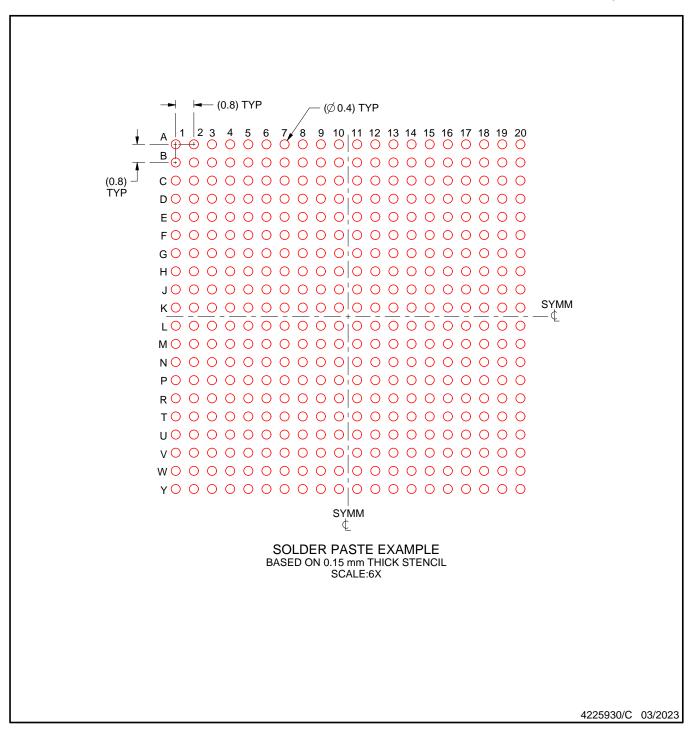

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2025. Texas Instruments Incorporated