

# CC35xE 2.4GHz SimpleLink™ Wi-Fi 6 and Bluetooth® Low Energy Wireless MCU

## 1 Features

### Microcontroller

- Powerful 160MHz Arm® Cortex®-M33 processor with FPU, TrustZone®, and AI acceleration
- High-speed quad-SPI and octal-SPI for XiP flash with on-the-fly decryption
- Flexible configuration of low-latency TCM (up to 32KB) and Cache (32KB or 64KB) for improved code execution performance
- Over 1MB embedded SRAM including 128KB TCM for Wi-Fi, BLE, networking, and application data

### Peripherals

- Up to 38 I/Os with flexible multiplexing options
- 8 × general-purpose timers and pulse-width modulation (PWM)
- 2 × universal asynchronous receiver-transmitter (UART)
- 2 × Serial Peripheral Interface (SPI)
- 2 × inter-integrated circuit (I²C)
- Inter-IC sound (I²S)
- Pulse density modulation (PDM)
- Secure digital and multimedia card (SD/MMC)
- Secure digital input output (SDIO) 2.0
- Controller area network (CAN) 2.0
- 8-channel, 12-bit analog-to-digital converter (ADC)

### System Services

- Direct memory access (DMA)
- One-time-programmable memory (OTP)
- Real-time clock (RTC) and watchdog timer (WDT)

### Radio

- Wi-Fi 6 (802.11ax)
  - 2.4GHz, single-stream 20MHz channels with application throughput up to 20Mbps (UDP)
  - Compatible with IEEE 802.11 b/g/n/ax
    - Orthogonal frequency-division multiple access (OFDMA)
    - Target wake time (TWT)
    - Trigger frames
    - Basic service set (BSS) color
  - Integrated PA for a complete WLAN system with up to 20dBm output power at 1 DSSS
  - Role support: STA, softAP with up to four stations, Wi-Fi direct, multi-role AP + STA
  - Support for personal and enterprise Wi-Fi security: WPA and WPA2 PSK, WPA2 Enterprise, WPA3 personal or enterprise

- Wi-Fi TX Power:
  - 20dBm at 1 DSSS
  - 16dBm at 54 OFDM
- Wi-Fi RX Sensitivity:
  - –98.6dBm at 1 DSSS
  - –77.2dBm at 54 OFDM
- Bluetooth® low energy
  - Bluetooth low energy 5.4 certified stack
  - Supports long-range and high-speed PHYs (up to 2Mbps)

### Security Features

- ARM TrustZone
- Hardware security module supporting all of the following:
  - ECC, RSA, AES, SHA2/3, MD5, CRC 16/32, and TRNG
  - Secure key storage
- Initial secure programming
- Secure boot
- Software IP and cloning protection
- Debug security through JTAG and debug port lock
- OTP with the ability to program root-of-trust public key
- Secure over-the-air (OTA) updates
- Anti-rollback protection

### Clock Source

- 52MHz crystal
- Internal 32.768kHz low-frequency oscillator, external XTAL, or slow clock options

### Power Management

- Support for 3.3V and 1.8V on multiple I/O domains
- Supplies: VPA: 3.3V, VMAIN: 1.8V, VIO: 1.8/3.3V

### Key Benefits

- Complete software development kit with open-source TCP/IP and TLS stacks
- Operating temperature: –40°C to +105°C
- Support for 3-wire PTA coexistence interface for use with external 2.4GHz radios (for example Thread or Zigbee®)
- Antenna selection capability

### Package

- Easy to design with 56-pin, 7mm × 7mm quad flat no leaded (QFN) package

## 2 Applications

- [Building Automation](#)



## CC3501E

SWRS309A – SEPTEMBER 2024 – REVISED JANUARY 2025

- Thermostat
- HVAC motor control
- Wireless security camera
- Video Doorbell
- Garage door system
- Appliances
  - Refrigerator and freezer
  - Oven
  - Washer and dryer
  - Residential water heater
  - Air conditioner indoor unit
  - Coffee machine
  - Vacuum robot
  - Robotic lawn mower
- Grid Infrastructure
  - Electricity meter
  - String Inverter
- Micro Inverter
- Battery energy storage systems
- EV charging infrastructure
- Medical
  - Infusion pump
  - Electronic hospital bed and bed control
  - Multiparameter patient monitor
  - CPAP machine
  - Telehealth systems
  - Ultrasound scanner
  - Ultrasound smart probe
  - Electric toothbrush
- Retail automation and payment
- Connected peripherals and printers
- Factory automation and control
- Asset tracking

### 3 Description

The SimpleLink™ Wi-Fi system-on-chip CC35xx family is where affordability meets reliability, enabling engineers to connect more applications with confidence. CC35xx are single-chip Wi-Fi 6 and Bluetooth Low Energy 5.4 wireless microcontrollers (MCUs). The CC3500E and CC3501E are the first dual-band devices in this pin-to-pin compatible family.

- CC3500E: 2.4GHz Wi-Fi 6 wireless MCU
- CC3501E: 2.4GHz Wi-Fi 6 and Bluetooth low energy 5.4 wireless MCU


The CC350xE offers the latest standards from Wi-Fi and BLE while maintaining compatibility with Wi-Fi 4 (802.11 b/g/n) and Wi-Fi 5 (802.11 ac). These CC350xE are the 10th-generation connectivity combo chip from Texas Instruments. As such, the CC350xE is based on proven technology. These devices are an excellent choice to use in cost-sensitive embedded applications with RTOS software. CC350xE brings the efficiency of Wi-Fi 6 to embedded device applications for the Internet of Things (IoT), with a small PCB footprint and highly optimized bill of materials.

**Table 3-1. Device Information**

PART NUMBER	WI-FI 6 2.4GHz SISO	BLUETOOTH LOW ENERGY
CC3500E	✓	
CC3501E	✓	✓

## 4 Functional Block Diagram

The figure below shows a functional block diagram of the CC350xE.

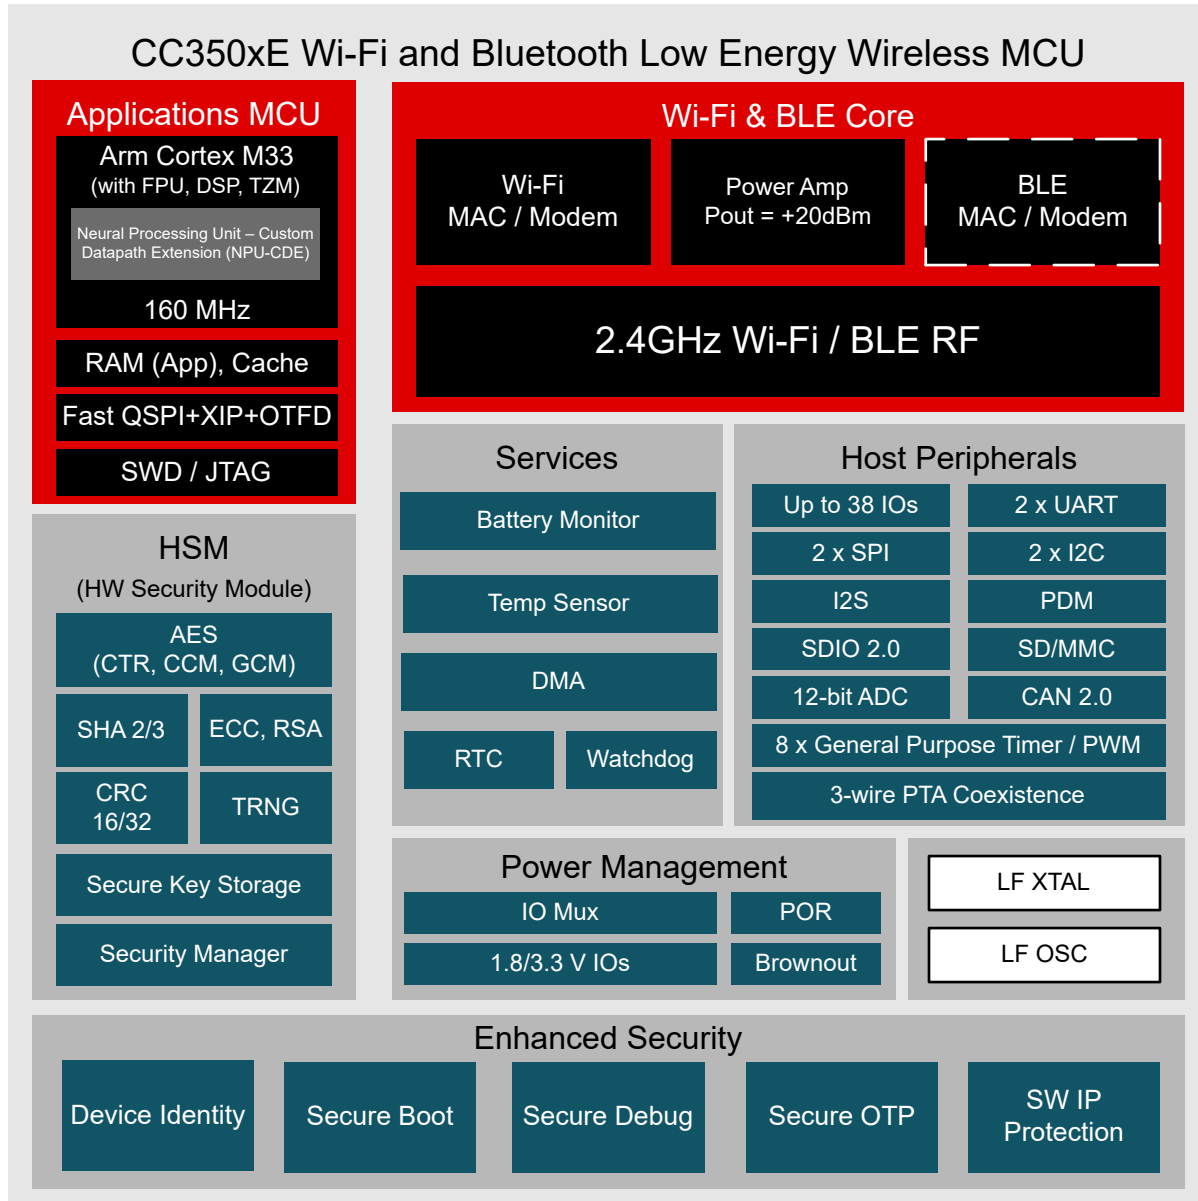

— — — — CC3501E only

**Figure 4-1. CC350xE High-Level System Diagram**

ADVANCE INFORMATION

## 5 Pin Diagram

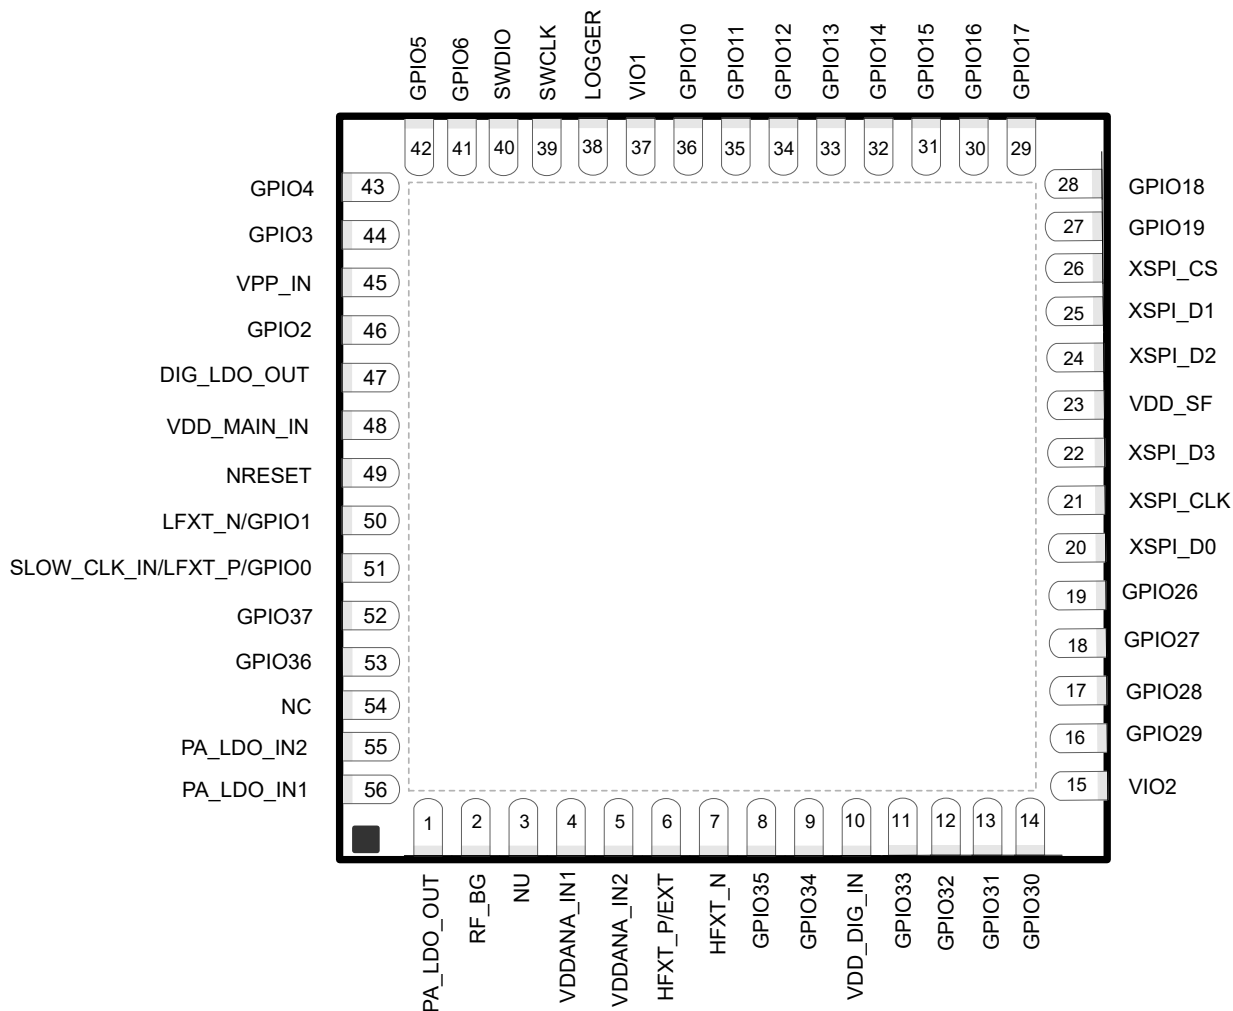


Figure 5-1. CC350xE Pin Diagram

## 6 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop systems are listed below.

### 6.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

### 6.2 Trademarks

SimpleLink™ is a trademark of Texas Instruments.

TI E2E™ is a trademark of Texas Instruments.

Bluetooth® is a registered trademark of Bluetooth SIG.

Arm® and Cortex® are registered trademarks of Arm Limited (or its subsidiaries or affiliates) in the US and/or elsewhere.

TrustZone® is a registered trademark of Arm Limited (or its subsidiaries) in the US and/or elsewhere.

is a registered trademark of Bluetooth SIG, Inc..

Zigbee® is a registered trademark of ZigBee Alliance.

All trademarks are the property of their respective owners.

### 6.3 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

### 6.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 6.5 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 7 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


### Changes from September 1, 2024 to January 1, 2025 (from Revision \* (September 2024) to Revision A (January 2025))

Page

- Updated [Features](#) ..... 1

## 8 Mechanical, Packaging, and Orderable Information


The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

**RSH0056G**

## PACKAGE OUTLINE

**VQFN - 1 mm max height**

PLASTIC QUAD FLATPACK - NO LEAD

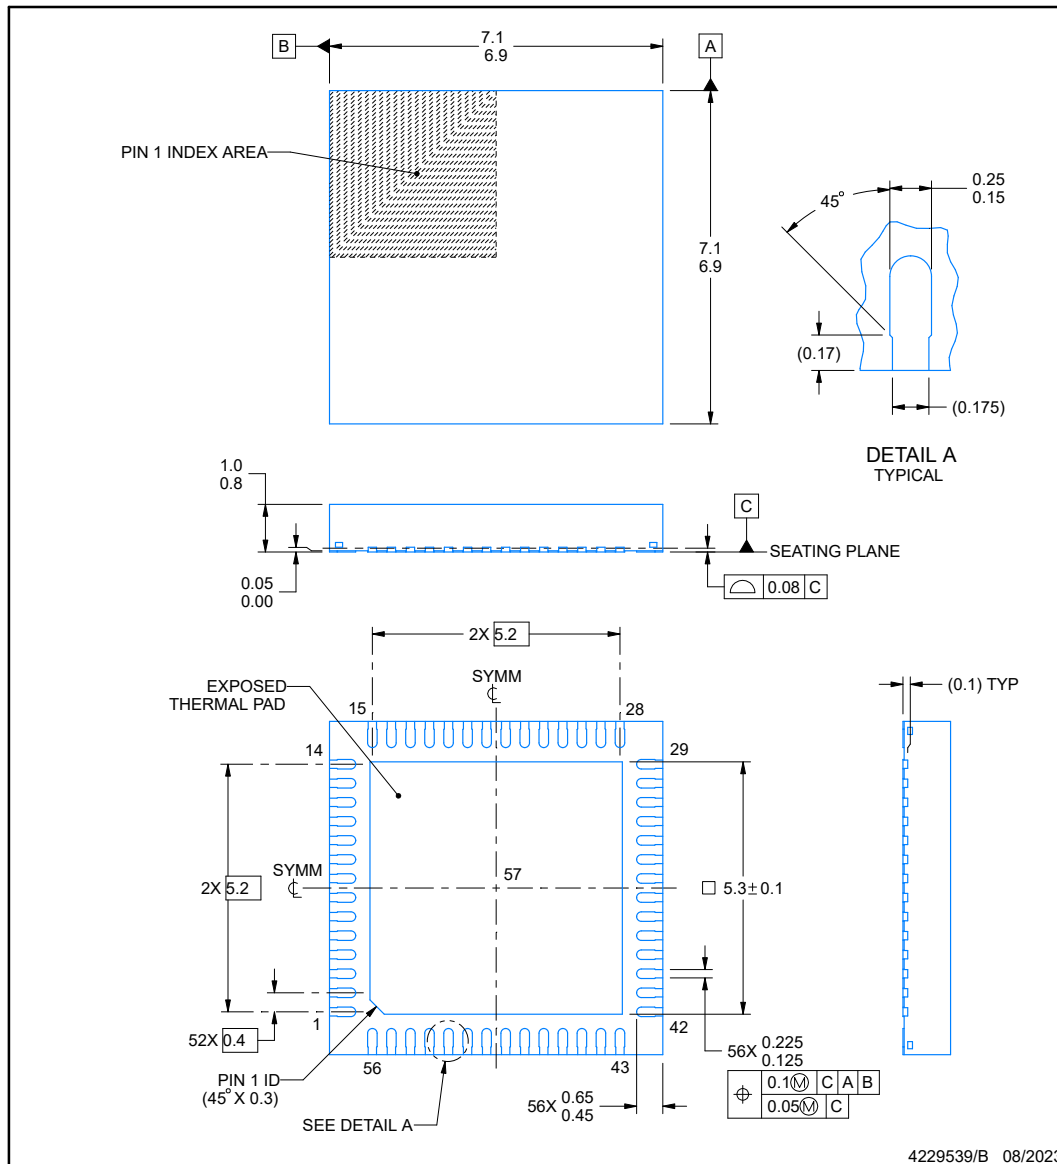

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

**Figure 8-1.**



**VQFN - 1 mm max height**


## ADVANCE INFORMATION



4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sl原因271](http://www.ti.com/lit/sl原因271)).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

**EXAMPLE STENCIL DESIGN****RSH0056G****VQFN - 1 mm max height**

PLASTIC QUAD FLATPACK - NO LEAD

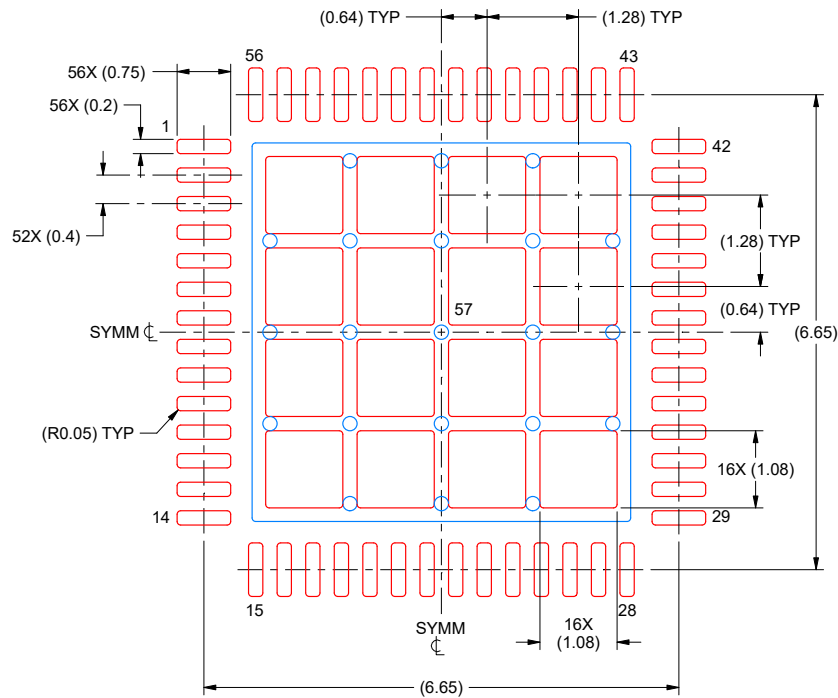

**SOLDER PASTE EXAMPLE**  
 BASED ON 0.100 MM THICK STENCIL  
 SCALE: 12X  
 EXPOSED PAD 57  
 66% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE

4229539/B 08/2023

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

**Figure 8-3.**

## PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">XCC3500ENJARSHR</a>	Active	Preproduction	VQFN (RSH)   56	2500   LARGE T&R	-	Call TI	Call TI	-40 to 105	
XCC3500ENJARSHR.B	Active	Preproduction	VQFN (RSH)   56	2500   LARGE T&R	-	Call TI	Call TI	-40 to 105	
<a href="#">XCC3501ENJARSHR</a>	Active	Preproduction	VQFN (RSH)   56	2500   LARGE T&R	-	Call TI	Call TI	-40 to 105	
XCC3501ENJARSHR.B	Active	Preproduction	VQFN (RSH)   56	2500   LARGE T&R	-	Call TI	Call TI	-40 to 105	

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**RSH 56**

**GENERIC PACKAGE VIEW**

**VQFN - 1 mm max height**

PLASTIC QUAD FLATPACK - NO LEAD

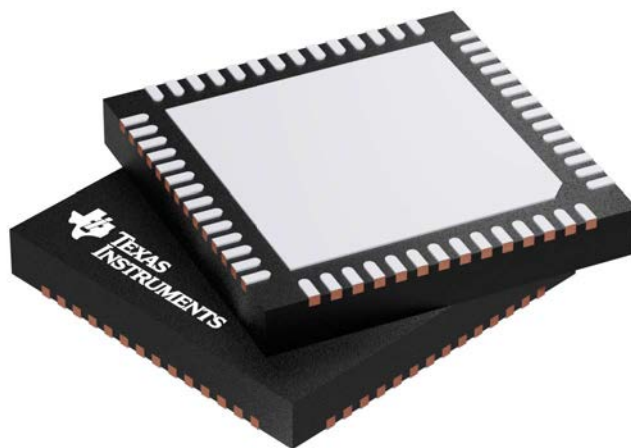

Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

4207513/D

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated