

SNVS369 - APRIL 2005 www.ti.com

LM5109 100V/1A Peak Half Bridge Gate Driver

Check for Samples: LM5109

FEATURES

- Drives Both a High Side and Low Side N-**Channel MOSFET**
- 1A Peak Output Current (1.0A Sink / 1.0A Source)
- **Independent TTL Compatible Inputs**
- **Bootstrap Supply Voltage to 118V DC**
- Fast Propagation Times (27 ns Typical)
- Drives 1000 pF Load with 15ns Rise and Fall **Times**
- **Excellent Propagation Delay Matching (2 ns** Typical)
- Supply Rail Under-voltage Lockout
- **Low Power Consumption**
- Pin Compatible with ISL6700

TYPICAL APPLICATIONS

- **Current Fed Push-pull Converters**
- Half and Full Bridge Power Converters
- **Solid State Motor Drives**
- Two Switch Forward Power Converters


PACKAGE

- SOIC-8
- WSON-8 (4 mm x 4 mm)

DESCRIPTION

The LM5109 is a low cost high voltage gate driver, designed to drive both the high side and the low side N-Channel MOSFETs in a synchronous buck or a half bridge configuration. The floating high-side driver is capable of working with rail voltages up to 100V. The outputs are independently controlled with TTL compatible input thresholds. A robust level shifter technology operates at high speed while consuming low power and providing clean level transitions from the control input logic to the high side gate driver. Under-voltage lockout is provided on both the low side and the high side power rails. The device is available in the SOIC-8 and the thermally enhanced WSON-8 packages.

SIMPLIFIED BLOCK DIAGRAM

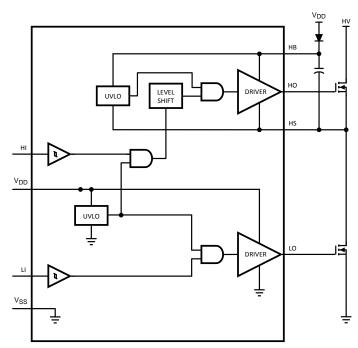

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



SNVS369 – APRIL 2005 www.ti.com



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

CONNECTION DIAGRAMS






Figure 1.

Table 1. PIN DESCRIPTION

| Pi | n No. | | | | | | |
|------|---------------------------|-----------------|---|---|--|--|--|
| SO-8 | WSON- 8 ⁽¹⁾ | Name | Description | Application Information | | | |
| 1 | 1 | V_{DD} | Positive gate drive supply | Locally decouple to $V_{\mbox{\footnotesize SS}}$ using low ESR/ESL capacitor located as close to IC as possible. | | | |
| 2 | 2 | HI | High side control input | The LM5109 HI input is compatible with TTL input thresholds. Unused HI input should be tied to ground and not left open | | | |
| 3 | 3 | LI | Low side control input The LM5109 LI input is compatible with TTL input thresholds. Unused L should be tied to ground and not left open. | | | | |
| 4 | 4 | V _{SS} | Ground reference | All signals are referenced to this ground. | | | |
| 5 | 5 | LO | Low side gate driver output | Connect to the gate of the low side N-MOS device. | | | |
| 6 | 6 | HS | High side source connection | Connect to the negative terminal of the bootstrap capacitor and to the source of the high side N-MOS device. | | | |
| 7 | 7 | НО | High side gate driver output | Connect to the gate of the low side N-MOS device. | | | |
| 8 | 8 | НВ | High side gate driver positive supply rail | Connect the positive terminal of the bootstrap capacitor to HB and the negative terminal of the bootstrap capacitor to HS. The bootstrap capacitor should be placed as close to IC as possible. | | | |

(1) For WSON-8 package it is recommended that the exposed pad on the bottom of the LM5109 be soldered to ground plane on the PCB board and the ground plane should extend out from underneath the package to improve heat dissipation.



www.ti.com SNVS369 – APRIL 2005

ABSOLUTE MAXIMUM RATINGS (1)

If Military/Aerospace specified devices are required, contact the Texas Instruments Sales Office/Distributors for availability and specifications.

| V _{DD} to V _{SS} HB to HS | -0.3V to 18V -0.3V to 18V |
|---|----------------------------------|
| HB to HS | -0.3V to 18V |
| | |
| LI or HI to V _{SS} | $-0.3V$ to V_{DD} +0.3V |
| LO to V _{SS} | $-0.3V$ to V_{DD} +0.3V |
| HO to V _{SS} | V_{HS} =0.3V to V_{HB} +0.3V |
| HS to V _{SS} ⁽²⁾ | -5V to 100V |
| HB to V _{SS} | 118V |
| Junction Temperature | -40°C to +150°C |
| Storage Temperature Range | −55°C to +150°C |
| ESD Rating HBM ⁽³⁾ | 2 kV |

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the component may occur. Operating Ratings are conditions under which operation of the device is specified. Operating Ratings do not imply specified performance limits. For specified performance limits and associated test conditions, see the Electrical Characteristics tables.
- (2) In the application the HS node is clamped by the body diode of the external lower N-MOSFET, therefore the HS voltage will generally not exceed -1V. However in some applications, board resistance and inductance may result in the HS node exceeding this stated voltage transiently. If negative transients occur on HS, the HS voltage must never be more negative than V_{DD} 15V. For example, if V_{DD} = 10V, the negative transients at HS must not exceed -5V.
- (3) The human body model is a 100 pF capacitor discharged through a 1.5kΩ resistor into each pin. Pin 6, Pin 7 and Pin 8 are rated at 500V.

RECOMMENDED OPERATING CONDITIONS

| V_{DD} | 8V to 14V |
|----------------------|-------------------------------|
| HS ⁽¹⁾ | -1V to 100V |
| НВ | V_{HS} +8V to V_{HS} +14V |
| HS Slew Rate | < 50 V/ns |
| Junction Temperature | −40°C to +125°C |

⁽¹⁾ In the application the HS node is clamped by the body diode of the external lower N-MOSFET, therefore the HS voltage will generally not exceed -1V. However in some applications, board resistance and inductance may result in the HS node exceeding this stated voltage transiently. If negative transients occur on HS, the HS voltage must never be more negative than V_{DD} - 15V. For example, if V_{DD} = 10V, the negative transients at HS must not exceed -5V.

ELECTRICAL CHARACTERISTICS

Specifications in standard typeface are for T_J = +25°C, and those in **boldface type** apply over the full **operating junction temperature range**. Unless otherwise specified, V_{DD} = V_{HB} = 12V, V_{SS} = V_{HS} = 0V, No Load on LO or HO.

| Symbol | Parameter | Conditions | Min ⁽¹⁾ | Тур | Max ⁽¹⁾ | Units |
|-------------------|--|-----------------------------|--------------------|------|--------------------|-------|
| SUPPLY | CURRENTS | | | | | |
| I_{DD} | V _{DD} Quiescent Current | LI = HI = 0V | | 0.3 | 0.6 | mA |
| I_{DDO} | V _{DD} Operating Current | f = 500 kHz | | 2.1 | 3.4 | mA |
| I_{HB} | Total HB Quiescent Current | LI = HI = 0V | | 0.06 | 0.2 | mA |
| I_{HBO} | Total HB Operating Current | f = 500 kHz | | 1.6 | 3.0 | mA |
| I _{HBS} | HB to V _{SS} Current, Quiescent | $V_{HS} = V_{HB} = 100V$ | | 0.1 | 10 | μΑ |
| I _{HBSO} | HB to V _{SS} Current, Operating | f = 500 kHz | | 0.5 | | mA |
| INPUT P | INS LI and HI | | · | | | |
| V_{IL} | Low Level Input Voltage Threshold | | 8.0 | 1.8 | | V |
| V_{IH} | High Level Input Voltage Threshold | | | 1.8 | 2.2 | ٧ |
| R_{l} | Input Pulldown Resistance | | 100 | 180 | 500 | kΩ |
| UNDER | VOLTAGE PROTECTION | | | | | |
| V_{DDR} | V _{DD} Rising Threshold | $V_{DDR} = V_{DD} - V_{SS}$ | 6.0 | 6.9 | 7.4 | V |

(1) Min and Max limits are 100% production tested at 25°C. Limits over the operating temperature range are specified through correlation using Statistical Quality Control (SQC) methods. Limits are used to calculate Texas Instrument's Average Outgoing Quality Level (AOQL).



SNVS369 - APRIL 2005 www.ti.com

ELECTRICAL CHARACTERISTICS (continued)

Specifications in standard typeface are for T_J = +25°C, and those in **boldface type** apply over the full **operating junction** temperature range. Unless otherwise specified, $V_{DD} = V_{HB} = 12V$, $V_{SS} = V_{HS} = 0V$, No Load on LO or HO.

| Symbol | Parameter | Conditions | Min ⁽¹⁾ | Тур | Max ⁽¹⁾ | Units |
|---------------------|--------------------------------------|---|--------------------|------|--------------------|-------|
| V_{DDH} | V _{DD} Threshold Hysteresis | | | 0.5 | | V |
| V_{HBR} | HB Rising Threshold | 5.7 | 6.6 | 7.1 | V | |
| V_{HBH} | HB Threshold Hysteresis | | | 0.4 | | V |
| LO GAT | E DRIVER | | | | | |
| V _{OLL} | Low-Level Output Voltage | I_{LO} = 100 mA, V_{OHL} = $V_{LO} - V_{SS}$ | | 0.28 | 0.45 | V |
| V_{OHL} | High-Level Output Voltage | $I_{LO} = -100 \text{ mA}, V_{OHL} = V_{DD} - V_{LO}$ | | 0.45 | 0.75 | V |
| I _{OHL} | Peak Pullup Current | $V_{LO} = 0V$ | | 1.0 | | Α |
| I _{OLL} | Peak Pulldown Current | V _{LO} = 12V | | 1.0 | | Α |
| HO GAT | E DRIVER | | | | | |
| V _{OLH} | Low-Level Output Voltage | I_{HO} = 100 mA, V_{OLH} = V_{HO} V_{HS} | | 0.28 | 0.45 | V |
| V_{OHH} | High-Level Output Voltage | $I_{HO} = -100 \text{ mA}, V_{OHH} = V_{HB} - V_{HO}$ | | 0.45 | 0.75 | V |
| I _{OHH} | Peak Pullup Current | V _{HO} = 0V | | 1.0 | | Α |
| I _{OLH} | Peak Pulldown Current | V _{HO} = 12V | | 1.0 | | Α |
| THERMA | AL RESISTANCE | | | | • | |
| 0 (2) | Lucation to Ambient | SOIC-8 | | 160 | | 0000 |
| $\theta_{JA}^{(2)}$ | Junction to Ambient | WSON-8 (3) | | 40 | | °C/W |

SWITCHING CHARACTERISTICS

Specifications in standard typeface are for T_J = +25°C, and those in **boldface type** apply over the full **operating junction** temperature range. Unless otherwise specified, $V_{DD} = V_{HB} = 12V$, $V_{SS} = V_{HS} = 0V$, No Load on LO or HO.

| Symbol | Parameter | Conditions | Min | Тур | Max | Units |
|-----------------------------------|---|--------------------------|-----|-----|-----|-------|
| LM5109 | | | | | | |
| t _{LPHL} | Lower Turn-Off Propagation Delay (LI Falling to LO Falling) | | | 27 | 56 | ns |
| t _{HPHL} | Upper Turn-Off Propagation Delay (HI Falling to HO Falling) | | | 27 | 56 | ns |
| t _{LPLH} | Lower Turn-On Propagation Delay (LI Rising to LO Rising) | | | 29 | 56 | ns |
| t _{HPLH} | Upper Turn-On Propagation Delay (HI Rising to HO Rising) | | | 29 | 56 | ns |
| t _{MON} | Delay Matching: Lower Turn-On and Upper Turn-Off | | | 2 | 15 | ns |
| t _{MOFF} | Delay Matching: Lower Turn-Off and Upper Turn-On | | | 2 | 15 | ns |
| t _{RC} , t _{FC} | Either Output Rise/Fall Time | C _L = 1000 pF | | 15 | - | ns |
| t _{PW} | Minimum Input Pulse Width that Changes the Output | | | 50 | | ns |


The θ_{JA} is not a constant for the package and depends on the printed circuit board design and the operating conditions. 4 layer board with Cu finished thickness 1.5/1/1/1.5 oz. Maximum die size used. 5x body length of Cu trace on PCB top. 50 x 50mm ground and power planes embedded in PCB. See Application Note AN-1187 (SNOA401).




www.ti.com SNVS369 - APRIL 2005

TYPICAL PERFORMANCE CHARACTERISTICS


V_{DD} Operating Current vs Frequency




Operating Current vs Temperature




Quiescent Current vs Voltage




HB Operating Current vs Frequency



Quiescent Current vs Temperature



Propagation Delay vs Temperature




Copyright © 2005, Texas Instruments Incorporated



SNVS369 – APRIL 2005 www.ti.com

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

LO and HO High Level Output Voltage vs Temperature



Undervoltage Rising Thresholds vs Temperature







Figure 10. Input Thresholds vs Temperature



LO and HO Low Level Output Voltage vs Temperature



Undervoltage Hysteresis vs Temperature



Input Thresholds vs Supply Voltage






Figure 13.



www.ti.com SNVS369 – APRIL 2005

TIMING DIAGRAM







SNVS369 – APRIL 2005 www.ti.com

LAYOUT CONSIDERATIONS

The optimum performance of high and low side gate drivers cannot be achieved without taking due considerations during circuit board layout. Following points are emphasized.

- 1. A low ESR / ESL capacitor must be connected close to the IC, and between V_{DD} and V_{SS} pins and between HB and HS pins to support high peak currents being drawn from VDD during turn-on of the external MOSFET.
- 2. To prevent large voltage transients at the drain of the top MOSFET, a low ESR electrolytic capacitor must be connected between MOSFET drain and ground (V_{SS}).
- 3. In order to avoid large negative transients on the switch node (HS) pin, the parasitic inductances in the source of top MOSFET and in the drain of the bottom MOSFET (synchronous rectifier) must be minimized.
- 4. Grounding Considerations:
 - (a) The first priority in designing grounding connections is to confine the high peak currents from charging and discharging the MOSFET gate in a minimal physical area. This will decrease the loop inductance and minimize noise issues on the gate terminal of the MOSFET. The MOSFETs should be placed as close as possible to the gate driver.
 - (b) The second high current path includes the bootstrap capacitor, the bootstrap diode, the local ground referenced bypass capacitor and low side MOSFET body diode. The bootstrap capacitor is recharged on the cycle-by-cycle basis through the bootstrap diode from the ground referenced V_{DD} bypass capacitor. The recharging occurs in a short time interval and involves high peak current. Minimizing this loop length and area on the circuit board is important to ensure reliable operation.

HS TRANSIENT VOLTAGES BELOW GROUND

The HS node will always be clamped by the body diode of the lower external FET. In some situations, board resistances and inductances can cause the HS node to transiently swing several volts below ground. The HS node can swing below ground provided:

- 1. HS must always be at a lower potential than HO. Pulling HO more than -0.3V below HS can activate parasitic transistors resulting in excessive current to flow from the HB supply possibly resulting in damage to the IC. The same relationship is true with LO and VSS. If necessary, a Schottky diode can be placed externally between HO and HS or LO and GND to protect the IC from this type of transient. The diode must be placed as close to the IC pins as possible in order to be effective.
- 2. HB to HS operating voltage should be 15V or less. Hence, if the HS pin transient voltage is -5V, VDD should be ideally limited to 10V to keep HB to HS below 15V.
- 3. A low ESR bypass capacitor between HB to HS as well as VDD to VSS is essential for proper operation. The capacitor should be located at the leads of the IC to minimize series inductance. The peak currents from LO and HO can be quite large. Any series inductances with the bypass capacitor will cause voltage ringing at the leads of the IC which must be avoided for reliable operation.

www.ti.com 11-Nov-2025

PACKAGING INFORMATION

| Orderable part number | Status | Material type | Package Pins | Package qty Carrier | RoHS | Lead finish/ | MSL rating/ | Op temp (°C) | Part marking |
|-----------------------|--------|---------------|----------------|-----------------------|------|---------------|--------------------|------------------------|--------------|
| | (1) | (2) | | | (3) | Ball material | Peak reflow | | (6) |
| | | | | | | (4) | (5) | | |
| LM5109MA/NOPB | Active | Production | SOIC (D) 8 | 95 TUBE | Yes | NIPDAU SN | Level-1-260C-UNLIM | - | L5109 MA |
| LM5109MA/NOPB.A | Active | Production | SOIC (D) 8 | 95 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | See LM5109MA/NOPB | L5109 MA |
| LM5109MA/NOPB.B | Active | Production | SOIC (D) 8 | 95 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | See LM5109MA/NOPB | L5109 MA |
| LM5109MAX/NOPB | Active | Production | SOIC (D) 8 | 2500 LARGE T&R | Yes | NIPDAU SN | Level-1-260C-UNLIM | - | L5109 MA |
| LM5109MAX/NOPB.A | Active | Production | SOIC (D) 8 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | See LM5109MAX/ NOPB | L5109 MA |
| LM5109MAX/NOPB.B | Active | Production | SOIC (D) 8 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | See LM5109MAX/ NOPB | L5109 MA |

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



PACKAGE OPTION ADDENDUM

www.ti.com 11-Nov-2025

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

PACKAGE MATERIALS INFORMATION

www.ti.com 23-May-2025

TAPE AND REEL INFORMATION





| A0 | Dimension designed to accommodate the component width |
|----|---|
| В0 | Dimension designed to accommodate the component length |
| K0 | Dimension designed to accommodate the component thickness |
| W | Overall width of the carrier tape |
| P1 | Pitch between successive cavity centers |

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

| Device | Package Type | Package Drawing | | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|-----------------|--------------------|---|------|--------------------------|--------------------------|------------|------------|------------|------------|-----------|------------------|
| LM5109MAX/NOPB | SOIC | D | 8 | 2500 | 330.0 | 12.4 | 6.5 | 5.4 | 2.0 | 8.0 | 12.0 | Q1 |

PACKAGE MATERIALS INFORMATION

www.ti.com 23-May-2025



*All dimensions are nominal

| Ì | Device | Device Package Type | | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) | |
|---|----------------|---------------------|---|------|------|-------------|------------|-------------|--|
| ı | LM5109MAX/NOPB | SOIC | D | 8 | 2500 | 367.0 | 367.0 | 35.0 | |

PACKAGE MATERIALS INFORMATION

www.ti.com 23-May-2025

TUBE



*All dimensions are nominal

| Device | Device Package Name | | Pins | SPQ | L (mm) | W (mm) | T (µm) | B (mm) |
|-----------------|---------------------|------|------|-----|--------|--------|--------|--------|
| LM5109MA/NOPB | D | SOIC | 8 | 95 | 495 | 8 | 4064 | 3.05 |
| LM5109MA/NOPB.A | D | SOIC | 8 | 95 | 495 | 8 | 4064 | 3.05 |
| LM5109MA/NOPB.B | D | SOIC | 8 | 95 | 495 | 8 | 4064 | 3.05 |



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES:

- 1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
- 4. This dimension does not include interlead flash.
- 5. Reference JEDEC registration MS-012, variation AA.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025