

LM833-N Dual Audio Operational Amplifier

Check for Samples: LM833-N

FEATURES

Wide Dynamic Range: >140dB

Low Input Noise Voltage: 4.5nV/√Hz

High Slew Rate: 7 V/µs (typ); 5V/µs (Min)

High Gain Bandwidth: 15MHz (typ); 10MHz (Min)

Wide Power Bandwidth: 120KHz

Low Distortion: 0.002% Low Offset Voltage: 0.3mV Large Phase Margin: 60°

Available in 8 Pin VSSOP Package

DESCRIPTION


The LM833-N is a dual general purpose operational amplifier designed with particular emphasis on performance in audio systems.

This dual amplifier IC utilizes new circuit and processing techniques to deliver low noise, high speed and wide bandwidth without increasing external components or decreasing stability. The LM833-N is internally compensated for all closed loop gains and is therefore optimized for all preamp and high level stages in PCM and HiFi systems.

The LM833-N is pin-for-pin compatible with industry standard dual operational amplifiers.

Schematic Diagram

(1/2 LM833-N)

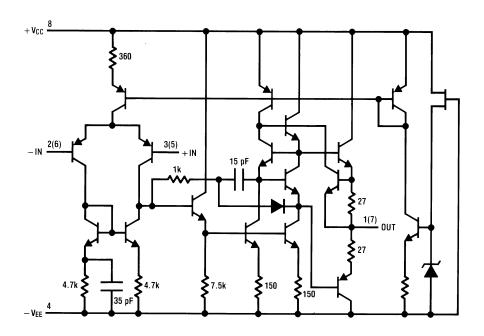

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet. All trademarks are the property of their respective owners.



Connection Diagram

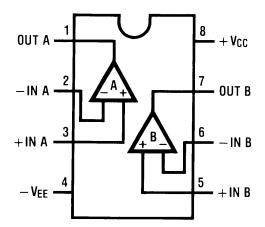


Figure 1. See Package Number D0008A, P0008E or DGK0008A



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

ABSOLUTE MAXIMUM RATINGS(1)(2)

Supply Voltage V _{CC} -V _{EE}	Supply Voltage V _{CC} –V _{EE}							
Differential Input Voltage ⁽³⁾) V _I		±30V					
Input Voltage Range (3) V _{IC}	Input Voltage Range ⁽³⁾ V _{IC}							
Power Dissipation (4) P _D			500 mW					
Operating Temperature Range T _{OPR}								
Storage Temperature Ran	ge T _{STG}		-60 ~ 150°C					
Soldering Information	PDIP Package	Soldering (10 seconds)	260°C					
	Small Outline Package (SOIC and VSSOP)	Vapor Phase (60 seconds)	215°C					
	Infrared (15 seconds)							
ESD tolerance (5)			1600V					

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not ensure specific performance limits. Electrical Characteristics state DC and AC electrical specifications under particular test conditions which ensure specific performance limits. This assumes that the device is within the Operating Ratings. Specifications are not ensured for parameters where no limit is given, however, the typical value is a good indication of device performance.
- (2) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/ Distributors for availability and specifications.
- (3) If supply voltage is less than ±15V, it is equal to supply voltage.
- (4) This is the permissible value at T_A ≤ 85°C.
- (5) Human body model, 1.5 kΩ in series with 100 pF.

Submit Documentation Feedback



DC ELECTRICAL CHARACTERISTICS(1)(2)

 $(T_A = 25^{\circ}C, V_S = \pm 15V)$

Symbol	Parameter	Conditions	Min	Тур	Max	Units
Vos	Input Offset Voltage	$R_S = 10\Omega$		0.3	5	mV
los	Input Offset Current			10	200	nA
I _B	Input Bias Current			500	1000	nA
A _V	Voltage Gain	$R_L = 2 k\Omega$, $V_O = \pm 10V$	90	110		dB
.,	Output Valtage Cuing	$R_L = 10 \text{ k}\Omega$	±12	±13.5		V
V_{OM}	Output Voltage Swing	$R_L = 2 k\Omega$	±12	±13.4		V
V _{CM}	Input Common-Mode Range		±12	±14.0		V
CMRR	Common-Mode Rejection Ratio	V _{IN} = ±12V	80	100		dB
PSRR	Power Supply Rejection Ratio	V _S = 15 ~ 5V, -15 ~ -5V	80	100		dB
Ι _Q	Supply Current	V _O = 0V, Both Amps		5	8	mA

⁽¹⁾ Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not ensure specific performance limits. Electrical Characteristics state DC and AC electrical specifications under particular test conditions which ensure specific performance limits. This assumes that the device is within the Operating Ratings. Specifications are not ensured for parameters where no limit is given, however, the typical value is a good indication of device performance.

AC ELECTRICAL CHARACTERISTICS

 $(T_A = 25^{\circ}C, V_S = \pm 15V, R_L = 2 k\Omega)$

Symbol	Parameter	Conditions	Min	Тур	Max	Units	
SR	Slew Rate	$R_L = 2 k\Omega$	5	7		V/µs	
GBW	Gain Bandwidth Product	f = 100 kHz	10	15		MHz	
V _{NI}	Equivalent Input Noise Voltage (LM833AM, LM833AMX)	RIAA, $R_S = 2.2 \text{ k}\Omega^{(1)}$			1.4	μV	

⁽¹⁾ RIAA Noise Voltage Measurement Circuit

DESIGN ELECTRICAL CHARACTERISTICS

 $(T_A = 25^{\circ}C, V_S = \pm 15V)$

The following parameters are not tested or ensured.


Symbol	Parameter	Conditions	Тур	Units
ΔV _{OS} /ΔT	Average Temperature Coefficient		2	μV/°C
	of Input Offset Voltage			
THD	Distortion	$R_L = 2 k\Omega$, $f = 20~20 kHz$	0.002	%
		$V_{OUT} = 3 \text{ Vrms}, A_V = 1$		
e _n	Input Referred Noise Voltage	$R_S = 100\Omega$, $f = 1 \text{ kHz}$	4.5	nV / √ Hz
i _n	Input Referred Noise Current	f = 1 kHz	0.7	pA / √Hz
PBW	Power Bandwidth	$V_{O} = 27 V_{pp}, R_{L} = 2 k\Omega, THD \le 1\%$	120	kHz
f _U	Unity Gain Frequency	Open Loop	9	MHz
ϕ_{M}	Phase Margin	Open Loop	60	deg
	Input Referred Cross Talk	f = 20~20 kHz	-120	dB


Product Folder Links: LM833-N

⁽²⁾ All voltages are measured with respect to the ground pin, unless otherwise specified.




TYPICAL PERFORMANCE CHARACTERISTICS

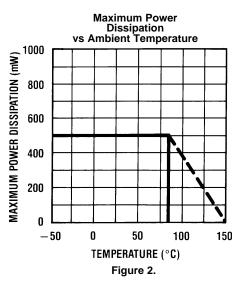






SUPPLY VOLTAGE (\pm V)

Figure 4.

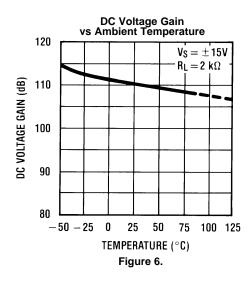

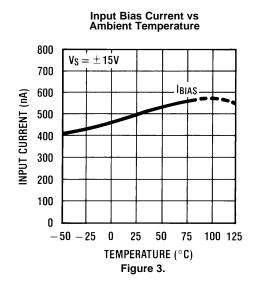


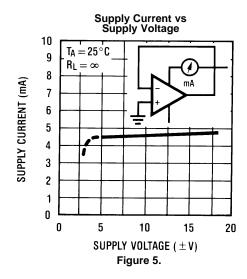


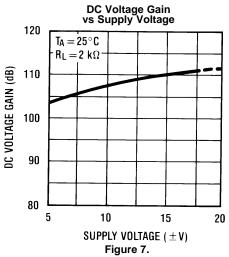






TYPICAL PERFORMANCE CHARACTERISTICS (continued)

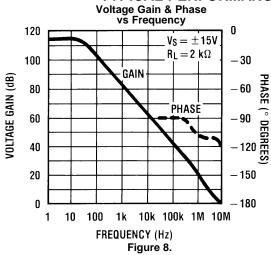


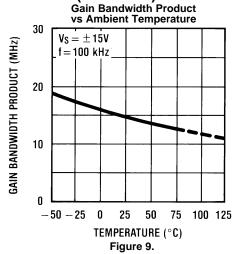

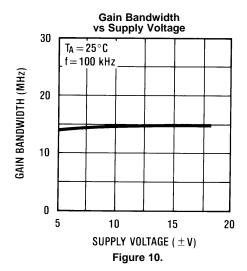

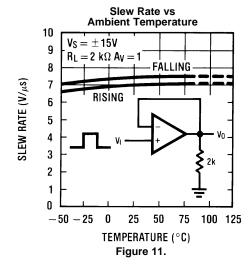

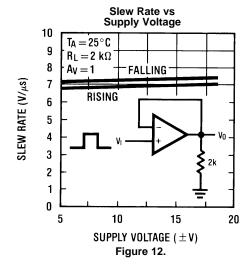


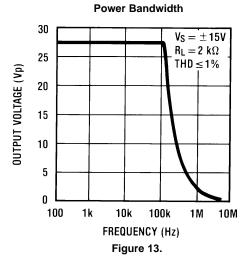






TYPICAL PERFORMANCE CHARACTERISTICS (continued)


Product Folder Links: LM833-N






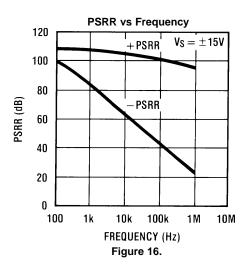

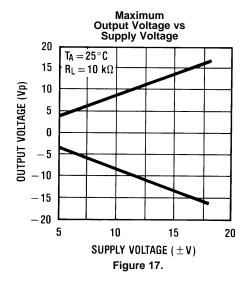


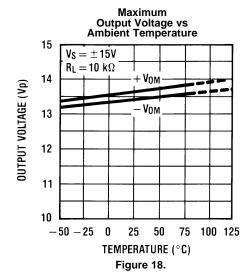


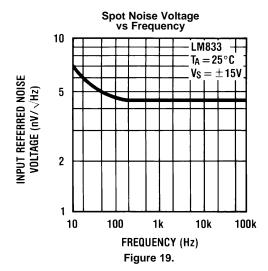





TYPICAL PERFORMANCE CHARACTERISTICS (continued) Spot Noise Current vs Frequency Input Referred Noise Voltage vs Source Resistance

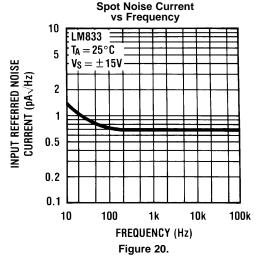

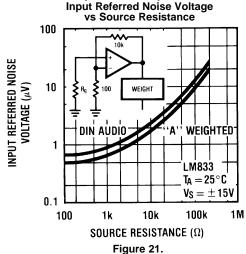


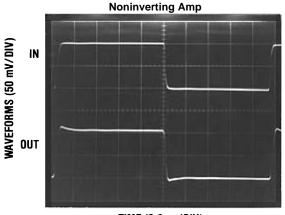

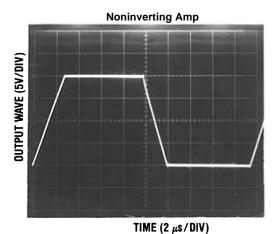

TIME (0.2 μ s/DIV) Figure 22.

Figure 23.

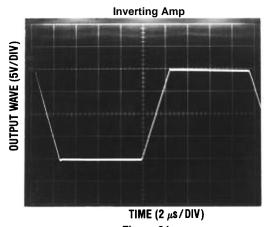




APPLICATION HINTS

The LM833-N is a high speed op amp with excellent phase margin and stability. Capacitive loads up to 50 pF will cause little change in the phase characteristics of the amplifiers and are therefore allowable.

Capacitive loads greater than 50 pF must be isolated from the output. The most straightforward way to do this is to put a resistor in series with the output. This resistor will also prevent excess power dissipation if the output is accidentally shorted.

Noise Measurement Circuit

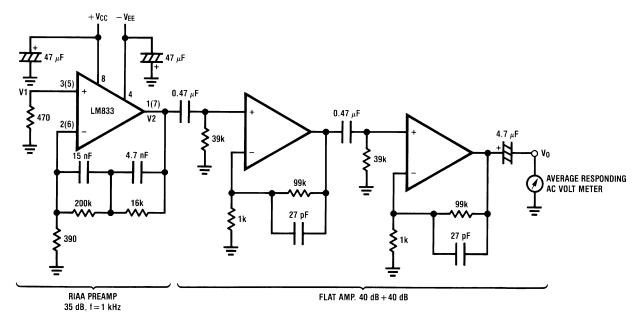


Complete shielding is required to prevent induced pick up from external sources. Always check with oscilloscope for power line noise.

Figure 25. Total Gain: 115 dB @f = 1 kHz Input Referred Noise Voltage: $e_n = V0/560,000$ (V)

Product Folder Links: LM833-N



RIAA Noise Voltage Measurement Circuit

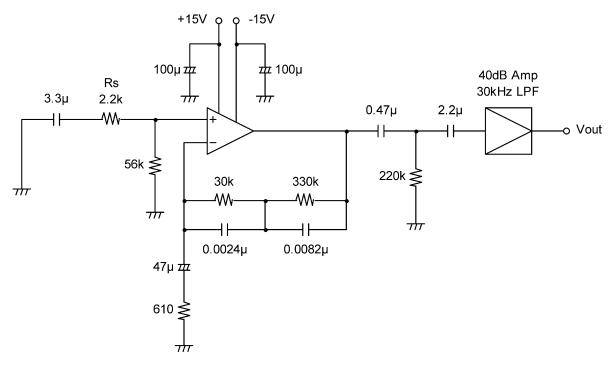

RIAA Preamp Voltage Gain, RIAA Deviation vs Frequency




Figure 26.

Flat Amp Voltage Gain vs Frequency





Figure 27.

Copyright © 2004–2012, Texas Instruments Incorporated

Submit Documentation Feedback



Typical Applications

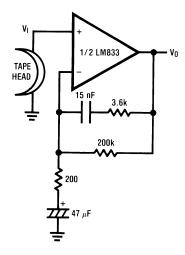

 $A_V = 34.5$ F = 1 kHz $E_n = 0.38 \text{ }\mu\text{V}$ A Weighted

Figure 28. NAB Preamp





Figure 29. NAB Preamp Voltage Gain vs Frequency




 $V_O = V1-V2$

Figure 30. Balanced to Single Ended Converter

Product Folder Links: LM833-N





$$V_0 = V1 + V2 - V3 - V4$$

Figure 31. Adder/Subtracter




Figure 32. Sine Wave Oscillator

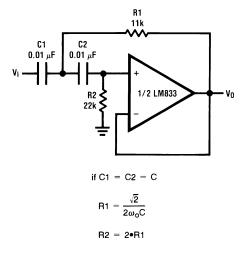


Illustration is $f_0 = 1 \text{ kHz}$

Figure 33. Second Order High Pass Filter (Butterworth)

Copyright © 2004–2012, Texas Instruments Incorporated

Submit Documentation Feedback




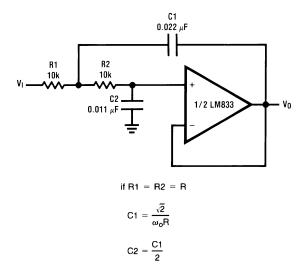


Illustration is $f_0 = 1 \text{ kHz}$

Figure 34. Second Order Low Pass Filter (Butterworth)

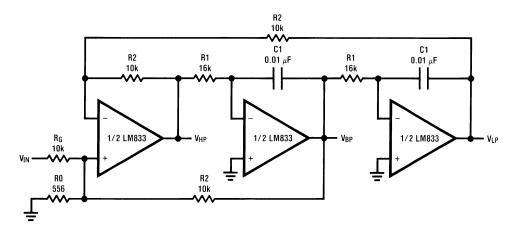

$$f_0 = \frac{1}{2\pi C1R1}, Q = \frac{1}{2}\left(1 + \frac{R2}{R0} + \frac{R2}{RG}\right), A_{BP} = QA_{LP} = QA_{LH} = \frac{R2}{RG}$$

Illustration is $f_0 = 1 \text{ kHz}$, Q = 10, $A_{BP} = 1$

Figure 35. State Variable Filter

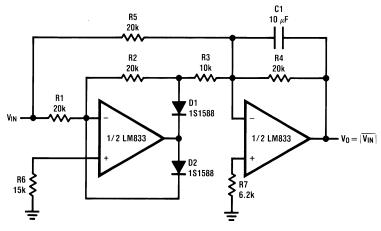


Figure 36. AC/DC Converter



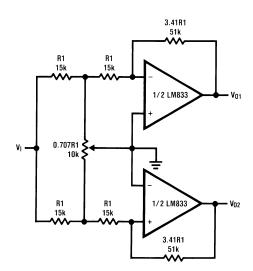


Figure 37. 2 Channel Panning Circuit (Pan Pot)


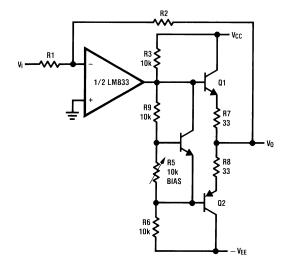


Figure 38. Line Driver



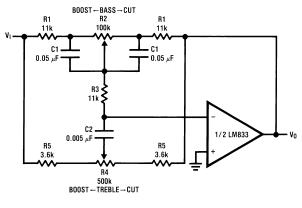

$$\begin{split} f_L &= \frac{1}{2\pi R2C1}, f_{LB} = \frac{1}{2\pi R1C1} \\ f_H &= \frac{1}{2\pi R5C2}, f_{HB} = \frac{1}{2\pi (R1 + R5 + 2R3)C2} \end{split}$$

Illustration is:

$$\begin{aligned} &f_L = 32 \text{ Hz}, \, f_{LB} = 320 \text{ Hz} \\ &f_H = &11 \text{ kHz}, \, f_{HB} = 1.1 \text{ kHz} \end{aligned}$$


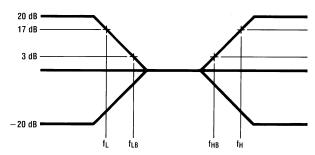


Figure 39. Tone Control

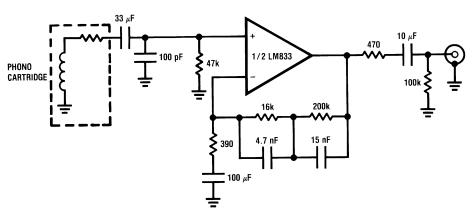


 $\begin{array}{l} A_{v}=35~\text{dB}\\ E_{n}=0.33~\mu\text{V}\\ \text{S/N}=90~\text{dB}\\ f=1~\text{kHz}\\ \text{A Weighted}, \text{ V}_{\text{IN}}=10~\text{mV}\\ @f=1~\text{kHz} \end{array}$

Figure 40. RIAA Preamp

Submit Documentation Feedback



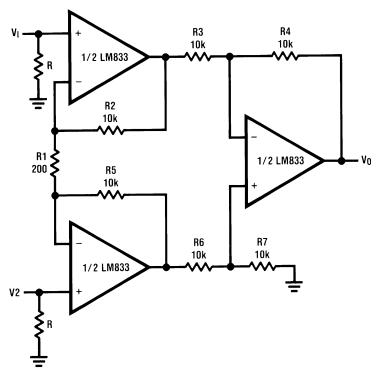

If R2 = R5, R3 = R6, R4 = R7

$$V0 = \left(1 + \frac{2R2}{R1}\right) \frac{R4}{R3} (V2 - V1)$$

Illustration is: V0 = 101(V2 - V1)

Figure 41. Balanced Input Mic Amp



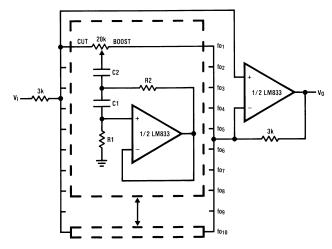


Figure 42. 10 Band Graphic Equalizer

fo (Hz)	C ₁	C ₂	R ₁	R ₂
32	0.12µF	4.7µF	75kΩ	500Ω
64	0.056µF	3.3µF	68kΩ	510Ω
125	0.033µF	1.5µF	62kΩ	510Ω
250	0.015µF	0.82µF	68kΩ	470Ω
500	8200pF	0.39µF	62kΩ	470Ω
1k	3900pF	0.22µF	68kΩ	470Ω
2k	2000pF	0.1µF	68kΩ	470Ω
4k	1100pF	0.056µF	62kΩ	470Ω
8k	510pF	0.022µF	68kΩ	510Ω
16k	330pF	0.012µF	51kΩ	510Ω

Note: At volume of change = ± 12 dB Q = 1.

LM833-N MDC MWC DUAL AUDIO OPERATIONAL AMPLIFIER

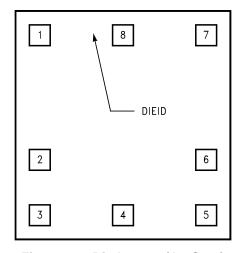


Figure 43. Die Layout (A - Step)

Product Folder Links: LM833-N

www.ti.com

om 11-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
LM833M	Active	Production	SOIC (D) 8	95 TUBE	No	(4) SNPB	Level-1-235C-UNLIM	-40 to 85	LM833 M
LM833M.B	Active	Production	SOIC (D) 8	95 TUBE	No	SNPB	Level-1-235C-UNLIM	-40 to 85	LM833 M
LM833M/NOPB	Active	Production	SOIC (D) 8	95 TUBE	Yes	SN	Level-1-260C-UNLIM	-40 to 85	LM833 M
LM833M/NOPB.B	Active	Production	SOIC (D) 8	95 TUBE	Yes	SN	Level-1-260C-UNLIM	-40 to 85	LM833 M
LM833MM/NOPB	Active	Production	VSSOP (DGK) 8	1000 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	Z83
LM833MM/NOPB.B	Active	Production	VSSOP (DGK) 8	1000 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	Z83
LM833MMX/NOPB	Active	Production	VSSOP (DGK) 8	3500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	Z83
LM833MMX/NOPB.B	Active	Production	VSSOP (DGK) 8	3500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	Z83
LM833MX/NOPB	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	LM833 M
LM833MX/NOPB.B	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	LM833 M
LM833N/NOPB	Active	Production	PDIP (P) 8	40 TUBE	Yes	NIPDAU	Level-1-NA-UNLIM	-40 to 85	LM 833N
LM833N/NOPB.B	Active	Production	PDIP (P) 8	40 TUBE	Yes	NIPDAU	Level-1-NA-UNLIM	-40 to 85	LM 833N

⁽¹⁾ Status: For more details on status, see our product life cycle.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.



PACKAGE OPTION ADDENDUM

www.ti.com 11-Nov-2025

(5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

PACKAGE MATERIALS INFORMATION

www.ti.com 1-Aug-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LM833MM/NOPB	VSSOP	DGK	8	1000	177.8	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LM833MMX/NOPB	VSSOP	DGK	8	3500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LM833MX/NOPB	SOIC	D	8	2500	330.0	12.4	6.5	5.4	2.0	8.0	12.0	Q1

www.ti.com 1-Aug-2025



*All dimensions are nominal

Device	Package Type Package Drawing		Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LM833MM/NOPB	VSSOP	DGK	8	1000	208.0	191.0	35.0
LM833MMX/NOPB	VSSOP	DGK	8	3500	367.0	367.0	35.0
LM833MX/NOPB	SOIC	D	8	2500	367.0	367.0	35.0

PACKAGE MATERIALS INFORMATION

www.ti.com 1-Aug-2025

TUBE



*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
LM833M	D	SOIC	8	95	495	8	4064	3.05
LM833M	D	SOIC	8	95	495	8	4064	3.05
LM833M.B	D	SOIC	8	95	495	8	4064	3.05
LM833M.B	D	SOIC	8	95	495	8	4064	3.05
LM833M/NOPB	D	SOIC	8	95	495	8	4064	3.05
LM833M/NOPB.B	D	SOIC	8	95	495	8	4064	3.05
LM833N/NOPB	Р	PDIP	8	40	502	14	11938	4.32
LM833N/NOPB.B	Р	PDIP	8	40	502	14	11938	4.32



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES:

- 1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
- 4. This dimension does not include interlead flash.
- 5. Reference JEDEC registration MS-012, variation AA.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE PACKAGE



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Falls within JEDEC MS-001 variation BA.





SMALL OUTLINE PACKAGE



NOTES:

PowerPAD is a trademark of Texas Instruments.

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-187.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
- 8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
- 9. Size of metal pad may vary due to creepage requirement.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 12. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025