



OPA244 OPA2244 OPA4244

MicroPower, Single-Supply **OPERATIONAL AMPLIFIERS** MicroAmplifier™ Series

FEATURES

MicroSIZE PACKAGES OPA244 (Single): SOT-23-5 OPA2244 (Dual): MSOP-8 OPA4244 (Quad): TSSOP-14

● *Micro*POWER: I_Q = 50μA/channel SINGLE SUPPLY OPERATION WIDE BANDWIDTH: 430kHz

WIDE SUPPLY RANGE: Single Supply: 2.2V to 36V Dual Supply: $\pm 1.1V$ to $\pm 18V$

APPLICATIONS

- BATTERY POWERED SYSTEMS
- PORTABLE EQUIPMENT
- PCMCIA CARDS
- BATTERY PACKS AND POWER SUPPLIES
- CONSUMER PRODUCTS


OPA244 Out 2 +In 3 SOT-23-5


DESCRIPTION


The OPA244 (single), OPA2244 (dual), and OPA4244 (quad) op amps are designed for very low quiescent current (50µA/channel), yet achieve excellent bandwidth. Ideal for battery powered and portable instrumentation, all versions are offered in micro packages for space-limited applications. The dual and quad versions feature completely independent circuitry for lowest crosstalk and freedom from interaction, even when overdriven or overloaded.


The OPA244 series is easy to use and free from phase inversion and overload problems found in some other op amps. These amplifiers are stable in unity gain and excellent performance is maintained as they swing to their specified limits. They can be operated from single (+2.2V to +36V) or dual supplies ($\pm 1.1V$ to $\pm 18V$). The input common-mode voltage range includes ground—ideal for many single supply applications. All versions have similar performance. However, there are some differences, such as common-mode rejection. All versions are interchangeable in most applications.

All versions are offered in miniature, surface-mount packages. OPA244 (single version) comes in the tiny 5-lead SOT-23-5 surface mount, SO-8 surface mount, and 8-pin DIP. OPA2244 (dual version) is available in the MSOP-8 surface mount, SO-8 surface-mount, and 8-pin DIP. The OPA4244 (quad) comes in the TSSOP-14 surface mount. They are fully specified from -40°C to +85°C and operate from -55°C to +125°C. A SPICE Macromodel is available for design analysis.









International Airport Industrial Park • Mailing Address: PO Box 11400, Tucson, AZ 85734 • Street Address: 6730 S. Tucson Blvd., Tucson, AZ 85706 • Tel: (520) 746-1111 Twx: 910-952-1111 • Internet: http://www.burr-brown.com/ • Cable: BBRCORP • Telex: 066-6491 • FAX: (520) 889-1510 • Immediate Product Info: (800) 548-6132

SPECIFICATIONS: $V_S = +2.6V$ to +36V

Boldface limits apply over the specified temperature range, $T_A = -40^{\circ}C$ to $+85^{\circ}C$

At T_A = +25°C, R_L = 20k Ω connected to ground, unless otherwise noted.

			OI	OPA244NA, PA, UA					
PARAMETER		CONDITION	MIN	TYP ⁽¹⁾	MAX	UNITS			
OFFSET VOLTAGE Input Offset Voltage $T_A = -40^{\circ}C \text{ to } 85^{\circ}C$ vs Temperature vs Power Supply $T_A = -40^{\circ}C \text{ to } 85^{\circ}C$	V _{OS} dV _{OS} /dT PSRR	$V_S = \pm 7.5V$, $V_{CM} = 0$ $T_A = -40^{\circ}C \text{ to } 85^{\circ}C$ $V_S = +2.6V \text{ to } +36V$ $V_S = +2.6V \text{ to } +36V$		±0.7 ± 4 5	±1.5 ±2 50 50	mV mV μV/°C μV/V μV/V			
INPUT BIAS CURRENT Input Bias Current Input Offset Current	I _B I _{OS}	$V_{CM} = V_S/2$ $V_{CM} = V_S/2$		-10 ±1	−25 ±10	nA nA			
NOISE Input Voltage Noise, f = 0.1kHz t Input Voltage Noise Density, f = Current Noise Density, f = 1kHz	I			0.4 22 40		μVp-p nV/√Hz fA/√Hz			
INPUT VOLTAGE RANGE Common-Mode Voltage Range Common-Mode Rejection $T_A = -40^{\circ}\text{C}$ to 85°C	V _{CM} CMRR	$V_S = \pm 18V$, $V_{CM} = -18V$ to +17.1V $V_S = \pm 18V$, $V_{CM} = -18V$ to +17.1V	0 84 84	98	(V+) - 0.9	V dB dB			
INPUT IMPEDANCE Differential Common-Mode				10 ⁶ 2 10 ⁹ 2		Ω pF Ω pF			
OPEN-LOOP GAIN Open-Loop Voltage Gain T _A = -40°C to 85°C	A _{OL}	$V_O = 0.5V$ to $(V+) - 0.9$ $V_O = 0.5V$ to $(V+) - 0.9$	86 86	106		dB dB			
FREQUENCY RESPONSE Gain-Bandwidth Product Slew Rate Settling Time 0.01% Overload Recovery Time	GBW SR	G = 1 10V Step $V_{IN} \cdot Gain = V_{S}$		430 -0.1/+0.16 150 8		kHz V/μs μs μs			
OUTPUT Voltage Output, Positive $T_A = -40^{\circ}C$ to $85^{\circ}C$ Voltage Output, Negative $T_A = -40^{\circ}C$ to $85^{\circ}C$ Voltage Output, Positive $T_A = -40^{\circ}C$ to $85^{\circ}C$ Voltage Output, Negative $T_A = -40^{\circ}C$ to $85^{\circ}C$ Short-Circuit Current Capacitive Load Drive	V _O I _{SC} C _{LOAD}	$\begin{array}{l} A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ V_S/2 \\ A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ V_S/2 \\ A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ V_S/2 \\ A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ V_S/2 \\ A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ Ground \\ A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ Ground \\ A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ Ground \\ A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ Ground \\ A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ Ground \\ \end{array}$	(V+) - 0.9 (V+) - 0.9 0.5 0.5	(V+) - 0.75 (V+) - 0.75 0.2 0.2 (V+) - 0.75 (V+) - 0.75 0.1 -25/+12 see Typical Cur	ve	V V V V V V mA			
POWER SUPPLY Specified Voltage Range Minimum Operating Voltage Quiescent Current $T_A = -40^{\circ}C \text{ to } 85^{\circ}C$	V _s	$T_A = -40$ °C to 85°C $I_O = 0$ $I_O = 0$	+2.6	+2.2 50	+36 60 70	V V μΑ μΑ			
TEMPERATURE RANGE Specified Range Operating Range Storage Range Thermal Resistance SOT-23-5 Surface-Mount SO-8 Surface-Mount 8-Pin DIP	$ heta_{ extsf{JA}}$		-40 -55 -65	200 150 100	85 125 150	°C °C °C/W °C/W °C/W			

NOTE: (1) $V_S = +15V$.

The information provided herein is believed to be reliable; however, BURR-BROWN assumes no responsibility for inaccuracies or omissions. BURR-BROWN assumes no responsibility for the use of this information, and all use of such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. BURR-BROWN does not authorize or warrant any BURR-BROWN product for use in life support devices and/or systems.

SPECIFICATIONS: $V_S = +2.6V$ to +36V

Boldface limits apply over the specified temperature range, $T_A = -40^{\circ}C$ to $+85^{\circ}C$

At T_A = +25°C, R_L = 20k Ω connected to ground, unless otherwise noted.

			OP	OPA2244EA, PA, UA					
PARAMETER		CONDITION	MIN	TYP ⁽¹⁾	MAX	UNITS			
OFFSET VOLTAGE Input Offset Voltage $T_A = -40^{\circ}C \text{ to } 85^{\circ}C$ vs Temperature vs Power Supply $T_A = -40^{\circ}C \text{ to } 85^{\circ}C$ Channel Separation	V _{OS} dV _{OS} /dT PSRR	$V_S = \pm 7.5 \text{V}, V_{CM} = 0$ $T_A = -40^{\circ}\text{C to } 85^{\circ}\text{C}$ $V_S = +2.6 \text{V to } +36 \text{V}$ $V_S = +2.6 \text{V to } +36 \text{V}$		±0.7 ± 4 5	±1.5 ±2 50 50	mV mV μV/°C μV/V μV/V dB			
INPUT BIAS CURRENT Input Bias Current Input Offset Current NOISE	I _B I _{OS}	$V_{CM} = V_S/2$ $V_{CM} = V_S/2$		-10 ±1	-25 ±10	nA nA			
Input Voltage Noise, f = 0.1kHz to Input Voltage Noise Density, f = 1kHz Current Noise Density, f = 1kHz				0.4 22 40		μVp-p nV/√Hz fA/√Hz			
INPUT VOLTAGE RANGE Common-Mode Voltage Range Common-Mode Rejection $T_A = -40^{\circ}\text{C}$ to 85°C	V _{CM} CMRR	$V_S = \pm 18V$, $V_{CM} = -18V$ to +17.1V $V_S = \pm 18V$, $V_{CM} = -18V$ to +17.1V	0 72 72	98	(V+) - 0.9	V dB dB			
INPUT IMPEDANCE Differential Common-Mode				10 ⁶ 2 10 ⁹ 2		Ω pF Ω pF			
OPEN-LOOP GAIN Open-Loop Voltage Gain $T_A = -40$ °C to 85°C	A _{OL}	$V_O = 0.5V$ to $(V+) - 0.9$ $V_O = 0.5V$ to $(V+) - 0.9$	86 86	106		dB dB			
FREQUENCY RESPONSE Gain-Bandwidth Product Slew Rate Settling Time 0.01% Overload Recovery Time	GBW SR	G = 1 10V Step $V_{IN} \cdot Gain = V_{S}$		430 -0.1/+0.16 150 8		kHz V/μs μs μs			
OUTPUT Voltage Output, Positive $T_A = -40^{\circ}C$ to $85^{\circ}C$ Voltage Output, Negative $T_A = -40^{\circ}C$ to $85^{\circ}C$ Voltage Output, Positive $T_A = -40^{\circ}C$ to $85^{\circ}C$ Voltage Output, Negative $T_A = -40^{\circ}C$ to $85^{\circ}C$ Voltage Output, Negative $T_A = -40^{\circ}C$ to $85^{\circ}C$ Short-Circuit Current Capacitive Load Drive	Vo I _{SC} C _{LOAD}	$\begin{array}{l} A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{V}_S/2 \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{V}_S/2 \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{V}_S/2 \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{V}_S/2 \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ \text{to} \ \text{Ground} \\ A_{OL} \geq 80 \text{dB}, \ R_L = 20 \text{k}\Omega \ d$	(V+) - 0.9 (V+) - 0.9 0.5 0.5	(V+) - 0.75 (V+) - 0.75 0.2 0.2 (V+) - 0.75 (V+) - 0.75 0.1 0.1 -25/+12 lee Typical Cur	ve	V V V V V V V mA			
POWER SUPPLY Specified Voltage Range Minimum Operating Voltage Quiescent Current (per amplifier) $T_A = -40^{\circ}C \text{ to } 85^{\circ}C$	V _S	$T_A = -40^{\circ}C \text{ to } 85^{\circ}C$ $I_O = 0$ $I_O = 0$	+2.6	+2.2 40	+36 50 63	V V μΑ μΑ			
TEMPERATURE RANGE Specified Range Operating Range Storage Range Thermal Resistance MSOP-8 Surface-Mount SO-8 Surface-Mount 8-Pin DIP	$ heta_{\sf JA}$		-40 -55 -65	200 150 100	85 125 150	°C °C °C/W °C/W °C/W			

NOTE: (1) $V_S = +15V$.

SPECIFICATIONS: $V_S = +2.6V$ to +36V

Boldface limits apply over the specified temperature range, $T_A = -40^{\circ}C$ to $+85^{\circ}C$

At T_A = +25°C, R_L = 20k Ω connected to ground, unless otherwise noted.

		OPA4244EA				
PARAMETER	CONDITION	MIN	TYP ⁽¹⁾	MAX	UNITS	
OFFSET VOLTAGE Input Offset Voltage V_{OS} $T_A = -40^{\circ}C$ to $85^{\circ}C$ vs Temperature dV_{OS}/dT vs Power Supply PSRR $T_A = -40^{\circ}C$ to $85^{\circ}C$ Channel Separation	$V_S = \pm 7.5V$, $V_{CM} = 0$ $T_A = -40^{\circ}C \text{ to } 85^{\circ}C$ $V_S = +2.6V \text{ to } +36V$ $V_S = +2.6V \text{ to } +36V$		±0.7 ± 4 5	±1.5 ±2 50 50	mV mV μV/°C μV/V μV/V dB	
INPUT BIAS CURRENT Input Bias Current I _B Input Offset Current I _{OS}	$V_{CM} = V_S/2$ $V_{CM} = V_S/2$		-10 ±1	-25 ±10	nA nA	
$\begin{tabular}{ll} \textbf{NOISE} \\ \textbf{Input Voltage Noise, f = 0.1kHz to 10kHz} \\ \textbf{Input Voltage Noise Density, f = 1kHz} \\ \textbf{Current Noise Density, f = 1kHz} \\ \end{tabular} \begin{tabular}{ll} \textbf{e}_n \\ \textbf{i}_n \\ \end{tabular}$			0.4 22 40		μVp-p nV/√Hz fA/√Hz	
INPUT VOLTAGE RANGE Common-Mode Voltage Range Common-Mode Rejection $T_A = -40^{\circ}C$ to $85^{\circ}C$ CMRR	$V_S = \pm 18V$, $V_{CM} = -18V$ to +17.1V $V_S = \pm 18V$, $V_{CM} = -18V$ to +17.1V	0 82 82	104	(V+) - 0.9	V dB dB	
INPUT IMPEDANCE Differential Common-Mode			10 ⁶ 2 10 ⁹ 2		Ω pF Ω pF	
OPEN-LOOP GAIN Open-Loop Voltage Gain $T_A = -40^{\circ}C$ to $85^{\circ}C$	$V_O = 0.5V$ to $(V+) - 0.9$ $V_O = 0.5V$ to $(V+) - 0.9$	86 86	106		dB dB	
FREQUENCY RESPONSE Gain-Bandwidth Product GBW Slew Rate SR Settling Time 0.01% Overload Recovery Time	G = 1 10V Step V _{IN} • Gain = V _S		430 -0.1/+0.16 150 8		kHz V/μs μs μs	
OUTPUT Voltage Output, Positive $T_A = -40^{\circ}C$ to $85^{\circ}C$ Voltage Output, Negative $T_A = -40^{\circ}C$ to $85^{\circ}C$ Voltage Output, Negative $T_A = -40^{\circ}C$ to $85^{\circ}C$ Short-Circuit Current I_{SC} Capacitive Load Drive	$\begin{array}{c} A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ V_S/2 \\ A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ V_S/2 \\ A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ V_S/2 \\ A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ V_S/2 \\ A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ Ground \\ A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ Ground \\ A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ Ground \\ A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ Ground \\ A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ Ground \\ A_{OL} \geq 80 dB, \ R_L = 20 k\Omega \ to \ Ground \\ \end{array}$	(V+) - 0.9 (V+) - 0.9 0.5 0.5	(V+) - 0.75 (V+) - 0.75 0.2 0.2 (V+) - 0.75 (V+) - 0.75 0.1 0.1 -25/+12 see Typical Cur	ve	V V V V V V mA	
POWER SUPPLY Specified Voltage Range V_S Minimum Operating Voltage Quiescent Current (per amplifier) I_Q $T_A = -40$ °C to 85°C	$T_A = -40$ °C to 85°C $I_O = 0$ $I_O = 0$	+2.6	+2.2 40	+36 60 70	V V μΑ μΑ	
TEMPERATURE RANGE Specified Range Operating Range Storage Range Thermal Resistance θ_{JA} TSSOP-14 Surface Mount		-40 -55 -65	100	85 125 150	°C °C °C °C/W	

NOTE: (1) $V_S = +15V$.

ABSOLUTE MAXIMUM RATINGS(1)

Supply Voltage, V+ to V	36V
Input Voltage Range ⁽²⁾	(V-) - 0.3V to (V+) + 0.3V
Input Current ⁽²⁾	10mA
Output Short-Circuit(3)	Continuous
Operating Temperature	55°C to +125°C
Storage Temperature	65°C to +150°C
Junction Temperature	150°C
Lead Temperature (soldering, 10s)	300°C
ESD Capability	2000V

NOTES: (1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. (2) Inputs are diode-clamped to the supply rails and should be current-limited to 10mA or less if input voltages can exceed rails by more than 0.3V. (3) Short-circuit to ground, one amplifier per package.



This integrated circuit can be damaged by ESD. Burr-Brown recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.


PACKAGE/ORDERING INFORMATION


PRODUCT	PACKAGE	PACKAGE DRAWING NUMBER	SPECIFIED TEMPERATURE RANGE	PACKAGE MARKING	ORDERING NUMBER ⁽¹⁾	TRANSPORT MEDIA
Single OPA244NA " OPA244PA OPA244UA	SOT-23-5 Surface-Mount " 8-Pin DIP SO-8 Surface-Mount "	331 " 006 182	-40°C to +85°C -40°C to +85°C -40°C to +85°C	A44 " OPA244PA OPA244UA "	OPA244NA/250 OPA244NA/3K OPA244PA OPA244UA OPA244UA/2K5	Tape and Reel Tape and Reel Rails Rails Tape and Reel
Dual OPA2244EA " OPA2244PA OPA2244UA	MSOP-8 Surface-Mount " 8-Pin DIP SO-8 Surface-Mount "	337 " 006 182	-40°C to +85°C -40°C to +85°C -40°C to +85°C	A44 " OPA2244PA OPA2244UA	OPA2244EA/250 OPA2244EA/2K5 OPA2244PA OPA2244UA OPA2244UA/2K5	Tape and Reel Tape and Reel Rails Rails Tape and Reel
Quad OPA4244EA	TSSOP-14 Surface-Mount	357 "	-40°C to +85°C	OPA4244EA	OPA4244EA/250 OPA4244EA/2K5	Tape and Reel Tape and Reel

NOTE: (1) Products followed by a slash (/) are only available in Tape and Reel in the quantities indicated (e.g., /250 indicates 250 devices per reel). Ordering 3000 pieces of "OPA244NA/3K" will get a single 3000 piece Tape and Reel.


TYPICAL PERFORMANCE CURVES


At T_A = 25°C, V_S = +15V, and R_L = 20k Ω connected to Ground, unless otherwise noted.

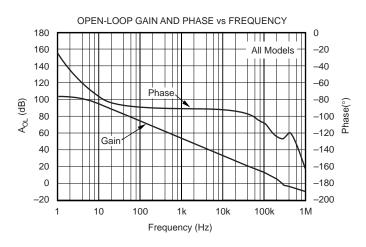





POWER SUPPLY AND COMMON-MODE REJECTION vs FREQUENCY














At T_A = 25°C, V_S = +15V, and R_L = 20k Ω connected to Ground, unless otherwise noted.















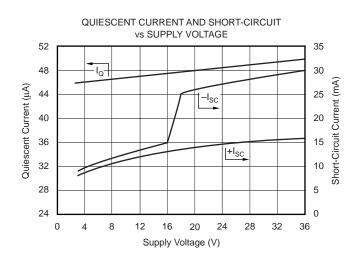



At T_A = 25°C, V_S = +15V, and R_L = 20k Ω connected to Ground, unless otherwise noted.

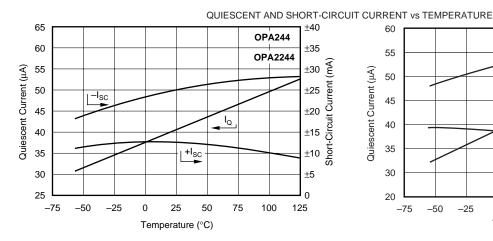




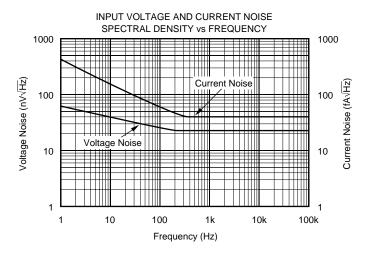







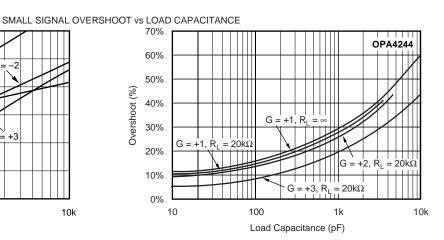


At T_A = 25°C, V_S = +15V, and R_L = 20k Ω connected to Ground, unless otherwise noted.


LARGE-SIGNAL STEP RESPONSE, G = 1, $C_L = 100pF$







SMALL-SIGNAL STEP RESPONSE, G = 1, $C_L = 100pF$







OFFSET VOLTAGE PRODUCTION DISTRIBUTION





At T_A = 25°C, V_S = +15V, and R_L = 20k Ω connected to Ground, unless otherwise noted.



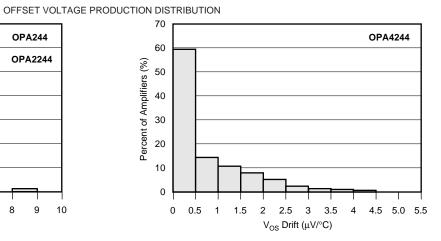

APPLICATIONS INFORMATION

The OPA244 is unity-gain stable and suitable for a wide range of general purpose applications. Power supply pins should be bypassed with $0.01\mu F$ ceramic capacitors.

OPERATING VOLTAGE

The OPA244 can operate from single supply (+2.2V to +36V) or dual supplies (±1.1 to $\pm18V$) with excellent performance. Unlike most op amps which are specified at only one supply voltage, the OPA244 is specified for real world applications; a single set of specifications applies throughout the +2.6V to +36V (±1.3 to $\pm18V$) supply range.

This allows a designer to have the same assured performance at any supply voltage within this range. In addition, many key parameters are guaranteed over the specified temperature range, –40°C to +85°C. Most behavior remains unchanged throughout the full operating voltage range. Parameters which vary significantly with operating voltage or temperature are shown in typical performance curves.

Useful information on solder pad design for printed circuit boards can be found in Burr-Brown's Application Bulletin AB-132B, "Solder Pad Recommendations for Surface-Mount Devices," easily found at Burr-Brown's web site (http://www.burr-brown.com).

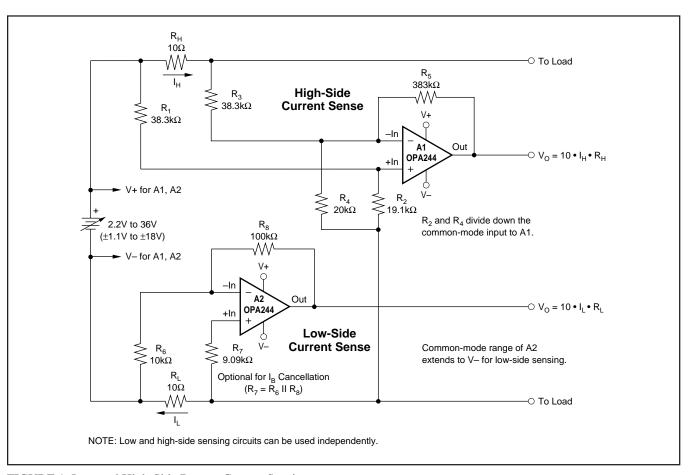


FIGURE 1. Low and High-Side Battery Current Sensing.

www.ti.com

18-Jul-2025

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
OPA2244EA/250	Obsolete	Production	VSSOP (DGK) 8	-	-	Call TI	Call TI	-40 to 85	A44
OPA2244EA/2K5	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	Call TI Nipdau	Level-2-260C-1 YEAR	-40 to 85	A44
OPA2244EA/2K5.A	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 85	A44
OPA2244EA/2K5G4	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	-	Call TI	Call TI	-40 to 85	
OPA2244PA	Active	Production	PDIP (P) 8	50 TUBE	Yes	NIPDAU	N/A for Pkg Type	-	OPA2244PA
OPA2244PA.A	Active	Production	PDIP (P) 8	50 TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	OPA2244PA
OPA2244UA	Obsolete	Production	SOIC (D) 8	-	-	Call TI	Call TI	-	OPA 2244UA
OPA2244UA/2K5	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-	OPA 2244UA
OPA2244UA/2K5.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	OPA 2244UA
OPA244NA/250	Obsolete	Production	SOT-23 (DBV) 5	-	-	Call TI	Call TI	-40 to 85	A44
OPA244NA/3K	Active	Production	SOT-23 (DBV) 5	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	A44
OPA244NA/3K.A	Active	Production	SOT-23 (DBV) 5	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	A44
OPA244NA/3K1G4	Active	Production	SOT-23 (DBV) 5	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	A44
OPA244NA/3K1G4.A	Active	Production	SOT-23 (DBV) 5	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	A44
OPA244UA	Obsolete	Production	SOIC (D) 8	-	-	Call TI	Call TI	-40 to 85	OPA 244UA
OPA244UA/2K5	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	OPA 244UA
OPA244UA/2K5.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	OPA 244UA
OPA4244EA/250	Obsolete	Production	TSSOP (PW) 14	-	-	Call TI	Call TI	-40 to 85	OPA 4244EA
OPA4244EA/2K5	Active	Production	TSSOP (PW) 14	2500 LARGE T&R	Yes	Call TI Nipdau	Level-3-260C-168 HR	-40 to 85	OPA 4244EA
OPA4244EA/2K5.A	Active	Production	TSSOP (PW) 14	2500 LARGE T&R	Yes	Call TI	Level-3-260C-168 HR	-40 to 85	OPA 4244EA
OPA4244EA/2K5.B	Active	Production	TSSOP (PW) 14	2500 LARGE T&R	-	Call TI	Call TI	-40 to 85	

⁽¹⁾ Status: For more details on status, see our product life cycle.



PACKAGE OPTION ADDENDUM

www.ti.com 18-Jul-2025

- (2) Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.
- (3) RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.
- (4) Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- (5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- (6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

PACKAGE MATERIALS INFORMATION

www.ti.com 24-Jul-2025

TAPE AND REEL INFORMATION



TAPE DIMENSIONS + K0 - P1 - B0 W Cavity - A0 -

A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
OPA2244EA/2K5	VSSOP	DGK	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
OPA2244UA/2K5	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
OPA244NA/3K	SOT-23	DBV	5	3000	178.0	8.4	3.3	3.2	1.4	4.0	8.0	Q3
OPA244NA/3K1G4	SOT-23	DBV	5	3000	178.0	8.4	3.3	3.2	1.4	4.0	8.0	Q3
OPA244UA/2K5	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
OPA4244EA/2K5	TSSOP	PW	14	2500	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1



www.ti.com 24-Jul-2025




*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
OPA2244EA/2K5	VSSOP	DGK	8	2500	353.0	353.0	32.0
OPA2244UA/2K5	SOIC	D	8	2500	353.0	353.0	32.0
OPA244NA/3K	SOT-23	DBV	5	3000	565.0	140.0	75.0
OPA244NA/3K1G4	SOT-23	DBV	5	3000	565.0	140.0	75.0
OPA244UA/2K5	SOIC	D	8	2500	353.0	353.0	32.0
OPA4244EA/2K5	TSSOP	PW	14	2500	353.0	353.0	32.0

PACKAGE MATERIALS INFORMATION

www.ti.com 24-Jul-2025

TUBE

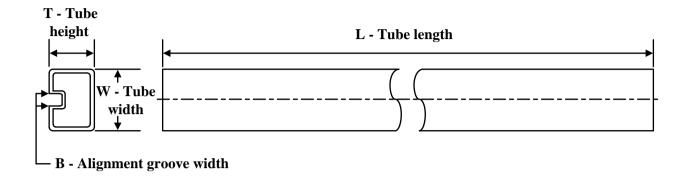

*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
OPA2244PA	Р	PDIP	8	50	506	13.97	11230	4.32
OPA2244PA.A	Р	PDIP	8	50	506	13.97	11230	4.32



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES:

- 1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
- 4. This dimension does not include interlead flash.
- 5. Reference JEDEC registration MS-012, variation AA.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE PACKAGE



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Falls within JEDEC MS-001 variation BA.







NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.





SMALL OUTLINE TRANSISTOR



NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
 2. This drawing is subject to change without notice.
 3. Reference JEDEC MO-178.

- 4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
- 5. Support pin may differ or may not be present.



SMALL OUTLINE TRANSISTOR



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE TRANSISTOR



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.







NOTES:

PowerPAD is a trademark of Texas Instruments.

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-187.





NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
- 8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
- 9. Size of metal pad may vary due to creepage requirement.





NOTES: (continued)

- 11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 12. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2025. Texas Instruments Incorporated