

# SN74AC8541-Q1 Automotive Octal Buffers or Drivers With 3-State Outputs

## 1 Features

- AEC-Q100 qualified for automotive applications:
  - Device temperature grade 1: -40°C to +125°C
  - Device HBM ESD classification level 2
  - Device CDM ESD classification level C4B
- Available in [wettable flank](#) QFN package
- Wide operating range of 1.5V to 6V
- Inputs accept voltages up to 6V
- Continuous  $\pm 24\text{mA}$  output drive at 5V
- Supports up to  $\pm 75\text{mA}$  output drive at 5V in short bursts
- Drives 50 $\Omega$  transmission lines
- Maximum  $t_{pd}$  of 6ns at 5V, 50pF load

## 2 Applications

- [Enable or disable a digital signal](#)
- [Eliminate slow or noisy input signals](#)
- [Hold a signal during controller reset](#)
- [Debounce a switch](#)


## 3 Description

The SN74AC8541-Q1 contains eight independent logic buffers with Schmitt-trigger inputs. The outputs can simultaneously be put into the high-impedance state using either of the provided output enable pins ( $\overline{\text{OE}}1$  or  $\overline{\text{OE}}2$ ).

### Package Information

| PART NUMBER   | PACKAGE <sup>(1)</sup> | PACKAGE SIZE <sup>(2)</sup> | BODY SIZE <sup>(3)</sup> |
|---------------|------------------------|-----------------------------|--------------------------|
| SN74AC8541-Q1 | DGS (VSSOP, 20)        | 5.1mm × 4.9mm               | 5.1mm × 3mm              |
|               | PW (TSSOP, 20)         | 6.5mm × 6.4mm               | 6.5mm × 4.4mm            |
|               | RKS (VQFN, 20)         | 4.5 mm × 2.5 mm             | 4.5 mm × 2.5 mm          |

- (1) For more information, see [Section 11](#).
- (2) The package size (length × width) is a nominal value and includes pins, where applicable
- (3) The body size (length × width) is a nominal value and does not include pins.

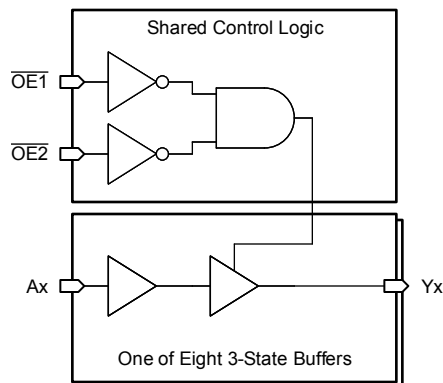


Logic Diagram (Positive Logic)




## Table of Contents

|                                                  |           |                                                                  |           |
|--------------------------------------------------|-----------|------------------------------------------------------------------|-----------|
| <b>1 Features</b> .....                          | <b>1</b>  | <b>8 Application and Implementation</b> .....                    | <b>15</b> |
| <b>2 Applications</b> .....                      | <b>1</b>  | 8.1 Application Information.....                                 | 15        |
| <b>3 Description</b> .....                       | <b>1</b>  | 8.2 Typical Application.....                                     | 15        |
| <b>4 Pin Configuration and Functions</b> .....   | <b>3</b>  | 8.3 Design Requirements.....                                     | 15        |
| <b>5 Specifications</b> .....                    | <b>4</b>  | 8.4 Detailed Design Procedure.....                               | 16        |
| 5.1 Absolute Maximum Ratings.....                | 4         | 8.5 Application Curves.....                                      | 17        |
| 5.2 ESD Ratings.....                             | 4         | 8.6 Power Supply Recommendations.....                            | 17        |
| 5.3 Recommended Operating Conditions.....        | 4         | 8.7 Layout.....                                                  | 17        |
| 5.4 Thermal Information.....                     | 5         | <b>9 Device and Documentation Support</b> .....                  | <b>18</b> |
| 5.5 Electrical Characteristics.....              | 5         | 9.1 Receiving Notification of Documentation Updates....          | 18        |
| 5.6 Switching Characteristics.....               | 6         | 9.2 Support Resources.....                                       | 18        |
| 5.7 Typical Characteristics.....                 | 8         | 9.3 Trademarks.....                                              | 18        |
| <b>6 Parameter Measurement Information</b> ..... | <b>11</b> | 9.4 Electrostatic Discharge Caution.....                         | 18        |
| <b>7 Detailed Description</b> .....              | <b>12</b> | 9.5 Glossary.....                                                | 18        |
| 7.1 Overview.....                                | 12        | <b>10 Revision History</b> .....                                 | <b>18</b> |
| 7.2 Functional Block Diagram.....                | 12        | <b>11 Mechanical, Packaging, and Orderable Information</b> ..... | <b>18</b> |
| 7.3 Device Functional Modes.....                 | 12        |                                                                  |           |
| 7.4 Feature Description.....                     | 12        |                                                                  |           |

## 4 Pin Configuration and Functions

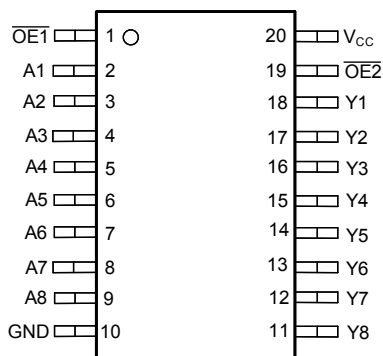

**Figure 4-1. DGS or PW Package,  
20-Pin SOT or TSSOP  
(Top View)**

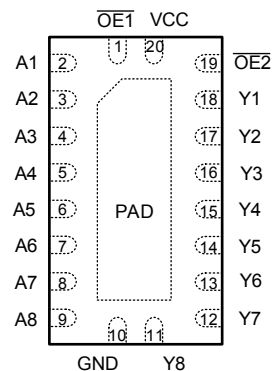

**Figure 4-2. RKS Package,  
20-Pin VQFN  
(Top View)**

**Table 4-1. Pin Functions**

| PIN                        |     | TYPE <sup>(1)</sup> | DESCRIPTION                                                                                           |
|----------------------------|-----|---------------------|-------------------------------------------------------------------------------------------------------|
| NAME                       | NO. |                     |                                                                                                       |
| OE1                        | 1   | I                   | Output enable input 1, active low                                                                     |
| A1                         | 2   | I                   | Input for channel 1                                                                                   |
| A2                         | 3   | I                   | Input for channel 2                                                                                   |
| A3                         | 4   | I                   | Input for channel 3                                                                                   |
| A4                         | 5   | I                   | Input for channel 4                                                                                   |
| A5                         | 6   | I                   | Input for channel 5                                                                                   |
| A6                         | 7   | I                   | Input for channel 6                                                                                   |
| A7                         | 8   | I                   | Input for channel 7                                                                                   |
| A8                         | 9   | I                   | Input for channel 8                                                                                   |
| GND                        | 10  | G                   | Ground                                                                                                |
| Y8                         | 11  | O                   | Output for channel 8                                                                                  |
| Y7                         | 12  | O                   | Output for channel 7                                                                                  |
| Y6                         | 13  | O                   | Output for channel 6                                                                                  |
| Y5                         | 14  | O                   | Output for channel 5                                                                                  |
| Y4                         | 15  | O                   | Output for channel 4                                                                                  |
| Y3                         | 16  | O                   | Output for channel 3                                                                                  |
| Y2                         | 17  | O                   | Output for channel 2                                                                                  |
| Y1                         | 18  | O                   | Output for channel 1                                                                                  |
| OE2                        | 19  | I                   | Output enable input 2, active low                                                                     |
| VCC                        | 20  | P                   | Positive supply                                                                                       |
| Thermal Pad <sup>(2)</sup> |     | —                   | The thermal pad can be connect to GND or left floating. Do not connect to any other signal or supply. |

(1) I = Input, O = Output, I/O = Input or Output, G = Ground, P = Power.

(2) RKS package only.

## 5 Specifications

### 5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                  |                                                          |                                                                     | MIN  | MAX                     | UNIT |
|------------------|----------------------------------------------------------|---------------------------------------------------------------------|------|-------------------------|------|
| V <sub>CC</sub>  | Supply voltage range                                     |                                                                     | -0.5 | 7                       | V    |
| V <sub>I</sub>   | Input voltage range <sup>(2)</sup>                       |                                                                     | -0.5 | V <sub>CC</sub> + 0.5 V | V    |
| V <sub>O</sub>   | Output voltage range <sup>(2)</sup>                      |                                                                     | -0.5 | V <sub>CC</sub> + 0.5 V | V    |
| I <sub>IK</sub>  | Input clamp current                                      | V <sub>I</sub> < -0.5 V or V <sub>I</sub> > V <sub>CC</sub> + 0.5 V |      | ±20                     | mA   |
| I <sub>OK</sub>  | Output clamp current                                     | V <sub>O</sub> < -0.5 V or V <sub>O</sub> > V <sub>CC</sub> + 0.5 V |      | ±50                     | mA   |
| I <sub>O</sub>   | Continuous output current                                | V <sub>O</sub> = 0 to V <sub>CC</sub>                               |      | ±50                     | mA   |
|                  | Continuous output current through V <sub>CC</sub> or GND |                                                                     |      | ±200                    | mA   |
| T <sub>stg</sub> | Storage temperature                                      |                                                                     | -65  | 150                     | °C   |

(1) Operation outside the *Absolute Maximum Ratings* may cause permanent device damage. Absolute maximum ratings do not imply functional operation of the device at these or any other conditions beyond those listed under *Recommended Operating Conditions*. If briefly operating outside the *Recommended Operating Conditions* but within the *Absolute Maximum Ratings*, the device may not sustain damage, but it may not be fully functional. Operating the device in this manner may affect device reliability, functionality, performance, and shorten the device lifetime.

(2) The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

### 5.2 ESD Ratings

|                    |                         |                                                                                        | VALUE | UNIT |
|--------------------|-------------------------|----------------------------------------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per AEC Q100-002 HBM ESD Classification Level 2 <sup>(1)</sup> | ±2000 | V    |
|                    |                         | Charged device model (CDM), per AEC Q100-011 CDM ESD Classification Level C4B          | ±1000 |      |

(1) AEC Q100-002 indicate that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

### 5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

| Specification                 | Description                        | Condition                     | MIN | MAX             | UNIT |
|-------------------------------|------------------------------------|-------------------------------|-----|-----------------|------|
| V <sub>CC</sub>               | Supply voltage                     |                               | 1.5 | 6               | V    |
| V <sub>I</sub> <sup>(1)</sup> | Input Voltage                      |                               | 0   | V <sub>CC</sub> | V    |
| V <sub>O</sub>                | Output Voltage                     |                               | 0   | V <sub>CC</sub> | V    |
| I <sub>OH</sub>               | High-level output current          | V <sub>CC</sub> = 1.8 V       |     | -1              | mA   |
|                               |                                    | V <sub>CC</sub> = 2.5 V       |     | -2              |      |
|                               |                                    | V <sub>CC</sub> = 3.3 V       |     | -12             |      |
|                               |                                    | V <sub>CC</sub> = 5 V         |     | -24             |      |
| I <sub>OL</sub>               | Low-level output current           | V <sub>CC</sub> = 1.8 V       |     | 1               | mA   |
|                               |                                    | V <sub>CC</sub> = 2.5 V       |     | 2               |      |
|                               |                                    | V <sub>CC</sub> = 3.3 V       |     | 12              |      |
|                               |                                    | V <sub>CC</sub> = 5 V         |     | 24              |      |
| Δt/Δv                         | Input transition rise or fall rate | 1.5 V ≤ V <sub>CC</sub> ≤ 3 V |     | 50              | ns/V |
|                               |                                    | 3 V < V <sub>CC</sub> ≤ 5.5 V |     | 20              |      |
| T <sub>A</sub>                | Operating free-air temperature     |                               | -40 | 125             | °C   |

(1) All unused inputs of the device must be held at V<sub>CC</sub> or GND for proper device operation. Refer to the TI application report [Implications of Slow or Floating CMOS Inputs](#).

## 5.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | SN74AC8541-Q1 |            |            | UNIT |
|-------------------------------|----------------------------------------------|---------------|------------|------------|------|
|                               |                                              | DGS (VSSOP)   | PW (TSSOP) | RKS (VQFN) |      |
|                               |                                              | 20 PINS       | 20 PINS    | 20 PINS    |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | 123.5         | 126.2      | 72.9       | °C/W |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    | 62.1          | 68.7       | 77.1       | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 78.5          | 77.3       | 45.6       | °C/W |
| $\Psi_{JT}$                   | Junction-to-top characterization parameter   | 7.8           | 22.3       | 13.2       | °C/W |
| $\Psi_{JB}$                   | Junction-to-board characterization parameter | 78            | 76.9       | 45.6       | °C/W |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance | N/A           | N/A        | 29.4       | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 5.5 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted); typical values measured at  $T_A = 25^\circ\text{C}$

| PARAMETER    | TEST CONDITIONS                        | $V_{CC}$ | MIN  | TYP  | MAX  | UNIT |
|--------------|----------------------------------------|----------|------|------|------|------|
| $V_{T+}$     | Positive-going input threshold voltage | 1.5 V    | 0.61 | 0.89 | 1.17 | V    |
|              |                                        | 1.8 V    | 0.72 | 1.03 | 1.33 |      |
|              |                                        | 2.5 V    | 0.8  | 1.29 | 1.61 |      |
|              |                                        | 3 V      | 0.8  | 1.8  | 2.2  |      |
|              |                                        | 4.5 V    | 1.5  | 2.6  | 3.2  |      |
|              |                                        | 5 V      | 2.6  | 2.9  | 3.4  |      |
|              |                                        | 5.5 V    | 1.6  | 3.2  | 3.9  |      |
| $V_{T-}$     | Negative-going input threshold voltage | 1.5 V    | 0.26 | 0.48 | 0.7  | V    |
|              |                                        | 1.8 V    | 0.37 | 0.54 | 0.70 |      |
|              |                                        | 2.5 V    | 0.5  | 0.7  | 0.84 |      |
|              |                                        | 3 V      | 0.5  | 0.8  | 1.2  |      |
|              |                                        | 4.5 V    | 0.9  | 1.4  | 1.8  |      |
|              |                                        | 5 V      | 1.6  | 1.6  | 2.4  |      |
|              |                                        | 5.5 V    | 1.1  | 1.8  | 2.3  |      |
| $\Delta V_T$ | Hysteresis ( $V_{T+} - V_{T-}$ )       | 1.5 V    | 0.22 | 0.41 | 0.6  | V    |
|              |                                        | 1.8 V    | 0.28 | 0.49 | 0.69 |      |
|              |                                        | 2.5 V    | 0.3  | 0.60 | 0.83 |      |
|              |                                        | 3 V      | 0.3  | 1    | 1.2  |      |
|              |                                        | 4.5 V    | 0.4  | 1.2  | 1.4  |      |
|              |                                        | 5 V      | 0.5  | 1.3  | 1.5  |      |
|              |                                        | 5.5 V    | 0.5  | 1.4  | 1.6  |      |

## 5.5 Electrical Characteristics (continued)

over operating free-air temperature range (unless otherwise noted); typical values measured at  $T_A = 25^\circ\text{C}$

| PARAMETER         | TEST CONDITIONS                        | $V_{CC}$     | MIN  | TYP  | MAX     | UNIT          |
|-------------------|----------------------------------------|--------------|------|------|---------|---------------|
| $V_{OH}$          | $I_{OH} = -50\mu\text{A}$              | 1.5 V        | 1.4  | 1.49 |         | V             |
|                   |                                        | 1.8 V        | 1.7  | 1.79 |         |               |
|                   |                                        | 2.5 V        | 2.4  | 2.49 |         |               |
|                   |                                        | 3 V          | 2.9  | 2.99 |         |               |
|                   |                                        | 4.5 V        | 4.4  | 4.49 |         |               |
|                   |                                        | 5.5 V        | 5.4  | 5.49 |         |               |
|                   | $I_{OH} = -1\text{mA}$                 | 1.8 V        | 1.44 |      |         |               |
|                   | $I_{OH} = -2\text{mA}$                 | 2.5 V        | 2    |      |         |               |
|                   | $I_{OH} = -4\text{mA}$                 | 3 V          | 2.4  |      |         |               |
|                   | $I_{OH} = -12\text{mA}$                | 3 V          | 2.4  |      |         |               |
|                   | $I_{OH} = -24\text{mA}$                | 4.5 V        | 3.7  |      |         |               |
|                   | $I_{OH} = -24\text{mA}$                | 5.5 V        | 4.7  |      |         |               |
|                   | $I_{OH} = -75\text{mA}$                | 5.5 V        |      |      |         |               |
|                   | $I_{OH} = -50\text{mA}$                | 5.5 V        | 3.85 |      |         |               |
| $V_{OL}$          | $I_{OL} = 50\mu\text{A}$               | 1.5 V        |      | 0.01 | 0.1     | V             |
|                   |                                        | 1.8 V        |      | 0.01 | 0.1     |               |
|                   |                                        | 2.5 V        |      | 0.01 | 0.1     |               |
|                   |                                        | 3 V          |      | 0.01 | 0.1     |               |
|                   |                                        | 4.5 V        |      | 0.01 | 0.1     |               |
|                   |                                        | 5.5 V        |      | 0.01 | 0.1     |               |
|                   | $I_{OL} = 1\text{mA}$                  | 1.8 V        |      |      | 0.36    |               |
|                   | $I_{OL} = 2\text{mA}$                  | 2.5 V        |      |      | 0.5     |               |
|                   | $I_{OL} = 4\text{mA}$                  | 3 V          |      |      | 0.5     |               |
|                   | $I_{OL} = 12\text{mA}$                 | 3 V          |      |      | 0.5     |               |
|                   | $I_{OL} = 24\text{mA}$                 | 4.5 V        |      |      | 0.5     |               |
|                   | $I_{OL} = 24\text{mA}$                 | 5.5 V        |      |      | 0.5     |               |
|                   | $I_{OL} = 50\text{mA}$                 | 5.5 V        |      |      | 1.65    |               |
|                   | $I_{OL} = 75\text{mA}$                 | 5.5 V        |      |      | 1.65    |               |
| $I_I$             | $V_I = 5.5\text{ V or GND}$            | 0 V to 5.5 V |      |      | $\pm 1$ | $\mu\text{A}$ |
| $I_{OZ}$          | $V_O = V_{CC}\text{ or GND}$           | 5.5 V        |      |      | $\pm 5$ | $\mu\text{A}$ |
| $I_{CC}$          | $V_I = V_{CC}\text{ or GND, } I_O = 0$ | 5.5 V        |      |      | 20      | $\mu\text{A}$ |
| $C_I$             | $V_I = V_{CC}\text{ or GND}$           | 5 V          |      | 9    |         | pF            |
| $C_O$             | $V_O = V_{CC}\text{ or GND}$           | 5 V          |      | 15   |         | pF            |
| $C_{PD}^{(1)(2)}$ | $F = 1\text{MHz}$                      | 5 V          |      | 60   |         | pF            |

(1)  $C_{PD}$  is used to determine the dynamic power consumption, per channel

(2)  $P_D = V_{CC}^2 \times F_I \times (C_{PD} + C_L)$  where  $F_I$  = input frequency,  $C_L$  = output load capacitance,  $V_{CC}$  = supply voltage

## 5.6 Switching Characteristics

$C_L = 50\text{pF}$ ; over operating free-air temperature range (unless otherwise noted). See *Parameter Measurement Information*

| PARAMETER | FROM (INPUT)    | TO (OUTPUT) | $V_{CC}$ | $T_A = 25^\circ\text{C}$ |      |      | $-40^\circ\text{C to } 85^\circ\text{C}$ |     |      | $-40^\circ\text{C to } 125^\circ\text{C}$ |     |      | UNIT |
|-----------|-----------------|-------------|----------|--------------------------|------|------|------------------------------------------|-----|------|-------------------------------------------|-----|------|------|
|           |                 |             |          | MIN                      | TYP  | MAX  | MIN                                      | TYP | MAX  | MIN                                       | TYP | MAX  |      |
| $t_{PLH}$ | A               | Y           | 1.5 V    |                          | 14.5 | 25.6 |                                          |     | 26.5 |                                           |     | 26.8 | ns   |
| $t_{PHL}$ | A               | Y           | 1.5 V    |                          | 14.8 | 27.5 |                                          |     | 28.4 |                                           |     | 28.8 | ns   |
| $t_{PZH}$ | $\overline{OE}$ | Y           | 1.5 V    |                          | 17.6 | 35   |                                          |     | 36.8 |                                           |     | 37.7 | ns   |

## 5.6 Switching Characteristics (continued)

$C_L = 50\text{pF}$ ; over operating free-air temperature range (unless otherwise noted). See *Parameter Measurement Information*

| PARAMETER | FROM<br>(INPUT) | TO (OUTPUT) | $V_{CC}$ | $T_A = 25^\circ\text{C}$ |      |      | $-40^\circ\text{C to } 85^\circ\text{C}$ |     |      | $-40^\circ\text{C to } 125^\circ\text{C}$ |     |      | UNIT |
|-----------|-----------------|-------------|----------|--------------------------|------|------|------------------------------------------|-----|------|-------------------------------------------|-----|------|------|
|           |                 |             |          | MIN                      | TYP  | MAX  | MIN                                      | TYP | MAX  | MIN                                       | TYP | MAX  |      |
| $t_{PZL}$ | $\overline{OE}$ | Y           | 1.5 V    |                          | 19.2 | 36.3 |                                          |     | 37.7 |                                           |     | 38.1 | ns   |
| $t_{PHZ}$ | $\overline{OE}$ | Y           | 1.5 V    |                          | 22.3 | 32.7 |                                          |     | 33.8 |                                           |     | 34.3 | ns   |
| $t_{PLZ}$ | $\overline{OE}$ | Y           | 1.5 V    |                          | 14   | 21.8 |                                          |     | 22.3 |                                           |     | 22.3 | ns   |
| $t_{PLH}$ | A               | Y           | 1.8 V    |                          | 10.1 | 16.4 |                                          |     | 17.7 |                                           |     | 18.5 | ns   |
| $t_{PHL}$ | A               | Y           | 1.8 V    |                          | 10.9 | 18.6 |                                          |     | 19.8 |                                           |     | 20.6 | ns   |
| $t_{PZH}$ | $\overline{OE}$ | Y           | 1.8 V    |                          | 12.8 | 22.7 |                                          |     | 24.7 |                                           |     | 25.9 | ns   |
| $t_{PZL}$ | $\overline{OE}$ | Y           | 1.8 V    |                          | 14.1 | 24.2 |                                          |     | 26   |                                           |     | 26.9 | ns   |
| $t_{PHZ}$ | $\overline{OE}$ | Y           | 1.8 V    |                          | 17.7 | 23.3 |                                          |     | 25.8 |                                           |     | 25.8 | ns   |
| $t_{PLZ}$ | $\overline{OE}$ | Y           | 1.8 V    |                          | 10.6 | 15.3 |                                          |     | 15.9 |                                           |     | 16   | ns   |
| $t_{PLH}$ | A               | Y           | 2.5 V    |                          | 6.4  | 9.5  |                                          |     | 10.6 |                                           |     | 11.3 | ns   |
| $t_{PHL}$ | A               | Y           | 2.5 V    |                          | 7.1  | 11.4 |                                          |     | 12.4 |                                           |     | 13.1 | ns   |
| $t_{PZH}$ | $\overline{OE}$ | Y           | 2.5 V    |                          | 8.3  | 13.5 |                                          |     | 15.1 |                                           |     | 16.2 | ns   |
| $t_{PZL}$ | $\overline{OE}$ | Y           | 2.5 V    |                          | 9.3  | 15.1 |                                          |     | 16.7 |                                           |     | 17.4 | ns   |
| $t_{PHZ}$ | $\overline{OE}$ | Y           | 2.5 V    |                          | 7.6  | 10.5 |                                          |     | 11.4 |                                           |     | 11.9 | ns   |
| $t_{PLZ}$ | $\overline{OE}$ | Y           | 2.5 V    |                          | 5.4  | 7.9  |                                          |     | 8.7  |                                           |     | 8.9  | ns   |
| $t_{PLH}$ | A               | Y           | 3.3 V    |                          | 5.3  | 7.6  |                                          |     | 8.6  |                                           |     | 9.2  | ns   |
| $t_{PHL}$ | A               | Y           | 3.3 V    |                          | 5.9  | 9.4  |                                          |     | 10.2 |                                           |     | 10.8 | ns   |
| $t_{PZH}$ | $\overline{OE}$ | Y           | 3.3 V    |                          | 7.2  | 11.2 |                                          |     | 12.4 |                                           |     | 13.2 | ns   |
| $t_{PZL}$ | $\overline{OE}$ | Y           | 3.3 V    |                          | 7.7  | 12.5 |                                          |     | 13.6 |                                           |     | 14.5 | ns   |
| $t_{PHZ}$ | $\overline{OE}$ | Y           | 3.3 V    |                          | 6.3  | 8.4  |                                          |     | 9.3  |                                           |     | 10   | ns   |
| $t_{PLZ}$ | $\overline{OE}$ | Y           | 3.3 V    |                          | 4.7  | 6.6  |                                          |     | 7.1  |                                           |     | 7.7  | ns   |
| $t_{PLH}$ | A               | Y           | 5 V      |                          | 3.9  | 5.3  |                                          |     | 6    |                                           |     | 6.4  | ns   |
| $t_{PHL}$ | A               | Y           | 5 V      |                          | 4.5  | 7    |                                          |     | 7.6  |                                           |     | 8    | ns   |
| $t_{PZH}$ | $\overline{OE}$ | Y           | 5 V      |                          | 5.6  | 8.3  |                                          |     | 9.2  |                                           |     | 9.8  | ns   |
| $t_{PZL}$ | $\overline{OE}$ | Y           | 5 V      |                          | 5.8  | 8.8  |                                          |     | 9.6  |                                           |     | 10.2 | ns   |
| $t_{PHZ}$ | $\overline{OE}$ | Y           | 5 V      |                          | 5    | 6.3  |                                          |     | 6.8  |                                           |     | 6.8  | ns   |
| $t_{PLZ}$ | $\overline{OE}$ | Y           | 5 V      |                          | 3.5  | 4.5  |                                          |     | 4.9  |                                           |     | 5.2  | ns   |

## 5.7 Typical Characteristics

$T_A = 25^\circ\text{C}$  (unless otherwise noted)

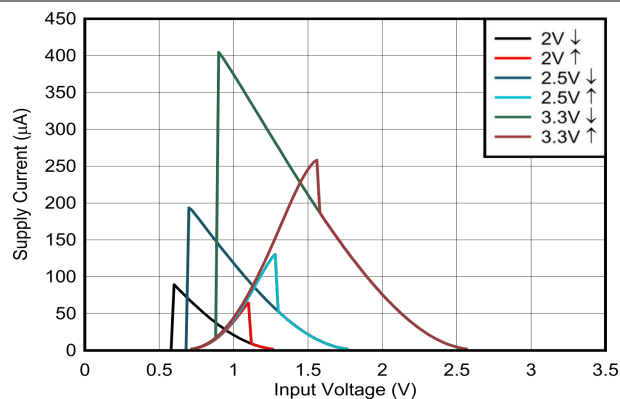


Figure 5-1. Supply Current Across Input Voltage 1.8V and 2.5V Supply

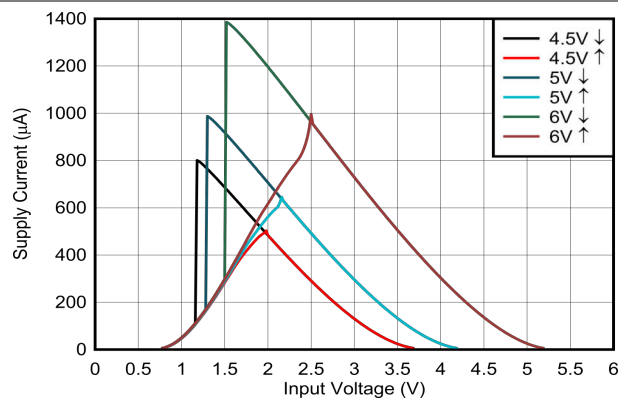


Figure 5-2. Supply Current Across Input Voltage 3.3V and 5.0V Supply

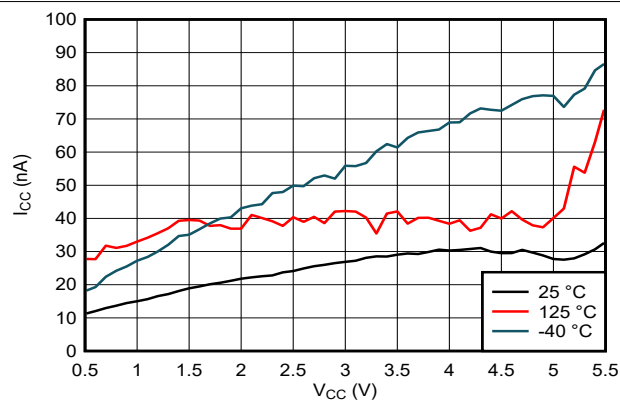


Figure 5-3. Supply Current Across Supply Voltage

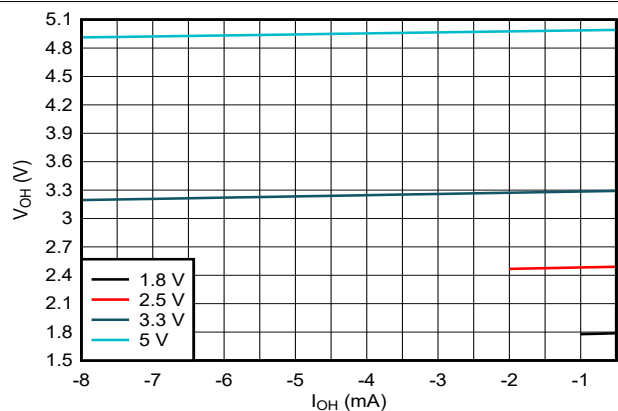


Figure 5-4. Output Voltage vs Current in HIGH State

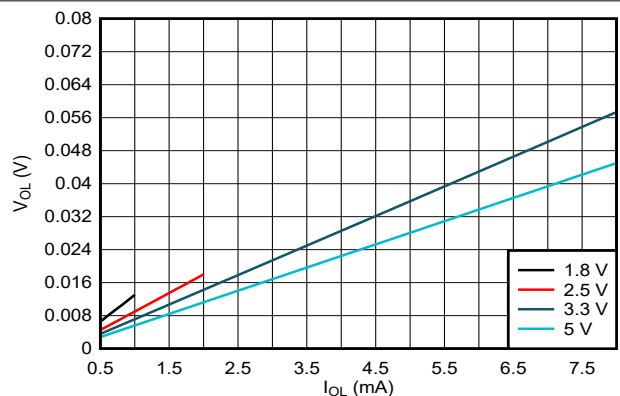


Figure 5-5. Output Voltage vs Current in LOW State

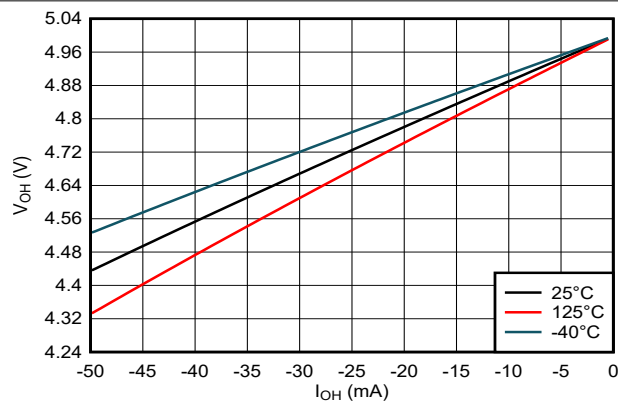


Figure 5-6. Output Voltage vs Current in HIGH State; 5V Supply

## 5.7 Typical Characteristics (continued)

$T_A = 25^\circ\text{C}$  (unless otherwise noted)

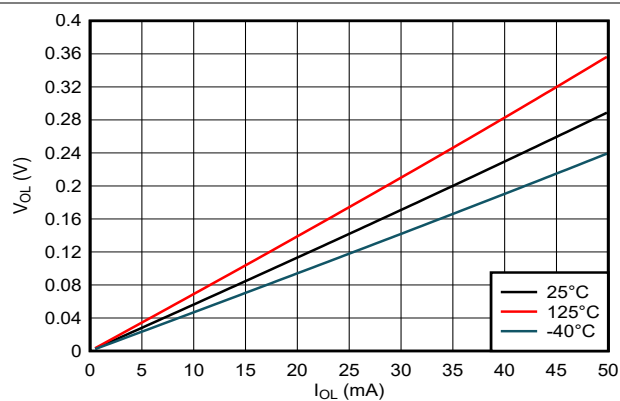


Figure 5-7. Output Voltage vs Current in LOW State; 5V Supply

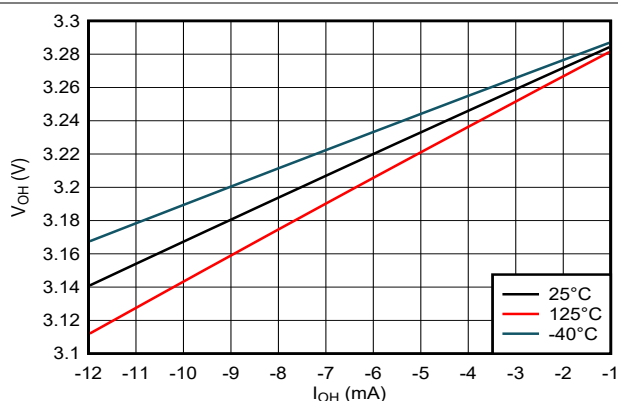


Figure 5-8. Output Voltage vs Current in HIGH State; 3.3V Supply

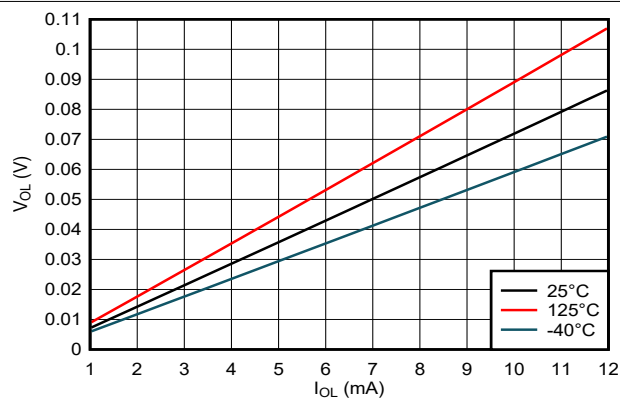


Figure 5-9. Output Voltage vs Current in LOW State; 3.3V Supply

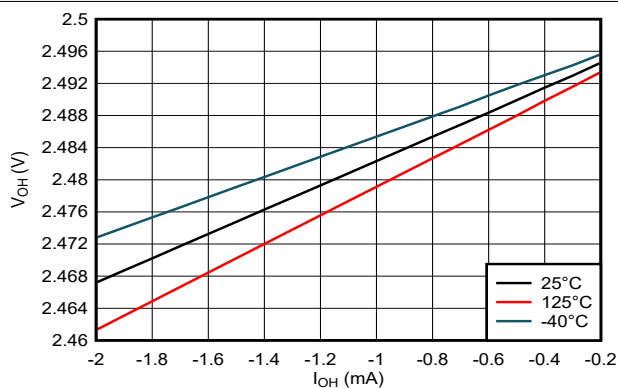


Figure 5-10. Output Voltage vs Current in HIGH State; 2.5V Supply

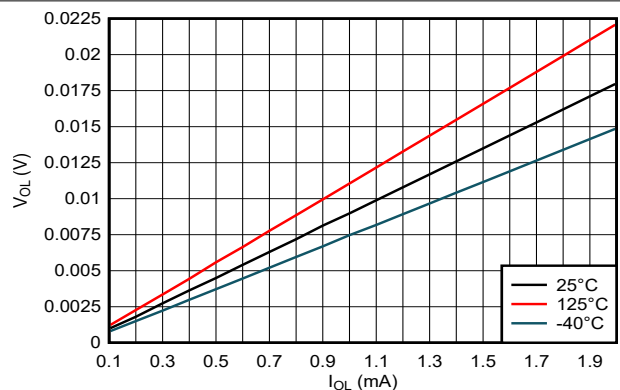


Figure 5-11. Output Voltage vs Current in LOW State; 2.5V Supply

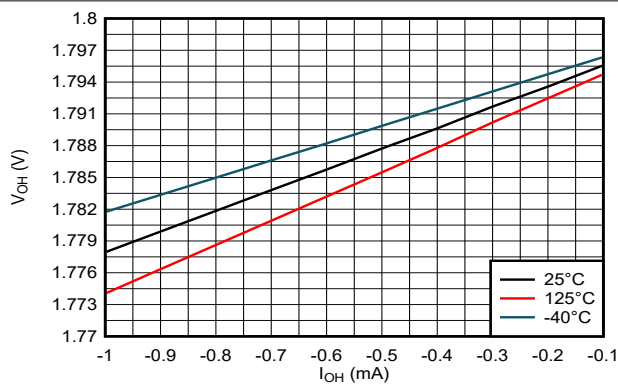


Figure 5-12. Output Voltage vs Current in HIGH State; 1.8V Supply

## 5.7 Typical Characteristics (continued)

$T_A = 25^\circ\text{C}$  (unless otherwise noted)

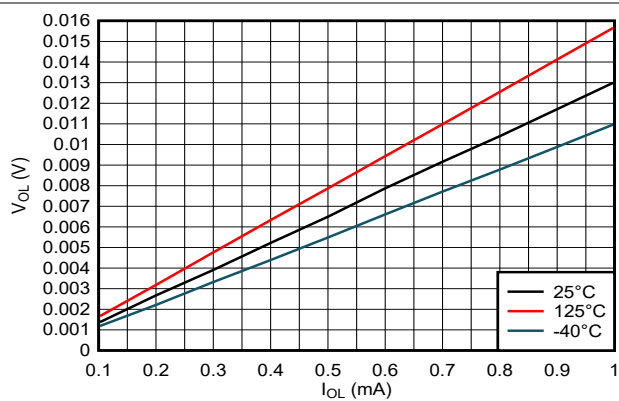



Figure 5-13. Output Voltage vs Current in LOW State; 1.8V Supply

## 6 Parameter Measurement Information

Phase relationships between waveforms were chosen arbitrarily for the examples listed in the following table. All input pulses are supplied by generators having the following characteristics:  $PRR \leq 1\text{MHz}$ ,  $Z_O = 50\Omega$ ,  $t_f < 2.5\text{ ns}$ .


The outputs are measured individually with one input transition per measurement.

| TEST                  | S1     | S2     | $R_L$        | $C_L$ | $\Delta V$ | $V_{CC}$            |
|-----------------------|--------|--------|--------------|-------|------------|---------------------|
| $t_{PLH}$ , $t_{PHL}$ | OPEN   | OPEN   | —            | 50pF  | —          | ALL                 |
| $t_{PLZ}$ , $t_{PZL}$ | CLOSED | OPEN   | 1k $\Omega$  | 50pF  | 0.15 V     | $\leq 2.5\text{ V}$ |
| $t_{PHZ}$ , $t_{PZH}$ | OPEN   | CLOSED | 1k $\Omega$  | 50pF  | 0.15 V     | $\leq 2.5\text{ V}$ |
| $t_{PLZ}$ , $t_{PZL}$ | CLOSED | OPEN   | 500 $\Omega$ | 50pF  | 0.3 V      | $> 2.5\text{ V}$    |
| $t_{PHZ}$ , $t_{PZH}$ | OPEN   | CLOSED | 500 $\Omega$ | 50pF  | 0.3 V      | $> 2.5\text{ V}$    |

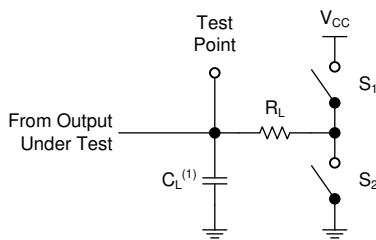


(1)  $C_L$  includes probe and test-fixture capacitance.

**Figure 6-1. Load Circuit for 3-State Outputs**

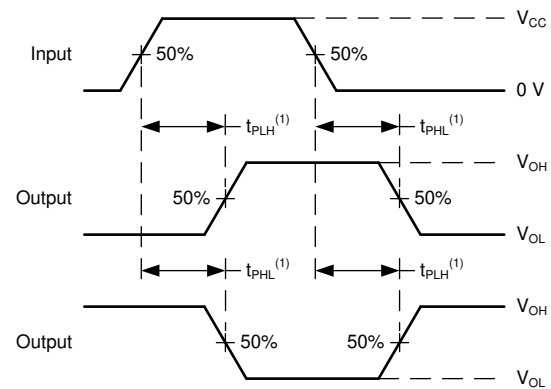

(1) The greater between  $t_{PLH}$  and  $t_{PHL}$  is the same as  $t_{pd}$ .


**Figure 6-2. Voltage Waveforms Propagation Delays**

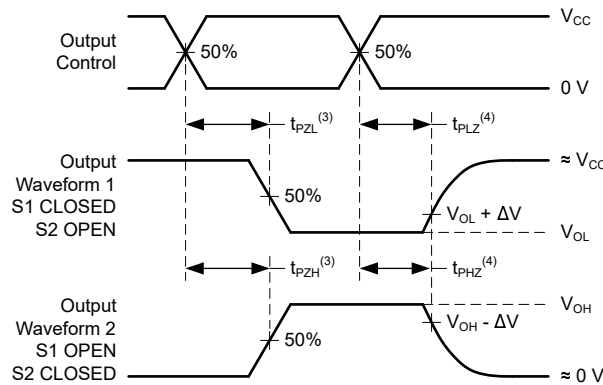

(3) The greater between  $t_{PZL}$  and  $t_{PZH}$  is the same as  $t_{en}$ .

(4) The greater between  $t_{PLZ}$  and  $t_{PHZ}$  is the same as  $t_{dis}$ .

**Figure 6-3. Voltage Waveforms Propagation Delays**

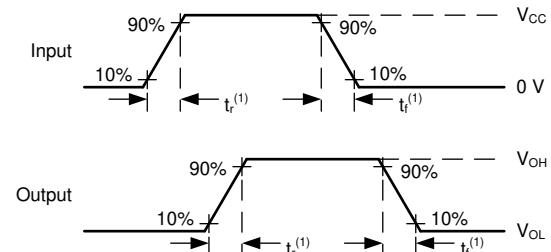

(1) The greater between  $t_r$  and  $t_f$  is the same as  $t_t$ .

**Figure 6-4. Voltage Waveforms, Input and Output Transition Times**

## 7 Detailed Description


### 7.1 Overview

The SN74AC8541-Q1 contains eight buffers with 3-state outputs and Schmitt-trigger inputs. The active low output enable pins ( $\overline{OE1}$  and  $\overline{OE2}$ ) control all eight channels, and are configured so that both must be low for the outputs to be active.

When the outputs are enabled, the outputs are actively driven low or high.

When the outputs are disabled, the outputs are set into the high-impedance state.

### 7.2 Functional Block Diagram

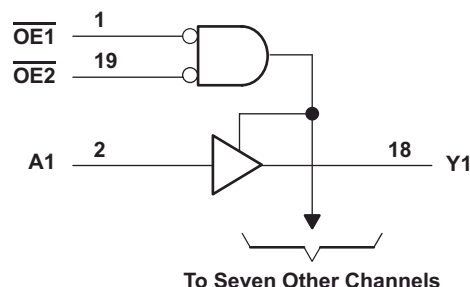

Copyright © 2016, Texas Instruments Incorporated

**Figure 7-1. Logic Diagram (Positive Logic)**

### 7.3 Device Functional Modes

**Table 7-1. Function Table**

| INPUTS <sup>(1)</sup> |                  |   | OUTPUT <sup>(2)</sup> |
|-----------------------|------------------|---|-----------------------|
| $\overline{OE1}$      | $\overline{OE2}$ | A | Y                     |
| L                     | L                | L | L                     |
| L                     | L                | H | H                     |
| H                     | X                | X | Z                     |
| X                     | H                | X | Z                     |

(1) L = input low, H = input high, X = don't care

(2) L = output low, H = output high, Z = high impedance

### 7.4 Feature Description

#### 7.4.1 Balanced CMOS 3-State Outputs

This device includes balanced CMOS 3-state outputs. Driving high, driving low, and high impedance are the three states that these outputs can be in. The term *balanced* indicates that the device can sink and source similar currents. The drive capability of this device may create fast edges into light loads, so routing and load conditions should be considered to prevent ringing. Additionally, the outputs of this device can drive larger currents than the device can sustain without being damaged. It is important for the output power of the device to be limited to avoid damage due to overcurrent. The electrical and thermal limits defined in the *Absolute Maximum Ratings* must be followed at all times.

When placed into the high-impedance state, the output will neither source nor sink current, with the exception of minor leakage current as defined in the *Electrical Characteristics* table. In the high-impedance state, the output voltage is not controlled by the device and is dependent on external factors. If no other drivers are connected to the node, then this is known as a floating node and the voltage is unknown. A pull-up or pull-down resistor can be connected to the output to provide a known voltage at the output while it is in the high-impedance state. The value of the resistor will depend on multiple factors, including parasitic capacitance and power consumption limitations. Typically, a 10kΩ resistor can be used to meet these requirements.

Unused 3-state CMOS outputs should be left disconnected.


### 7.4.2 CMOS Schmitt-Trigger Inputs

This device includes inputs with the Schmitt-trigger architecture. These inputs are high impedance and are typically modeled as a resistor in parallel with the input capacitance given in the *Electrical Characteristics* table from the input to ground. The worst case resistance is calculated with the maximum input voltage, given in the *Absolute Maximum Ratings* table, and the maximum input leakage current, given in the *Electrical Characteristics* table, using Ohm's law ( $R = V \div I$ ).

The Schmitt-trigger input architecture provides hysteresis as defined by  $\Delta V_T$  in the *Electrical Characteristics* table, which makes this device extremely tolerant to slow or noisy inputs. While the inputs can be driven much slower than standard CMOS inputs, it is still recommended to properly terminate unused inputs. Driving the inputs with slow transitioning signals will increase dynamic current consumption of the device. For additional information regarding Schmitt-trigger inputs, please see [Understanding Schmitt Triggers](#).

### 7.4.3 Wettable Flanks

This device includes wettable flanks for at least one package. See the *Features* section on the front page of the data sheet where packages include this feature.

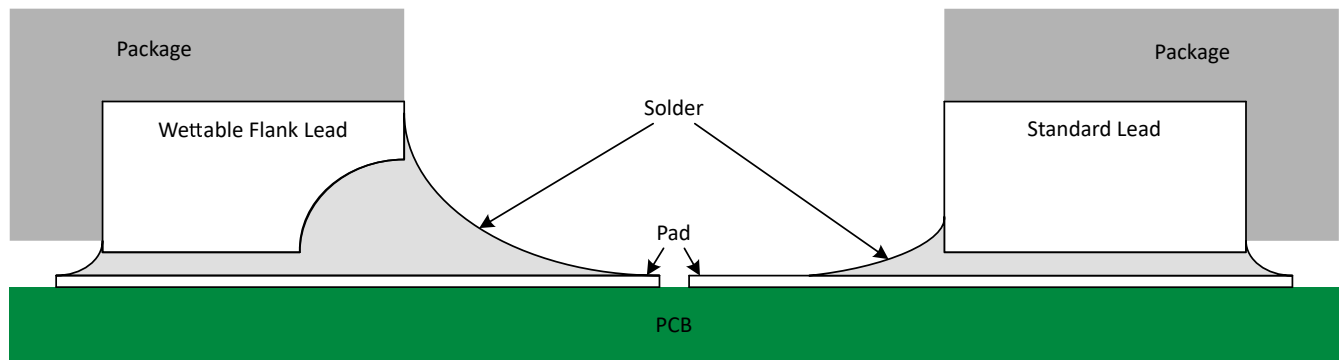

**Figure 7-2. Simplified Cutaway View of Wettable-Flank QFN Package and Standard QFN Package After Soldering**


Wettable flanks help improve side wetting after soldering, which makes QFN packages easier to inspect with automatic optical inspection (AOI). As shown in [Figure 7-2](#), a wettable flank can be dimpled or step-cut to provide additional surface area for solder adhesion which assists in reliably creating a side fillet. See the mechanical drawing for additional details.

### 7.4.4 Clamp Diode Structure

As shown in [Figure 7-3](#), the inputs and outputs to this device have both positive and negative clamping diodes.

#### **CAUTION**

Voltages beyond the values specified in the *Absolute Maximum Ratings* table can cause damage to the device. The input and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.

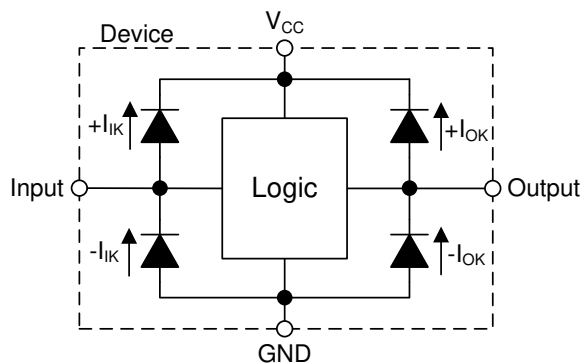

**Figure 7-3. Electrical Placement of Clamping Diodes for Each Input and Output**

## 8 Application and Implementation


### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

### 8.1 Application Information

The SN74AC8541-Q1 can be used to drive signals over relatively long traces or transmission lines. A series damping resistor placed in series with the transmitter's output can be used to reduce ringing caused by impedance mismatches between the driver, transmission line, and receiver. The figure in the *Application Curve* section shows the received signal with three separate resistor values. Just a small amount of resistance can make a significant impact on signal integrity in this type of application.

### 8.2 Typical Application

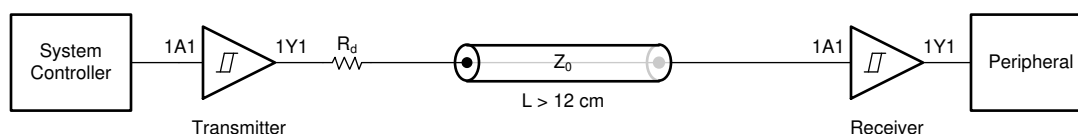

**Figure 8-1. Typical Application Block Diagram**

### 8.3 Design Requirements

#### 8.3.1 Power Considerations

Ensure the desired supply voltage is within the range specified in the *Recommended Operating Conditions*. The supply voltage sets the device's electrical characteristics of the device as described in the *Electrical Characteristics* section.

The positive voltage supply must be capable of sourcing current equal to the total current to be sourced by all outputs of the SN74AC8541-Q1 plus the maximum static supply current,  $I_{CC}$ , listed in the *Electrical Characteristics*, and any transient current required for switching. The logic device can only source as much current that is provided by the positive supply source. Ensure the maximum total current through  $V_{CC}$  listed in the *Absolute Maximum Ratings* is not exceeded.

The ground must be capable of sinking current equal to the total current to be sunk by all outputs of the SN74AC8541-Q1 plus the maximum supply current,  $I_{CC}$ , listed in the *Electrical Characteristics*, and any transient current required for switching. The logic device can only sink as much current that can be sunk into its ground connection. Ensure the maximum total current through GND listed in the *Absolute Maximum Ratings* is not exceeded.

The SN74AC8541-Q1 can drive a load with a total capacitance less than or equal to 50pF while still meeting all of the data sheet specifications. Larger capacitive loads can be applied; however, it is not recommended to exceed 50pF.

The SN74AC8541-Q1 can drive a load with total resistance described by  $R_L \geq V_O / I_O$ , with the output voltage and current defined in the *Electrical Characteristics* table with  $V_{OH}$  and  $V_{OL}$ . When outputting in the HIGH state, the output voltage in the equation is defined as the difference between the measured output voltage and the supply voltage at the  $V_{CC}$  pin.

Total power consumption can be calculated using the information provided in [CMOS Power Consumption and Cpd Calculation](#).

Thermal increase can be calculated using the information provided in [Thermal Characteristics of Standard Linear and Logic \(SLL\) Packages and Devices](#).

**CAUTION**

The maximum junction temperature,  $T_{J(max)}$  listed in the *Absolute Maximum Ratings*, is an additional limitation to prevent damage to the device. Do not violate any values listed in the *Absolute Maximum Ratings*. These limits are provided to prevent damage to the device.

**8.3.2 Input Considerations**

Input signals must cross  $V_{t-(min)}$  to be considered a logic LOW, and  $V_{t+(max)}$  to be considered a logic HIGH. Do not exceed the maximum input voltage range found in the *Absolute Maximum Ratings*.

Unused inputs must be terminated to either  $V_{CC}$  or ground. The unused inputs can be directly terminated if the input is completely unused, or they can be connected with a pull-up or pull-down resistor if the input will be used sometimes, but not always. A pull-up resistor is used for a default state of HIGH, and a pull-down resistor is used for a default state of LOW. The drive current of the controller, leakage current into the SN74AC8541-Q1 (as specified in the *Electrical Characteristics*), and the desired input transition rate limits the resistor size. A 10k $\Omega$  resistor value is often used due to these factors.

The SN74AC8541-Q1 has no input signal transition rate requirements because it has Schmitt-Trigger inputs.

Another benefit to having Schmitt-Trigger inputs is the ability to reject noise. Noise with a large enough amplitude can still cause issues. To know how much noise is too much, please refer to the  $\Delta V_{T(min)}$  in the *Electrical Characteristics*. This hysteresis value will provide the peak-to-peak limit.

Unlike what happens with standard CMOS inputs, Schmitt-Trigger inputs can be held at any valid value without causing huge increases in power consumption. The typical additional current caused by holding an input at a value other than  $V_{CC}$  or ground is plotted in the *Typical Characteristics*.

Refer to the *Feature Description* section for additional information regarding the inputs for this device.

**8.3.3 Output Considerations**

The positive supply voltage is used to produce the output HIGH voltage. Drawing current from the output will decrease the output voltage as specified by the  $V_{OH}$  specification in the *Electrical Characteristics*. The ground voltage is used to produce the output LOW voltage. Sinking current into the output will increase the output voltage as specified by the  $V_{OL}$  specification in the *Electrical Characteristics*.

Push-pull outputs that could be in opposite states, even for a very short time period, should never be connected directly together. This can cause excessive current and damage to the device.

Two channels within the same device with the same input signals can be connected in parallel for additional output drive strength.


Unused outputs can be left floating. Do not connect outputs directly to  $V_{CC}$  or ground.

Refer to the *Feature Description* section for additional information regarding the outputs for this device.

**8.4 Detailed Design Procedure**

1. Add a decoupling capacitor from  $V_{CC}$  to GND. The capacitor needs to be placed physically close to the device and electrically close to both the  $V_{CC}$  and GND pins. An example layout is shown in the *Layout* section.
2. Ensure the capacitive load at the output is  $\leq 50\text{pF}$ . This is not a hard limit; by design, however, it will optimize performance. This can be accomplished by providing short, appropriately sized traces from the SN74AC8541-Q1 to one or more of the receiving devices.
3. Ensure the resistive load at the output is larger than  $(V_{CC} / I_{O(max)})\Omega$ . Doing this will prevent the maximum output current from the *Absolute Maximum Ratings* from being violated. Most CMOS inputs have a resistive load measured in M $\Omega$ ; much larger than the minimum calculated previously.
4. Thermal issues are rarely a concern for logic gates; the power consumption and thermal increase, however, can be calculated using the steps provided in the application report, [CMOS Power Consumption and Cpd Calculation](#).

## 8.5 Application Curves

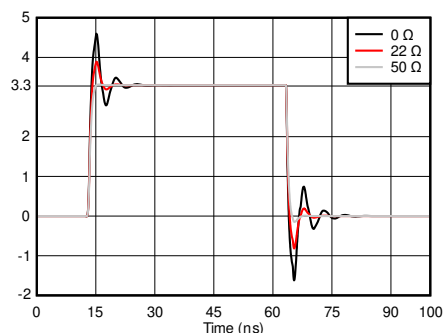

**Figure 8-2. Simulated Signal Integrity at the Receiver With Different Damping Resistor ( $R_d$ ) Values**

## 8.6 Power Supply Recommendations


The power supply can be any voltage between the minimum and maximum supply voltage rating located in the *Recommended Operating Conditions*. Each  $V_{CC}$  terminal should have a good bypass capacitor to prevent power disturbance. A  $0.1\mu\text{F}$  capacitor is recommended for this device. It is acceptable to parallel multiple bypass capacitors to reject different frequencies of noise. The  $0.1\mu\text{F}$  and  $1\mu\text{F}$  capacitors are commonly used in parallel. The bypass capacitor should be installed as close to the power terminal as possible for best results.

## 8.7 Layout

### 8.7.1 Layout Guidelines

When using multiple-input and multiple-channel logic devices, inputs must never be left floating. In many cases, functions or parts of functions of digital logic devices are unused; for example, when only two inputs of a triple-input AND gate are used or only 3 of the 4 buffer gates are used. Such unused input pins must not be left unconnected because the undefined voltages at the outside connections result in undefined operational states. All unused inputs of digital logic devices must be connected to a logic high or logic low voltage, as defined by the input voltage specifications, to prevent them from floating. The logic level that must be applied to any particular unused input depends on the function of the device. Generally, the inputs are tied to GND or  $V_{CC}$ , whichever makes more sense for the logic function or is more convenient.

### 8.7.2 Layout Example

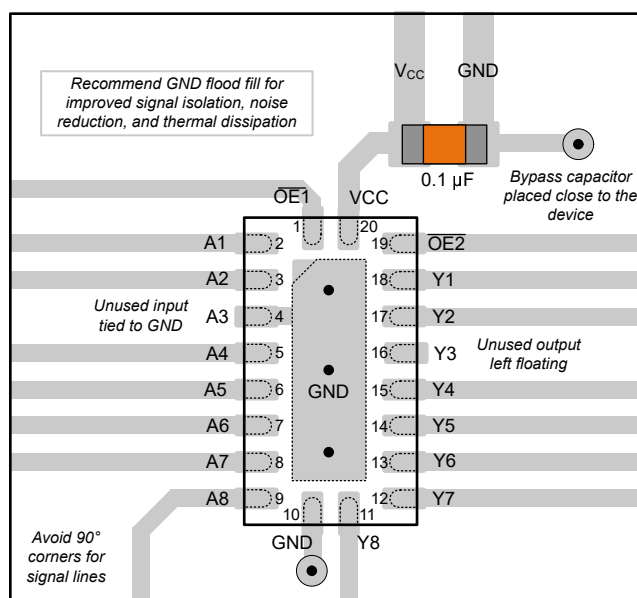

**Figure 8-3. Example Layout for the SN74AC8541-Q1 in the RKS Package**

## 9 Device and Documentation Support

### 9.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](https://www.ti.com). Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 9.2 Support Resources

TI E2E™ [support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

### 9.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

### 9.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 9.5 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 10 Revision History

| Changes from Revision * (November 2023) to Revision A (March 2024)                                                                                       | Page |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| • Added DGS and PW packages to <i>Device Information</i> table, <i>Pin Configuration and Functions</i> section and <i>Thermal Information</i> table..... | 1    |

## 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable part number              | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|------------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">SN74AC8541QDGSRQ1</a>  | Active        | Production           | VSSOP (DGS)   20 | 5000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 8541Q               |
| SN74AC8541QDGSRQ1.A                | Active        | Production           | VSSOP (DGS)   20 | 5000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 8541Q               |
| <a href="#">SN74AC8541QPWRQ1</a>   | Active        | Production           | TSSOP (PW)   20  | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | AC8541Q             |
| SN74AC8541QPWRQ1.A                 | Active        | Production           | TSSOP (PW)   20  | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | AC8541Q             |
| <a href="#">SN74AC8541QWRKSRQ1</a> | Active        | Production           | VQFN (RKS)   20  | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | AC8541Q             |
| SN74AC8541QWRKSRQ1.A               | Active        | Production           | VQFN (RKS)   20  | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | AC8541Q             |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF SN74AC8541-Q1 :**

- Catalog : [SN74AC8541](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device             | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74AC8541QDGSRQ1  | VSSOP        | DGS             | 20   | 5000 | 330.0              | 16.4               | 5.4     | 5.4     | 1.45    | 8.0     | 16.0   | Q1            |
| SN74AC8541QPWRQ1   | TSSOP        | PW              | 20   | 3000 | 330.0              | 16.4               | 6.95    | 7.0     | 1.4     | 8.0     | 16.0   | Q1            |
| SN74AC8541QWRKSRQ1 | VQFN         | RKS             | 20   | 3000 | 180.0              | 12.4               | 2.8     | 4.8     | 1.2     | 4.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device             | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74AC8541QDGSRQ1  | VSSOP        | DGS             | 20   | 5000 | 353.0       | 353.0      | 32.0        |
| SN74AC8541QPWRQ1   | TSSOP        | PW              | 20   | 3000 | 353.0       | 353.0      | 32.0        |
| SN74AC8541QWRKSRQ1 | VQFN         | RKS             | 20   | 3000 | 210.0       | 185.0      | 35.0        |



4220206/A 02/2017

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

# EXAMPLE BOARD LAYOUT


PW0020A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

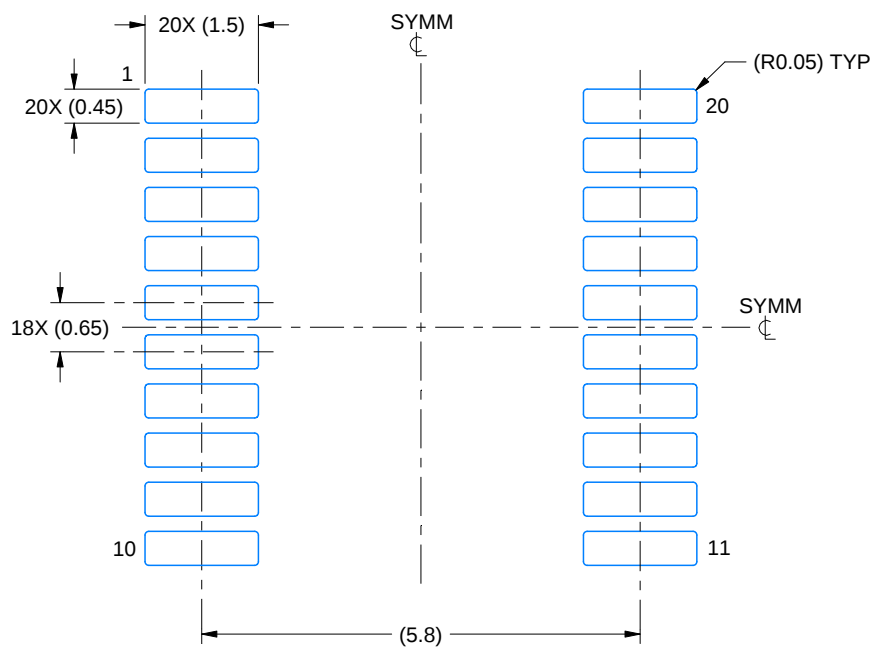

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X

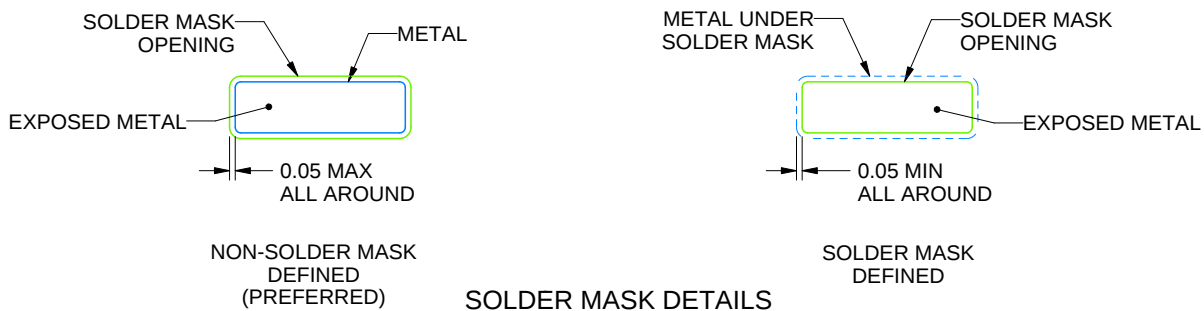

4220206/A 02/2017

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

PW0020A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4220206/A 02/2017

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.



## VSSOP - 1.1 mm max height

Technical drawing of a 16-pin connector showing front and side views with dimensions and callouts.

**Front View Dimensions:**



- Pin 1 INDEX AREA (Callout to Pin 1)
- Pin 1 to Pin 16 distance: 5.1 TYP, 4.7
- Pin 1 to Pin 16 distance: 5.2, 5.0 (NOTE 3)
- Pin 1 to Pin 16 distance: 3.1, 2.9
- Pin 1 to Pin 16 distance: 18X 0.5
- Pin 1 to Pin 16 distance: 2X 4.5
- Pin 1 to Pin 16 distance: 20X 0.275, 0.165
- Pin 1 to Pin 16 distance: 11

**Side View Dimensions:**

- SEATING PLANE (Callout to Pin 1)
- Pin 1 to Pin 16 distance: 4X (0° -15°)

**Callouts:**

- A
- B
- C
- 0.1 C
- 0.1 M
- C A B

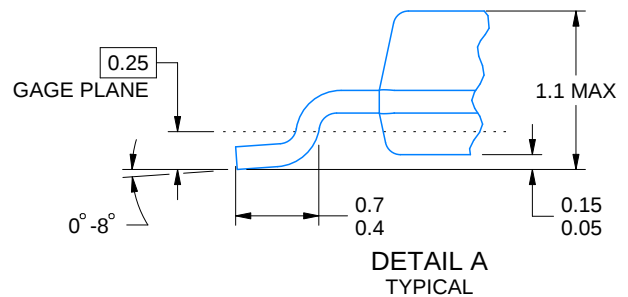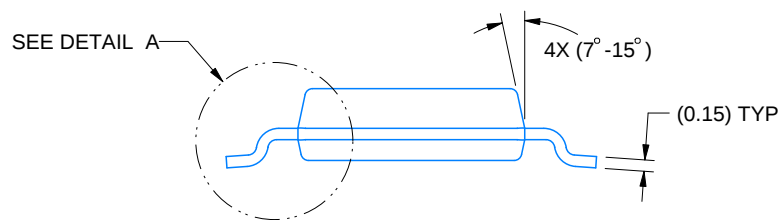

PowerPAD is a trademark of Texas Instruments.



- 
- TEXAS  
INSTRUMENTS  
www.ti.com

# EXAMPLE BOARD LAYOUT

DGS0020A

VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

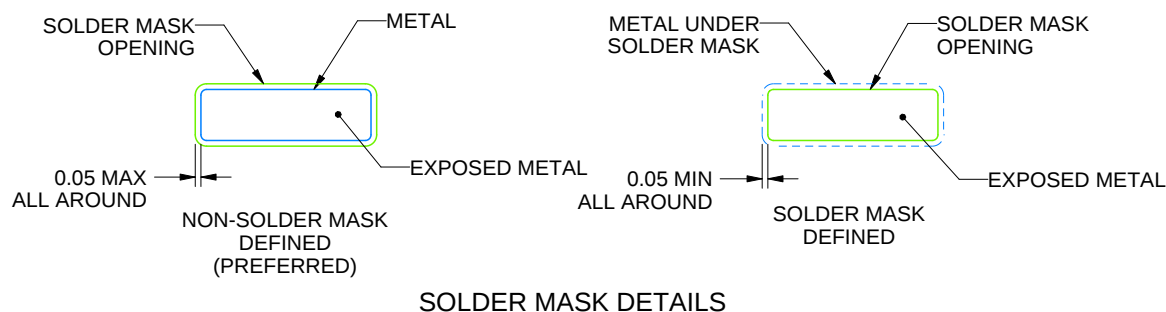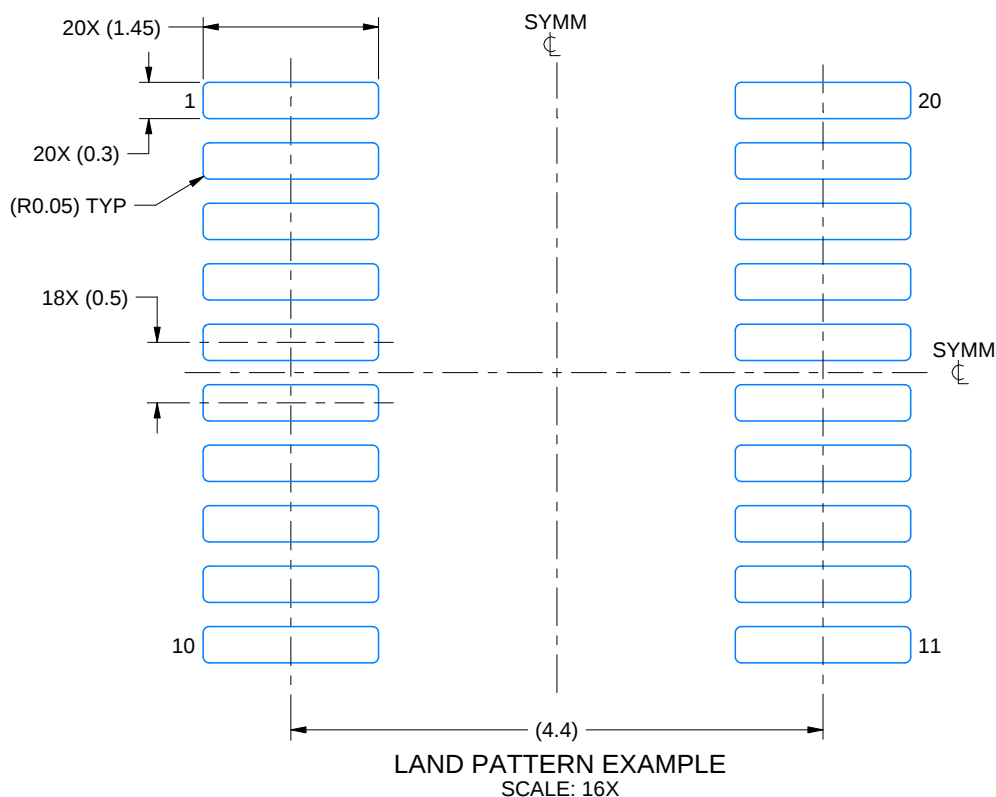

4226367/A 10/2020

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature numbers SLMA002 ([www.ti.com/lit/slma002](http://www.ti.com/lit/slma002)) and SLMA004 ([www.ti.com/lit/slma004](http://www.ti.com/lit/slma004)).
9. Size of metal pad may vary due to creepage requirement.
10. Vias are optional depending on application, refer to device data sheet. It is recommended that vias under paste be filled, plugged or tented.

# EXAMPLE STENCIL DESIGN

DGS0020A

VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

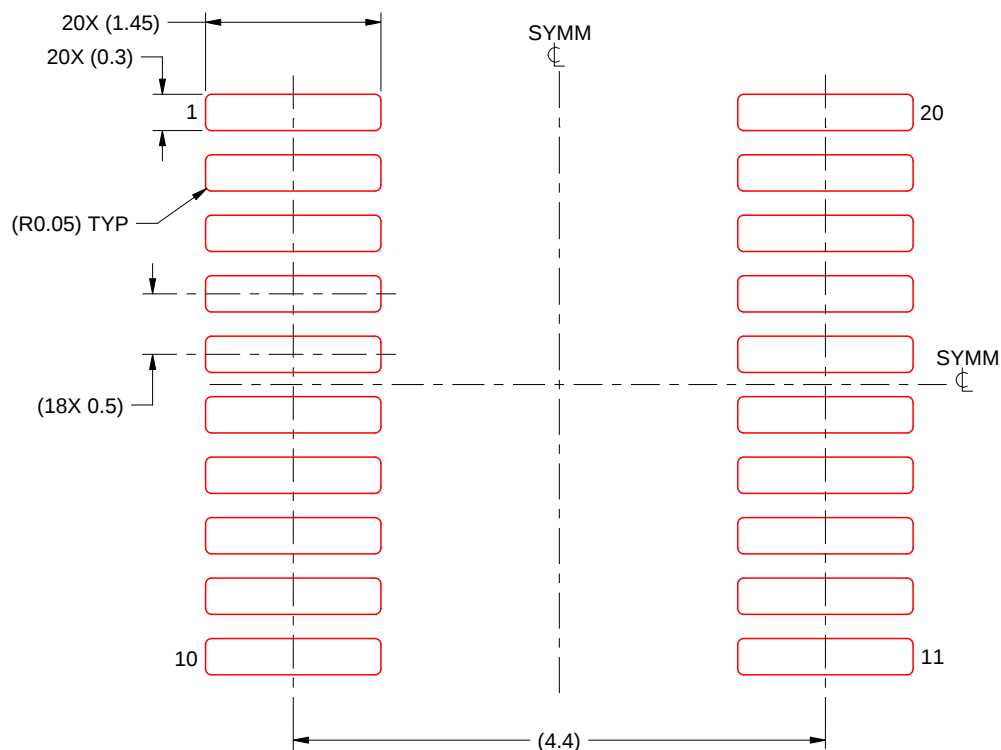

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 16X

4226367/A 10/2020

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.

## GENERIC PACKAGE VIEW


**RKS 20**

**VQFN - 1 mm max height**

2.5 x 4.5, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

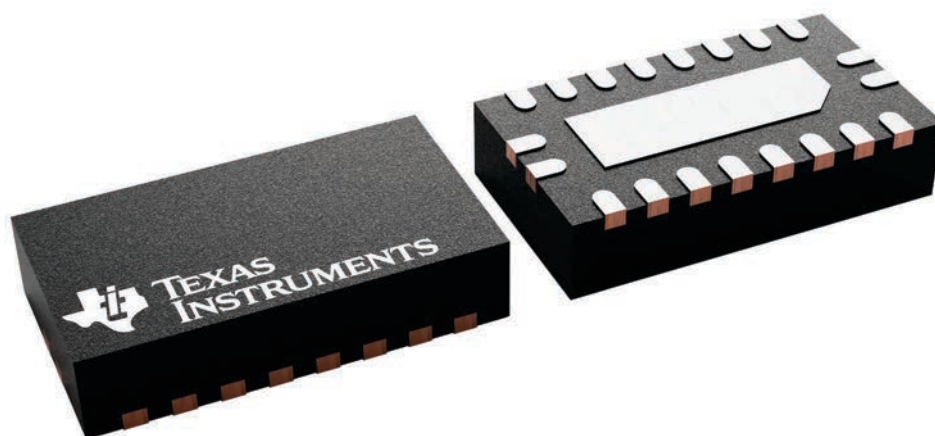

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated