

## SN74HCS14 Hex Inverter With Schmitt-Trigger Inputs

### 1 Features

- Wide operating voltage range: 2V to 6V
- [Schmitt-trigger inputs](#) allow for slow or noisy input signals
- Low power consumption
  - Typical  $I_{CC}$  of 100nA
  - Typical input leakage current of  $\pm 100$ nA
- $\pm 7.8$ mA output drive at 6V
- Extended ambient temperature range:  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ ,  $T_A$

### 2 Applications

- [Synchronize inverted clock inputs](#)
- [Debounce a switch](#)
- Invert a digital signal


### 3 Description

This device contains six independent inverters with Schmitt-trigger inputs. Each gate performs the Boolean function  $Y = \bar{A}$  in positive logic.

#### Package Information

| PART NUMBER  | PACKAGE <sup>(1)</sup> | PACKAGE SIZE <sup>(2)</sup> |
|--------------|------------------------|-----------------------------|
| SN74HCS14PW  | TSSOP (14)             | 5.00mm × 4.40mm             |
| SN74HCS14D   | SOIC (14)              | 9.90mm × 3.90mm             |
| SN74HCS14BQA | WQFN (14)              | 3.00mm × 2.50mm             |
| SN74HCS14DYY | SOT-23-THIN (14)       | 2.00mm × 4.20mm             |

- (1) For all available packages, see the orderable addendum at the end of the data sheet.
- (2) The package size (length × width) is a nominal value and includes pins, where applicable.

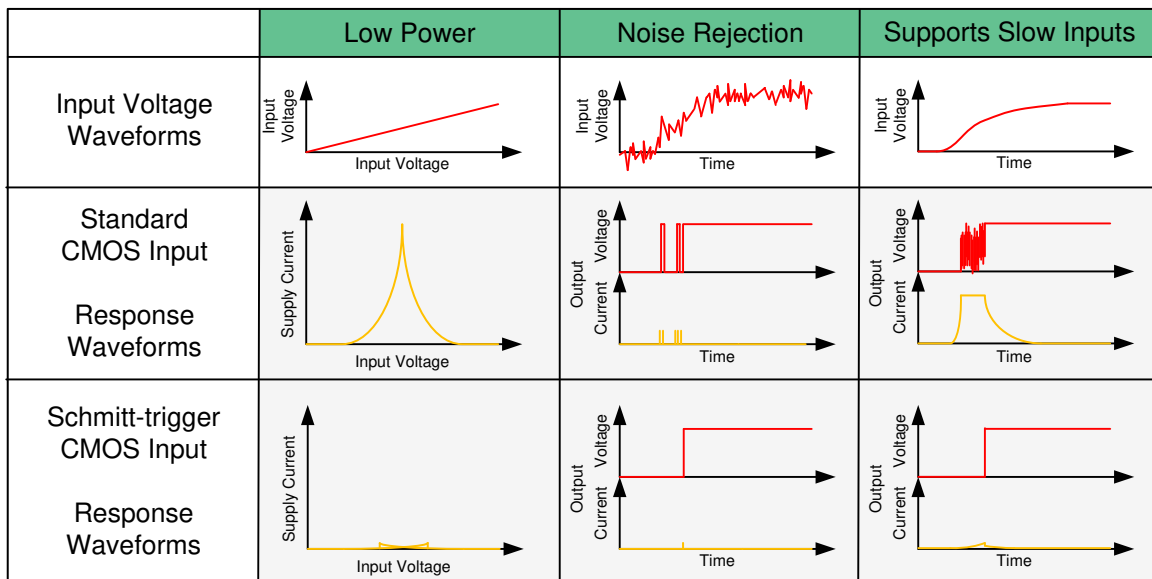


**Benefits of Schmitt-trigger inputs**




## Table of Contents

|                                                  |          |                                                                  |           |
|--------------------------------------------------|----------|------------------------------------------------------------------|-----------|
| <b>1 Features</b> .....                          | <b>1</b> | 7.4 Device Functional Modes.....                                 | <b>10</b> |
| <b>2 Applications</b> .....                      | <b>1</b> | <b>8 Application and Implementation</b> .....                    | <b>11</b> |
| <b>3 Description</b> .....                       | <b>1</b> | 8.1 Application Information.....                                 | <b>11</b> |
| <b>4 Pin Configuration and Functions</b> .....   | <b>3</b> | 8.2 Typical Application.....                                     | <b>11</b> |
| <b>5 Specifications</b> .....                    | <b>4</b> | 8.3 Power Supply Recommendations.....                            | <b>13</b> |
| 5.1 Absolute Maximum Ratings.....                | <b>4</b> | 8.4 Layout.....                                                  | <b>13</b> |
| 5.2 ESD Ratings.....                             | <b>4</b> | <b>9 Device and Documentation Support</b> .....                  | <b>14</b> |
| 5.3 Recommended Operating Conditions.....        | <b>4</b> | 9.1 Documentation Support.....                                   | <b>14</b> |
| 5.4 Thermal Information.....                     | <b>5</b> | 9.2 Receiving Notification of Documentation Updates....          | <b>14</b> |
| 5.5 Electrical Characteristics.....              | <b>5</b> | 9.3 Support Resources.....                                       | <b>14</b> |
| 5.6 Switching Characteristics.....               | <b>6</b> | 9.4 Trademarks.....                                              | <b>14</b> |
| 5.7 Typical Characteristics.....                 | <b>7</b> | 9.5 Electrostatic Discharge Caution.....                         | <b>14</b> |
| <b>6 Parameter Measurement Information</b> ..... | <b>8</b> | 9.6 Glossary.....                                                | <b>14</b> |
| <b>7 Detailed Description</b> .....              | <b>9</b> | <b>10 Revision History</b> .....                                 | <b>14</b> |
| 7.1 Overview.....                                | <b>9</b> | <b>11 Mechanical, Packaging, and Orderable Information</b> ..... | <b>16</b> |
| 7.2 Functional Block Diagram.....                | <b>9</b> |                                                                  |           |
| 7.3 Feature Description.....                     | <b>9</b> |                                                                  |           |

## 4 Pin Configuration and Functions

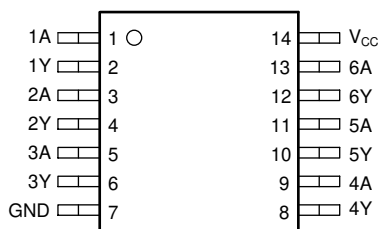

**D, PW or DYY Package**  
**14-Pin SOIC, TSSOP or SOT**  
**Top View**



**BQA Package**  
**14-Pin WQFN**  
**Top View**

**Table 4-1. Pin Functions**

| PIN                        |     | TYPE   | DESCRIPTION                                                                                            |
|----------------------------|-----|--------|--------------------------------------------------------------------------------------------------------|
| NAME                       | NO. |        |                                                                                                        |
| 1A                         | 1   | Input  | Channel 1, Input A                                                                                     |
| 1Y                         | 2   | Output | Channel 1, Output Y                                                                                    |
| 2A                         | 3   | Input  | Channel 2, Input A                                                                                     |
| 2Y                         | 4   | Output | Channel 2, Output Y                                                                                    |
| 3A                         | 5   | Input  | Channel 3, Input A                                                                                     |
| 3Y                         | 6   | Output | Channel 3, Output Y                                                                                    |
| GND                        | 7   | —      | Ground                                                                                                 |
| 4Y                         | 8   | Output | Channel 4, Output Y                                                                                    |
| 4A                         | 9   | Input  | Channel 4, Input A                                                                                     |
| 5Y                         | 10  | Output | Channel 5, Output Y                                                                                    |
| 5A                         | 11  | Input  | Channel 5, Input A                                                                                     |
| 6Y                         | 12  | Output | Channel 6, Output Y                                                                                    |
| 6A                         | 13  | Input  | Channel 6, Input A                                                                                     |
| V <sub>CC</sub>            | 14  | —      | Positive Supply                                                                                        |
| Thermal Pad <sup>(1)</sup> |     | —      | The thermal pad can be connected to GND or left floating. Do not connect to any other signal or supply |

(1) BQA Package only.

## 5 Specifications

### 5.1 Absolute Maximum Ratings

over operating free-air temperature range(unless otherwise noted)<sup>(1)</sup>

|           |                                            |                                   | MIN  | MAX | UNIT |
|-----------|--------------------------------------------|-----------------------------------|------|-----|------|
| $V_{CC}$  | Supply voltage                             |                                   | –0.5 | 7   | V    |
| $I_{IK}$  | Input clamp current <sup>(2)</sup>         | $V_I < 0$ or $V_I > V_{CC} + 0.5$ |      | ±20 | mA   |
| $I_{OK}$  | Output clamp current <sup>(2)</sup>        | $V_O < 0$ or $V_O > V_{CC} + 0.5$ |      | ±20 | mA   |
| $I_O$     | Continuous output current                  | $V_O = 0$ to $V_{CC}$             |      | ±35 | mA   |
|           | Continuous current through $V_{CC}$ or GND |                                   |      | ±70 | mA   |
| $T_J$     | Junction temperature <sup>(3)</sup>        |                                   |      | 150 | °C   |
| $T_{stg}$ | Storage temperature                        |                                   | –65  | 150 | °C   |

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute maximum ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If briefly operating outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not sustain damage, but it may not be fully functional. Operating the device in this manner may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) The input and output voltage ratings may be exceeded if the input and output current ratings are observed.
- (3) Verified by design.

### 5.2 ESD Ratings

|             |                         |                                                                        | VALUE | UNIT |
|-------------|-------------------------|------------------------------------------------------------------------|-------|------|
| $V_{(ESD)}$ | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/ JEDEC JS-001 <sup>(1)</sup>     | ±4000 | V    |
|             |                         | Charged-device model (CDM), per ANSI/ESDA/ JEDEC JS-002 <sup>(2)</sup> | ±1500 |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|          |                     | MIN | NOM | MAX      | UNIT |
|----------|---------------------|-----|-----|----------|------|
| $V_{CC}$ | Supply voltage      | 2   | 5   | 6        | V    |
| $V_I$    | Input voltage       | 0   |     | $V_{CC}$ | V    |
| $V_O$    | Output voltage      | 0   |     | $V_{CC}$ | V    |
| $T_A$    | Ambient temperature | –40 |     | 125      | °C   |

## 5.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | SN74HCS14  |          |            |           | UNIT |
|-------------------------------|----------------------------------------------|------------|----------|------------|-----------|------|
|                               |                                              | PW (TSSOP) | D (SOIC) | BQA (WQFN) | DYY (SOT) |      |
|                               |                                              | 14 PINS    | 14 PINS  | 14 PINS    | 14 PINS   |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | 151.7      | 133.6    | 109.7      | 236.5     | °C/W |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    | 79.4       | 89.0     | 111.0      | 143.2     | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 94.7       | 89.5     | 77.9       | 146.0     | °C/W |
| $\Psi_{JT}$                   | Junction-to-top characterization parameter   | 25.2       | 45.5     | 20.2       | 29.5      | °C/W |
| $\Psi_{JB}$                   | Junction-to-board characterization parameter | 94.1       | 89.1     | 77.8       | 145.6     | °C/W |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance | N/A        | N/A      | 56.6       | N/A       | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 5.5 Electrical Characteristics

over operating free-air temperature range; typical ratings measured at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

| PARAMETER    |                                        | TEST CONDITIONS                |                           | $V_{CC}$ | MIN                             | TYP       | MAX        | UNIT          |
|--------------|----------------------------------------|--------------------------------|---------------------------|----------|---------------------------------|-----------|------------|---------------|
| $V_{T+}$     | Positive switching threshold           |                                |                           | 2V       | 1.18                            |           | 1.3        | V             |
|              |                                        |                                |                           | 4.5V     | 2.39                            |           | 2.58       |               |
|              |                                        |                                |                           | 6V       | 3.11                            |           | 3.32       |               |
| $V_{T-}$     | Negative switching threshold           |                                |                           | 2V       | 0.61                            |           | 0.66       | V             |
|              |                                        |                                |                           | 4.5V     | 1.31                            |           | 1.42       |               |
|              |                                        |                                |                           | 6V       | 1.72                            |           | 1.87       |               |
| $\Delta V_T$ | $V_{T+} - V_{T-}$                      |                                |                           | 2V       | 0.55                            |           | 0.67       | V             |
|              |                                        |                                |                           | 4.5V     | 1.04                            |           | 1.21       |               |
|              |                                        |                                |                           | 6V       | 1.34                            |           | 1.49       |               |
| $V_{OH}$     | High-level output voltage              | $V_I = V_{IH}$ or $V_{IL}$     | $I_{OH} = -20\mu\text{A}$ | 2V to 6V | $V_{CC} - 0.1$ $V_{CC} - 0.002$ |           |            | V             |
|              |                                        |                                | $I_{OH} = -6\text{mA}$    | 4.5V     | 4.0                             | 4.3       |            |               |
|              |                                        |                                | $I_{OH} = -7.8\text{mA}$  | 6V       | 5.4                             | 5.75      |            |               |
| $V_{OL}$     | Low-level output voltage               | $V_I = V_{IH}$ or $V_{IL}$     | $I_{OL} = 20\mu\text{A}$  | 2V to 6V |                                 | 0.002     | 0.1        | V             |
|              |                                        |                                | $I_{OL} = 4\text{mA}$     | 4.5V     |                                 | 0.18      | 0.30       |               |
|              |                                        |                                | $I_{OL} = 7.8\text{mA}$   | 6V       |                                 | 0.22      | 0.33       |               |
| $I_I$        | Input leakage current                  | $V_I = V_{CC}$ or 0            |                           | 6V       |                                 | $\pm 100$ | $\pm 1000$ | nA            |
| $I_{CC}$     | Supply current                         | $V_I = V_{CC}$ or 0, $I_O = 0$ |                           | 6V       |                                 | 0.1       | 2          | $\mu\text{A}$ |
| $C_i$        | Input capacitance                      |                                |                           | 2V to 6V |                                 |           | 5          | pF            |
| $C_{pd}$     | Power dissipation capacitance per gate | No load                        |                           | 2V to 6V |                                 | 10        |            | pF            |


## 5.6 Switching Characteristics

over operating free-air temperature range; typical values measured at  $T_A = 25^\circ\text{C}$  (unless otherwise noted). See *Parameter Measurement Information*


| PARAMETER |                   | FROM (INPUT) | TO (OUTPUT) | $V_{CC}$ | MIN | TYP | MAX | UNIT |
|-----------|-------------------|--------------|-------------|----------|-----|-----|-----|------|
| $t_{pd}$  | Propagation delay | A            | Y           | 2 V      |     | 15  | 40  | ns   |
|           |                   |              |             | 4.5 V    |     | 6   | 17  |      |
|           |                   |              |             | 6 V      |     | 5   | 16  |      |
| $t_t$     | Transition-time   |              | Y           | 2 V      |     | 9   | 17  | ns   |
|           |                   |              |             | 4.5 V    |     | 5   | 8   |      |
|           |                   |              |             | 6 V      |     | 4   | 7   |      |

## 5.7 Typical Characteristics


$T_A = 25^\circ\text{C}$

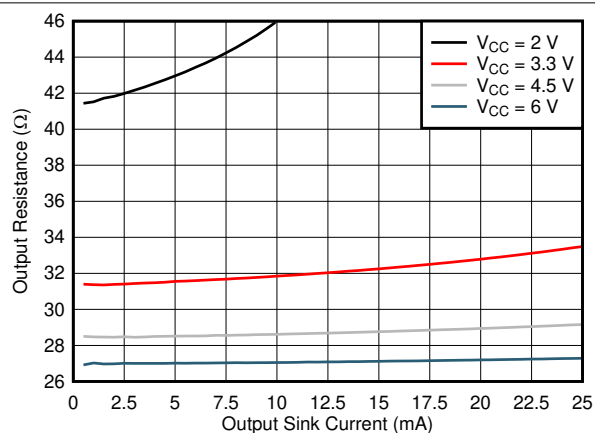


**Figure 5-1. Output Driver Resistance in LOW State**

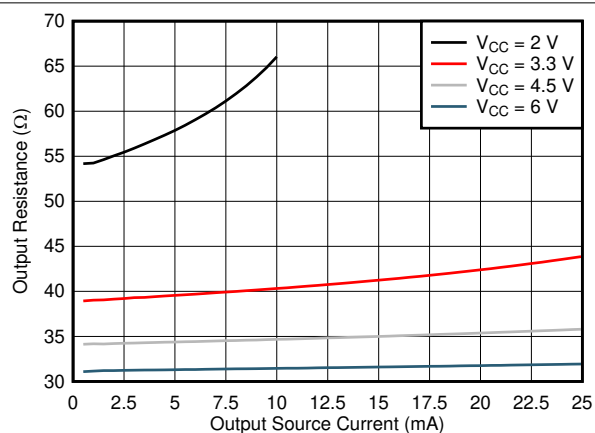

**Figure 5-2. Output Driver Resistance in HIGH State**

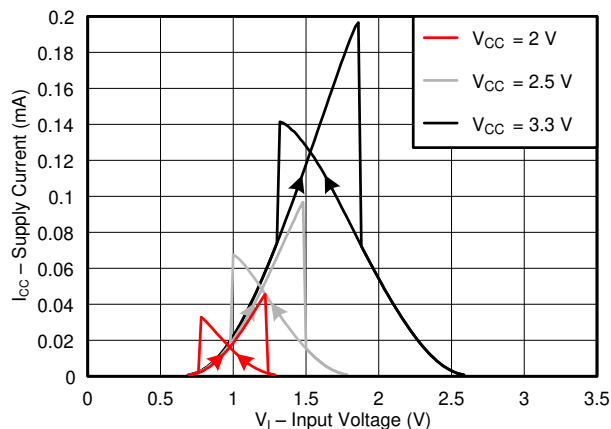

**Figure 5-3. Supply Current Across Input Voltage, 2-, 2.5-, and 3.3V Supply**

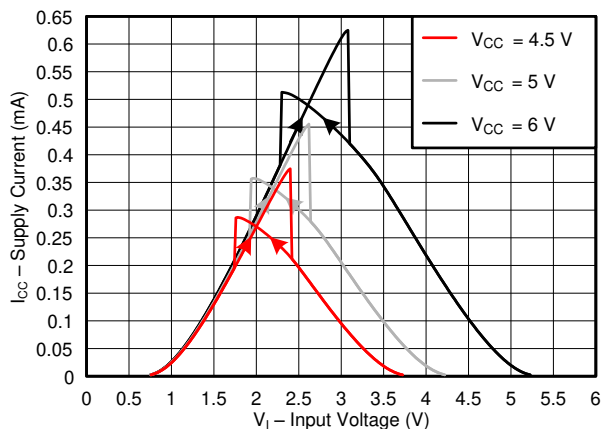


**Figure 5-4. Supply Current Across Input Voltage, 4.5-, 5-, and 6V Supply**

## 6 Parameter Measurement Information

Phase relationships between waveforms are selected arbitrarily. All input pulses are supplied by generators having the following characteristics:  $PRR \leq 1\text{MHz}$ ,  $Z_O = 50\Omega$ ,  $t_t < 2.5\text{ns}$ .


For clock inputs,  $f_{\text{max}}$  is measured when the input duty cycle is 50%.

The outputs are measured one at a time with one input transition per measurement.




(1)  $C_L$  includes probe and test-fixture capacitance.

**Figure 6-1. Load Circuit for Push-Pull Outputs**

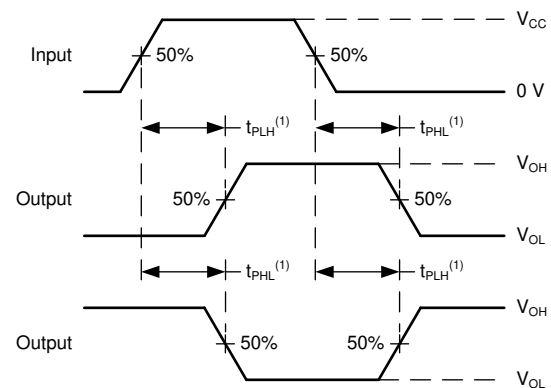

(1) The greater between  $t_{PLH}$  and  $t_{PHL}$  is the same as  $t_{pd}$ .

**Figure 6-2. Voltage Waveforms Propagation Delays**

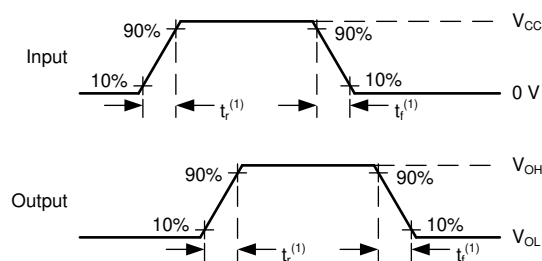

(1) The greater between  $t_r$  and  $t_f$  is the same as  $t_t$ .

**Figure 6-3. Voltage Waveforms, Input and Output Transition Times**




## 7 Detailed Description

### 7.1 Overview

This device contains six independent Inverter with Schmitt-trigger inputs. Each gate performs the Boolean function  $Y = \overline{A}$  in positive logic.

### 7.2 Functional Block Diagram

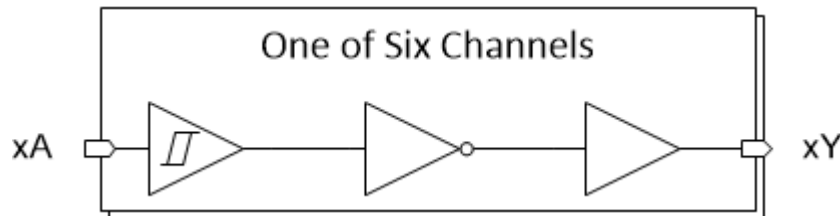

### 7.3 Feature Description

#### 7.3.1 Balanced CMOS Push-Pull Outputs

This device includes balanced CMOS push-pull outputs. The term *balanced* indicates that the device can sink and source similar currents. The drive capability of this device can create fast edges into light loads, so routing and load conditions must be considered to prevent ringing. Additionally, the outputs of this device are capable of driving larger currents than the device can sustain without being damaged. Limit the output power of the device to avoid damage due to overcurrent. The electrical and thermal limits defined in the *Absolute Maximum Ratings* must be followed at all times.

Unused push-pull CMOS outputs must be left disconnected.

#### 7.3.2 CMOS Schmitt-Trigger Inputs

This device includes inputs with the Schmitt-trigger architecture. These inputs are high impedance and are typically modeled as a resistor in parallel with the input capacitance given in the *Electrical Characteristics* table from the input to ground. The worst case resistance is calculated with the maximum input voltage, given in the *Absolute Maximum Ratings* table, and the maximum input leakage current, given in the *Electrical Characteristics* table, using Ohm's law ( $R = V \div I$ ).


The Schmitt-trigger input architecture provides hysteresis as defined by  $\Delta V_T$  in the *Electrical Characteristics* table, which makes this device extremely tolerant to slow or noisy inputs. While the inputs can be driven much slower than standard CMOS inputs, properly terminating unused inputs is still recommended. Driving the inputs with slow transitioning signals increases dynamic current consumption of the device. For additional information regarding Schmitt-trigger inputs, please see [Understanding Schmitt Triggers](#).

#### 7.3.3 Clamp Diode Structure

As shown in [Figure 7-1](#), the inputs and outputs to this device have both positive and negative clamping diodes.

#### CAUTION

Voltages beyond the values specified in the *Absolute Maximum Ratings* table can cause damage to the device. The input and output voltage ratings can be exceeded if the input and output clamp-current ratings are observed.

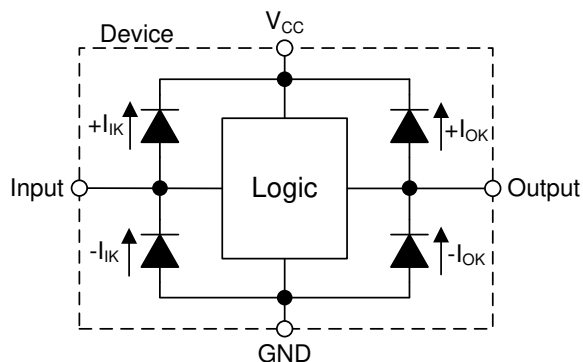

**Figure 7-1. Electrical Placement of Clamping Diodes for Each Input and Output**

## 7.4 Device Functional Modes

[Function Table](#) lists the functional modes of the SN74HCS14.

**Table 7-1. Function Table**

| INPUTS <sup>(1)</sup> | OUTPUT |
|-----------------------|--------|
| A                     | Y      |
| L                     | H      |
| H                     | L      |

(1) H = High Voltage Level, L = Low Voltage Level

## 8 Application and Implementation


### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

### 8.1 Application Information

The SN74HCS14 can be used to add an additional stage to a counter with an external flip-flop. Because counters use a negative edge trigger, the flip-flop's clock input must be inverted to provide this function. Having Schmitt-trigger inputs is important in this application to eliminate any noise issues that could impact the counting function which could lead to incorrect frequency division. This function only requires one of the six available inverters in the SN74HCS14 device, so the remaining channels can be used for other applications needing an inverted signal or improved signal integrity. Unused inputs must be terminated at  $V_{CC}$  or GND. Unused outputs can be left floating.

### 8.2 Typical Application

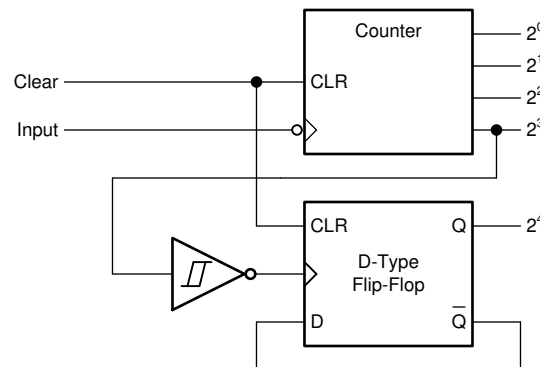

**Figure 8-1. Typical Application Block Diagram**

#### 8.2.1 Design Requirements

##### 8.2.1.1 Power Considerations

Verify that the desired supply voltage is within the range specified in the *Electrical Characteristics*. The supply voltage sets the device electrical characteristics, as described in the *Electrical Characteristics* section.

The positive voltage supply must be capable of sourcing current equal to the total current to be sourced by all outputs of the SN74HCS14 plus the maximum static supply current,  $I_{CC}$ , listed in the *Electrical Characteristics*, and any transient current required for switching. The logic device can only source as much current that is provided by the positive supply source. Verify that the maximum total current through  $V_{CC}$  listed in the *Absolute Maximum Ratings* is not exceeded.

The ground must be capable of sinking current equal to the total current to be sunk by all outputs of the SN74HCS14 plus the maximum supply current,  $I_{CC}$ , listed in the *Electrical Characteristics*, and any transient current required for switching. The logic device can only sink as much current that can be sunk into the ground connection. Verify that the maximum total current through GND listed in the *Absolute Maximum Ratings* is not exceeded.

The SN74HCS14 can drive a load with a total capacitance less than or equal to 50pF while still meeting all of the datasheet specifications. Larger capacitive loads can be applied; however, do not exceed 50pF.

The SN74HCS14 can drive a load with total resistance described by  $R_L \geq V_O / I_O$ , with the output voltage and current defined in the *Electrical Characteristics* table with  $V_{OH}$  and  $V_{OL}$ . When outputting in the HIGH state, the

output voltage in the equation is defined as the difference between the measured output voltage and the supply voltage at the  $V_{CC}$  pin.

Total power consumption can be calculated using the information provided in the [CMOS Power Consumption and Cpd Calculation application note](#).

Thermal increase can be calculated using the information provided in the [Thermal Characteristics of Standard Linear and Logic \(SLL\) Packages and Devices application note](#).

#### CAUTION

The maximum junction temperature,  $T_{J(max)}$  listed in the *Absolute Maximum Ratings*, is an additional limitation to prevent damage to the device. Do not violate any values listed in the *Absolute Maximum Ratings*. These limits are provided to prevent damage to the device.

#### 8.2.1.2 Input Considerations

Input signals must cross  $V_{t(min)}$  to be considered a logic LOW, and  $V_{t+(max)}$  to be considered a logic HIGH. Do not exceed the maximum input voltage range found in the *Absolute Maximum Ratings*.

Unused inputs must be terminated to either  $V_{CC}$  or ground. The unused inputs can be directly terminated if the input is completely unused, or the inputs can be connected with a pullup or pulldown resistor if the input is used sometimes, but not always. A pullup resistor is used for a default state of HIGH, and a pulldown resistor is used for a default state of LOW. The drive current of the controller, leakage current into the SN74HCS14 (as specified in the *Electrical Characteristics*), and the desired input transition rate limits the resistor size. A 10k $\Omega$  resistor value is often used due to these factors.

The SN74HCS14 has no input signal transition rate requirements because the device has Schmitt-Trigger inputs.

Another benefit to having Schmitt-Trigger inputs is the ability to reject noise. Noise with a large enough amplitude can still cause issues. To know how much noise is too much, please refer to the  $\Delta V_{T(min)}$  in the *Electrical Characteristics*. This hysteresis value provides the peak-to-peak limit.

Unlike what happens with standard CMOS inputs, Schmitt-Trigger inputs can be held at any valid value without causing huge increases in power consumption. The typical additional current caused by holding an input at a value other than  $V_{CC}$  or ground is plotted in the *Typical Characteristics*.

Refer to the *Feature Description* for additional information regarding the inputs for this device.

#### 8.2.1.3 Output Considerations

The positive supply voltage is used to produce the output HIGH voltage. Drawing current from the output decreases the output voltage as specified by the  $V_{OH}$  specification in the *Electrical Characteristics*. The ground voltage is used to produce the output LOW voltage. Sinking current into the output increases the output voltage as specified by the  $V_{OL}$  specification in the *Electrical Characteristics*.

Push-pull outputs that can be in opposite states, even for a very short time period, must never be connected directly together. This can cause excessive current and damage to the device.

Two channels within the same device with the same input signals can be connected in parallel for additional output drive strength.

Unused outputs can be left floating. Do not connect outputs directly to  $V_{CC}$  or ground.


Refer to the *Feature Description* section for additional information regarding the outputs for this device.

#### 8.2.2 Detailed Design Procedure

1. Add a decoupling capacitor from  $V_{CC}$  to GND. The capacitor needs to be placed physically close to the device and electrically close to both the  $V_{CC}$  and GND pins. An example layout is shown in the *Layout* section.

2. Verify that the capacitive load at the output is  $\leq 50\text{pF}$ . Low load capacitance can be accomplished by providing short, appropriately sized traces from the SN74HCS14 to the receiving device.
3. Verify that the resistive load at the output is larger than  $(V_{CC} / I_{O(max)})\Omega$ . Never violate the maximum output current from the *Absolute Maximum Ratings*. Most CMOS inputs have a resistive load measured in  $M\Omega$ ; much larger than the minimum calculated previously.
4. Thermal issues are rarely a concern for logic gates; however, the power consumption and thermal increase can be calculated using the steps provided in the [CMOS Power Consumption and Cpd Calculation application note](#).

### 8.2.3 Application Curves

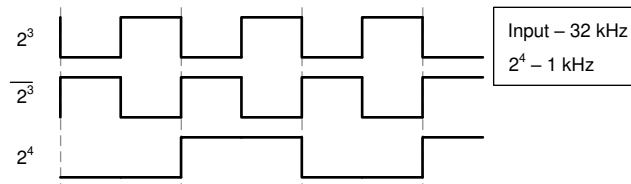

**Figure 8-2. Application timing diagram**

## 8.3 Power Supply Recommendations


The power supply can be any voltage between the minimum and maximum supply voltage rating located in the *Recommended Operating Conditions*. Each  $V_{CC}$  terminal must have a good bypass capacitor to prevent power disturbance. A  $0.1\mu\text{F}$  capacitor is recommended for this device. Multiple bypass capacitors can be placed in parallel to reject different frequencies of noise. The  $0.1\mu\text{F}$  and  $1\mu\text{F}$  capacitors are commonly used in parallel. The bypass capacitor must be installed as close to the power terminal as possible for best results, as shown in the following layout example.

## 8.4 Layout

### 8.4.1 Layout Guidelines

When using multiple-input and multiple-channel logic devices, inputs must never be left floating. In many cases, functions or parts of functions of digital logic devices are unused; for example, when only two inputs of a triple-input AND gate are used or only 3 of the 4 buffer gates are used. Such unused input pins must not be left unconnected because the undefined voltages at the outside connections result in undefined operational states. All unused inputs of digital logic devices must be connected to a logic high or logic low voltage, as defined by the input voltage specifications, to prevent them from floating. The logic level that must be applied to any particular unused input depends on the function of the device. Generally, the inputs are tied to GND or  $V_{CC}$ , whichever makes more sense for the logic function or is more convenient.

### 8.4.2 Layout Example

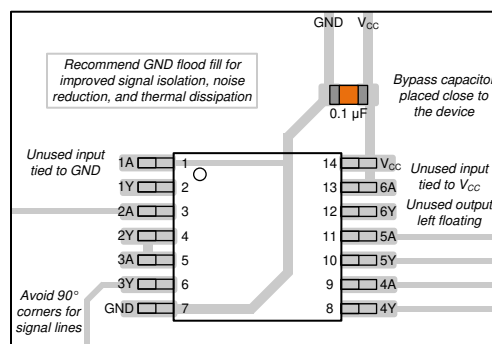

**Figure 8-3. Example layout for the SN74HCS14**

## 9 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

### 9.1 Documentation Support

#### 9.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, [HCMOS Design Considerations application report](#)
- Texas Instruments, [CMOS Power Consumption and  \$C\_{pd}\$  Calculation application report](#)
- Texas Instruments, [Designing With Logic application report](#)

### 9.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](#). Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 9.3 Support Resources

TI E2E™ [support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

### 9.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

### 9.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 9.6 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 10 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

### Changes from December 1, 2021 to March 19, 2026 (from Revision D (December 2021) to Revision E (March 2026))

|                                                                                                             | Page |
|-------------------------------------------------------------------------------------------------------------|------|
| • Changed $V_{T+}$ limits at 2V $V_{CC}$ from 0.7V (min), 1.5V (max) to 1.18V (min), 1.3V (max) .....       | 5    |
| • Changed $V_{T+}$ limits at 4.5V $V_{CC}$ from 1.7V (min), 3.15V (max) to 2.39V (min), 2.58V (max) .....   | 5    |
| • Changed $V_{T+}$ limits at 6V $V_{CC}$ from 2.1V (min), 4.2V (max) to 3.11V (min), 3.32V (max) .....      | 5    |
| • Changed $V_{T-}$ limits at 2V $V_{CC}$ from 0.3V (min), 1.0V (max) to 0.61V (min), 0.66V (max).....       | 5    |
| • Changed $V_{T-}$ limits at 4.5V $V_{CC}$ from 0.9V (min), 2.2V (max) to 1.31V (min), 1.42V (max) .....    | 5    |
| • Changed $V_{T-}$ limits at 6V $V_{CC}$ from 1.2V (min), 3.0V (max) to 1.72V (min), 1.87V (max).....       | 5    |
| • Changed $\Delta V_T$ limits at 2V $V_{CC}$ from 0.2V (min), 1.0V (max) to 0.55V (min), 0.67V (max).....   | 5    |
| • Changed $\Delta V_T$ limits at 4.5V $V_{CC}$ from 0.4V (min), 1.4V (max) to 1.04V (min), 1.21V (max)..... | 5    |
| • Changed $\Delta V_T$ limits at 6V $V_{CC}$ from 0.6V (min), 1.6V (max) to 1.34V (min), 1.49V (max).....   | 5    |

**Changes from Revision C (April 2021) to Revision D (December 2021)****Page**

|                                                                                 |   |
|---------------------------------------------------------------------------------|---|
| • Added DYY package information to <i>Device Information</i> .....              | 1 |
| • Added DYY package information to <i>Pin Configuration and Functions</i> ..... | 3 |
| • Added DYY package to Thermal Information table.....                           | 5 |

## 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.



## PACKAGING INFORMATION

| Orderable part number         | Status<br>(1) | Material type<br>(2) | Package   Pins            | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-------------------------------|---------------|----------------------|---------------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">SN74HCS14BQAR</a> | Active        | Production           | WQFN (BQA)   14           | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | HCS14               |
| SN74HCS14BQAR.A               | Active        | Production           | WQFN (BQA)   14           | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | HCS14               |
| <a href="#">SN74HCS14DR</a>   | Active        | Production           | SOIC (D)   14             | 2500   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | HCS14               |
| SN74HCS14DR.A                 | Active        | Production           | SOIC (D)   14             | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | HCS14               |
| <a href="#">SN74HCS14DYYR</a> | Active        | Production           | SOT-23-THIN<br>(DYY)   14 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | HCS14               |
| SN74HCS14DYYR.A               | Active        | Production           | SOT-23-THIN<br>(DYY)   14 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | HCS14               |
| <a href="#">SN74HCS14PWR</a>  | Active        | Production           | TSSOP (PW)   14           | 2000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | HCS14               |
| SN74HCS14PWR.A                | Active        | Production           | TSSOP (PW)   14           | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | HCS14               |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative

and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


**OTHER QUALIFIED VERSIONS OF SN74HCS14 :**

- Automotive : [SN74HCS14-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects


## TAPE AND REEL INFORMATION

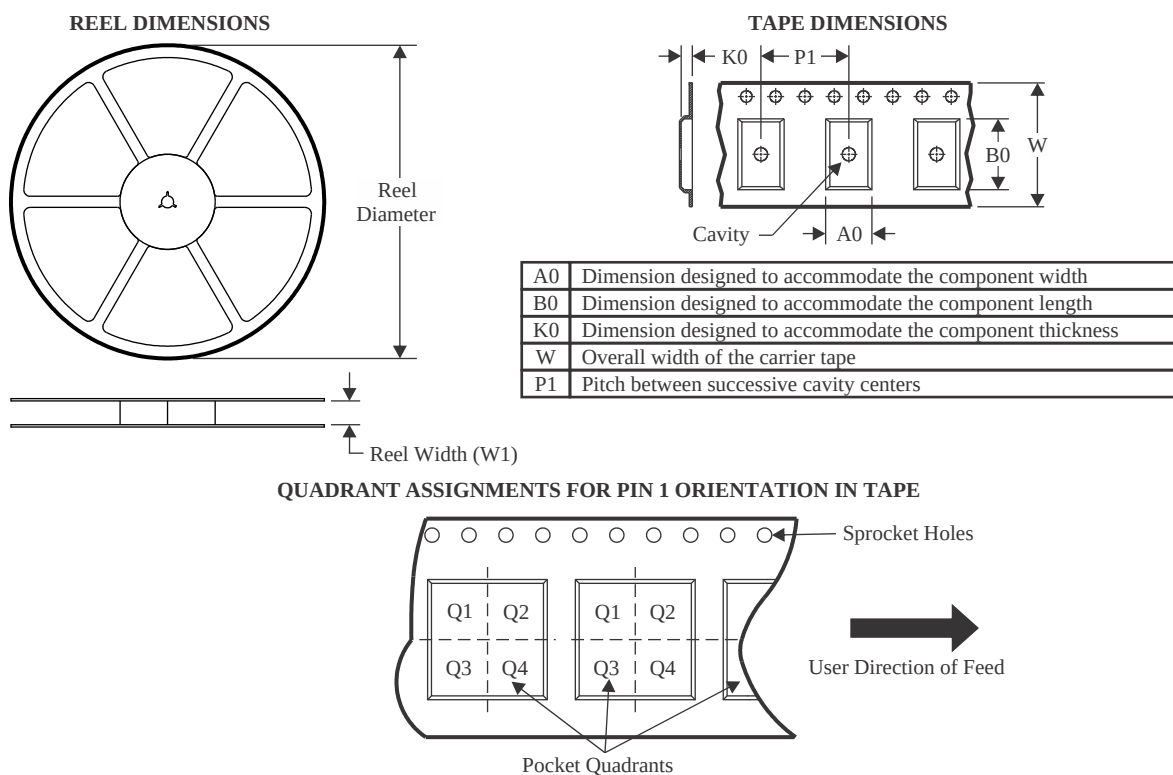

\*All dimensions are nominal


| Device        | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74HCS14BQAR | WQFN         | BQA             | 14   | 3000 | 180.0              | 12.4               | 2.8     | 3.3     | 1.1     | 4.0     | 12.0   | Q1            |
| SN74HCS14DR   | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| SN74HCS14DYYR | SOT-23-THIN  | DYY             | 14   | 3000 | 330.0              | 12.4               | 4.8     | 3.6     | 1.6     | 8.0     | 12.0   | Q3            |
| SN74HCS14PWR  | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

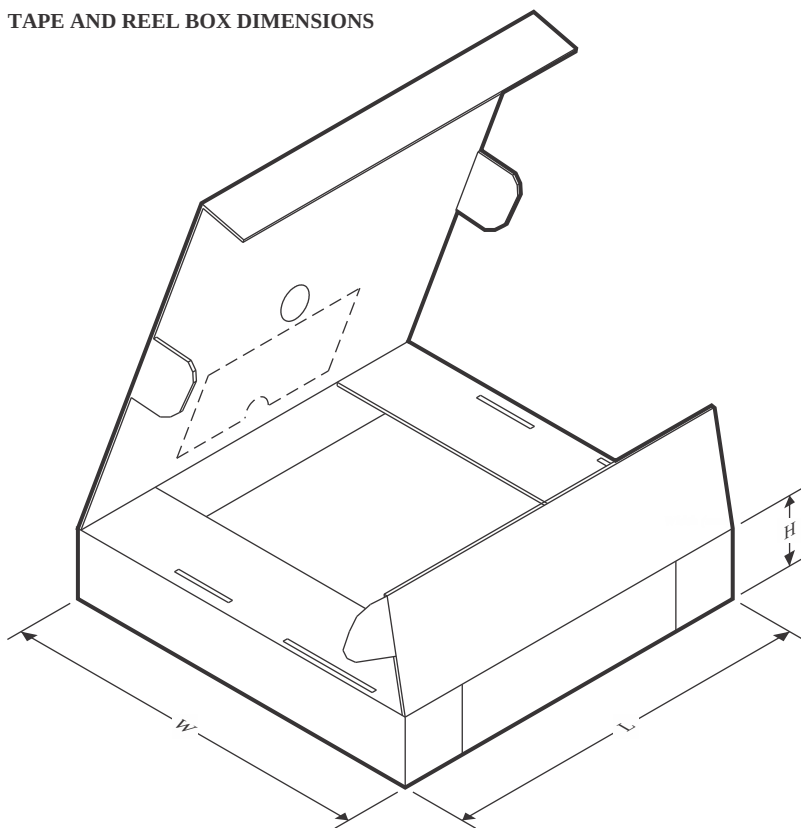

\*All dimensions are nominal


| Device        | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74HCS14BQAR | WQFN         | BQA             | 14   | 3000 | 210.0       | 185.0      | 35.0        |
| SN74HCS14DR   | SOIC         | D               | 14   | 2500 | 353.0       | 353.0      | 32.0        |
| SN74HCS14DYYR | SOT-23-THIN  | DYY             | 14   | 3000 | 336.6       | 336.6      | 31.8        |
| SN74HCS14PWR  | TSSOP        | PW              | 14   | 2000 | 356.0       | 356.0      | 35.0        |

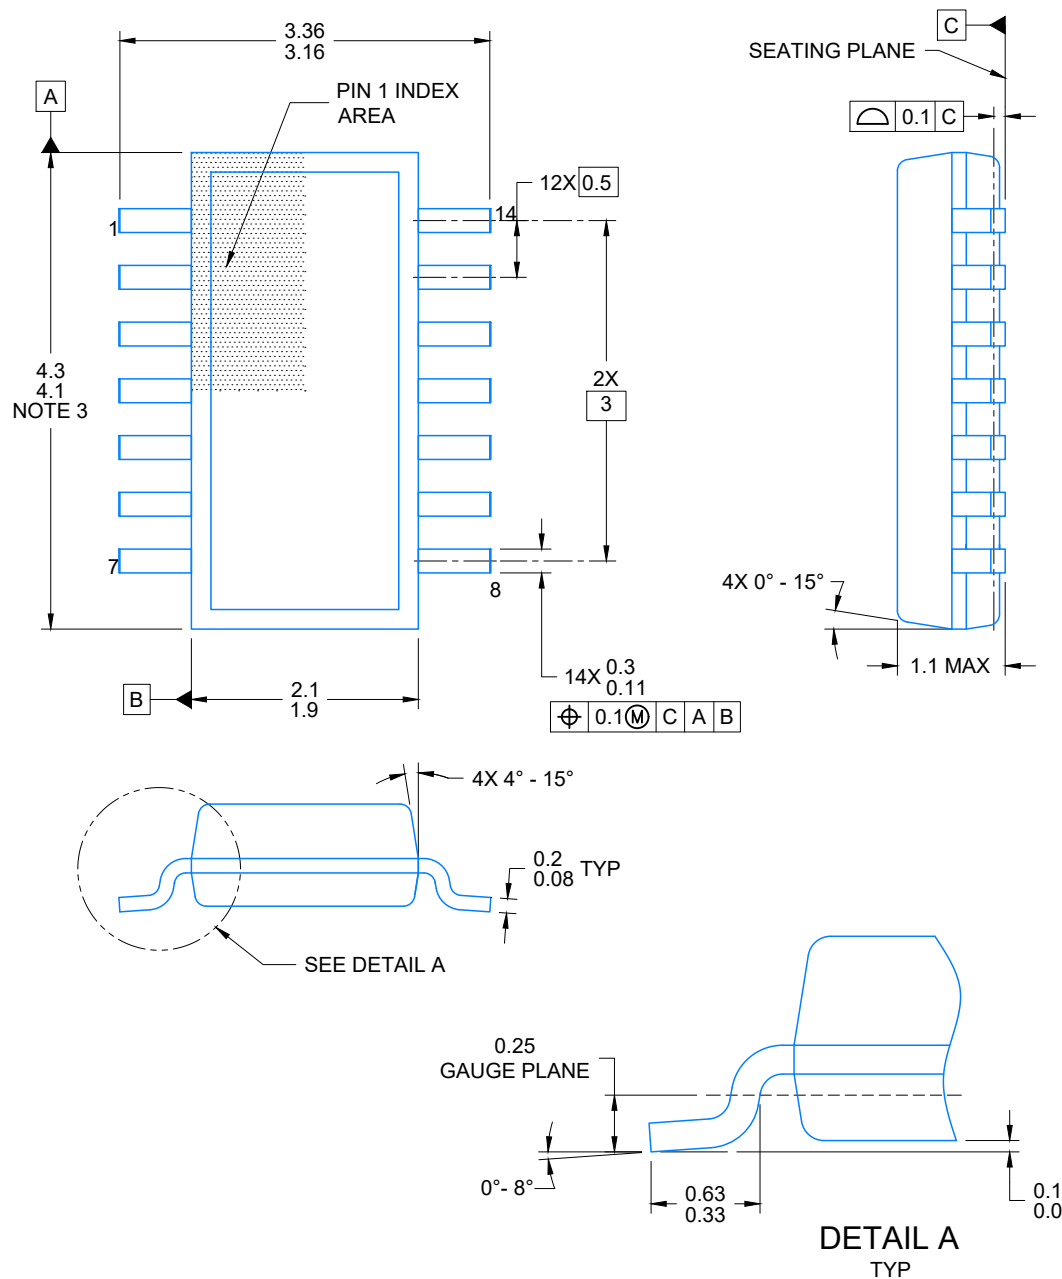


4224643/D 07/2024

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.50 per side.
5. Reference JEDEC Registration MO-345, Variation AB

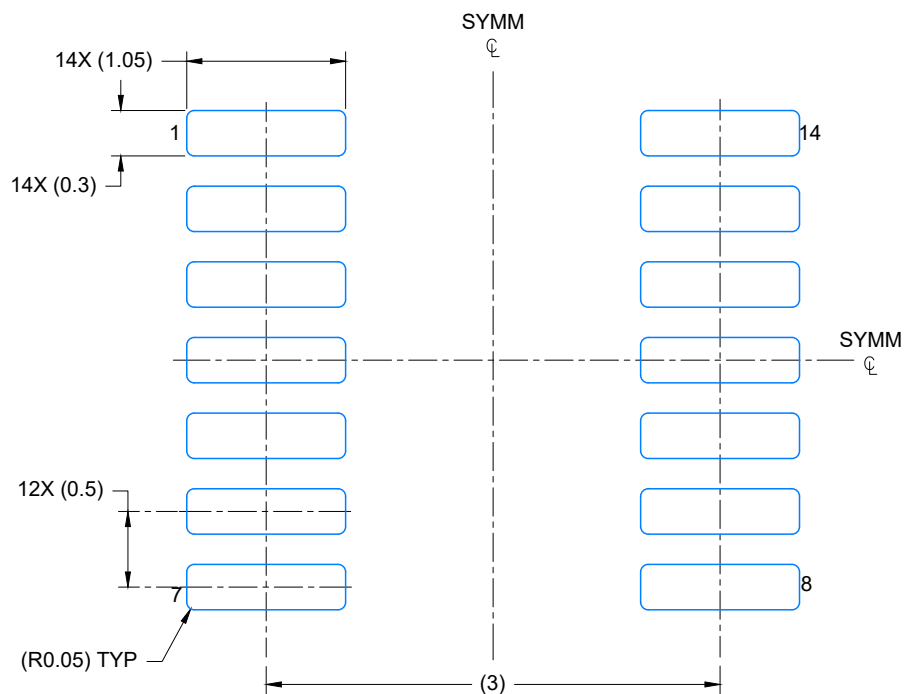


LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 20X

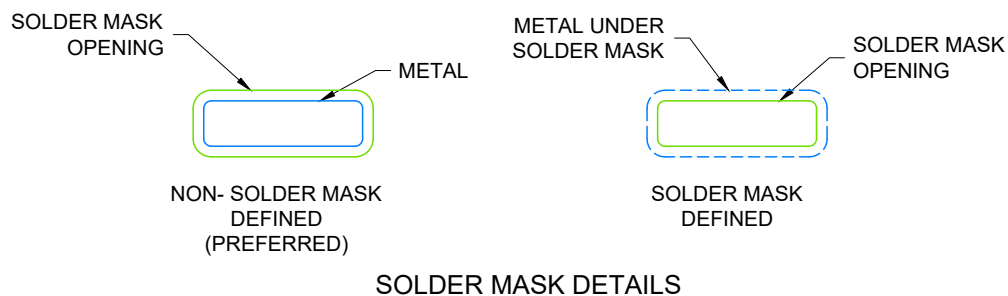

4224643/D 07/2024

## NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

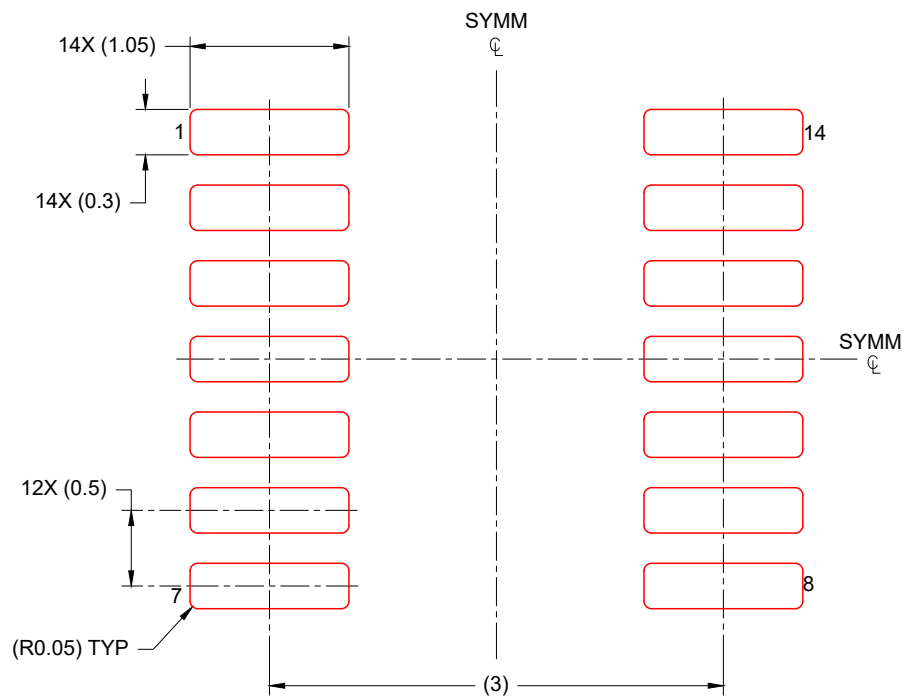


SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 20X


4224643/D 07/2024

## NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

**D0014A****PACKAGE OUTLINE****SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

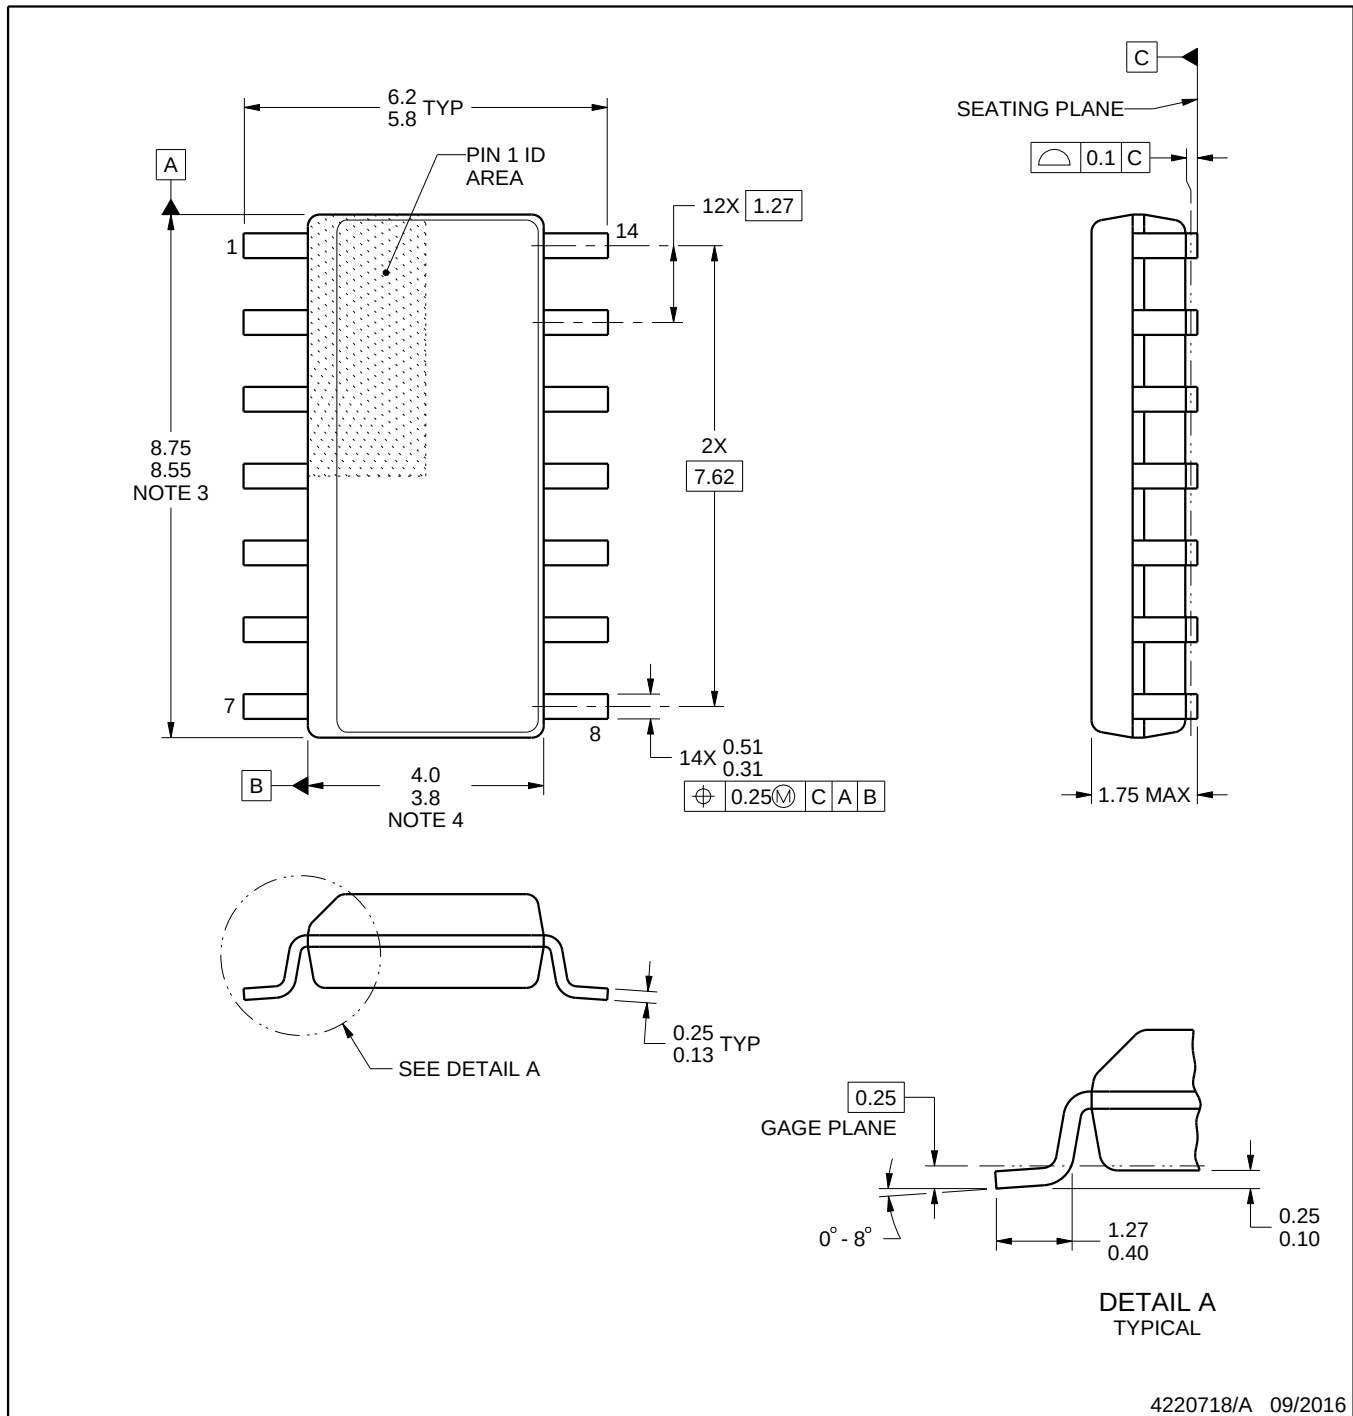**NOTES:**

1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
5. Reference JEDEC registration MS-012, variation AB.




# EXAMPLE BOARD LAYOUT



D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

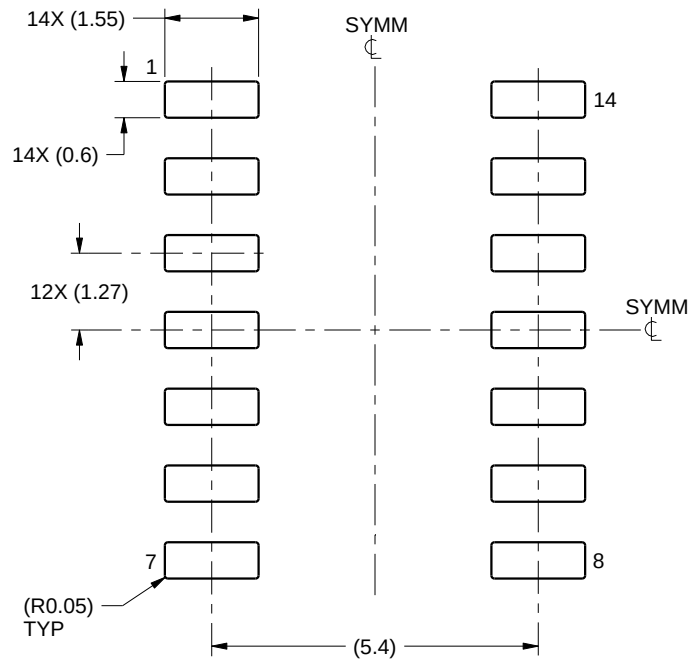

LAND PATTERN EXAMPLE  
SCALE:8X

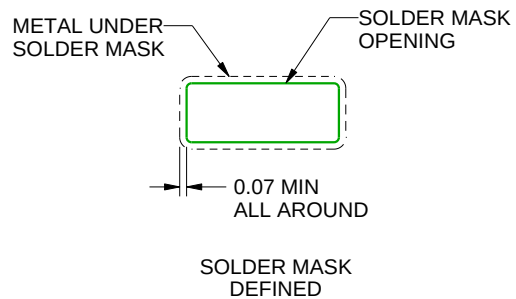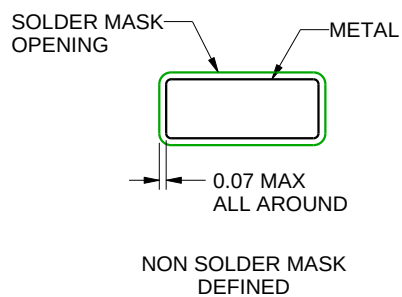

SOLDER MASK DETAILS

4220718/A 09/2016

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

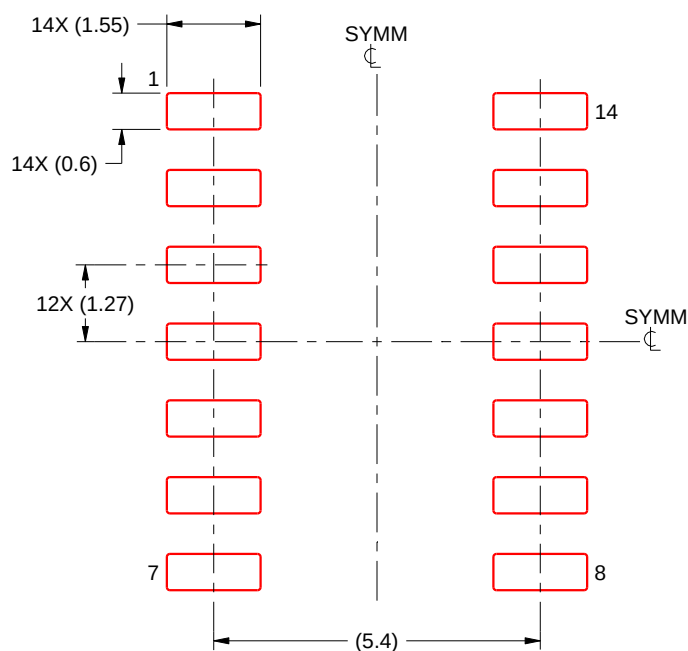

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:8X

4220718/A 09/2016

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## GENERIC PACKAGE VIEW


**BQA 14**

**WQFN - 0.8 mm max height**

2.5 x 3, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

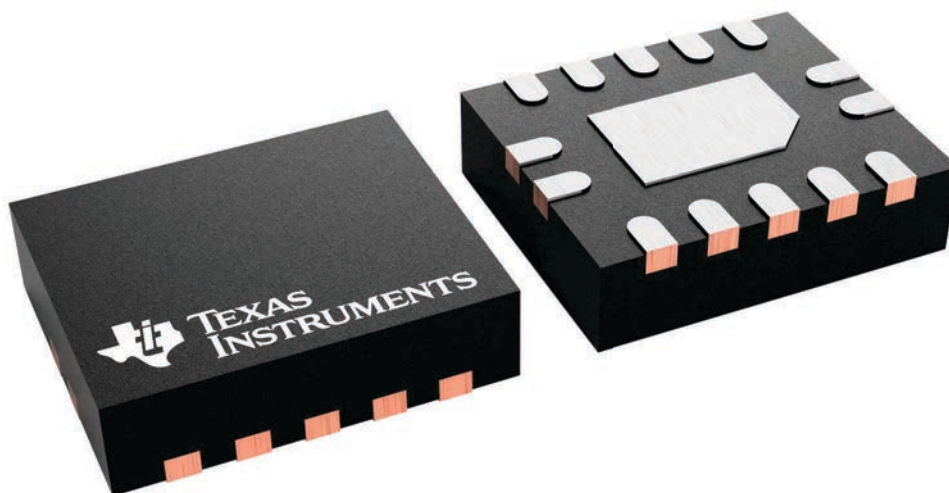


4227145/A

**PW0014A**

## PACKAGE OUTLINE

**TSSOP - 1.2 mm max height**

SMALL OUTLINE PACKAGE

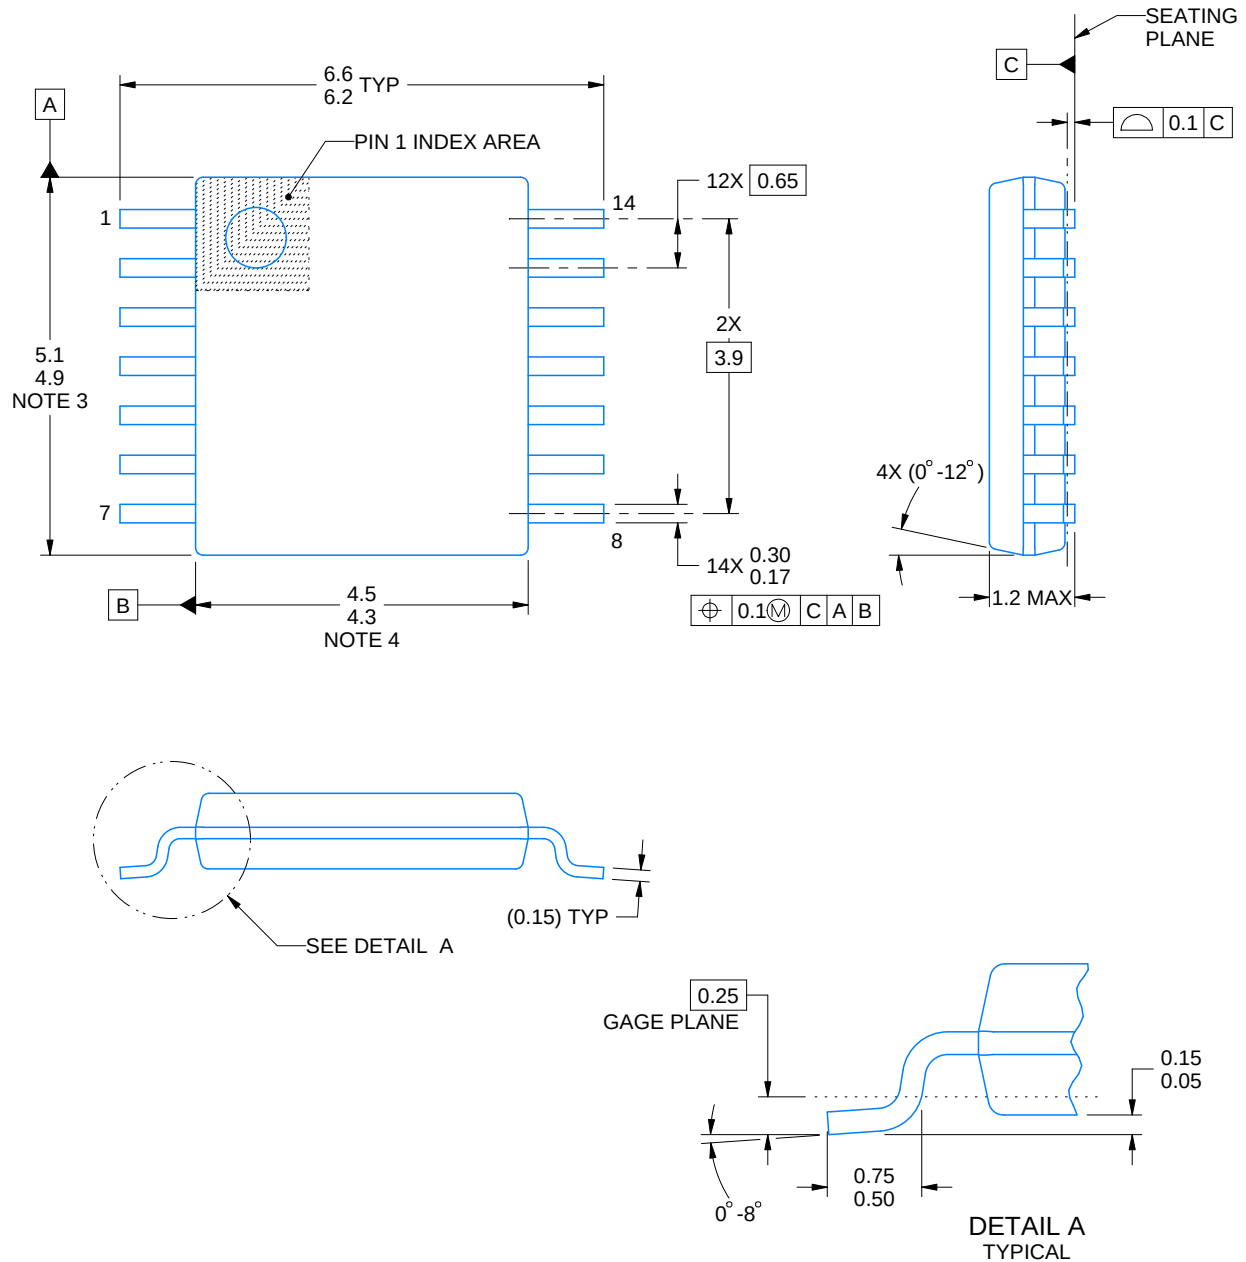

4220202/B 12/2023

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

# EXAMPLE BOARD LAYOUT



PW0014A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

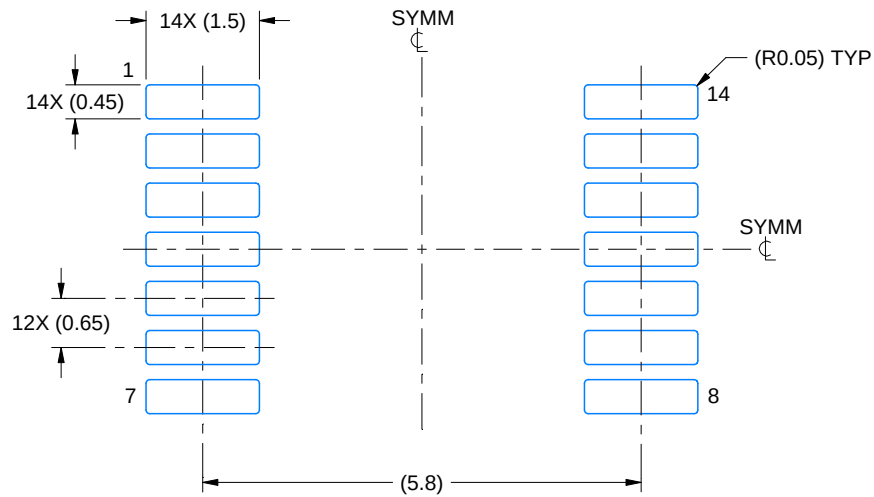

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X

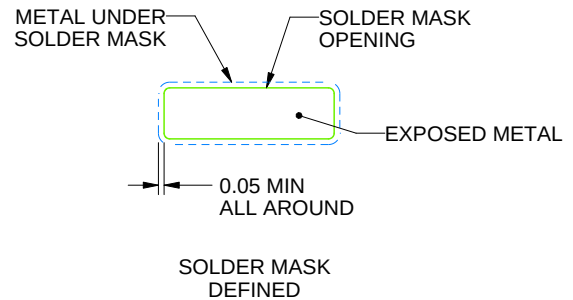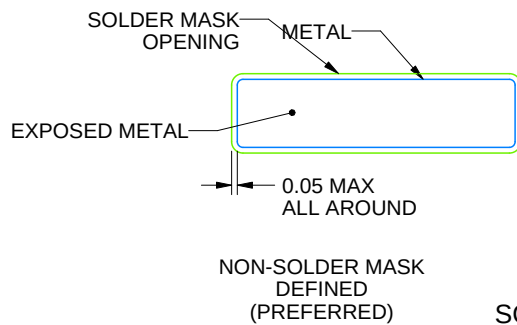

SOLDER MASK DETAILS

4220202/B 12/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

PW0014A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

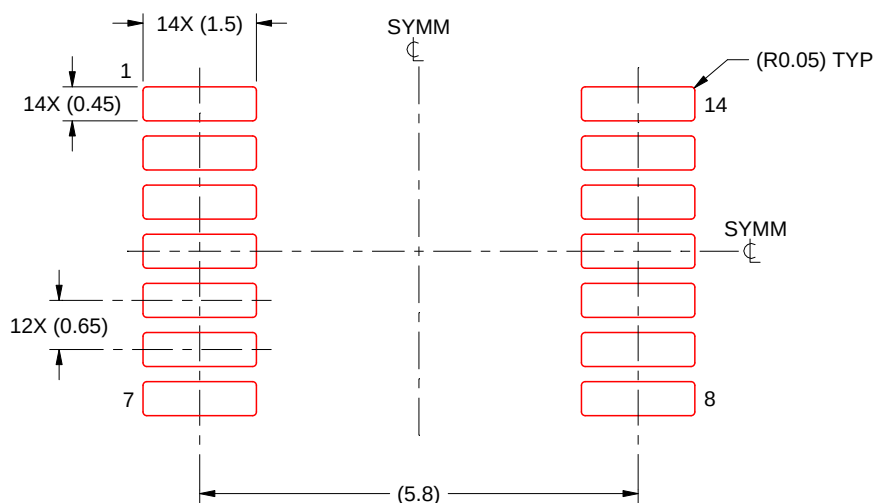

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4220202/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025