

# SN74LV4051A-Q1 Automotive 8-Channel Analog Multiplexer or Demultiplexer

#### 1 Features

- Qualified for automotive applications
- AEC-Q100 qualified with the following results:
  - Device temperature grade 1: –40°C to +125°C ambient operating temperature range
  - Device HBM ESD classification level 2
  - Device CDM ESD classification level C4B
- 1.65V to 5.5V V<sub>CC</sub> operation
- Supports mixed-mode voltage operation on all ports
- High on-off output-voltage ratio
- Low crosstalk between switches
- Individual switch controls
- Extremely low input current
- Latch-up performance exceeds 100mA per JESD 78, class II

## 2 Applications

- Automotive infotainment and cluster
- Telematics, eCall

## 3 Description

This 8-channel CMOS analog multiplexer and demultiplexer is designed for 1.65V to 5.5V V<sub>CC</sub> operation.


The SN74LV4051A-Q1 handles analog and digital signals. Each channel permits signals with amplitudes up to 5.5V (peak) to be transmitted in either direction.

**Applications** include signal gating, chopping, modulation or demodulation (modem), and signal multiplexing for analog-to-digital and digital-to-analog conversion systems.

**Package Information** 

PART NUMBER	PACKAGE <sup>(1)</sup>	PACKAGE SIZE <sup>(2)</sup>	
	PW (TSSOP, 16)	5mm × 6.4mm	
SN74LV4051A-Q1	D (SOIC, 16)	9.9mm × 6mm	
	DYY (SOT-23- THIN, 16)	4.2mm x 3.26mm	

- For more information, see Section 11. (1)
- The package size (length × width) is a nominal value and (2)includes pins, where applicable.

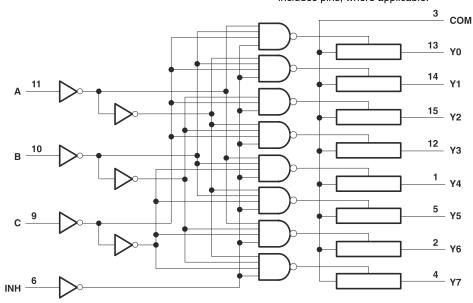

Logic Diagram (Positive Logic)



# **Table of Contents**

1 Features1	7.2 Functional Block Diagram	13
2 Applications1	7.3 Feature Description	
3 Description1	7.4 Device Functional Modes	13
4 Pin Configuration and Functions3	8 Application and Implementation	14
5 Specifications4	8.1 Application Information	14
5.1 Absolute Maximum Ratings4	8.2 Typical Application	14
5.2 ESD Ratings4	8.3 Power Supply Recommendations	15
5.3 Thermal Information: SN74LV4051A-Q15	8.4 Layout	15
5.4 Recommended Operating Conditions6	9 Device and Documentation Support	
5.5 Electrical Characteristics6	9.1 Receiving Notification of Documentation Updates	16
5.6 Timing Characteristics V <sub>CC</sub> = 2.5 V ± 0.2 V8	9.2 Support Resources	16
5.7 Timing Characteristics V <sub>CC</sub> = 3.3 V ± 0.3 V8	9.3 Trademarks	16
5.8 Timing Characteristics V <sub>CC</sub> = 5 V ± 0.5 V8	9.4 Electrostatic Discharge Caution	16
5.9 AC Characteristics9	9.5 Glossary	16
6 Parameter Measurement Information10	10 Revision History	
7 Detailed Description13	11 Mechanical, Packaging, and Orderable	
7.1 Overview	Information	16



# **4 Pin Configuration and Functions**




Figure 4-1. D, PW or DYY Package, 16-Pin SOIC, TSSOP, or SOT-23-THIN (Top View)

**Table 4-1. Pin Functions** 

PI	N	TYPE <sup>(1)</sup>	DESCRIPTION
NAME	NO.	TIPE(*)	DESCRIPTION
Y4	1	J(2)	Input to mux
Y6	2	J(2)	Input to mux
СОМ	3	O <sup>(2)</sup>	Output of mux
Y7	4	J(2)	Input to mux
Y5	5	J(2)	Input to mux
INH	6	J(2)	Enables the outputs of the device. Logic low level with turn the outputs on, high level will turn them off.
GND	7	_	Ground
GND	8	_	Ground
С	9	I	Selector line for outputs (see Section 7.4 for specific information)
В	10	I	Selector line for outputs (see Section 7.4 for specific information)
Α	11	I	Selector line for outputs (see Section 7.4 for specific information)
Y3	12	J(2)	Input to mux
Y0	13	J(2)	Input to mux
Y1	14	<b>I</b> (2)	Input to mux
Y2	15	J <sup>(2)</sup>	Input to mux
Vcc	16	I	Device power input

<sup>(1)</sup> I = input, O = output

<sup>(2)</sup> These I/O descriptions represent the device when used as a multiplexer, when this device is operated as a demultiplexer pins Y0-Y7 may be considered outputs (O) and the COM pin may be considered inputs (I).



## **5 Specifications**

## 5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1) (3)

			MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage	Supply voltage			V
VI	Logic input voltage range	Logic input voltage range			V
V <sub>IO</sub>	Switch I/O voltage range <sup>(2) (3)</sup>	Switch I/O voltage range <sup>(2) (3)</sup>		V <sub>CC</sub> + 0.5	V
I <sub>IK</sub>	Input clamp current	V <sub>I</sub> < 0	-20		mA
I <sub>IOK</sub>	Switch IO diode clamp current	V <sub>IO</sub> < 0 or V <sub>IO</sub> > V <sub>CC</sub>	-50	50	mA
I <sub>T</sub>	Switch continuous current	V <sub>IO</sub> = 0 to V <sub>CC</sub>		±25	mA
	Continuous current through V <sub>CC</sub>	Continuous current through V <sub>CC</sub> or GND		±50	mA
T <sub>stg</sub>	Storage temperature	Storage temperature		150	°C

<sup>(1)</sup> Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute maximum ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If briefly operating outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not sustain damage, but it may not be fully functional. Operating the device in this manner may affect device reliability, functionality, performance, and shorten the device lifetime.

## 5.2 ESD Ratings

				VALUE	UNIT
V <sub>(ESD)</sub>	Electrostatic discharge	Human body model (HBM), per AEC Q100-002 <sup>(1)</sup>	All pins	±2000	V
V <sub>(ESD)</sub>	Electrostatic discharge	Charged device model (CDM), per AEC Q100-011	All pins	±500	V

(1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated

<sup>(2)</sup> Pins are diode-clamped to the power-supply rails. Over voltage signals must be voltage and current limited to maximum ratings.

<sup>(3)</sup> This value is limited to 5.5 V maximum



## 5.3 Thermal Information: SN74LV4051A-Q1

		SN74LV4051A-Q1	SN74LV4051A-Q1	
	THERMAL METRIC (1)	PW (TSSOP)	DYY (SOT)	UNIT
		16 PINS	16 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	140.2	199.7	°C/W
R <sub>0</sub> JC(top)	Junction-to-case (top) thermal resistance	72.6	121.2	°C/W
R <sub>0JB</sub>	Junction-to-board thermal resistance	98.7	129.0	°C/W
$\Psi_{JT}$	Junction-to-top characterization parameter	13.4	24.6	°C/W
$\Psi_{JB}$	Junction-to-board characterization parameter	97.3	126.7	°C/W
R <sub>0JC(bot)</sub>	Junction-to-case (bottom) thermal resistance	N/A	N/A	°C/W

<sup>(1)</sup> For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.



## **5.4 Recommended Operating Conditions**

over operating free-air temperature range (unless otherwise noted)(1)

			MIN	NOM MAX	UNIT	
V <sub>CC</sub>	Supply voltage		1(2)	5.5	V	
		V <sub>CC</sub> = 1.65	1.2	5.5		
		V <sub>CC</sub> = 2 V	1.5	5.5		
$V_{IH}$	High-level input voltage, logic control inputs	V <sub>CC</sub> = 2.3 V to 2.7 V	V <sub>CC</sub> x 0.7	5.5	V	
V <sub>IH</sub>	logic control inputs	V <sub>CC</sub> = 3 V to 3.6 V	V <sub>CC</sub> x 0.7	5.5		
		V <sub>CC</sub> = 4.5 V to 5.5 V	V <sub>CC</sub> x 0.7	5.5		
		V <sub>CC</sub> = 1.65 V	0	0.4		
	Low-level input voltage, logic control inputs	V <sub>CC</sub> = 2	0	0.5		
$V_{IL}$		$V_{CC}$ = 2.3V to 2.7V	0	V <sub>CC</sub> x 0.3	V	
V <sub>IL</sub>		V <sub>CC</sub> = 3 V to 3.6 V	0	V <sub>CC</sub> x 0.3		
		V <sub>CC</sub> = 4.5 V to 5.5 V	0	V <sub>CC</sub> x 0.3		
VI	Logic control input voltage		0	5.5	V	
V <sub>IO</sub>	Switch input or output voltage		0	V <sub>CC</sub>	V	
		V <sub>CC</sub> = 1.0 V to 2.0 V		500		
۸+/۸\/	Logic input transition rice or fall rate	V <sub>CC</sub> = 2.0 V to 2.7 V		200	no/\/	
ΔυΔν	Logic input transition rise or fall rate	V <sub>CC</sub> = 3 V to 3.6 V		100	ns/V	
		V <sub>CC</sub> = 4.5 V to 5.5 V		20		
T <sub>A</sub>	Ambient temperature	,	-40	125	°C	

<sup>(1)</sup> All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to TI application report Implications of Slow or Floating CMOS Inputs, SCBA004.

### 5.5 Electrical Characteristics

over recommended operating free-air temperature range (unless otherwise noted)

I	PARAMETER	Condition	T <sub>A</sub>	V <sub>cc</sub>	MIN	TYP	MAX	UNIT
			25°C			60	150	
			-40°C to 85°C	1.65 V			225	
			-40°C to 125°C				225	
			25°C			38	180	
	ON-state switch	itch $ \begin{aligned} I_T &= 2 \text{ mA,} \\ V_I &= V_{CC} \text{ or GND,} \\ V_{INH} &= V_{IL} \end{aligned} $	-40°C to 85°C	2.3 V			225	Ω
_			-40°C to 125°C				225	
r <sub>ON</sub>	resistance		25°C			30	150	22
			-40°C to 85°C	3 V			190	
			-40°C to 125°C				190	
			25°C	4.5 V		22	75	
			-40°C to 85°C				100	
			-40°C to 125°C				100	

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated

<sup>(2)</sup> When using a V<sub>CC</sub> of ≤1.2 V, it is recommended to use these devices only for transmitting digital signals. When supply voltage is near 1.2 V the analog switch ON resistance becomes very non-linear



## **5.5 Electrical Characteristics (continued)**

over recommended operating free-air temperature range (unless otherwise noted)

	PARAMETER	Condition	T <sub>A</sub>	V <sub>CC</sub>	MIN	TYP	MAX	UNIT
			25°C			220	600	
			-40°C to 85°C	1.65 V			700	
			-40°C to 125°C				700	
			25°C			113	500	
			-40°C to 85°C	2.3 V			600	
_	Peak ON-state	$I_T = 2 \text{ mA},$	-40°C to 125°C				600	0
r <sub>ON(p)</sub>	resistance	$V_I = GND \text{ to } V_{CC},$ $V_{INH} = V_{IL}$	25°C			54	180	Ω
			-40°C to 85°C	3 V			225	
			-40°C to 125°C				225	
			25°C			31	100	
			-40°C to 85°C	4.5 V			125	
			-40°C to 125°C				125	
			25°C			3	40	
			-40°C to 85°C	1.65 V			40	
			-40°C to 125°C				40	
			25°C			2.1	30	
	Difference in ON- state resistance between switches		-40°C to 85°C	2.3 V			40	
۸		$I_T = 2 \text{ mA},$ $V_I = \text{GND to } V_{CC},$	-40°C to 125°C				40	
∆r <sub>ON</sub>		$V_{\text{INH}} = V_{\text{IL}}$	25°C			1.4	20	Ω
			-40°C to 85°C	3 V			30	
			-40°C to 125°C				30	
			25°C			1.3	15	
			-40°C to 85°C	4.5 V			20	
			-40°C to 125°C				20	
_			25°C		-0.1		0.1	
I <sub>IH</sub> I <sub>IL</sub>	Control input current	V <sub>I</sub> = 5.5 V or GND	-40°C to 85°C	0 to 5.5 V	-1		1	μΑ
'IL			-40°C to 125°C		-2		2	
		V <sub>I</sub> = V <sub>CC</sub> and V <sub>O</sub> =	25°C		-0.1		0.1	
lo, m	OFF-state switch	GND, or $V_1$ = GND and $V_0$ =	-40°C to 85°C	5.5 V	-1		1	μA
I <sub>S(off)</sub>	leakage current	$V_{CC}$ , $V_{INH} = V_{IH}$	-40°C to 125°C	0.5 v	-2		2	μΛ
			25°C		-0.1		0.1	
I <sub>S(on)</sub>	ON-state switch leakage current	$V_I = V_{CC}$ or GND,	-40°C to 85°C	5.5 V	-1		1	μΑ
` '	leakage current	$V_{INH} = V_{IL}$	-40°C to 125°C		-2		2	
			25°C			0.01		
I <sub>CC</sub>	Supply current	$V_I = V_{CC}$ or GND	-40°C to 85°C	5.5 V			20	μΑ
		V <sub>INH</sub> = 0 V	-40°C to 125°C				40	
C <sub>IC</sub>	Control input capacitance	f = 10 MHz	25°C	3.3 V		2		pF
C <sub>IS</sub>	Common terminal capacitance	f = 10 MHz	25°C	3.3 V		23.4		pF
C <sub>OS</sub>	Switch ternminal capacitance	f = 10 MHz	25°C	3.3 V		5.7		pF
C <sub>F</sub>	Feedthrough capacitance	f = 10 MHz	25°C	3.3 V		0.5		pF



## **5.5 Electrical Characteristics (continued)**

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		Condition	TA	V <sub>CC</sub>	MIN	TYP MAX	UNIT
Cpn	Power dissipation capacitance	C <sub>L</sub> = 50 pF, f = 10 MHz	25°C	3.3 V		5.9	pF

# 5.6 Timing Characteristics $V_{CC}$ = 2.5 V ± 0.2 V

	PARAMETER	FROM (INPUT)	TO (OUTPUT)	CONDITIONS	T <sub>A</sub>	MIN	TYP	MAX	UNIT
					25°C		1.9	10	
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay time	COM or Yn	Yn or COM	C <sub>L</sub> = 15 pF	–40°C to 85°C			16	ns
PHL	dolay timo				–40°C to 125°C			18	
					25°C		6.6	18	
t <sub>PZH</sub> t <sub>PZL</sub>	Enable delay time	INH	COM or Yn	C <sub>L</sub> = 15 pF	–40°C to 85°C			23	ns
PZL	unio				–40°C to 125°C			25	
	Disable delay time	INH CC	COM or Yn	C <sub>L</sub> = 15 pF	25°C		7.4	18	ns
t <sub>PHZ</sub>					–40°C to 85°C			23	
t <sub>PLZ</sub>					-40°C to 125°C			25	
		Propagation COM or Yn	Yn or COM	C <sub>L</sub> = 50 pF	25°C		3.8	12	4
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay time				–40°C to 85°C			18	
PHL	delay time				–40°C to 125°C			20	
					25°C		7.8	28	
t <sub>PZH</sub>	Enable delay time	INH	COM or Yn	C <sub>L</sub> = 50 pF	–40°C to 85°C			35	ns
PZL	unio				–40°C to 125°C			35	1
					25°C		11.5	28	-
t <sub>PHZ</sub> t <sub>PLZ</sub>	Disable delay	Disable delay time INH COM or Yi	COM or Yn	C <sub>L</sub> = 50 pF	–40°C to 85°C			35	
PLZ	unio				–40°C to 125°C			35	

# 5.7 Timing Characteristics $V_{CC}$ = 3.3 V $\pm$ 0.3 V

PA	ARAMETER	FROM (INPUT)	TO (OUTPUT)	CONDITIONS	T <sub>A</sub>	MIN	TYP	MAX	UNIT
					25°C		2.5	9	
t <sub>PLH</sub>	Propagation delay time	COM or Yn	Yn or COM	C <sub>L</sub> = 50 pF	–40°C to 85°C			12	ns
t <sub>PZH</sub>	dolay amo	delay time			-40°C to 125°C			14	
		Enable delay INH C	COM or Yn C	C <sub>L</sub> = 50 pF	25°C		5.5	20	
t <sub>PZH</sub>	Enable delay time				–40°C to 85°C			25	ns
PZL					-40°C to 125°C			25	
					25°C		8.8	20	
t <sub>PHZ</sub>	Disable delay time	' INH ICOMOTYN	COM or Yn	C <sub>L</sub> = 50 pF	–40°C to 85°C			25	ns
	une				–40°C to 125°C			25	

# 5.8 Timing Characteristics $V_{CC}$ = 5 V ± 0.5 V

PARAMETER		FROM (INPUT)	TO (OUTPUT)	CONDITIONS	T <sub>A</sub>	MIN	TYP	MAX	UNIT
		COM or Yn	Yn or COM	C <sub>L</sub> = 50 pF	25°C		1.5	6	
t <sub>PLH</sub>	Propagation delay time				–40°C to 85°C			8	ns
t <sub>PHL</sub> dela	25.2,				–40°C to 125°C			10	

Product Folder Links: SN74LV4051A-Q1



# 5.8 Timing Characteristics $V_{CC} = 5 V \pm 0.5 V$ (continued)

PARAMETER		FROM (INPUT)	TO (OUTPUT)	CONDITIONS	T <sub>A</sub>	MIN	TYP	MAX	UNIT
		INH	COM or Yn		25°C		4	14	
t <sub>PZH</sub> Enable delay time	C <sub>L</sub> = 50 pF			-40°C to 85°C			18	ns	
					-40°C to 125°C			18	
					25°C		6.2	14	
$t_{PHZ}$	Disable delay time	INH CO	COM or Yn	C <sub>L</sub> = 50 pF	–40°C to 85°C			18	ns
PLZ					–40°C to 125°C			18	

## **5.9 AC Characteristics**

PARAMETER	FROM (INPUT)	TO (OUTPUT)	Device	CONDITIONS		MIN 7	ГҮР	MAX	UNIT
Frequency				C <sub>L</sub> = 50 pF, R <sub>L</sub> =			20		
response (switch	COM or Yn	Yn or COM	SN74LV4051	$600 \Omega$ , $F_{in} = 1 \text{ MHz (sine wave)}$	V <sub>CC</sub> = 3 V		25		MHz
on)				wave)	V <sub>CC</sub> = 4.5 V		35		
Feedthrough				C <sub>L</sub> = 50 pF, R <sub>L</sub> =			<b>–</b> 45		
attenuation	COM or Yn	Yn or COM	ALL	$600 \Omega$ , $F_{in} = 1 \text{ MHz (sine)}$	V <sub>CC</sub> = 3 V		<b>–45</b>		dB
(switch off)				wave)	V <sub>CC</sub> = 4.5 V		<b>–45</b>		
Crosstalk	COM or Yn	Yn or COM	ALL	$C_L$ = 50 pF, $R_L$ = 600 $\Omega$ , $F_{in}$ = 1 MHz (sine wave)	V <sub>CC</sub> = 2.3 V		20		
(between any					V <sub>CC</sub> = 3 V		35		mV
switches)					V <sub>CC</sub> = 4.5 V		60		
		Yn or COM		C <sub>L</sub> = 50 pF, R <sub>L</sub> =	$V_{I} = 2 V_{p-p}$ $V_{CC} = 2.3 V$		0.1		
Sine-wave distortion	COM or Yn		ALL	10 kΩ, $F_{in}$ = 1 kHz (sine	V <sub>I</sub> = 2.5 V <sub>p-p</sub> V <sub>CC</sub> = 3 V		0.1		%
				wave)	$V_{I} = 4 V_{p-p}$ $V_{CC} = 4.5 V$		0.1		



## **6 Parameter Measurement Information**


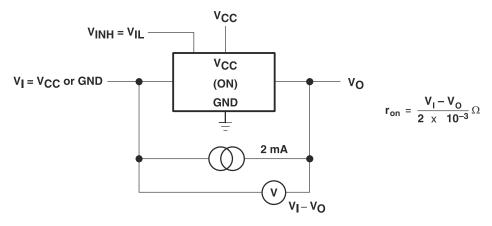


Figure 6-1. On-State Resistance Test Circuit

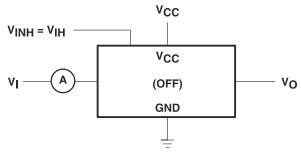

Condition 1:  $V_I = 0$ ,  $V_O = V_{CC}$ Condition 2:  $V_I = V_{CC}$ ,  $V_O = 0$ 

Figure 6-2. Off-State Switch Leakage-Current Test Circuit

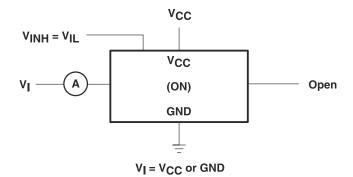


Figure 6-3. On-State Switch Leakage-Current Test Circuit

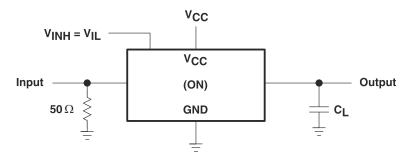


Figure 6-4. Propagation Delay Time, Signal Input to Signal Output


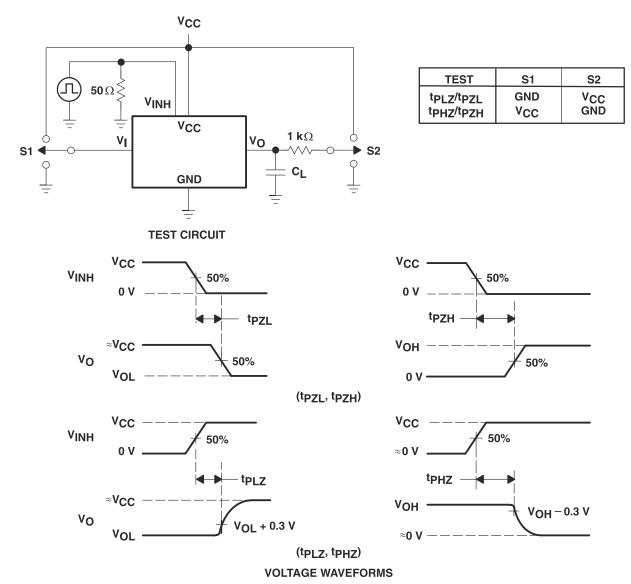


Figure 6-5. Switching Time (t<sub>PZL</sub>, t<sub>PLZ</sub>, t<sub>PZH</sub>, t<sub>PHZ</sub>), Control to Signal Output



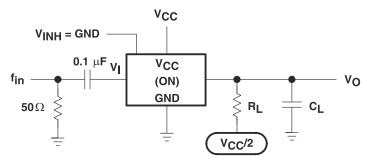

NOTE A: fin is a sine wave.

Figure 6-6. Frequency Response (Switch On)

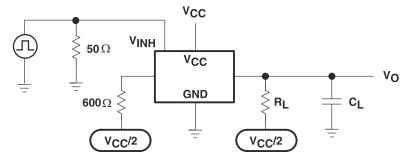


Figure 6-7. Crosstalk (Control Input, Switch Output)

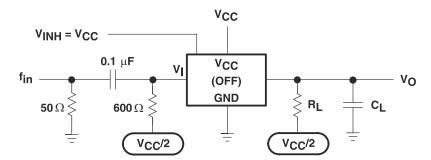


Figure 6-8. Feedthrough Attenuation (Switch Off)

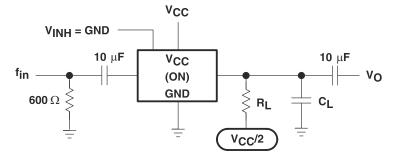



Figure 6-9. Sine-Wave Distortion

# 7 Detailed Description

### 7.1 Overview

This device is an 8-channel analog multiplexer. A multiplexer is used when several signals must share the same device or resource. This device allows the selection of one of these signals at a time, for analysis or propagation.

## 7.2 Functional Block Diagram

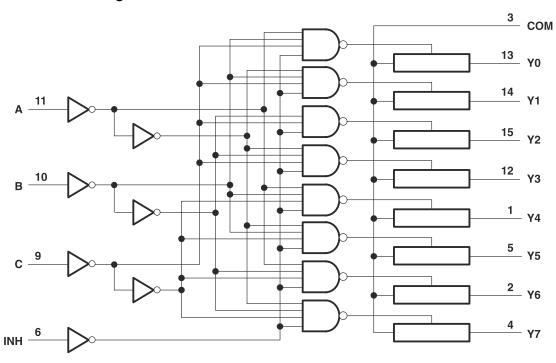

## 7.3 Feature Description

This device contains one 8-channel multiplexer for use in a variety of applications, and can also be configured as demultiplexer by using the COM pin as an input and the Yx pins as outputs. This device is qualified for automotive applications and has an extended temperature range of -40°C to 125°C (maximum depends on package type).

### 7.4 Device Functional Modes

**Table 7-1. Function Table** 

	INP	ON		
INH	С	ВА		CHANNEL
L	L	L	L	Y0
L	L	L	Н	Y1
L	L	Н	L	Y2
L	L	Н	Н	Y3
L	Н	L	L	Y4
L	Н	L	Н	Y5
L	Н	Н	L	Y6
L	Н	Н	Н	Y7
Н	Х	Х	Х	None



## 8 Application and Implementation

#### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

## 8.1 Application Information

A multiplexer is used in applications where multiple signals share a resource. In the example below, several different sensors are connected to the analog-to-digital converter (ADC) of a microcontroller unit (MCU).

## 8.2 Typical Application

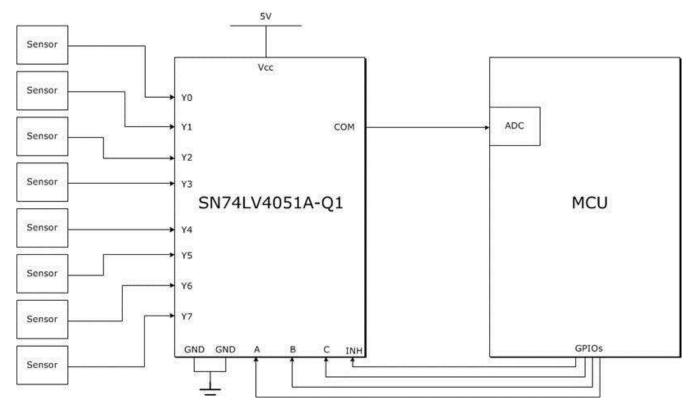


Figure 8-1. Example of Multiplexer Use With Analog Sensors and the ADC of an MCU

#### 8.2.1 Design Requirements

Designing with the SN74LV4051A-Q1 device requires a stable input voltage between 2 V (see *Recommended Operating Conditions* for details) and 5.5V. Another important design consideration are the characteristics of the signal being multiplexed—ensure no important information is lost due to timing or incompatibility with this device.

#### 8.2.2 Detailed Design Procedure

Processing eight different analog signals would normally require eight separate ADCs, but Figure 8-1 shows how to achieve this using only one ADC and four GPIOs (general-purpose input/outputs).

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated

## 8.3 Power Supply Recommendations

Most systems have a common 3.3V or 5V rail that can supply the Vcc pin of this device. If this is not available, a switched-mode power supply (SMPS) or a low dropout regulator (LDO) can supply this device from a higher voltage rail.

### 8.4 Layout

#### 8.4.1 Layout Guidelines

TI recommends keeping the signal lines as short and as straight as possible. Incorporation of microstrip or stripline techniques is also recommended when signal lines are more than 1 inch long. These traces must be designed with a characteristic impedance of either  $50\Omega$  or  $75\Omega$ , as required by the application. Do not place this device too close to high-voltage switching components, as they may cause interference.

## 8.4.2 Layout Example

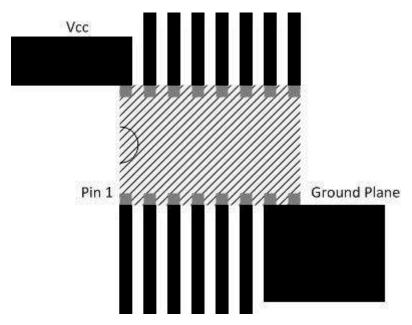


Figure 8-2. Layout Schematic



## 9 Device and Documentation Support

## 9.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 9.2 Support Resources

TI E2E<sup>™</sup> support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

#### 9.3 Trademarks

TI E2E<sup>™</sup> is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

## 9.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## 9.5 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

## 10 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision G (September 2024) to Revision H (October 2024)	Page
Added 50mA to the Switch IO diode clamp current	4
Changes from Revision F (June 2024) to Revision G (September 2024)	Page
Changes from Revision F (June 2024) to Revision G (September 2024)  • Added DYY package and size	
Added DYY package and size	1
	3

# 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Product Folder Links: SN74LV4051A-Q1

www.ti.com

8-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking
	(1)	(2)			(3)	(4)	(5)		(6)
CLV4051ATDWRG4Q1	NRND	Production	SOIC (DW)   16	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	L4051AQ
CLV4051ATDWRG4Q1.A	NRND	Production	SOIC (DW)   16	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	L4051AQ
CLV4051ATPWRG4Q1	Obsolete	Production	TSSOP (PW)   16	-	-	Call TI	Call TI	-40 to 105	L4051AQ
SN74LV4051AQDYYRQ1	Active	Production	SOT-23-THIN (DYY)   16	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LV4051Q
SN74LV4051AQDYYRQ1.A	Active	Production	SOT-23-THIN (DYY)   16	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LV4051Q
SN74LV4051AQPWRQ1	Active	Production	TSSOP (PW)   16	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	4051AQ1
SN74LV4051AQPWRQ1.A	Active	Production	TSSOP (PW)   16	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	4051AQ1
SN74LV4051ATDRQ1	NRND	Production	SOIC (D)   16	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	L4051AQ
SN74LV4051ATDRQ1.A	NRND	Production	SOIC (D)   16	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	L4051AQ
SN74LV4051ATDWRQ1	NRND	Production	SOIC (DW)   16	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	L4051AQ
SN74LV4051ATDWRQ1.A	NRND	Production	SOIC (DW)   16	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	L4051AQ
SN74LV4051ATPWRQ1	Active	Production	TSSOP (PW)   16	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	L4051AQ
SN74LV4051ATPWRQ1.A	Active	Production	TSSOP (PW)   16	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	L4051AQ

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No. RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

# **PACKAGE OPTION ADDENDUM**

www.ti.com 8-Nov-2025

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF SN74LV4051A-Q1:

Catalog: SN74LV4051A

Enhanced Product : SN74LV4051A-EP

NOTE: Qualified Version Definitions:

Catalog - TI's standard catalog product

• Enhanced Product - Supports Defense, Aerospace and Medical Applications

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 24-Jul-2025

## TAPE AND REEL INFORMATION





	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CLV4051ATDWRG4Q1	SOIC	DW	16	2000	330.0	16.4	10.75	10.7	2.7	12.0	16.0	Q1
SN74LV4051AQDYYRQ1	SOT-23- THIN	DYY	16	3000	330.0	12.4	4.8	3.6	1.6	8.0	12.0	Q3
SN74LV4051AQPWRQ1	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74LV4051ATDWRQ1	SOIC	DW	16	2000	330.0	16.4	10.75	10.7	2.7	12.0	16.0	Q1
SN74LV4051ATPWRQ1	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1



www.ti.com 24-Jul-2025



#### \*All dimensions are nominal

7 til dillici sions die nomina							
Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
CLV4051ATDWRG4Q1	SOIC	DW	16	2000	350.0	350.0	43.0
SN74LV4051AQDYYRQ1	SOT-23-THIN	DYY	16	3000	336.6	336.6	31.8
SN74LV4051AQPWRQ1	TSSOP	PW	16	2000	353.0	353.0	32.0
SN74LV4051ATDWRQ1	SOIC	DW	16	2000	350.0	350.0	43.0
SN74LV4051ATPWRQ1	TSSOP	PW	16	2000	353.0	353.0	32.0

# D (R-PDS0-G16)

## PLASTIC SMALL OUTLINE



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AC.



PLASTIC SMALL OUTLINE



## NOTES:

- All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 per side
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.50 per side.
- 5. Reference JEDEC Registration MO-345, Variation AA



PLASTIC SMALL OUTLINE



NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



PLASTIC SMALL OUTLINE



#### NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



7.5 x 10.3, 1.27 mm pitch

SMALL OUTLINE INTEGRATED CIRCUIT

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.





SOIC



#### NOTES:

- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing
- per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm, per side.
- 5. Reference JEDEC registration MS-013.



SOIC



### NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SOIC



#### NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.





SMALL OUTLINE PACKAGE



#### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025