



ULTRA-SMALL SUPPLY VOLTAGE SUPERVISORS

Check for Samples: [TPS3800-xx](#), [TPS3801-xx](#), [TPS3802-xx](#)

FEATURES

- Small, 5-Pin SC-70 (SOT-323) Package
- Supply Current of 9 μ A
- Power-On Reset Generator With Fixed Delay Time
 - TPS3800 = 100 ms
 - TPS3801 = 200 ms
 - TPS3802 = 400 ms
- Precision Supply Voltage Monitor 1.8 V, 2.5 V, 2.7 V, 3 V, 3.3 V, 5 V, and Adjustable
- Manual Reset Input (Except TPS3801-01)
- Temperature Range: -40°C to $+85^{\circ}\text{C}$

APPLICATIONS

- Applications Using DSPs, Microcontrollers, or Microprocessors
- Wireless Communication Systems
- Portable/Battery-Powered Equipment
- Programmable Controls
- Intelligent Instruments
- Industrial Equipment
- Notebook/Desktop Computers
- Automotive Systems

DESCRIPTION



The TPS380x family of supervisory circuits monitor supply voltages to provide circuit initialization and timing supervision, primarily for DSPs and other processor-based systems.

These devices assert a push-pull $\overline{\text{RESET}}$ signal when the SENSE (adjustable version) or V_{DD} (fixed version) drops below a preset threshold. The $\overline{\text{RESET}}$ output remains asserted for the factory programmed delay time after the SENSE or V_{DD} return above its threshold.

The TPS380x devices, except the TPS3801-01, incorporate a manual reset input ($\overline{\text{MR}}$). A low level at $\overline{\text{MR}}$ causes $\overline{\text{RESET}}$ to become active.

The TPS380x uses a precision reference to achieve an overall threshold accuracy of 2%–2.5%. These devices are available in a 5-pin SC-70 package, which is only about half the size of a 5-pin SOT-23 package.

The TPS380x devices are fully specified over a temperature range of -40°C to $+85^{\circ}\text{C}$.

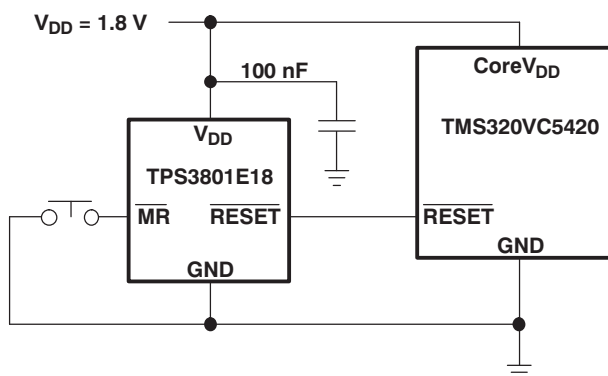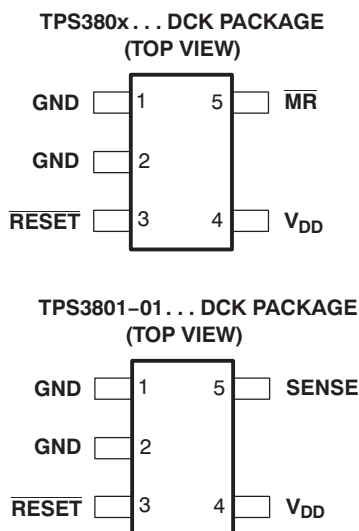

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

AVAILABLE OPTIONS⁽¹⁾

T _A	DEVICE NAME	THRESHOLD VOLTAGE	TYP DELAY TIME	MARKING
–40°C to 85°C	TPS3801-01DCK	Adjustable (V _{ref} = 1.14 V)	200 ms	ARF
	TPS3801E18DCK	1.71 V	200 ms	ARE
	TPS3801J25DCK	2.25 V	200 ms	NJA
	TPS3800G27DCK	2.5 V	95 ms	ARI
	TPS3801L30DCK	2.64 V	200 ms	NPA
	TPS3801K33DCK	2.93 V	200 ms	NWA
	TPS3802L30DCK	2.64 V	380 ms	ASA
	TPS3802K33DCK	2.93 V	380 ms	ARK
	TPS3801T50DCK	4.00 V	25 ms	AVI
	TPS3801I50DCK	4.55 V	200 ms	NSA

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this data sheet, or refer to our web site at www.ti.com.

ABSOLUTE MAXIMUM RATINGS^{(1) (2)}

Over operating free-air temperature range (unless otherwise noted).

	UNIT
Supply voltage, V _{DD}	7 V
SENSE	–0.3 V to 5 V
All other pins	–0.3 V to 7 V
$\overline{\text{MR}}$	–0.3 V to V _{DD} + 0.3 V
$\overline{\text{RESET}}$	–0.3 V to V _{DD} + 0.3 V
Maximum low-output current, I _{OL}	5 mA
Maximum high-output current, I _{OH}	–5 mA
Input-clamp current, I _{IK} (V _I < 0 or V _I > V _{DD})	±20 mA
Output-clamp current, I _{OK} (V _O < 0 or V _O > V _{DD})	±20 mA
Operating junction temperature range, T _J ⁽³⁾	–40°C to +85°C
Storage temperature range, T _{stg}	–65°C to +150°C

- (1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to GND. For reliable operation, the device should not be operated at 7 V for more than t = 1000h continuously.
- (3) Due to the low dissipation power of this device, it is assumed that T_J = T_A.

RECOMMENDED OPERATING CONDITIONS

	MIN	MAX	UNIT
Supply voltage, V _{DD}	TPS3801J25, TPS3801L30, TPS3801K33, TPS3801I50, TPS3801T50	2	6
	All other devices	1.6	4
SENSE	0	See ⁽¹⁾	V
Input voltage, V _I	0	V _{DD} + 0.3	V
High-level input voltage, V _{IH}	0.7 × V _{DD}	V _{DD} + 0.3	V
Low-level input voltage, V _{IL}		0.3 × V _{DD}	V
Input transition rise and fall rate at $\overline{\text{MR}}$, Δt/ΔV		100	ns/V
Pull-up resistor value, $\overline{\text{RESET}}$	V _{Pull-up} 50μA		Ω
Operating free-air temperature range, T _A	–40	+85	°C

- (1) Maximum = V_{DD} + 0.3 or 4.5 V, whichever is greater.

ELECTRICAL CHARACTERISTICS

Over -40°C to $+85^{\circ}\text{C}$ free-air temperature range (unless otherwise noted).

PARAMETER		TEST CONDITIONS	TPS3800-xx, TPS3801-xx, TPS3802-xx			UNIT
			MIN	TYP	MAX	
V _{OH} High-level output voltage ($\overline{\text{RESET}}$)		V _{DD} = 1.6 V to 6 V I _{OH} = −500 μA	V _{DD} −0.2			V
		V _{DD} = 3.3 V I _{OH} = −2 mA	V _{DD} −0.4			
		V _{DD} = 6 V I _{OH} = −4 mA ⁽¹⁾	V _{DD} −0.4			
V _{OL} Low-level output voltage ($\overline{\text{RESET}}$)		V _{DD} = 1.6 V to 6 V, I _{OL} = 500 μA	0.2			V
		V _{DD} = 3.3 V, I _{OL} = 2 mA	0.4			
		V _{DD} = 6 V, I _{OL} = 4 mA ⁽¹⁾	0.4			
Power-up reset voltage ⁽²⁾		V _{DD} ≥ 1.1 V, I _{OL} = 50 μA	0.2			V
V _{IT−} Negative-going input threshold voltage ⁽³⁾	TPS380x-01	T _A = −40°C to 85°C	1.117	1.14	1.163	V
	TPS380xE18		1.67	1.71	1.75	
	TPS380xJ25		2.2	2.25	2.3	
	TPS380xG27		2.45	2.5	2.55	
	TPS380xL30		2.58	2.64	2.7	
	TPS380xK33		2.87	2.93	2.99	
	TPS380xI50		4.45	4.55	4.65	
	TPS380xT50		3.92	4	4.08	
V _{hys} Threshold hysteresis	TPS380x-01		15			mV
	TPS380xx18		25			
	TPS380xx25		30			
	TPS380xx27		35			
	TPS380xx30		35			
	TPS380xx33		40			
	TPS380xx50		60			
I _{IH} High-level input current ($\overline{\text{MR}}$)		$\overline{\text{MR}}$ = 0.7×V _{DD} , V _{DD} = 6 V	−40	−60	−100	μA
I _{IL} Low-level input current ($\overline{\text{MR}}$)		$\overline{\text{MR}}$ = 0 V, V _{DD} = 6 V	−130	−200	−340	
I _I Input current (SENSE)			−25		25	nA
I _{DD} Supply current	TPS3801J25, TPS3801L30, TPS3801K33, TPS3801I50, TPS3801T50	V _{DD} = 2 V, $\overline{\text{MR}}$ and output unconnected	9			μA
		V _{DD} = 6 V, $\overline{\text{MR}}$ and output unconnected	20			
	TPS3801-01	V _{DD} = 1.6 V, SENSE = 0 V to V _{DD} , output unconnected	7			
		V _{DD} = 4 V, SENSE = 0 V to V _{DD} , output unconnected	9			
	TPS3801E18, TPS3800G27, TPS3802K33, TPS3802L30	V _{DD} = 1.6 V, $\overline{\text{MR}}$ and output unconnected	8			
		V _{DD} = 4 V, $\overline{\text{MR}}$ and output unconnected	13			
C _i Input capacitance		V _I = 0 V to V _{DD}	5			pF

(1) Only valid for the TPS3801J25, TPS3801L30, TPS3801K33, TPS3801I50, and TPS3801T50.

(2) The lowest supply voltage at which $\overline{\text{RESET}}$ becomes active. t_r , $V_{DD} \geq 15\text{ }\mu\text{s/V}$.

(3) To ensure the best stability of the threshold voltage, a bypass capacitor (0.1- μF ceramic) should be placed near the supply terminals.

TIMING REQUIREMENTS

at $R_L = 1\text{ M}\Omega$, $C_L = 50\text{ pF}$, $T_A = +25^\circ\text{C}$


PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_w Pulse width	at SENSE	$V_{DD} = 1.6\text{ V}$, $V_{IH} = 1.1 \times V_{IT-}$, $V_{IL} = 0.9 \times V_{IT-}$	1			μs
	at V_{DD}	$V_{DD} = V_{IT-} + 0.2\text{ V}$, $V_{DD} = V_{IT-} - 0.2\text{ V}$	3			
	at $\overline{\text{MR}}$	$V_{DD} \geq V_{IT-} + 0.2\text{ V}$, $V_{IL} = 0.3 \times V_{DD}$, $V_{IH} = 0.7 \times V_{DD}$	100			ns

SWITCHING CHARACTERISTICS

at $R_L = 1\text{ M}\Omega$, $C_L = 50\text{ pF}$, $T_A = +25^\circ\text{C}$

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_d $\overline{\text{RESET}}$ recovery delay time	TPS3801T50	$V_{DD} \geq V_{IT-} + 0.2\text{ V}$, $\overline{\text{MR}} \geq 0.7 \times V_{DD}$ See timing diagram	15	25	35	ms
	TPS3800		60	95	140	
	TPS3801		120	200	280	
	TPS3802		240	380	560	
t_{PHL} Propagation (delay) time, high-to-low-level output	$\overline{\text{MR}}$ to $\overline{\text{RESET}}$ delay	$V_{DD} \geq V_{IT-} + 0.2\text{ V}$, $V_{IL} = 0.3 \times V_{DD}$, $V_{IH} = 0.7 \times V_{DD}$		15		ns
	V_{DD} to $\overline{\text{RESET}}$ delay	$V_{IL} = V_{IT-} - 0.2\text{ V}$, $V_{IH} = V_{IT-} + 0.2\text{ V}$		1		μs
	SENSE to $\overline{\text{RESET}}$					

TIMING DIAGRAM

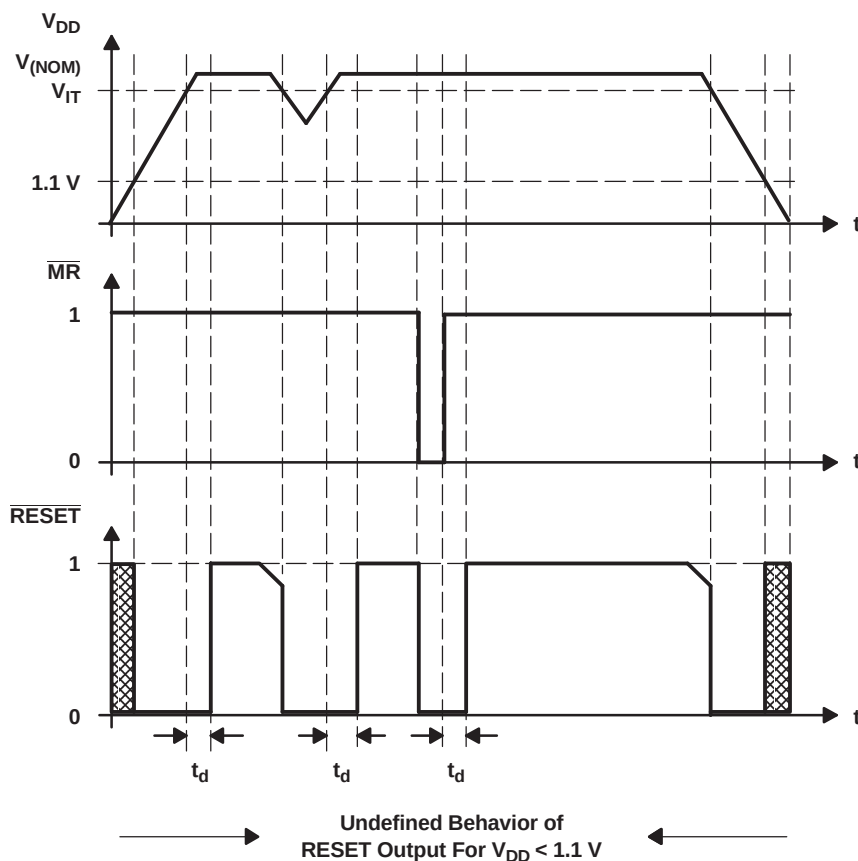

NOTE: $\overline{\text{RESET}}$ should not be forced high during the power-up sequence (until $V_{DD} > 1.1\text{ V}$).

FUNCTIONAL BLOCK DIAGRAMS

FUNCTION/TRUTH TABLE, TPS380x

MR	$V_{DD} > V_{IT}$	RESET
L	0	L
L	1	L
H	0	L
H	1	H

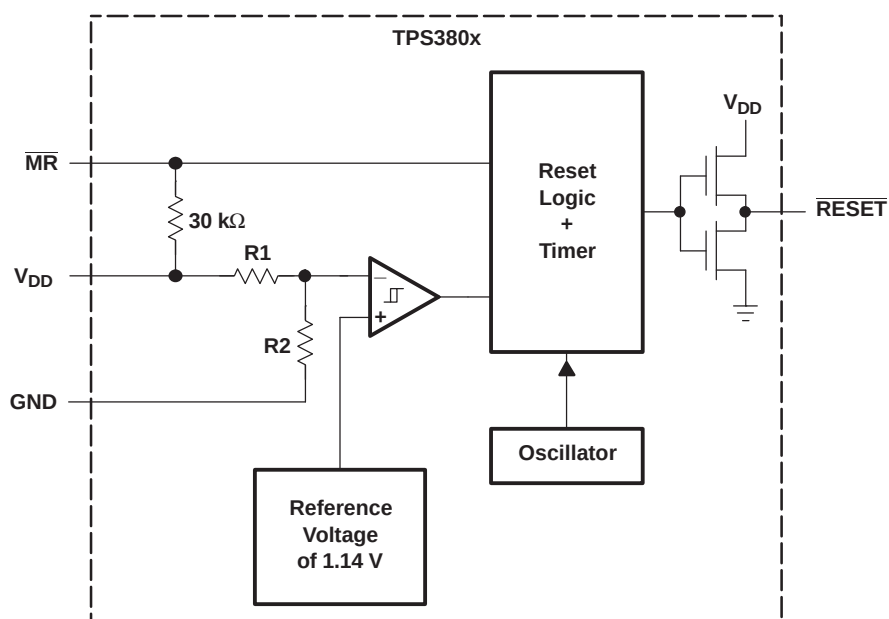


Figure 1.

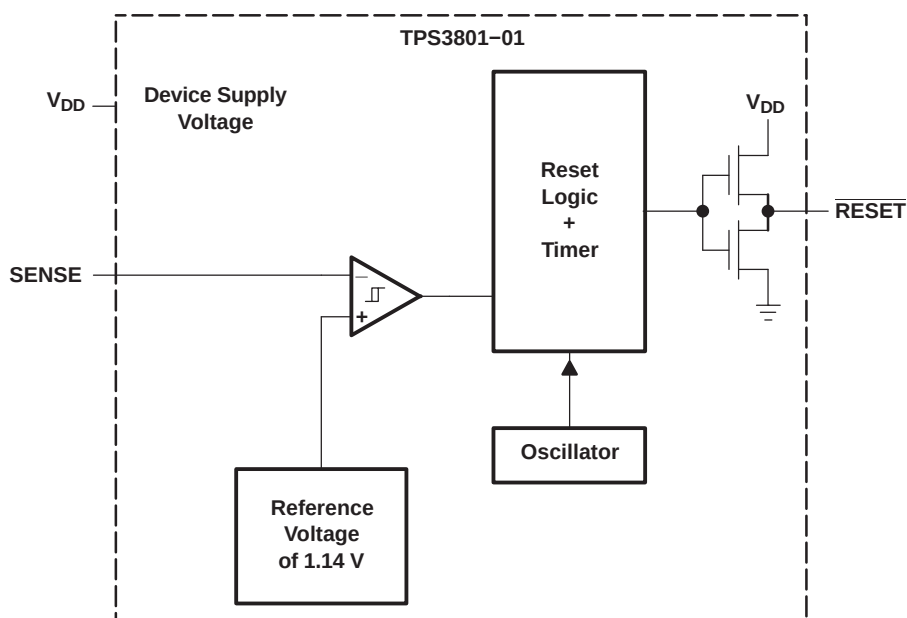


Figure 2.

TYPICAL CHARACTERISTICS

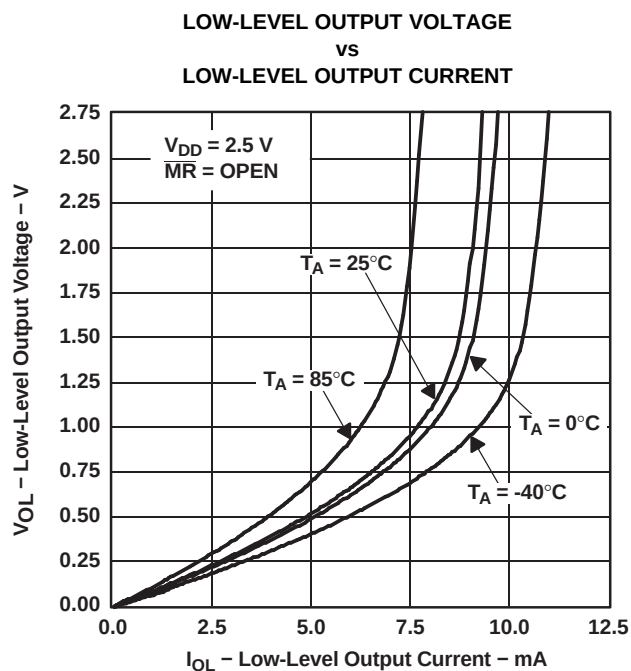


Figure 3.

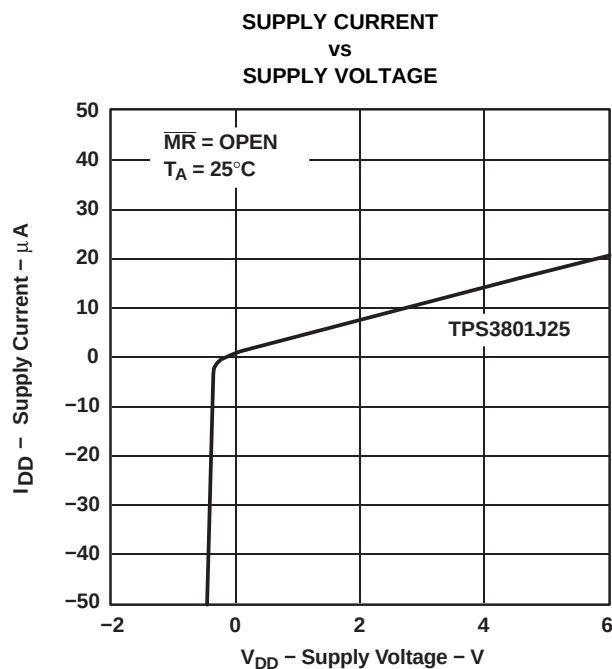


Figure 4.

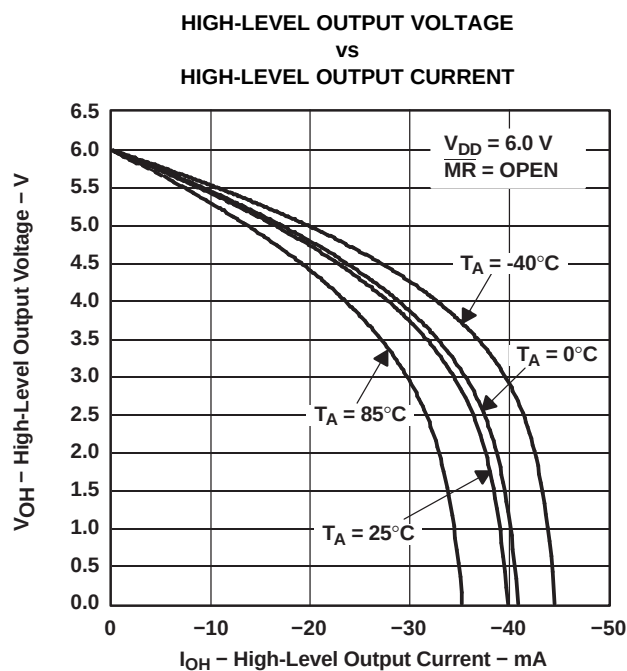


Figure 5.

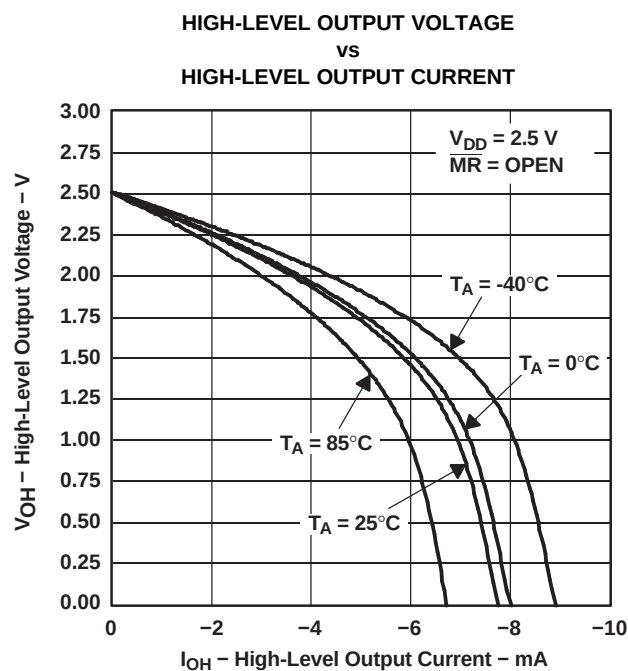


Figure 6.

TYPICAL CHARACTERISTICS (continued)

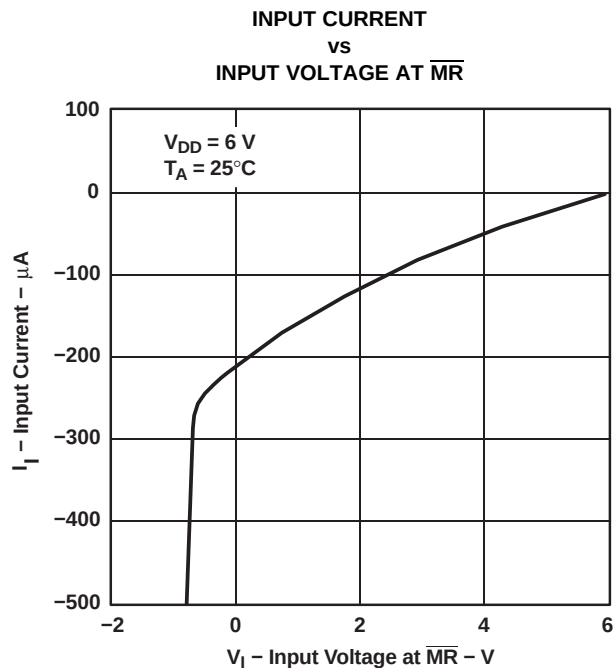


Figure 7.

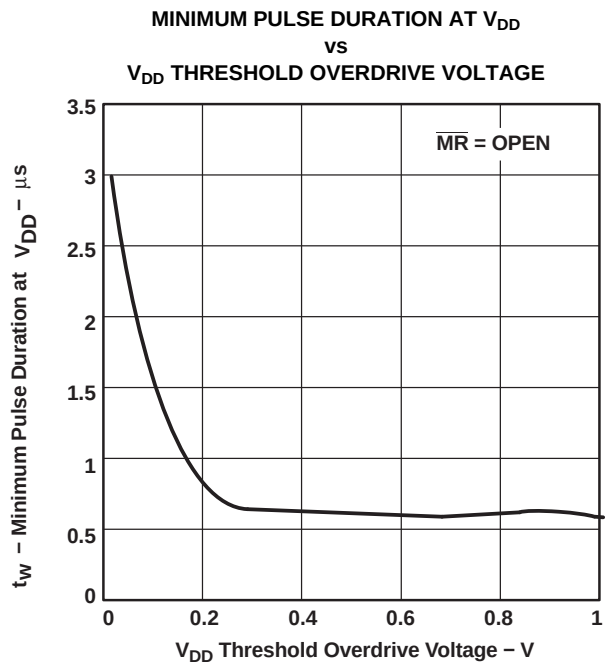


Figure 8.

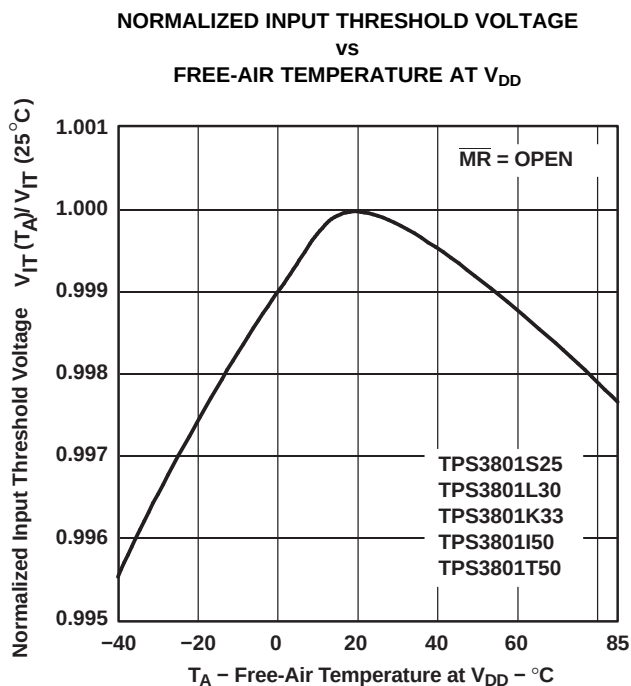


Figure 9.

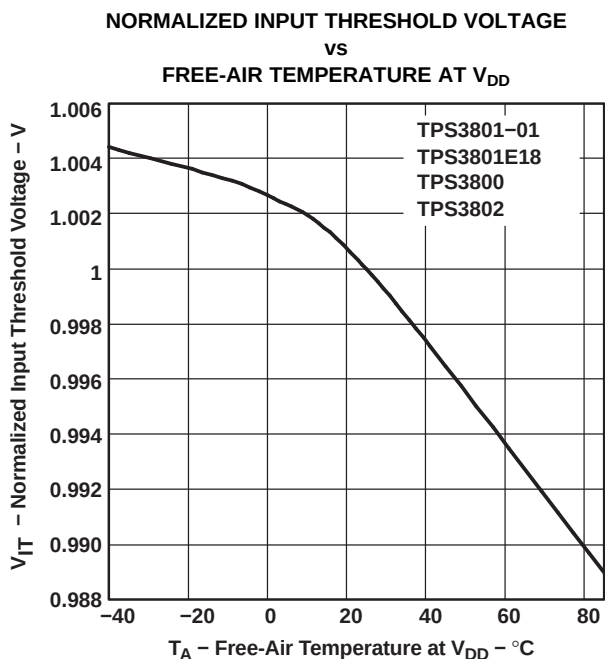


Figure 10.

Changes from Revision D (December 2006) to Revision E

Page

-
- Added Pull-up resistor value, $\overline{\text{RESET}}$ to the Recommended Operating Conditions Table [2](#)
-

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPS3800G27DCKR	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ARI
TPS3800G27DCKR.A	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ARI
TPS3801-01DCKR	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ARF
TPS3801-01DCKR.A	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ARF
TPS3801E18DCKR	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ARE
TPS3801E18DCKR.A	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ARE
TPS3801I50DCKR	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NSA
TPS3801I50DCKR.A	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NSA
TPS3801J25DCKR	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NJA
TPS3801J25DCKR.A	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NJA
TPS3801K33DCKR	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NWA
TPS3801K33DCKR.A	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NWA
TPS3801L30DCKR	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NPA
TPS3801L30DCKR.A	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NPA
TPS3801T50DCKR	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AVI
TPS3801T50DCKR.A	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AVI
TPS3802K33DCKR	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ARK
TPS3802K33DCKR.A	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ARK
TPS3802L30DCKR	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ASA
TPS3802L30DCKR.A	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ASA

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


TAPE AND REEL INFORMATION

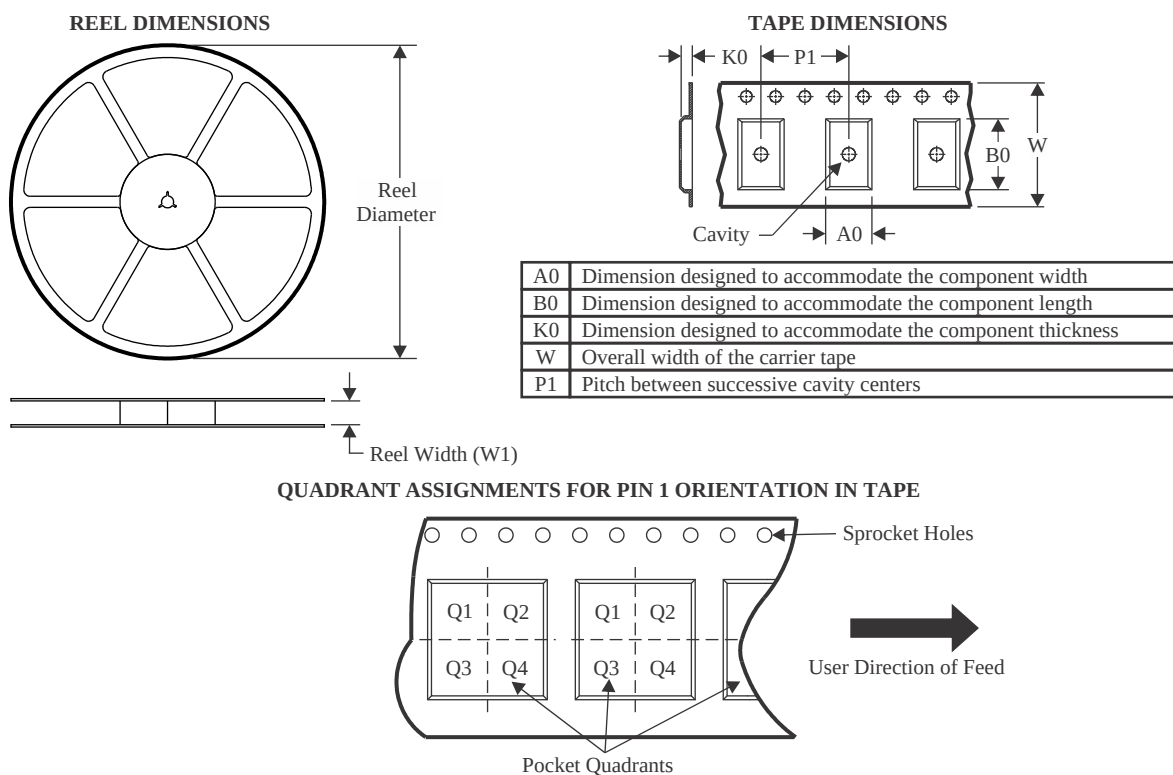

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS3800G27DCKR	SC70	DCK	5	3000	178.0	9.0	2.4	2.5	1.2	4.0	8.0	Q3
TPS3801-01DCKR	SC70	DCK	5	3000	178.0	9.0	2.4	2.5	1.2	4.0	8.0	Q3
TPS3801E18DCKR	SC70	DCK	5	3000	178.0	9.0	2.4	2.5	1.2	4.0	8.0	Q3
TPS3801I50DCKR	SC70	DCK	5	3000	180.0	8.4	2.41	2.41	1.2	4.0	8.0	Q3
TPS3801J25DCKR	SC70	DCK	5	3000	180.0	8.4	2.41	2.41	1.2	4.0	8.0	Q3
TPS3801K33DCKR	SC70	DCK	5	3000	178.0	9.0	2.4	2.5	1.2	4.0	8.0	Q3
TPS3801L30DCKR	SC70	DCK	5	3000	180.0	8.4	2.41	2.41	1.2	4.0	8.0	Q3
TPS3801T50DCKR	SC70	DCK	5	3000	178.0	9.0	2.4	2.5	1.2	4.0	8.0	Q3
TPS3801T50DCKR	SC70	DCK	5	3000	180.0	8.4	2.41	2.41	1.2	4.0	8.0	Q3
TPS3802K33DCKR	SC70	DCK	5	3000	178.0	9.0	2.4	2.5	1.2	4.0	8.0	Q3
TPS3802L30DCKR	SC70	DCK	5	3000	180.0	8.4	2.41	2.41	1.2	4.0	8.0	Q3

TAPE AND REEL BOX DIMENSIONS

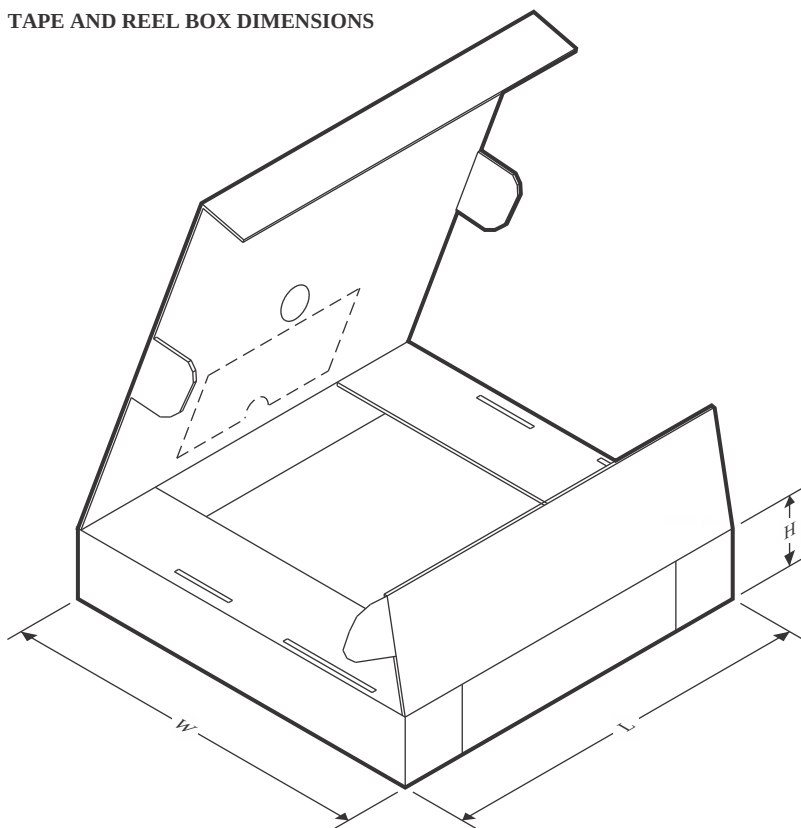

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS3800G27DCKR	SC70	DCK	5	3000	180.0	180.0	18.0
TPS3801-01DCKR	SC70	DCK	5	3000	180.0	180.0	18.0
TPS3801E18DCKR	SC70	DCK	5	3000	180.0	180.0	18.0
TPS3801I50DCKR	SC70	DCK	5	3000	183.0	183.0	20.0
TPS3801J25DCKR	SC70	DCK	5	3000	183.0	183.0	20.0
TPS3801K33DCKR	SC70	DCK	5	3000	180.0	180.0	18.0
TPS3801L30DCKR	SC70	DCK	5	3000	183.0	183.0	20.0
TPS3801T50DCKR	SC70	DCK	5	3000	180.0	180.0	18.0
TPS3801T50DCKR	SC70	DCK	5	3000	183.0	183.0	20.0
TPS3802K33DCKR	SC70	DCK	5	3000	180.0	180.0	18.0
TPS3802L30DCKR	SC70	DCK	5	3000	183.0	183.0	20.0



SOT - 1.1 max height

Technical drawing of a mechanical part showing three views: front, side, and top.

Front View:

- Overall dimensions: 2.4 (width) x 2.15 (height).
- Feature locations: 1.4, 1.1, 1.3, 1.3.
- Feature sizes: 0.15, 0.1.
- Feature control frames: $\oplus$ 0.1 M C A B (Feature 1), 0.1 C (Feature 2).
- Feature 1: PIN 1 INDEX AREA.
- Feature 2: NOTE 4.
- Feature 3: 5X 0.33 0.15.
- Feature 4: 2X 0.65.
- Feature 5: 1.3.
- Feature 6: 0.1.
- Feature 7: 0.15.
- Feature 8: 0.1.
- Feature 9: 0.1.
- Feature 10: 0.1.
- Feature 11: 0.1.
- Feature 12: 0.1.
- Feature 13: 0.1.
- Feature 14: 0.1.
- Feature 15: 0.1.
- Feature 16: 0.1.
- Feature 17: 0.1.
- Feature 18: 0.1.
- Feature 19: 0.1.
- Feature 20: 0.1.
- Feature 21: 0.1.
- Feature 22: 0.1.
- Feature 23: 0.1.
- Feature 24: 0.1.
- Feature 25: 0.1.
- Feature 26: 0.1.
- Feature 27: 0.1.
- Feature 28: 0.1.
- Feature 29: 0.1.
- Feature 30: 0.1.
- Feature 31: 0.1.
- Feature 32: 0.1.
- Feature 33: 0.1.
- Feature 34: 0.1.
- Feature 35: 0.1.
- Feature 36: 0.1.
- Feature 37: 0.1.
- Feature 38: 0.1.
- Feature 39: 0.1.
- Feature 40: 0.1.
- Feature 41: 0.1.
- Feature 42: 0.1.
- Feature 43: 0.1.
- Feature 44: 0.1.
- Feature 45: 0.1.
- Feature 46: 0.1.
- Feature 47: 0.1.
- Feature 48: 0.1.
- Feature 49: 0.1.
- Feature 50: 0.1.
- Feature 51: 0.1.
- Feature 52: 0.1.
- Feature 53: 0.1.
- Feature 54: 0.1.
- Feature 55: 0.1.
- Feature 56: 0.1.
- Feature 57: 0.1.
- Feature 58: 0.1.
- Feature 59: 0.1.
- Feature 60: 0.1.
- Feature 61: 0.1.
- Feature 62: 0.1.
- Feature 63: 0.1.
- Feature 64: 0.1.
- Feature 65: 0.1.
- Feature 66: 0.1.
- Feature 67: 0.1.
- Feature 68: 0.1.
- Feature 69: 0.1.
- Feature 70: 0.1.
- Feature 71: 0.1.
- Feature 72: 0.1.
- Feature 73: 0.1.
- Feature 74: 0.1.
- Feature 75: 0.1.
- Feature 76: 0.1.
- Feature 77: 0.1.
- Feature 78: 0.1.
- Feature 79: 0.1.
- Feature 80: 0.1.
- Feature 81: 0.1.
- Feature 82: 0.1.
- Feature 83: 0.1.
- Feature 84: 0.1.
- Feature 85: 0.1.
- Feature 86: 0.1.
- Feature 87: 0.1.
- Feature 88: 0.1.
- Feature 89: 0.1.
- Feature 90: 0.1.
- Feature 91: 0.1.
- Feature 92: 0.1.
- Feature 93: 0.1.
- Feature 94: 0.1.
- Feature 95: 0.1.
- Feature 96: 0.1.
- Feature 97: 0.1.
- Feature 98: 0.1.
- Feature 99: 0.1.
- Feature 100: 0.1.



Side View:

- Overall dimensions: 1.1 MAX (width) x 0.1 (thickness).
- Feature control frame: 0.1 C.
- Feature 1: 0.1.
- Feature 2: 0.1.
- Feature 3: 0.1.
- Feature 4: 0.1.
- Feature 5: 0.1.
- Feature 6: 0.1.
- Feature 7: 0.1.
- Feature 8: 0.1.
- Feature 9: 0.1.
- Feature 10: 0.1.
- Feature 11: 0.1.
- Feature 12: 0.1.
- Feature 13: 0.1.
- Feature 14: 0.1.
- Feature 15: 0.1.
- Feature 16: 0.1.
- Feature 17: 0.1.
- Feature 18: 0.1.
- Feature 19: 0.1.
- Feature 20: 0.1.
- Feature 21: 0.1.
- Feature 22: 0.1.
- Feature 23: 0.1.
- Feature 24: 0.1.
- Feature 25: 0.1.
- Feature 26: 0.1.
- Feature 27: 0.1.
- Feature 28: 0.1.
- Feature 29: 0.1.
- Feature 30: 0.1.
- Feature 31: 0.1.
- Feature 32: 0.1.
- Feature 33: 0.1.
- Feature 34: 0.1.
- Feature 35: 0.1.
- Feature 36: 0.1.
- Feature 37: 0.1.
- Feature 38: 0.1.
- Feature 39: 0.1.
- Feature 40: 0.1.
- Feature 41: 0.1.
- Feature 42: 0.1.
- Feature 43: 0.1.
- Feature 44: 0.1.
- Feature 45: 0.1.
- Feature 46: 0.1.
- Feature 47: 0.1.
- Feature 48: 0.1.
- Feature 49: 0.1.
- Feature 50: 0.1.
- Feature 51: 0.1.
- Feature 52: 0.1.
- Feature 53: 0.1.
- Feature 54: 0.1.
- Feature 55: 0.1.
- Feature 56: 0.1.
- Feature 57: 0.1.
- Feature 58: 0.1.
- Feature 59: 0.1.
- Feature 60: 0.1.
- Feature 61: 0.1.
- Feature 62: 0.1.
- Feature 63: 0.1.
- Feature 64: 0.1.
- Feature 65: 0.1.
- Feature 66: 0.1.
- Feature 67: 0.1.
- Feature 68: 0.1.
- Feature 69: 0.1.
- Feature 70: 0.1.
- Feature 71: 0.1.
- Feature 72: 0.1.
- Feature 73: 0.1.
- Feature 74: 0.1.
- Feature 75: 0.1.
- Feature 76: 0.1.
- Feature 77: 0.1.
- Feature 78: 0.1.
- Feature 79: 0.1.
- Feature 80: 0.1.
- Feature 81: 0.1.
- Feature 82: 0.1.
- Feature 83: 0.1.
- Feature 84: 0.1.
- Feature 85: 0.1.
- Feature 86: 0.1.
- Feature 87: 0.1.
- Feature 88: 0.1.
- Feature 89: 0.1.
- Feature 90: 0.1.
- Feature 91: 0.1.
- Feature 92: 0.1.
- Feature 93: 0.1.
- Feature 94: 0.1.
- Feature 95: 0.1.
- Feature 96: 0.1.
- Feature 97: 0.1.
- Feature 98: 0.1.
- Feature 99: 0.1.
- Feature 100: 0.1.

Top View:

- Overall dimensions: 0.46 TYP (width) x 0.22 TYP (height).
- Feature control frame: 0.15.
- Feature 1: 0.15.
- Feature 2: 0.15.
- Feature 3: 0.15.
- Feature 4: 0.15.
- Feature 5: 0.15.
- Feature 6: 0.15.
- Feature 7: 0.15.
- Feature 8: 0.15.
- Feature 9: 0.15.
- Feature 10: 0.15.
- Feature 11: 0.15.
- Feature 12: 0.15.
- Feature 13: 0.15.
- Feature 14: 0.15.
- Feature 15: 0.15.
- Feature 16: 0.15.
- Feature 17: 0.15.
- Feature 18: 0.15.
- Feature 19: 0.15.
- Feature 20: 0.15.
- Feature 21: 0.15.
- Feature 22: 0.15.
- Feature 23: 0.15.
- Feature 24: 0.15.
- Feature 25: 0.15.
- Feature 26: 0.15.
- Feature 27: 0.15.
- Feature 28: 0.15.
- Feature 29: 0.15.
- Feature 30: 0.15.
- Feature 31: 0.15.
- Feature 32: 0.15.
- Feature 33: 0.15.
- Feature 34: 0.15.
- Feature 35: 0.15.
- Feature 36: 0.15.
- Feature 37: 0.15.
- Feature 38: 0.15.
- Feature 39: 0.15.
- Feature 40: 0.15.
- Feature 41: 0.15.

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-203.
4. Support pin may differ or may not be present.
5. Lead width does not comply with JEDEC.
6. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25mm per side

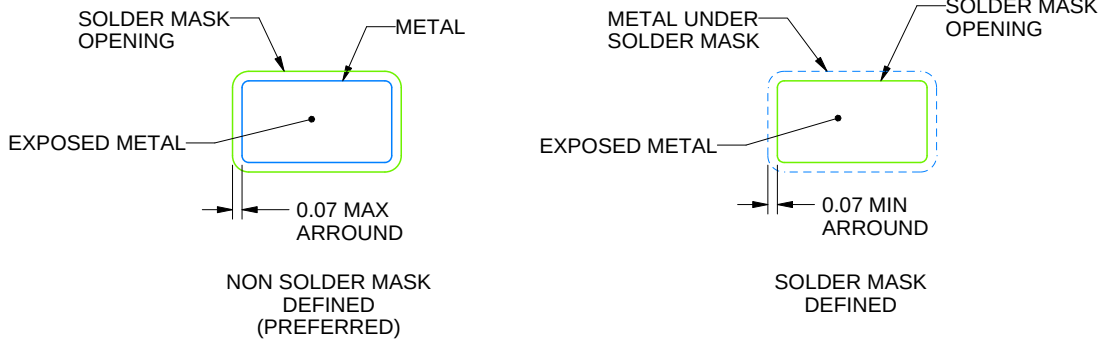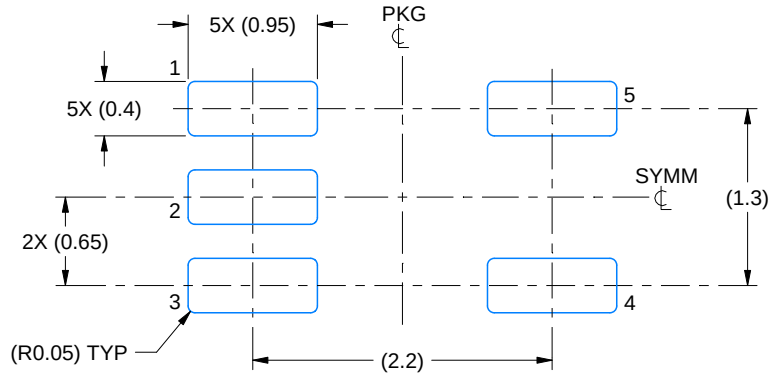

4214834/G 11/2024


NOTES: (continued)

7. Publication IPC-7351 may have alternate designs.
8. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

DCK0005A

SOT - 1.1 max height

SMALL OUTLINE TRANSISTOR

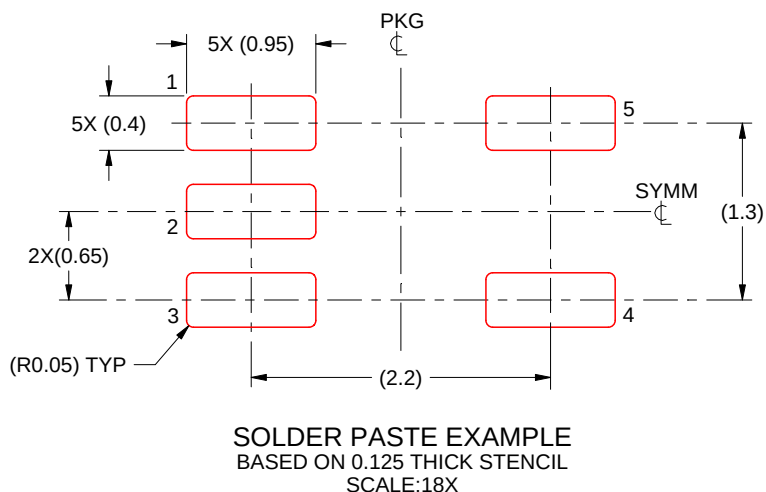

4214834/G 11/2024

NOTES: (continued)

9. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
10. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated