

TPS22975 5.7-V, 6-A, 16-m Ω On-Resistance Load Switch


1 Features

- Integrated Single-Channel Load Switch
- Input Voltage Range: 0.6 V to V_{BIAS}
- V_{BIAS} Voltage Range: 2.5 V to 5.7 V
- On-Resistance (R_{ON})
 - $R_{ON} = 16\text{ m}\Omega$ (typical) at $V_{IN} = 0.6\text{ V}$ to 5.7 V , $V_{BIAS} = 5.7\text{ V}$
- 6-A Maximum Continuous Switch Current
- Low Quiescent Current
 - $37\text{ }\mu\text{A}$ (typical) at $V_{IN} = V_{BIAS} = 5\text{ V}$
- Low-Control Input-Threshold Enables Use of 1.2-, 1.8-, 2.5-, and 3.3-V Logic
- Configurable Rise Time
- Thermal Shutdown
- Quick-Output Discharge (QOD) (Optional)
- SON 8-pin Package with Thermal Pad
- ESD Performance Tested per JESD 22
 - 2000-V HBM and 1000-V CDM

2 Applications

- Ultrabook™
- Notebooks and Netbooks
- Tablet PC
- Consumer Electronics
- Set-top Boxes and Residential Gateways
- Telecom Systems
- Solid State Drives (SSDs)

Simplified Schematic

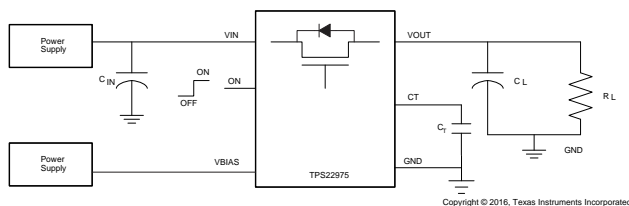

3 Description

The TPS22975 product family consists of two devices: TPS22975 and TPS22975N. Each device is a single-channel load switch that provides a configurable rise time to minimize inrush current. The device contains an N-channel MOSFET that can operate over an input voltage range of 0.6 V to 5.7 V and can support a maximum continuous current of 6 A. The switch is controlled by an on and off input (ON), which is capable of interfacing directly with low-voltage control signals. TPS22975 has an optional 230- Ω on-chip load resistor for quick output discharge when switch is turned off.

The TPS22975 is available in a small, space-saving 2-mm \times 2-mm 8-pin SON package (DSG) with integrated thermal pad allowing for high power dissipation. The device is characterized for operation over the free-air temperature range of -40°C to $+105^{\circ}\text{C}$.

Device Information⁽¹⁾

| PART NUMBER | PACKAGE | BODY SIZE (NOM) |
|-----------------------|----------|--------------------------|
| TPS22975 TPS22975N | WSON (8) | 2.00 mm \times 2.00 mm |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

On-Resistance vs Input Voltage

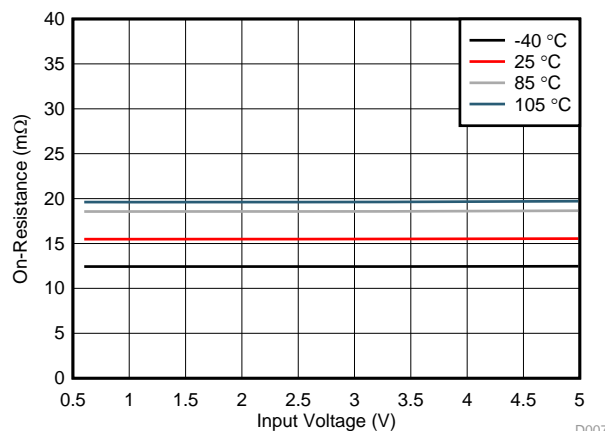


Table of Contents

| | | | |
|---|-----------|--|-----------|
| 1 Features | 1 | 9.3 Feature Description | 15 |
| 2 Applications | 1 | 9.4 Device Functional Modes | 15 |
| 3 Description | 1 | 10 Application and Implementation | 16 |
| 4 Revision History | 2 | 10.1 Application Information | 16 |
| 5 Device Comparison Table | 3 | 10.2 Typical Application | 16 |
| 6 Pin Configuration and Functions | 3 | 11 Power Supply Recommendations | 18 |
| 7 Specifications | 4 | 12 Layout | 19 |
| 7.1 Absolute Maximum Ratings | 4 | 12.1 Layout Guidelines | 19 |
| 7.2 ESD Ratings | 4 | 12.2 Layout Example | 19 |
| 7.3 Recommended Operating Conditions | 4 | 12.3 Thermal Considerations | 19 |
| 7.4 Thermal Information | 5 | 13 Device and Documentation Support | 20 |
| 7.5 Electrical Characteristics— $V_{BIAS} = 5\text{ V}$ | 5 | 13.1 Device Support | 20 |
| 7.6 Electrical Characteristics— $V_{BIAS} = 2.5\text{ V}$ | 6 | 13.2 Related Documentation | 20 |
| 7.7 Switching Characteristics | 7 | 13.3 Receiving Notification of Documentation Updates | 20 |
| 7.8 Typical DC Characteristics | 8 | 13.4 Community Resources | 20 |
| 7.9 Typical AC Characteristics | 10 | 13.5 Trademarks | 20 |
| 8 Parameter Measurement Information | 13 | 13.6 Electrostatic Discharge Caution | 20 |
| 9 Detailed Description | 14 | 13.7 Glossary | 20 |
| 9.1 Overview | 14 | 14 Mechanical, Packaging, and Orderable Information | 20 |
| 9.2 Functional Block Diagram | 14 | | |


4 Revision History

| Changes from Revision A (June 2016) to Revision B | Page |
|---|----------|
| • Updated V_{IH} in Recommended Operating Conditions | 4 |
| Changes from Original (May 2016) to Revision A | Page |
| • Changed device status from <i>Product Preview</i> to <i>Production Data</i> | 1 |

5 Device Comparison Table

| DEVICE | R_{ON} AT $V_{IN} = V_{BIAS} = 5\text{ V}$ (TYPICAL) | QUICK-OUTPUT DISCHARGE | MAXIMUM OUTPUT CURRENT | ENABLE |
|-----------|---|---------------------------|---------------------------|-------------|
| TPS22975 | 16 m Ω | Yes | 6 A | Active high |
| TPS22975N | 16 m Ω | No | 6 A | Active high |

6 Pin Configuration and Functions

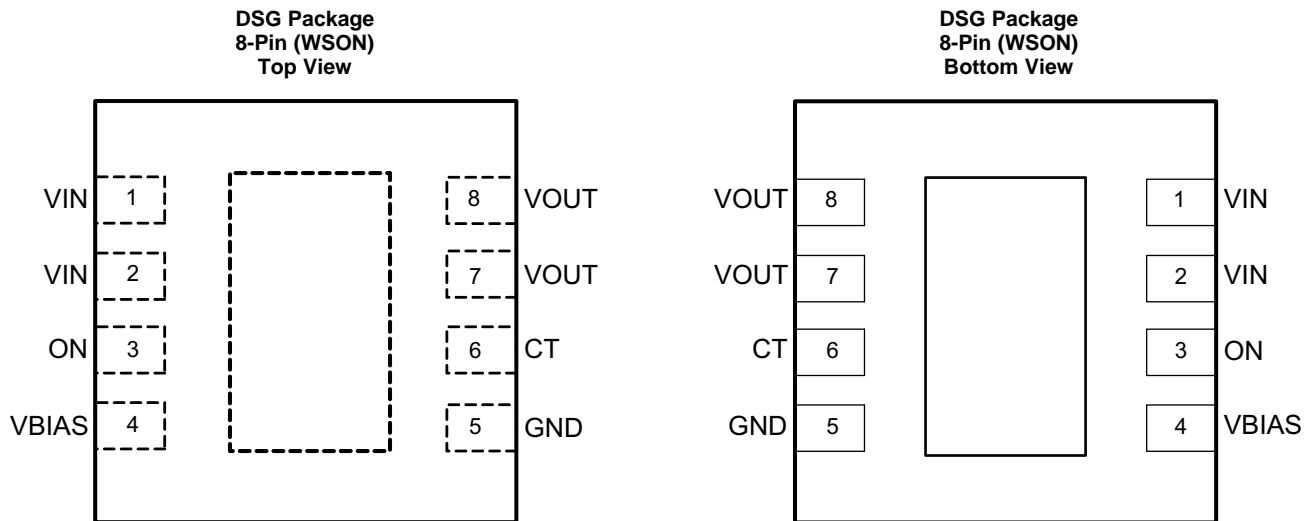

Pin Functions

| PIN | | I/O | DESCRIPTION |
|-----|-------------|-----|---|
| NO. | NAME | | |
| 1 | VIN | I | Switch input. Input bypass capacitor recommended for minimizing V_{IN} dip. Must be connected to Pin 1 and Pin 2. See the Application and Implementation section for more information |
| 2 | | | |
| 3 | ON | I | Active high switch control input. Do not leave floating |
| 4 | VBIAS | I | Bias voltage. Power supply to the device. Recommended voltage range for this pin is 2.5 V to 5.7 V. See the Application and Implementation section for more information |
| 5 | GND | — | Device ground |
| 6 | CT | O | Switch slew rate control. Can be left floating. See the Adjustable Rise Time section under Feature Description for more information |
| 7 | VOUT | O | Switch output |
| 8 | | | |
| — | Thermal Pad | — | Thermal pad (exposed center pad) to alleviate thermal stress. Tie to GND. See the Layout Example section for layout guidelines |

7 Specifications

7.1 Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted)⁽¹⁾

| | | MIN | MAX | UNIT |
|-------------------|--|------|-----|------|
| V _{IN} | Input voltage | −0.3 | 6 | V |
| V _{OUT} | Output voltage | −0.3 | 6 | V |
| V _{BIAS} | Bias voltage | −0.3 | 6 | V |
| V _{ON} | On voltage | −0.3 | 6 | V |
| I _{MAX} | Maximum continuous switch current | | 6 | A |
| I _{PLS} | Maximum pulsed switch current, pulse < 300 μs, 2% duty cycle | | 8 | A |
| T _J | Maximum junction temperature | | 125 | °C |
| T _{stg} | Storage temperature | −65 | 150 | °C |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

7.2 ESD Ratings

| | | VALUE | UNIT |
|--------------------|-------------------------|--|-------|
| V _(ESD) | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾ | ±2000 |
| | | Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾ | ±1000 |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions

| | | MIN | MAX | UNIT |
|-------------------|--|--|-------------------|------|
| V _{IN} | Input voltage | 0.6 | V _{BIAS} | V |
| V _{BIAS} | Bias voltage | 2.5 | 5.7 | V |
| V _{ON} | ON voltage | 0 | 5.7 | V |
| V _{OUT} | Output voltage | | V _{IN} | V |
| V _{IH} | High-level input voltage, ON | V _{BIAS} = 2.5 V to 5 V, T _A < 85°C | 1.05 | 5.7 |
| | | V _{BIAS} = 2.5 V to 5 V, T _A < 105°C | 1.1 | 5.7 |
| | | V _{BIAS} = 5 V to 5.7 V, T _A < 105°C | 1.2 | 5.7 |
| V _{IL} | Low-level input voltage, ON | V _{BIAS} = 2.5 V to 5.7 V | 0 | 0.5 |
| C _{IN} | Input capacitor | 1 ⁽¹⁾ | | μF |
| T _A | Operating free-air temperature ⁽¹⁾⁽²⁾ | −40 | 105 | °C |

- (1) See the [Application Information](#) section.

- (2) In applications where high power dissipation and/or poor package thermal resistance is present, the maximum ambient temperature may have to be derated and device lifetime may be affected. Maximum ambient temperature (T_{A(max)}) is dependent on the maximum operating junction temperature (T_{J(max)}), the maximum power dissipation of the device in the application (P_{D(max)}), and the junction-to-ambient thermal resistance of the part-package in the application (θ_{JA}), and can be approximated by the following equation: T_{A(max)} = T_{J(max)} − (θ_{JA} × P_{D(max)}).

7.4 Thermal Information

| THERMAL METRIC ⁽¹⁾ | | TPS22975 | UNIT |
|-------------------------------|--|------------|------|
| | | DSG (WSON) | |
| | | 8 PINS | |
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | 74.8 | °C/W |
| $R_{\theta JC(top)}$ | Junction-to-case (top) thermal resistance | 81 | °C/W |
| $R_{\theta JB}$ | Junction-to-board thermal resistance | 44.7 | °C/W |
| ψ_{JT} | Junction-to-top characterization parameter | 3.9 | °C/W |
| ψ_{JB} | Junction-to-board characterization parameter | 45.1 | °C/W |
| $R_{\theta JC(bot)}$ | Junction-to-case (bottom) thermal resistance | 16.4 | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

7.5 Electrical Characteristics— $V_{BIAS} = 5\text{ V}$

Unless otherwise noted, the specifications in the following table applies where $V_{BIAS} = 5\text{ V}$. Typical values are for $T_A = 25\text{ °C}$.

| PARAMETER | | TEST CONDITIONS | | T _A | MIN | TYP | MAX | UNIT |
|-------------------------------------|--|--|--------------------------|-----------------|-----|-------|-----|------|
| POWER SUPPLIES AND CURRENTS | | | | | | | | |
| I _Q , V _{BIAS} | V _{BIAS} quiescent current | I _{OUT} = 0 A, V _{IN} = V _{ON} = 5 V | | –40°C to +105°C | | 37 | 45 | μA |
| I _{SD} , V _{BIAS} | V _{BIAS} shutdown current | V _{ON} = V _{OUT} = 0 V | | –40°C to +105°C | | | 2.3 | μA |
| I _{SD} , V _{IN} | V _{IN} off-state supply current | V _{ON} = V _{OUT} = 0 V | V _{IN} = 5 V | –40°C to +85°C | | 0.005 | 5 | μA |
| | | | | –40°C to +105°C | | | 10 | |
| | | | V _{IN} = 3.3 V | –40°C to +85°C | | 0.002 | 1.5 | |
| | | | | –40°C to +105°C | | | 3.5 | |
| | | | V _{IN} = 1.8 V | –40°C to +85°C | | 0.002 | 1 | |
| | | | | –40°C to +105°C | | | 2 | |
| | | | V _{IN} = 0.6 V | –40°C to +85°C | | 0.001 | 0.5 | |
| | | | | –40°C to +105°C | | | 1 | |
| I _{ON} | On-pin input leakage current | V _{ON} = 5.5 V | | –40°C to +105°C | | | 0.1 | μA |
| RESISTANCE CHARACTERISTICS | | | | | | | | |
| R _{ON} | On-resistance | I _{OUT} = –200 mA | V _{IN} = 5 V | 25°C | | 16 | 19 | mΩ |
| | | | | –40°C to +85°C | | | 23 | |
| | | | | –40°C to +105°C | | | 25 | |
| | | | V _{IN} = 3.3 V | 25°C | | 16 | 19 | |
| | | | | –40°C to +85°C | | | 23 | |
| | | | | –40°C to +105°C | | | 25 | |
| | | | V _{IN} = 1.8 V | 25°C | | 16 | 19 | |
| | | | | –40°C to +85°C | | | 23 | |
| | | | | –40°C to +105°C | | | 25 | |
| | | | V _{IN} = 1.5 V | 25°C | | 16 | 19 | |
| | | | | –40°C to +85°C | | | 23 | |
| | | | | –40°C to +105°C | | | 25 | |
| | | | V _{IN} = 1.05 V | 25°C | | 16 | 19 | |
| | | | | –40°C to +85°C | | | 23 | |
| | | | | –40°C to +105°C | | | 25 | |
| | | | V _{IN} = 0.6 V | 25°C | | 16 | 19 | |
| | | | | –40°C to +85°C | | | 23 | |
| | | | | –40°C to +105°C | | | 25 | |
| V _{ON, HYS} | On-pin hysteresis | V _{IN} = 5 V | | 25°C | | 120 | | mV |
| R _{PD} ⁽¹⁾ | Output pulldown resistance | V _{IN} = 5 V, V _{ON} = 0 V | | –40°C to +105°C | | 230 | 300 | Ω |
| T _{SD} | Thermal shutdown | Junction temperature rising | | | | 160 | | °C |
| T _{SD, HYS} | Thermal shutdown hysteresis | Junction temperature falling | | | | 20 | | °C |

(1) TPS22975 only

TPS22975

SLVSD00B – MAY 2016 – REVISED SEPTEMBER 2017

www.ti.com
7.6 Electrical Characteristics— $V_{BIAS} = 2.5\text{ V}$

Unless otherwise noted, the specifications in the following table applies where $V_{BIAS} = 2.5\text{ V}$. Typical values are for $T_A = 25^\circ\text{C}$.

| PARAMETER | | TEST CONDITIONS | | T _A | MIN | TYP | MAX | UNIT |
|-------------------------------------|--|---|--------------------------|-----------------|-----|-------|-----|------|
| POWER SUPPLIES AND CURRENTS | | | | | | | | |
| I _Q , V _{BIAS} | V _{BIAS} quiescent current | I _{OUT} = 0 mA, V _{IN} = V _{ON} = 2.5 V | | −40°C to +105°C | | 14 | 20 | μA |
| I _{SD} , V _{BIAS} | V _{BIAS} shutdown current | V _{ON} = V _{OUT} = 0 V | | −40°C to +105°C | | | 1 | μA |
| I _{SD} , V _{IN} | V _{IN} off-state supply current | V _{ON} = V _{OUT} = 0 V | V _{IN} = 2.5 V | −40°C to +85°C | | 0.005 | 1.3 | μA |
| | | | | −40°C to +105°C | | | 2.6 | |
| | | | V _{IN} = 1.8 V | −40°C to +85°C | | 0.002 | 1 | |
| | | | | −40°C to +105°C | | | 2 | |
| | | | V _{IN} = 1.05 V | −40°C to +85°C | | 0.002 | 0.8 | |
| | | | | −40°C to +105°C | | | 1.5 | |
| | | | V _{IN} = 0.6 V | −40°C to +85°C | | 0.001 | 0.5 | |
| | | | | −40°C to +105°C | | | 1 | |
| I _{ON} | On-pin input leakage current | V _{ON} = 5.5 V | | −40°C to +105°C | | | 0.1 | μA |
| RESISTANCE CHARACTERISTICS | | | | | | | | |
| R _{ON} | On-resistance | I _{OUT} = −200 mA | V _{IN} = 2.5 V | 25°C | | 20 | 26 | mΩ |
| | | | | −40°C to +85°C | | | 32 | |
| | | | | −40°C to +105°C | | | 34 | |
| | | | V _{IN} = 1.8 V | 25°C | | 18 | 23 | |
| | | | | −40°C to +85°C | | | 29 | |
| | | | | −40°C to +105°C | | | 31 | |
| | | | V _{IN} = 1.5 V | 25°C | | 18 | 22 | |
| | | | | −40°C to +85°C | | | 28 | |
| | | | | −40°C to +105°C | | | 30 | |
| | | | V _{IN} = 1.2 V | 25°C | | 17 | 22 | |
| | | | | −40°C to +85°C | | | 27 | |
| | | | | −40°C to +105°C | | | 29 | |
| | | | V _{IN} = 0.6 V | 25°C | | 17 | 21 | |
| | | | | −40°C to +85°C | | | 26 | |
| | | | | −40°C to +105°C | | | 27 | |
| V _{ON} , HYS | On-pin hysteresis | V _{IN} = 2.5 V | | 25°C | | 85 | | mV |
| R _{PD} ⁽¹⁾ | Output pulldown resistance | V _{IN} = 2.5 V, V _{ON} = 0 V | | −40°C to +105°C | | 230 | 330 | Ω |
| T _{SD} | Thermal shutdown | Junction temperature rising | | | | 160 | | °C |
| T _{SD} , HYS | Thermal shutdown hysteresis | Junction temperature falling | | | | 20 | | °C |

(1) TPS22975 only

7.7 Switching Characteristics

| PARAMETER | | TEST CONDITION | MIN | TYP | MAX | UNIT |
|--|----------------------------|---|-----|------|-----|------|
| V _{IN} = V _{BIAS} = 5 V, T _A = 25°C (unless otherwise noted) | | | | | | |
| t _{ON} | Turnon time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 1450 | | μs |
| t _{OFF} | Turnoff time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 2 | | |
| t _R | V _{OUT} rise time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 1750 | | |
| t _F | V _{OUT} fall time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 2 | | |
| t _D | ON delay time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 600 | | |
| V _{IN} = 0.6 V, V _{BIAS} = 5 V, T _A = 25°C (unless otherwise noted) | | | | | | |
| t _{ON} | Turnon time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 620 | | μs |
| t _{OFF} | Turnoff time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 2 | | |
| t _R | V _{OUT} rise time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 280 | | |
| t _F | V _{OUT} fall time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 2 | | |
| t _D | ON delay time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 485 | | |
| V _{IN} = V _{BIAS} = 2.5 V, T _A = 25°C (unless otherwise noted) | | | | | | |
| t _{ON} | Turnon time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 2180 | | μs |
| t _{OFF} | Turnoff time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 2 | | |
| t _R | V _{OUT} rise time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 2150 | | |
| t _F | V _{OUT} fall time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 2 | | |
| t _D | ON delay time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 1120 | | |
| V _{IN} = 0.6 V, V _{BIAS} = 2.5 V, T _A = 25°C (unless otherwise noted) | | | | | | |
| t _{ON} | Turnon time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 1315 | | μs |
| t _{OFF} | Turnoff time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 3 | | |
| t _R | V _{OUT} rise time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 650 | | |
| t _F | V _{OUT} fall time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 2 | | |
| t _D | ON delay time | R _L = 10 Ω, C _L = 0.1 μF, C _{IN} = 1 μF, C _T = 1000 pF, V _{ON} = 5 V | | 975 | | |

7.8 Typical DC Characteristics

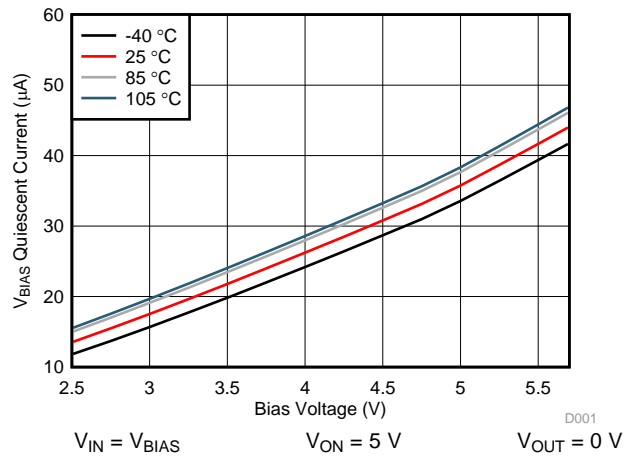


Figure 1. V_{BIAS} Quiescent Current vs Bias Voltage

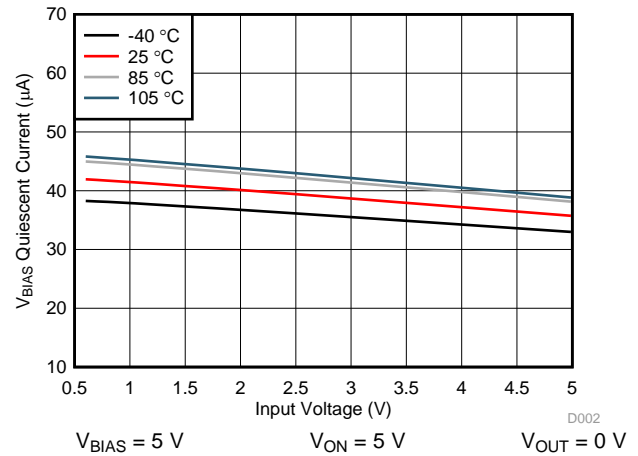


Figure 2. V_{BIAS} Quiescent Current vs Input Voltage

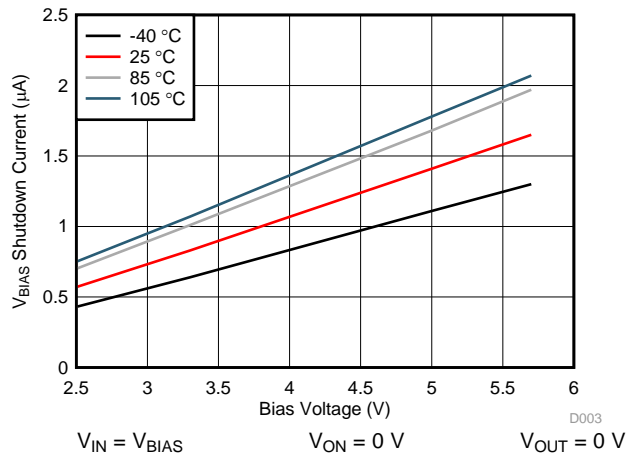


Figure 3. V_{BIAS} Shutdown Current vs Bias Voltage


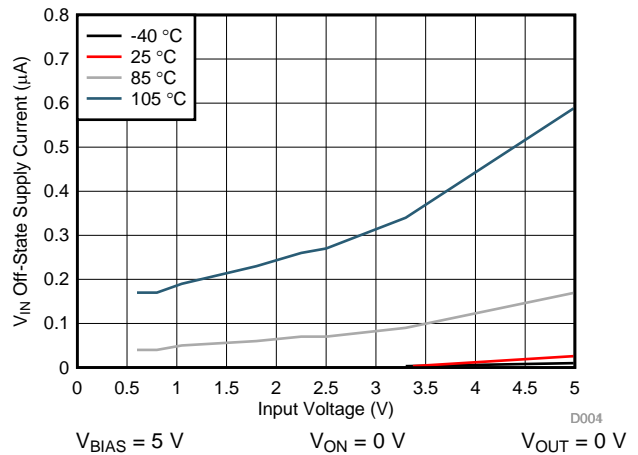


Figure 4. V_{IN} Off-State Supply Current vs Input Voltage

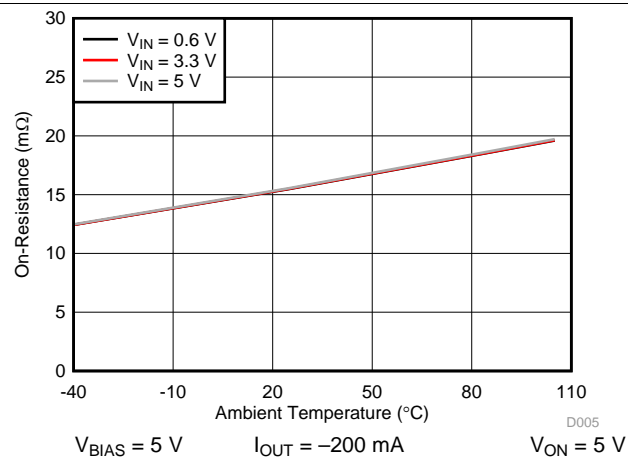

Note: All three R_{ON} curves have the same values; therefore, only one line is visible.

Figure 5. On-Resistance vs Ambient Temperature

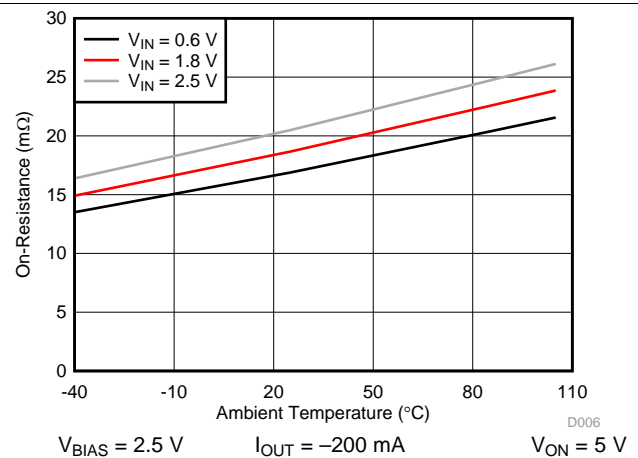


Figure 6. On-Resistance vs Ambient Temperature

Typical DC Characteristics (continued)

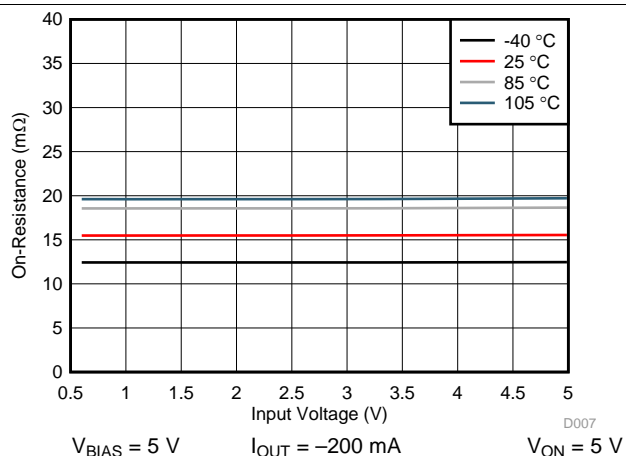


Figure 7. On-Resistance vs Input Voltage

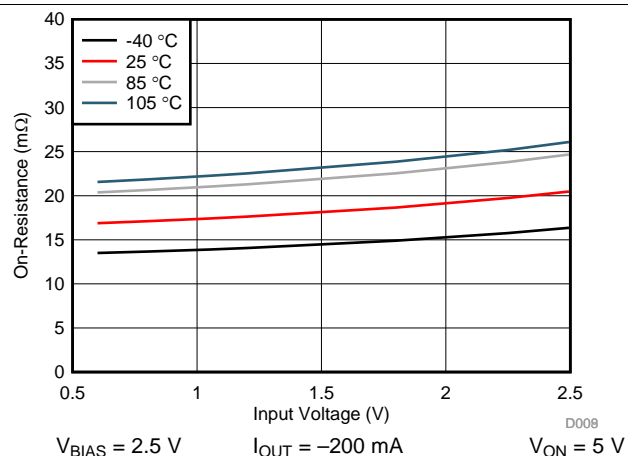


Figure 8. On-Resistance vs Input Voltage

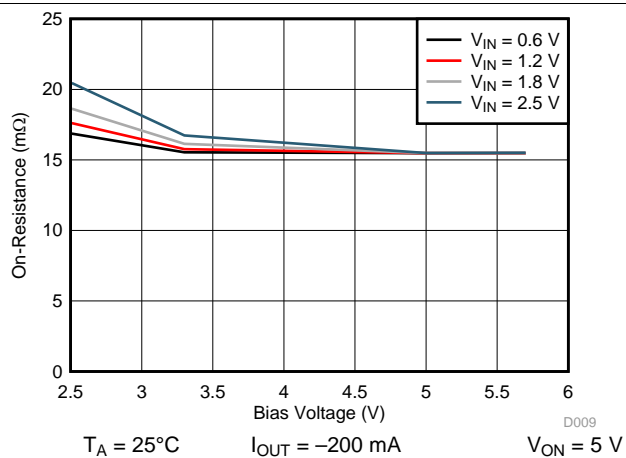


Figure 9. On-Resistance vs Bias Voltage

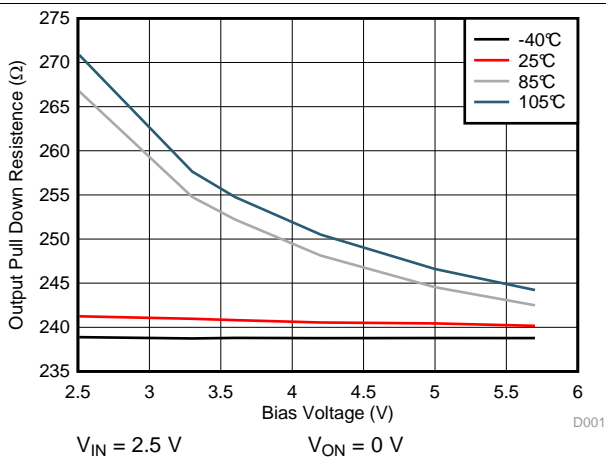
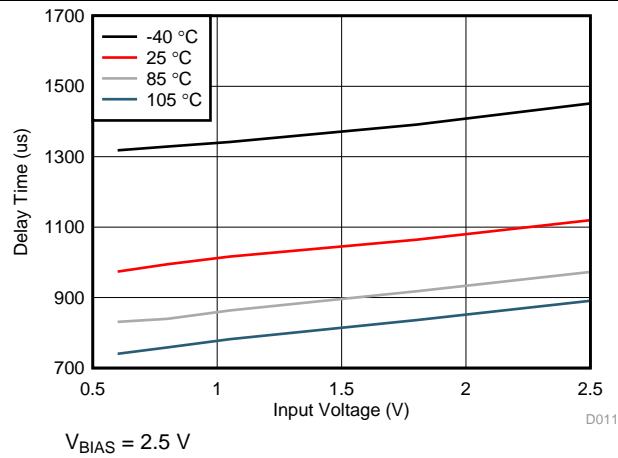
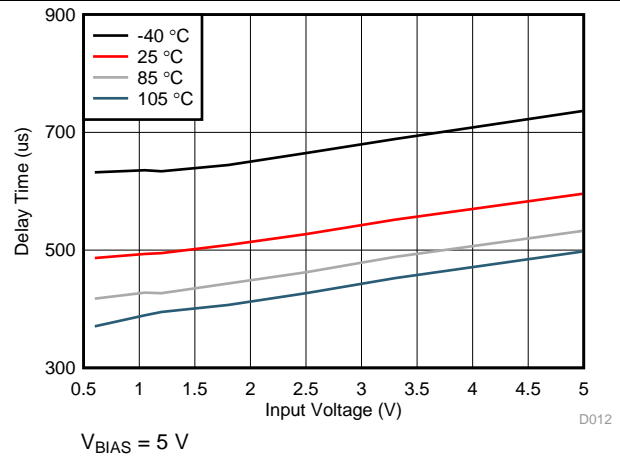
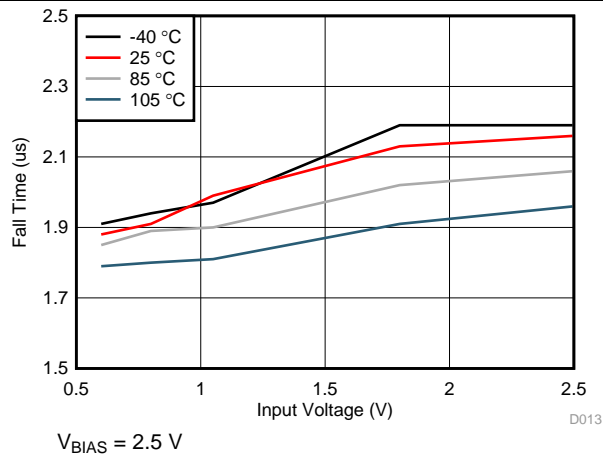
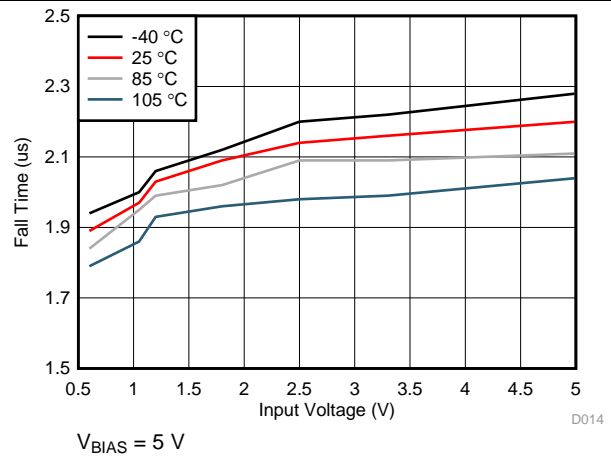
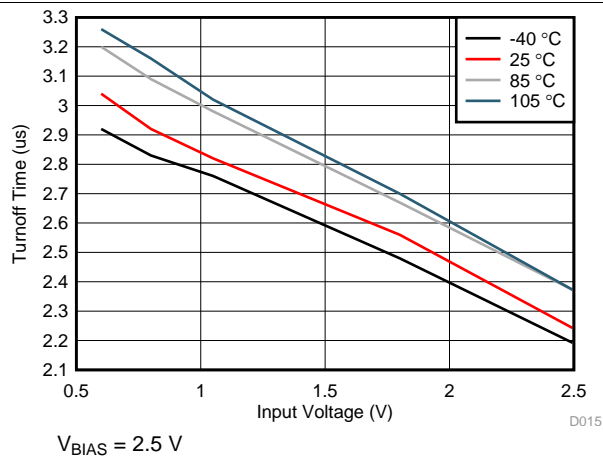
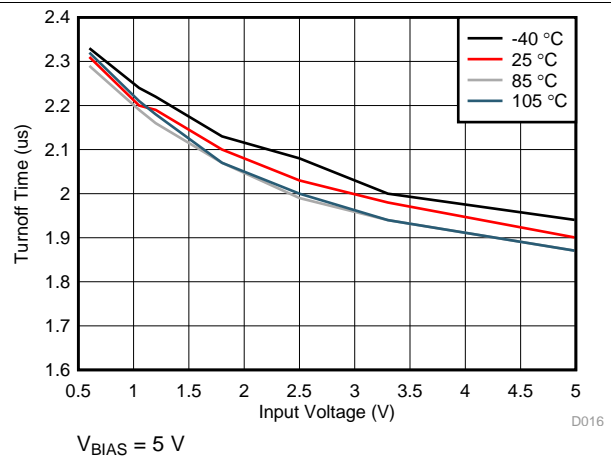


Figure 10. Output Pull Down Resistance vs Bias Voltage

7.9 Typical AC Characteristics

 $T_A = 25^\circ\text{C}$, $C_T = 1000\text{ pF}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_L = 0.1\text{ }\mu\text{F}$, $R_L = 10\text{ }\Omega$

Figure 11. Delay Time vs Input Voltage

Figure 12. Delay Time vs Input Voltage

Figure 13. Fall Time vs Input Voltage

Figure 14. Fall Time vs Input Voltage

Figure 15. Turnoff Time vs Input Voltage

Figure 16. Turnoff Time vs Input Voltage

Typical AC Characteristics (continued)

$T_A = 25^\circ\text{C}$, $C_T = 1000\text{ pF}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_L = 0.1\text{ }\mu\text{F}$, $R_L = 10\text{ }\Omega$

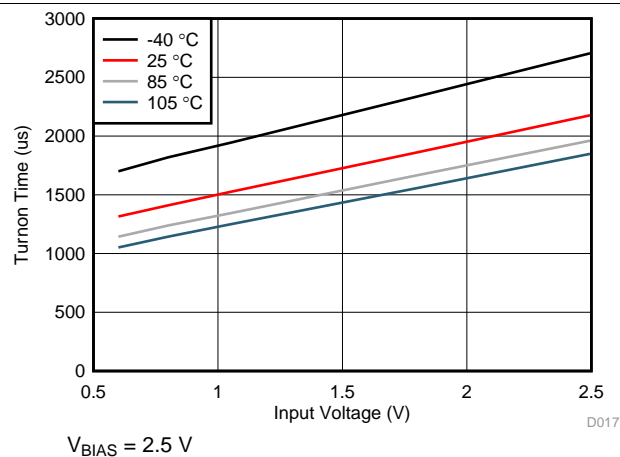


Figure 17. Turnon Time vs Input Voltage

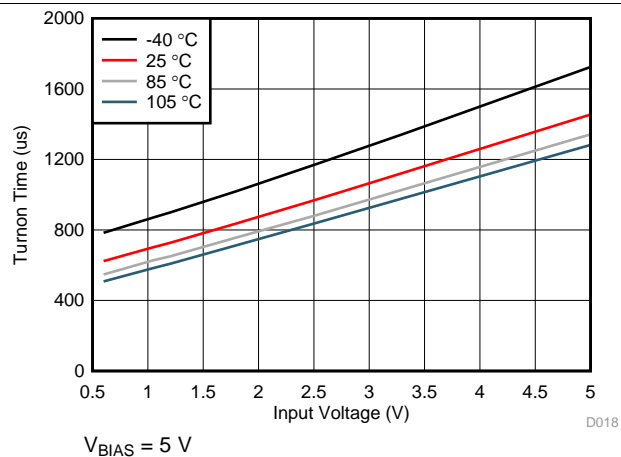


Figure 18. Turnon Time vs Input Voltage

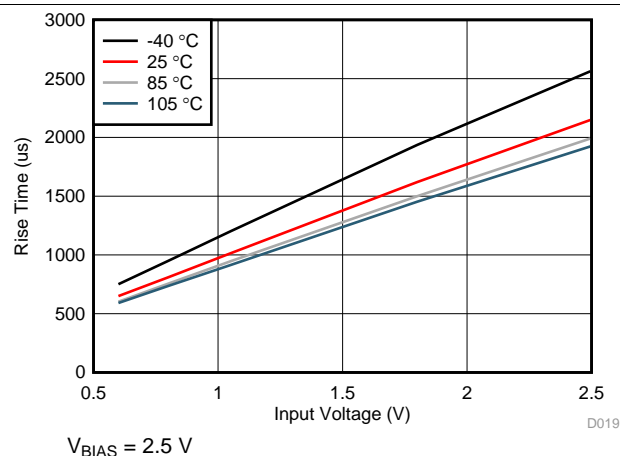


Figure 19. Rise Time vs Input Voltage

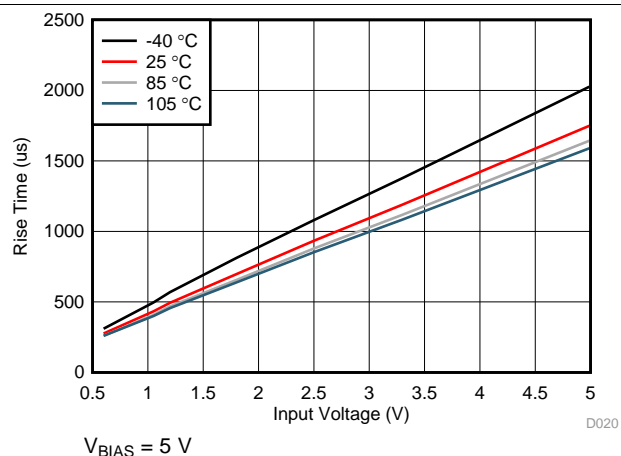


Figure 20. Rise Time vs Input Voltage

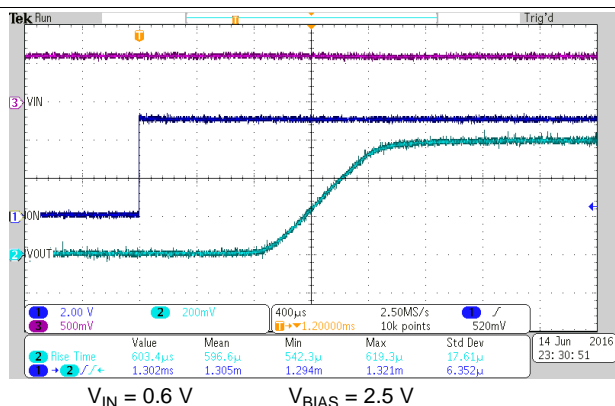


Figure 21. Turnon Response Time

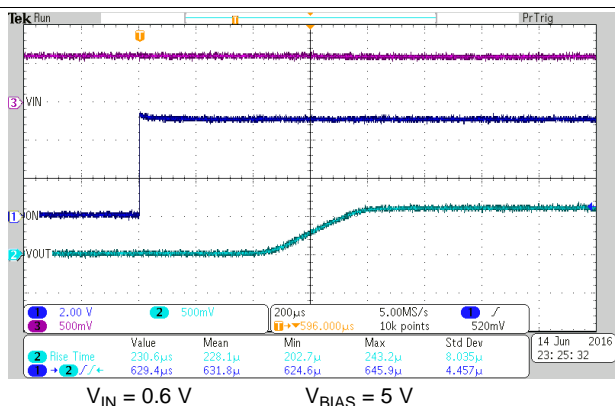


Figure 22. Turnon Response Time

Typical AC Characteristics (continued)

$T_A = 25^\circ\text{C}$, $C_T = 1000\text{ pF}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_L = 0.1\text{ }\mu\text{F}$, $R_L = 10\text{ }\Omega$

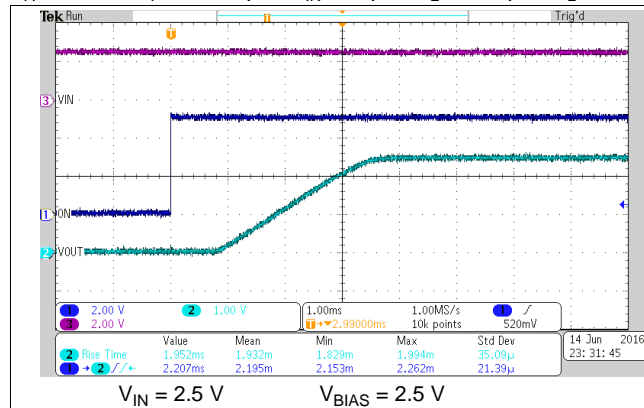


Figure 23. Turnon Response Time

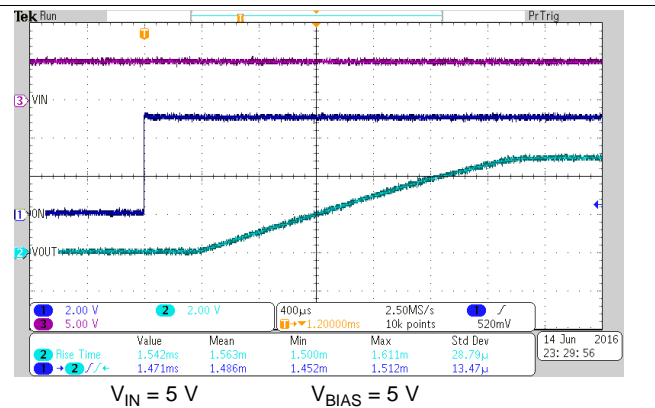


Figure 24. Turnon Response Time

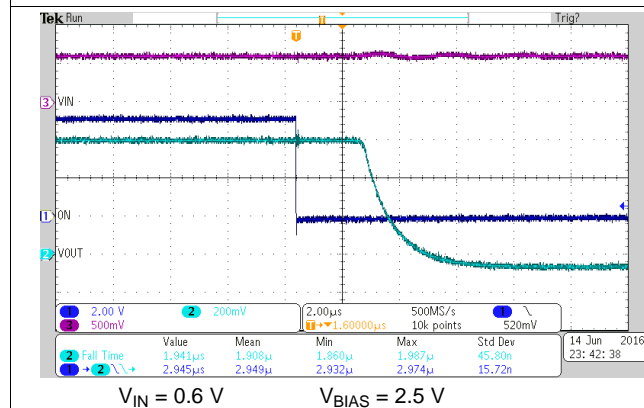


Figure 25. Turnoff Response Time

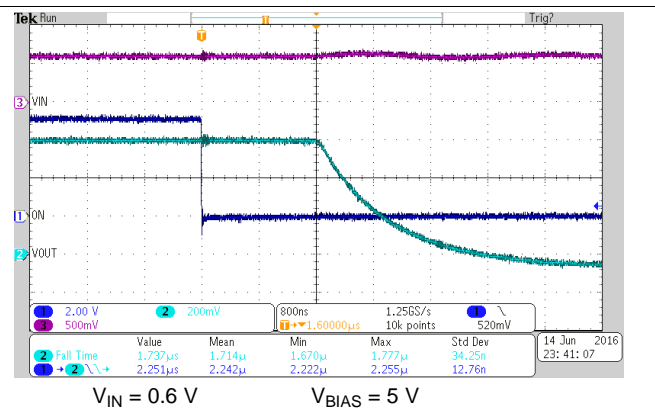


Figure 26. Turnoff Response Time

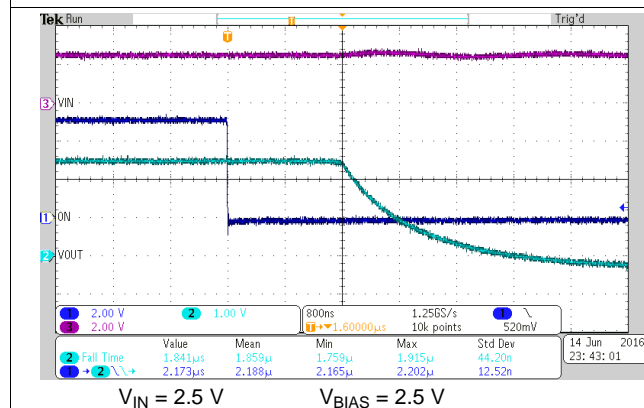


Figure 27. Turnoff Response Time


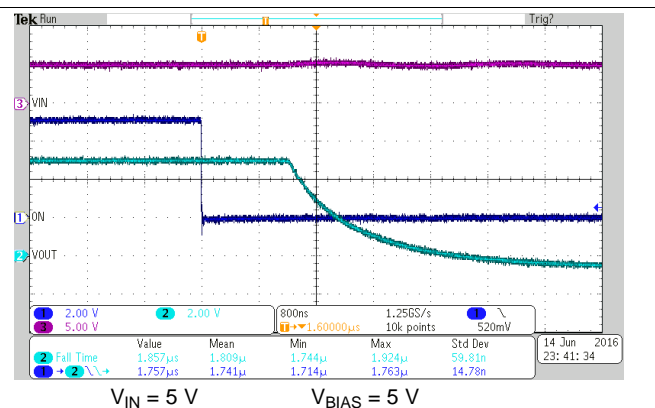


Figure 28. Turnoff Response Time

8 Parameter Measurement Information

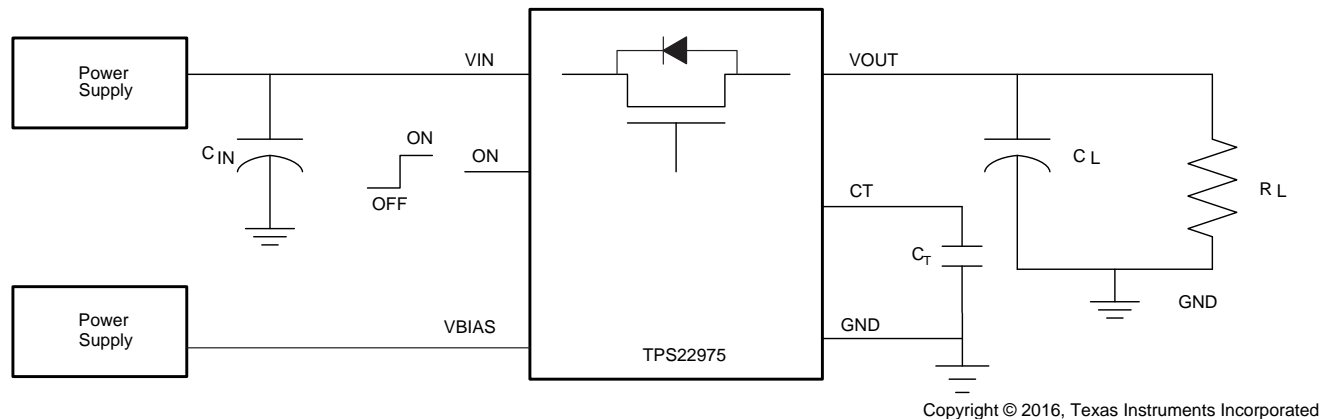

- A. Rise and fall times of the control signal are 100 ns.
- B. Turnoff times and fall times are dependent on the time constant at the load. For the TPS22975, the internal pull-down resistance R_{PD} is enabled when the switch is disabled. The time constant is $(R_{PD} \parallel R_L) \times C_L$.

Figure 29. Test Circuit

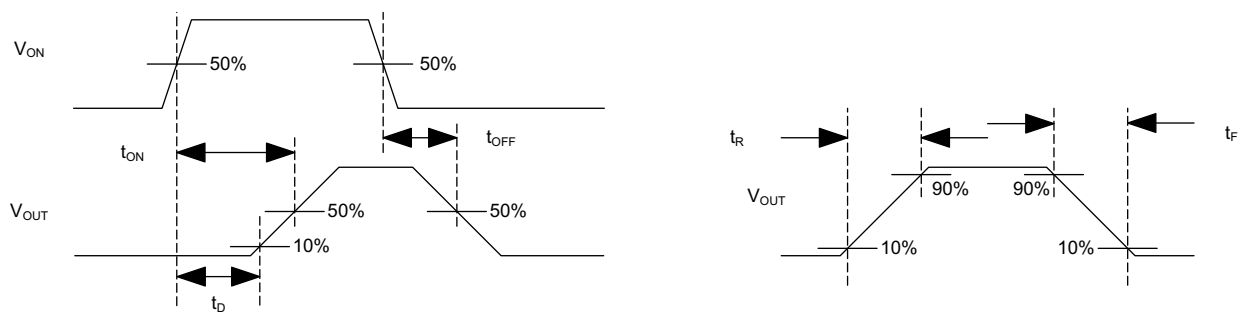


Figure 30. t_{ON} and t_{OFF} Waveforms


9 Detailed Description

9.1 Overview

The TPS22975 device is a single-channel, 6-A load switch in an 8-pin SON package. To reduce the voltage drop in high current rails, the device implements an N-channel MOSFET. The device has a configurable slew rate for applications that require a specific rise-time.

The device prevents downstream circuits from pulling high standby current from the supply by limiting the leakage current of the device when it is disabled. The integrated control logic, driver, power supply, and output discharge FET eliminates the need for any external components, which reduces solution size and bill of materials (BOM) count.

9.2 Functional Block Diagram

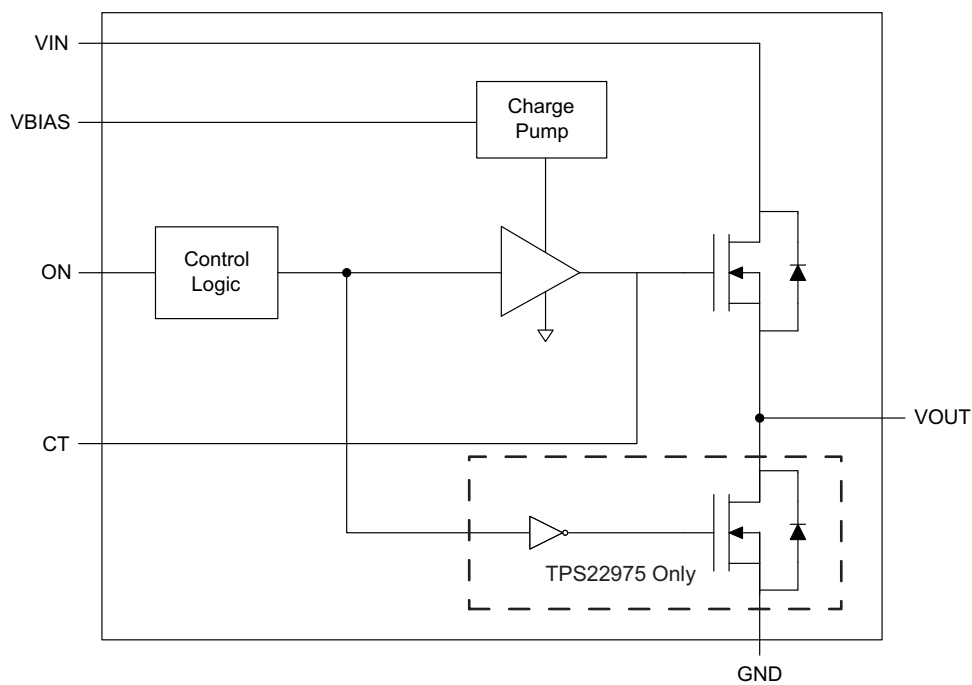

Copyright © 2016, Texas Instruments Incorporated

9.3 Feature Description

9.3.1 Adjustable Rise Time

A capacitor to GND on the CT pin sets the slew rate. The voltage on the CT pin can be as high as 15 V; therefore, the minimum voltage rating for the CT capacitor must be 30 V for optimal performance. An approximate formula for the relationship between C_T and slew rate when V_{BIAS} is set to 5 V is shown in Equation 1. This equation accounts for 10% to 90% measurement on V_{OUT} and does not apply for $C_T < 100$ pF. Use Table 1 to determine rise times for when $C_T = 0$ pF.

$$SR = 0.43 \times C_T + 26$$

where

- SR is the slew rate (in $\mu\text{s/V}$)
- C_T is the capacitance value on the CT pin (in pF)
- The units for the constant 26 are $\mu\text{s/V}$. The units for the constant 0.43 are $\mu\text{s}/(\text{V} \times \text{pF})$. (1)

Rise time can be calculated by multiplying the input voltage by the slew rate. Table 1 contains rise time values measured on a typical device. Rise times shown in Table 1 are only valid for the power-up sequence where V_{IN} and V_{BIAS} are already in steady state condition before the ON pin is asserted high.

Table 1. Rise Time t_R vs CT Capacitor

| C_T (pF) | RISE TIME (μs) 10% - 90%, $C_L = 0.1 \mu\text{F}$, $C_{IN} = 1 \mu\text{F}$, $R_L = 10 \Omega$, $V_{BIAS} = 5 \text{ V}^{(1)}$ | | | | | | |
|------------|--|--------------------------|--------------------------|--------------------------|--------------------------|---------------------------|--------------------------|
| | $V_{IN} = 5 \text{ V}$ | $V_{IN} = 3.3 \text{ V}$ | $V_{IN} = 1.8 \text{ V}$ | $V_{IN} = 1.5 \text{ V}$ | $V_{IN} = 1.2 \text{ V}$ | $V_{IN} = 1.05 \text{ V}$ | $V_{IN} = 0.6 \text{ V}$ |
| 0 | 140 | 105 | 75 | 65 | 60 | 55 | 40 |
| 220 | 520 | 360 | 215 | 185 | 160 | 140 | 95 |
| 470 | 970 | 660 | 385 | 330 | 275 | 240 | 155 |
| 1000 | 1750 | 1190 | 700 | 595 | 495 | 435 | 275 |
| 2200 | 3875 | 2615 | 1520 | 1290 | 1070 | 940 | 595 |
| 4700 | 7580 | 5110 | 2950 | 2510 | 2075 | 1830 | 1150 |
| 10000 | 16980 | 11485 | 6650 | 5635 | 4685 | 4110 | 2595 |

(1) Typical Values at 25°C with a 25-V X7R 10% Ceramic Capacitor on CT

9.3.2 Quick-Output Discharge (QOD) (Optional)

The TPS22975 includes an optional QOD feature. When the switch is disabled, an internal discharge resistance is connected between VOUT and GND to remove the remaining charge from the output. This resistance has a typical value of 230 Ω and prevents the output from floating while the switch is disabled. For best results, it is recommended that the device gets disabled before V_{BIAS} falls below the minimum recommended voltage.

9.3.3 Thermal Shutdown

Thermal shutdown protects the part from internally or externally generated excessive temperatures. When the device temperature triggers T_{SD} (typical 160°C), the switch is turned off. The switch automatically turns on again if the temperature of the die drops 20 degrees below the T_{SD} threshold.

9.4 Device Functional Modes

The Table 2 lists the VOUT pin states as determined by the ON pin.

Table 2. VOUT Connection

| ON | TPS22975 | TPS22975N |
|----|----------|-----------|
| L | GND | Open |
| H | VIN | VIN |

10 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

10.1 Application Information

10.1.1 ON and OFF Control

The ON pin controls the state of the switch. ON is active high and has a 1.2-V ON-pin enable threshold, making it capable of interfacing with low-voltage signals. The ON pin is compatible with standard GPIO logic thresholds. It can be used with any microcontroller with 1.2 V or higher GPIO voltage. This pin cannot be left floating and must be driven either high or low for proper functionality.

10.1.2 Input Capacitor (C_{IN}) (Optional)

To limit the voltage drop on the input supply caused by transient inrush currents when the switch turns on into a discharged load capacitor or short-circuit, a capacitor needs to be placed between V_{IN} and GND. A 1- μ F ceramic capacitor, C_{IN} , placed close to the pins, is usually sufficient. Higher values of C_{IN} can be used to further reduce the voltage drop during high current applications. When switching heavy loads, it is recommended to have an input capacitor about 10 times higher than the output capacitor (C_L) to avoid excessive voltage drop.

10.1.3 Output Capacitor (C_L) (Optional)

Because of the integrated body diode in the NMOS switch, a C_{IN} greater than C_L is highly recommended. A C_L greater than C_{IN} can cause V_{OUT} to exceed V_{IN} when the system supply is removed. This could result in current flow through the body diode from V_{OUT} to V_{IN} . A C_{IN} to C_L ratio of 10 to 1 is recommended for minimizing V_{IN} dip caused by inrush currents during startup; however, a 10 to 1 ratio for capacitance is not required for proper functionality of the device. A ratio smaller than 10 to 1 (such as 1 to 1) could cause slightly more V_{IN} dip upon turn-on because of inrush currents. This can be mitigated by increasing the capacitance on the CT pin for a longer rise time (see the [Adjustable Rise Time](#) section).

10.2 Typical Application

For optimal R_{ON} performance, it is recommended to have $V_{IN} \leq V_{BIAS}$. The device is functional if $V_{IN} > V_{BIAS}$ but it exhibits R_{ON} greater than what is listed in the [Electrical Characteristics— \$V_{BIAS} = 5\$ V](#) and [Electrical Characteristics— \$V_{BIAS} = 2.5\$ V](#) tables.

[Figure 31](#) demonstrates how the TPS22975 can be used to power downstream modules.

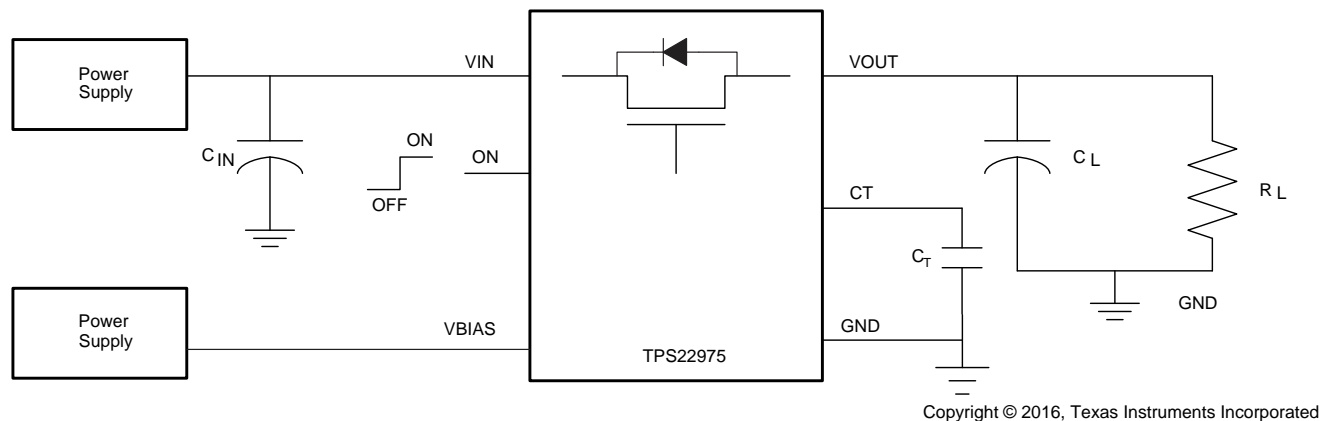


Figure 31. Powering a Downstream Module

Typical Application (continued)

10.2.1 Design Requirements

| DESIGN PARAMETER | EXAMPLE VALUE |
|-----------------------------------|---------------|
| V_{IN} | 3.3 V |
| V_{BIAS} | 5 V |
| C_L | 22 μ F |
| Maximum Acceptable Inrush Current | 400 mA |

10.2.2 Detailed Design Procedure

10.2.2.1 Inrush Current

When the switch is enabled, the output capacitors must be charged up from 0 V to the set value (3.3 V in this example). This charge arrives in the form of inrush current. Inrush current can be calculated using [Equation 2](#).

$$\text{Inrush Current} = C_L \times dV_{OUT}/dt$$

Where:

- C_L is the output capacitance
- dV_{OUT} is the change in V_{OUT} during the ramp up of the output voltage when device is enabled.
- dt is the rise time in V_{OUT} during the ramp up of the output voltage when the device is enabled.

The TPS22975 offers adjustable rise time for V_{OUT} . This feature allows the user to control the inrush current during turnon. The appropriate rise time can be calculated using the design requirements and the inrush current equation as shown in [Equation 3](#).



$$400 \text{ mA} = 22 \text{ } \mu\text{F} \times 3.3 \text{ V}/dt \quad (2)$$

The value of dt is given by [Equation 4](#).

$$dt = 181.5 \text{ } \mu\text{s} \quad (4)$$

To ensure an inrush current of less than 400 mA, choose a CT value that yields a rise time of more than 181.5 μ s. See the oscilloscope captures in the [Application Curves](#) section for an example of how the CT capacitor can be used to reduce inrush current.

10.2.3 Application Curves

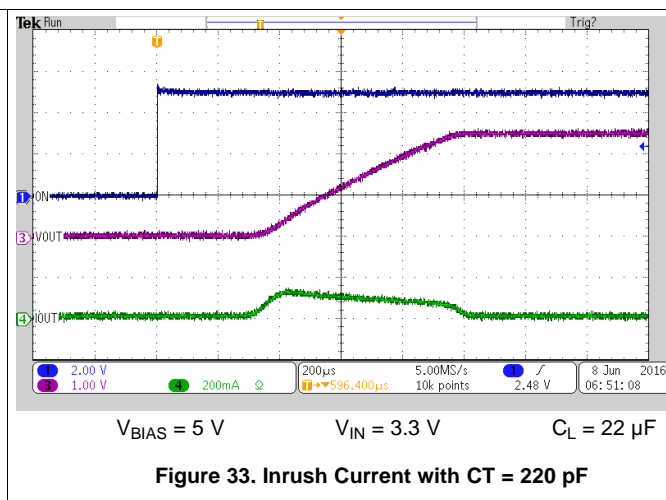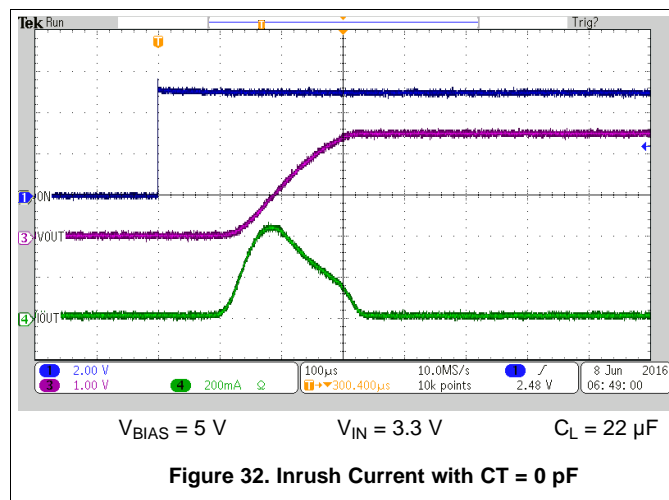

11 Power Supply Recommendations

The supply to the device must be well regulated and placed as close to the device terminal as possible with the recommended 1- μ F bypass capacitor. If the supply is located more than a few inches from the device terminals, additional bulk capacitance may be required in addition to the ceramic bypass capacitors. If additional bulk capacitance is required, an electrolytic, tantalum or ceramic capacitor of 1 μ F may be sufficient.

The TPS22975 operates regardless of power sequencing order. The order in which voltages are applied to V_{IN} , V_{BIAS} , and ON does not damage the device as long as the voltages do not exceed the absolute maximum operating conditions. If voltage is applied to ON before V_{IN} , the slew rate of V_{OUT} can not be controlled.

12 Layout

12.1 Layout Guidelines

For best performance, all traces must be as short as possible. To be most effective, the input and output capacitors must be placed close to the device to minimize the effects that parasitic trace inductances may have on normal operation. Using wide traces for VIN, VOUT, and GND helps minimize the parasitic electrical effects along with minimizing the case to ambient thermal impedance. The CT trace must be as short as possible to reduce parasitic capacitance.

12.2 Layout Example

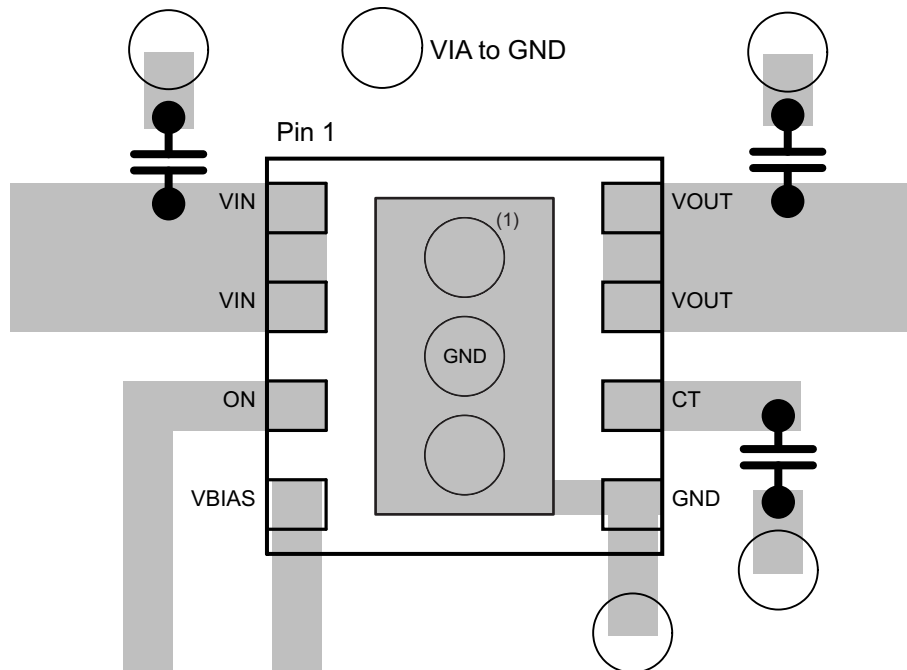


Figure 34. Layout Recommendation

12.3 Thermal Considerations

The maximum IC junction temperature must be restricted to 125°C under normal operating conditions. To calculate the maximum allowable dissipation, $P_{D(max)}$, for a given ambient temperature, use [Equation 5](#) as a guideline.

$$P_{D(max)} = \frac{T_{J(max)} - T_A}{\theta_{JA}}$$

where

- $P_{D(max)}$ is the maximum allowable power dissipation
- $T_{J(max)}$ is the maximum allowable junction temperature (125°C for the TPS22975)
- T_A is the ambient temperature of the device
- θ_{JA} is the junction to air thermal impedance. See the [Thermal Information](#) section. This parameter is highly dependent upon board layout. (5)

In [Figure 34](#), notice that the thermal vias are located under the exposed thermal pad of the device. This allows for thermal diffusion away from the device.

13 Device and Documentation Support

13.1 Device Support

13.1.1 Developmental Support

For the TPS22975 PSpice Transient Model, see [SLVMBO6](#).

13.2 Related Documentation

For related documentation see the following:

- *Fundamentals of On-Resistance in Load Switches*, [SLVA771](#)
- *TPS22975 Load Switch Evaluation Module User's Guide*, [SLVUAR3](#)

13.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](#). In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

13.4 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At [e2e.ti.com](#), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

13.5 Trademarks

E2E is a trademark of Texas Instruments.

Ultrabook is a trademark of Intel.

All other trademarks are the property of their respective owners.

13.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

13.7 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

14 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|-------------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| TPS22975DSGR | Active | Production | WSO (DSG) 8 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 105 | 13XH |
| TPS22975DSGR.A | Active | Production | WSO (DSG) 8 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 105 | 13XH |
| TPS22975DSGR.B | Active | Production | WSO (DSG) 8 | 3000 LARGE T&R | - | NIPDAU | Level-1-260C-UNLIM | -40 to 105 | 13XH |
| TPS22975DSGRG4 | Active | Production | WSO (DSG) 8 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 105 | 13XH |
| TPS22975DSGRG4.A | Active | Production | WSO (DSG) 8 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 105 | 13XH |
| TPS22975DSGT | Active | Production | WSO (DSG) 8 | 250 SMALL T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 105 | 13XH |
| TPS22975DSGT.A | Active | Production | WSO (DSG) 8 | 250 SMALL T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 105 | 13XH |
| TPS22975NDSGR | Active | Production | WSO (DSG) 8 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 105 | 14YH |
| TPS22975NDSGR.A | Active | Production | WSO (DSG) 8 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 105 | 14YH |
| TPS22975NDSGR.B | Active | Production | WSO (DSG) 8 | 3000 LARGE T&R | - | NIPDAU | Level-1-260C-UNLIM | -40 to 105 | 14YH |
| TPS22975NDSGRG4 | Active | Production | WSO (DSG) 8 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 105 | 14YH |
| TPS22975NDSGRG4.A | Active | Production | WSO (DSG) 8 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 105 | 14YH |
| TPS22975NDSGT | Active | Production | WSO (DSG) 8 | 250 SMALL T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 105 | 14YH |
| TPS22975NDSGT.A | Active | Production | WSO (DSG) 8 | 250 SMALL T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 105 | 14YH |

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS22975DSGR | WS0N | DSG | 8 | 3000 | 180.0 | 8.4 | 2.3 | 2.3 | 1.15 | 4.0 | 8.0 | Q2 |
| TPS22975DSGRG4 | WS0N | DSG | 8 | 3000 | 180.0 | 8.4 | 2.3 | 2.3 | 1.15 | 4.0 | 8.0 | Q2 |
| TPS22975DSGT | WS0N | DSG | 8 | 250 | 180.0 | 8.4 | 2.3 | 2.3 | 1.15 | 4.0 | 8.0 | Q2 |
| TPS22975NDSGR | WS0N | DSG | 8 | 3000 | 180.0 | 8.4 | 2.3 | 2.3 | 1.15 | 4.0 | 8.0 | Q2 |
| TPS22975NDSGRG4 | WS0N | DSG | 8 | 3000 | 180.0 | 8.4 | 2.3 | 2.3 | 1.15 | 4.0 | 8.0 | Q2 |
| TPS22975NDSGT | WS0N | DSG | 8 | 250 | 180.0 | 8.4 | 2.3 | 2.3 | 1.15 | 4.0 | 8.0 | Q2 |

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS22975DSGR | WSN | DSG | 8 | 3000 | 182.0 | 182.0 | 20.0 |
| TPS22975DSGRG4 | WSN | DSG | 8 | 3000 | 182.0 | 182.0 | 20.0 |
| TPS22975DSGT | WSN | DSG | 8 | 250 | 182.0 | 182.0 | 20.0 |
| TPS22975NDSGR | WSN | DSG | 8 | 3000 | 182.0 | 182.0 | 20.0 |
| TPS22975NDSGRG4 | WSN | DSG | 8 | 3000 | 182.0 | 182.0 | 20.0 |
| TPS22975NDSGT | WSN | DSG | 8 | 250 | 182.0 | 182.0 | 20.0 |

GENERIC PACKAGE VIEW


DSG 8

WSON - 0.8 mm max height



2 x 2, 0.5 mm pitch

PLASTIC SMALL OUTLINE - NO LEAD


This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

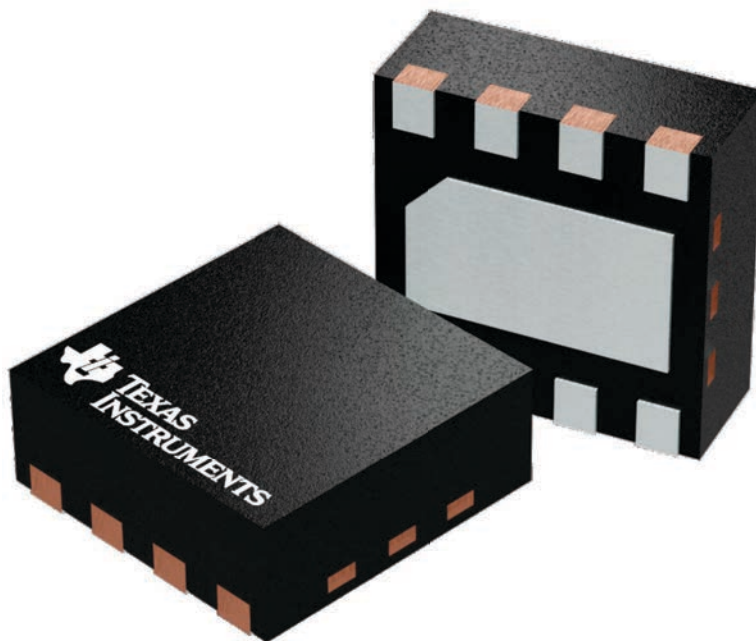

4224783/A

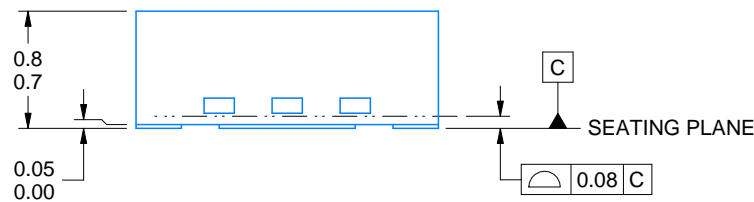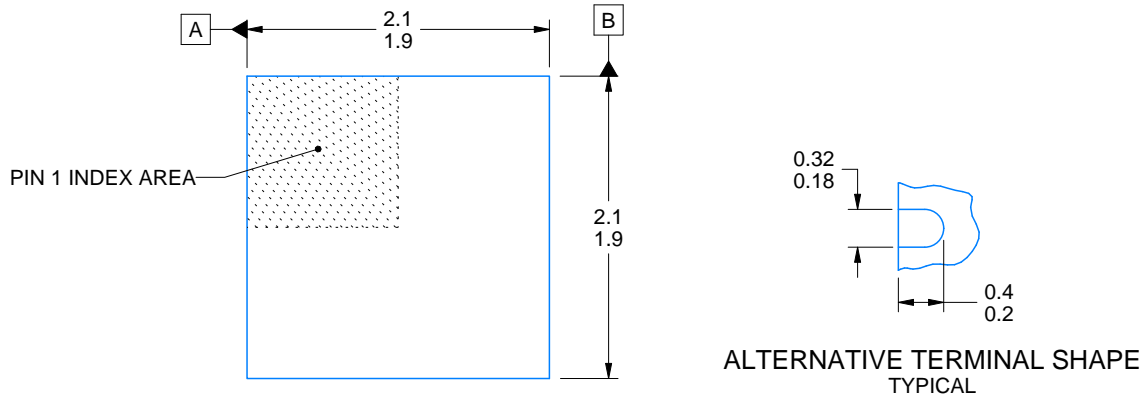

| SIDE WALL METAL THICKNESS DIM A | |
|---------------------------------------|----------|
| OPTION 1 | OPTION 2 |
| 0.1 | 0.2 |

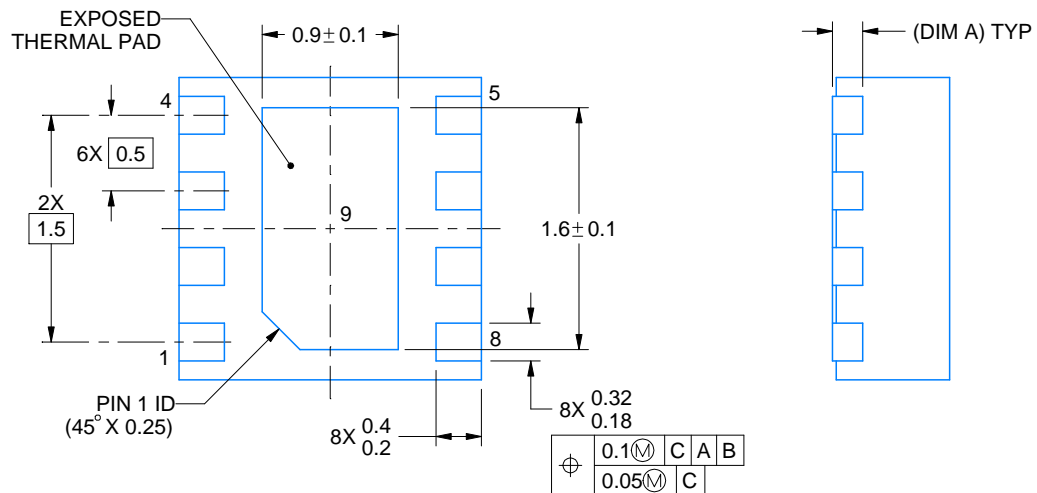

4218900/E 08/2022


NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.


DSG0008A

WSON - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

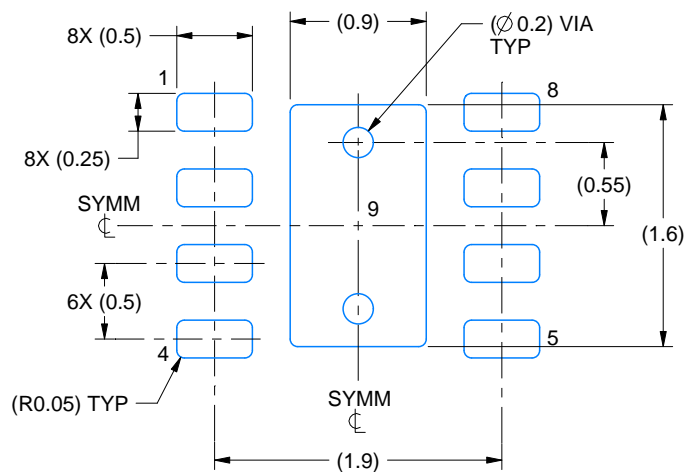

LAND PATTERN EXAMPLE
SCALE:20X

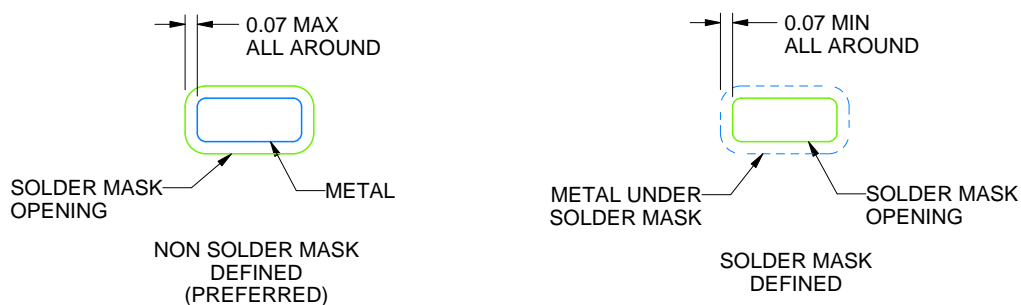

SOLDER MASK DETAILS

4218900/E 08/2022

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

DSG0008A

WSN - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

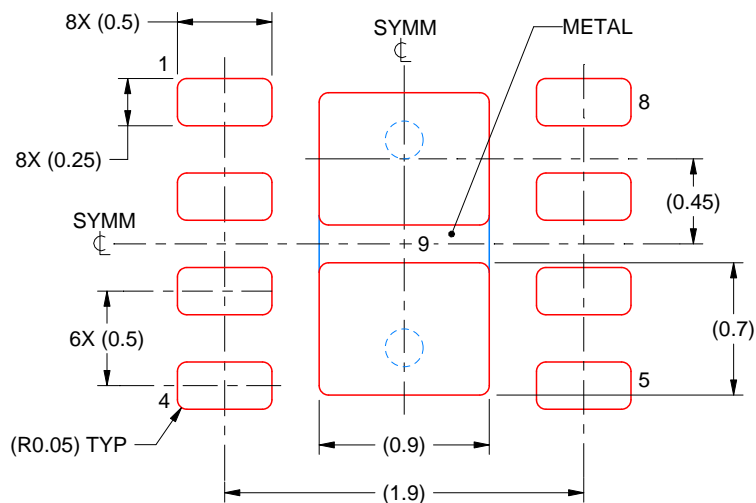

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 9:
87% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
SCALE:25X

4218900/E 08/2022

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated