


# TPS76425, TPS76427, TPS76428, TPS76430, TPS76433 LOW-POWER LOW-NOISE 150-mA LOW-DROPOUT LINEAR REGULATORS

SLVS180B – MARCH 1999 – REVISED MAY 2001

- 150-mA Low Noise, Low-Dropout Regulator
- Output Voltage: 2.5 V, 2.7 V, 2.8 V, 3.0 V, 3.3 V
- Output Noise Typically 50  $\mu$ V
- Quiescent Current Typically 85  $\mu$ A
- Dropout Voltage, Typically 300 mV at 150 mA
- Thermal Protection
- Over Current Limitation
- Less Than 2- $\mu$ A Quiescent Current in Shutdown Mode
- -40°C to 125°C Operating Junction Temperature Range
- 5-Pin SOT-23 (DBV) Package

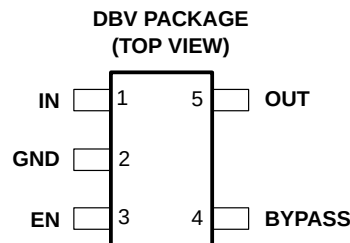

## description

The TPS764xx family of low-dropout (LDO) voltage regulators offers the benefits of a low noise, low-dropout voltage, low-power operation, and miniaturized package. Additionally, they feature low quiescent current when compared to conventional LDO regulators. Offered in 5-terminal small outline integrated-circuit SOT-23 package, the TPS764xx series devices are ideal for low-noise applications, cost-sensitive designs and applications where board space is at a premium.

A combination of new circuit design and process innovation has enabled the usual pnp pass transistor to be replaced by a PMOS pass element. Because the PMOS pass element behaves as a low-value resistor, the dropout voltage is very low—typically 300 mV at 150 mA of load current (TPS76433)—and is directly proportional to the load current. Since the PMOS pass element is a voltage-driven device, the quiescent current is very low (140  $\mu$ A maximum) and is stable over the entire range of output load current (0 mA to 150 mA). Intended for use in portable systems such as laptops and cellular phones, the low-dropout voltage feature and low-power operation result in a significant increase in system battery operating life.

The TPS764xx also features a logic-enabled sleep mode to shut down the regulator, reducing quiescent current to 1  $\mu$ A maximum at  $T_J = 25^\circ\text{C}$ . The TPS764xx is offered in 2.5-V, 2.7-V, 2.8-V, 3.0-V, and 3.3-V fixed-voltages.

AVAILABLE OPTIONS

| $T_J$          | VOLTAGE | PACKAGE         | PART NUMBER               |                           | SYMBOL |
|----------------|---------|-----------------|---------------------------|---------------------------|--------|
| -40°C to 125°C | 2.5 V   | SOT-23<br>(DBV) | TPS76425DBVT <sup>†</sup> | TPS76425DBVR <sup>‡</sup> | PBJI   |
|                | 2.7 V   |                 | TPS76427DBVT <sup>†</sup> | TPS76427DBVR <sup>‡</sup> | PBKI   |
|                | 2.8 V   |                 | TPS76428DBVT <sup>†</sup> | TPS76428DBVR <sup>‡</sup> | PCEI   |
|                | 3.0 V   |                 | TPS76430DBVT <sup>†</sup> | TPS76430DBVR <sup>‡</sup> | PBLI   |
|                | 3.3 V   |                 | TPS76433DBVT <sup>†</sup> | TPS76433DBVR <sup>‡</sup> | PBMI   |

<sup>†</sup> The DBVT passive indicates tape and reel of 250 parts.

<sup>‡</sup> The DBVR passive indicates tape and reel of 3000 parts.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**


POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2001, Texas Instruments Incorporated

TPS76425, TPS76427, TPS76428, TPS76430, TPS76433
LOW-POWER LOW-NOISE 150-mA LOW-DROPOUT LINEAR REGULATORS

SLVS180B – MARCH 1999 – REVISED MAY 2001

functional block diagram

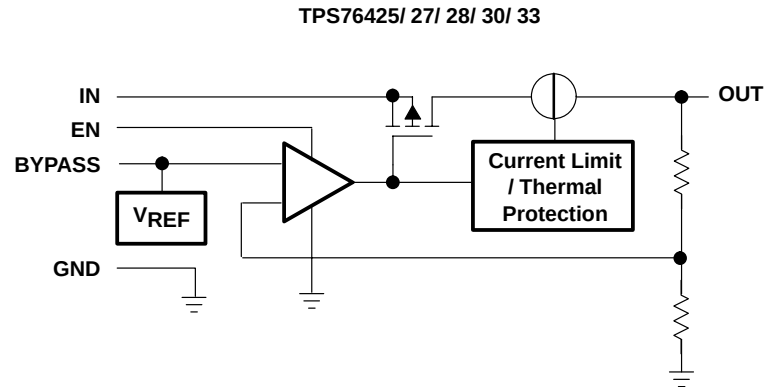

Terminal Functions

| TERMINAL NAME | I/O | DESCRIPTION              |
|---------------|-----|--------------------------|
| GND           |     | Ground                   |
| EN            | I   | Enable input             |
| BYPASS        |     | Output bypass capacitor  |
| IN            | I   | Input supply voltage     |
| OUT           | O   | Regulated output voltage |

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

|                                                     |                               |
|-----------------------------------------------------|-------------------------------|
| Input voltage range (see Note 1)                    | –0.3 V to 10 V                |
| Voltage range at EN                                 | –0.3 V to $V_I + 0.3$ V       |
| Voltage on OUT,                                     | 7 V                           |
| Peak output current                                 | Internally limited            |
| ESD rating, HBM                                     | 2 kV                          |
| Continuous total power dissipation                  | See dissipation rating tables |
| Operating virtual junction temperature range, $T_J$ | –40°C to 150°C                |
| Storage temperature range, $T_{stg}$                | –65°C to 150°C                |

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: All voltage values are with respect to network ground terminal.

DISSIPATION RATING TABLE

| BOARD   | PACKAGE | $R_{\theta JC}$ | $R_{\theta JA}$ | DERATING FACTOR<br>ABOVE $T_A = 25^\circ\text{C}$ | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | $T_A = 70^\circ\text{C}$<br>POWER RATING | $T_A = 85^\circ\text{C}$<br>POWER RATING |
|---------|---------|-----------------|-----------------|---------------------------------------------------|---------------------------------------------|------------------------------------------|------------------------------------------|
| Low K‡  | DBV     | 65.8 °C/W       | 259 °C/W        | 3.9 mW/°C                                         | 386 mW                                      | 212 mW                                   | 154 mW                                   |
| High K§ | DBV     | 65.8 °C/W       | 180 °C/W        | 5.6 mW/°C                                         | 555 mW                                      | 305 mW                                   | 222 mW                                   |

‡ The JEDEC Low K (1s) board design used to derive this data was a 3 inch x 3 inch, two layer board with 2 ounce copper traces on top of the board.  
§ The JEDEC High K (2s2p) board design used to derive this data was a 3 inch x 3 inch, multilayer board with 1 ounce internal power and ground planes and 2 ounce copper traces on top and bottom of the board.

# TPS76425, TPS76427, TPS76428, TPS76430, TPS76433

## LOW-POWER LOW-NOISE 150-mA LOW-DROPOUT LINEAR REGULATORS

SLVS180B – MARCH 1999 – REVISED MAY 2001

### recommended operating conditions

|                                       | MIN | NOM | MAX | UNIT |
|---------------------------------------|-----|-----|-----|------|
| Input voltage, $V_I^\dagger$          | 2.7 |     | 10  | V    |
| Continuous output current, $I_O$      | 0   |     | 150 | mA   |
| Operating junction temperature, $T_J$ | -40 |     | 125 | °C   |

$^\dagger$  To calculate the minimum input voltage for your maximum output current, use the following equation:  $V_{I(\min)} = V_{O(\max)} + V_{DO(\max \text{ load})}$

### electrical characteristics over recommended operating free-air temperature range, $V_I = V_{O(\text{typ})} + 1 \text{ V}$ , $I_O = 1 \text{ mA}$ , $EN = IN$ , $C_O = 4.7 \mu\text{F}$ (unless otherwise noted)

| PARAMETER |                                             |                                                                                                              | TEST CONDITIONS                                                    |  | MIN   | TYP | MAX    | UNIT          |
|-----------|---------------------------------------------|--------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|--|-------|-----|--------|---------------|
| $V_O$     | Output voltage                              | TPS76425                                                                                                     | $I_O = 1 \text{ mA to } 100 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |  | 2.45  | 2.5 | 2.55   | V             |
|           |                                             |                                                                                                              | $I_O = 1 \text{ mA to } 100 \text{ mA}$                            |  | 2.425 | 2.5 | 2.575  |               |
|           |                                             |                                                                                                              | $I_O = 1 \text{ mA to } 150 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |  | 2.438 | 2.5 | 2.562  |               |
|           |                                             |                                                                                                              | $I_O = 1 \text{ mA to } 150 \text{ mA}$                            |  | 2.407 | 2.5 | 2.593  |               |
|           |                                             | TPS76427                                                                                                     | $I_O = 1 \text{ mA to } 100 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |  | 2.646 | 2.7 | 2.754  | V             |
|           |                                             |                                                                                                              | $I_O = 1 \text{ mA to } 100 \text{ mA}$                            |  | 2.619 | 2.7 | 2.781  |               |
|           |                                             |                                                                                                              | $I_O = 1 \text{ mA to } 150 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |  | 2.632 | 2.7 | 2.768  |               |
|           |                                             |                                                                                                              | $I_O = 1 \text{ mA to } 150 \text{ mA}$                            |  | 2.598 | 2.7 | 2.8013 |               |
|           |                                             | TPS76428                                                                                                     | $I_O = 1 \text{ mA to } 100 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |  | 2.744 | 2.8 | 2.856  | V             |
|           |                                             |                                                                                                              | $I_O = 1 \text{ mA to } 150 \text{ mA}$ ,                          |  | 2.73  | 2.8 | 2.870  |               |
|           |                                             |                                                                                                              | $I_O = 1 \text{ mA to } 150 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |  | 2.716 | 2.8 | 2.884  |               |
|           |                                             |                                                                                                              | $I_O = 1 \text{ mA to } 150 \text{ mA}$                            |  | 2.695 | 2.8 | 2.905  |               |
|           |                                             | TPS76430                                                                                                     | $I_O = 1 \text{ mA to } 100 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |  | 2.94  | 3.0 | 3.06   | V             |
|           |                                             |                                                                                                              | $I_O = 1 \text{ mA to } 100 \text{ mA}$                            |  | 2.925 | 3.0 | 3.075  |               |
|           |                                             |                                                                                                              | $I_O = 1 \text{ mA to } 150 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |  | 2.91  | 3.0 | 3.090  |               |
|           |                                             |                                                                                                              | $I_O = 1 \text{ mA to } 150 \text{ mA}$                            |  | 2.887 | 3.0 | 3.112  |               |
|           |                                             | TPS76433                                                                                                     | $I_O = 1 \text{ mA to } 100 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |  | 3.234 | 3.3 | 3.366  | V             |
|           |                                             |                                                                                                              | $I_O = 1 \text{ mA to } 100 \text{ mA}$                            |  | 3.201 | 3.3 | 3.399  |               |
|           |                                             |                                                                                                              | $I_O = 1 \text{ mA to } 150 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |  | 3.218 | 3.3 | 3.382  |               |
|           |                                             |                                                                                                              | $I_O = 1 \text{ mA to } 150 \text{ mA}$                            |  | 3.177 | 3.3 | 3.423  |               |
| $I_{(Q)}$ | Quiescent current<br>(GND terminal current) | $I_O = 0 \text{ to } 150 \text{ mA}$ , $T_J = 25^\circ\text{C}$ ,<br>See Note 2                              |                                                                    |  | 85    |     | 100    | $\mu\text{A}$ |
|           |                                             | $I_O = 0 \text{ to } 150 \text{ mA}$ ,<br>See Note 2                                                         |                                                                    |  |       |     | 140    |               |
|           | Standby current                             | $EN < 0.5 \text{ V}$ , $T_J = 25^\circ\text{C}$                                                              |                                                                    |  | 0.5   |     | 1      |               |
|           |                                             | $EN < 0.5 \text{ V}$                                                                                         |                                                                    |  |       |     | 2      |               |
| $V_n$     | Output noise voltage                        | $BW = 300 \text{ Hz to } 50 \text{ kHz}$ , $C_O = 10 \mu\text{F}$ ,<br>$T_J = 25^\circ\text{C}$ , See Note 2 |                                                                    |  | 50    |     |        | $\mu\text{V}$ |
|           | Bypass voltage                              | $T_J = 25^\circ\text{C}$                                                                                     |                                                                    |  | 1.192 |     |        | V             |
| PSRR      | Ripple rejection                            | $f = 1 \text{ kHz}$ , $C_O = 10 \mu\text{F}$ , $T_J = 25^\circ\text{C}$ , See Note 2                         |                                                                    |  | 60    |     |        | dB            |
|           | Current limit                               | $T_J = 25^\circ\text{C}$ See Note 3                                                                          |                                                                    |  | 0.8   |     | 1.5    | A             |

NOTES: 2. Minimum  $IN$  operating voltage is 2.7 V or  $V_{O(\text{typ})} + 1 \text{ V}$ , whichever is greater.  
3. Test condition includes, output voltage  $V_O = 0 \text{ V}$  and pulse duration = 10 mS.



# TPS76425, TPS76427, TPS76428, TPS76430, TPS76433

## LOW-POWER LOW-NOISE 150-mA LOW-DROPOUT LINEAR REGULATORS

SLVS180B – MARCH 1999 – REVISED MAY 2001

electrical characteristics over recommended operating free-air temperature range,  
 $V_I = V_{O(\text{typ})} + 1 \text{ V}$ ,  $I_O = 1 \text{ mA}$ ,  $EN = IN$ ,  $C_O = 4.7 \mu\text{F}$  (unless otherwise noted) (continued)

| PARAMETER                                                           |                              | TEST CONDITIONS                                                                                   | MIN                                               | TYP   | MAX  | UNIT          |
|---------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------------------|---------------------------------------------------|-------|------|---------------|
| Output voltage line regulation ( $\Delta V_O/V_O$ )<br>(see Note 4) |                              | $V_O + 1 \text{ V} < V_I \leq 10 \text{ V}$ , $V_I \geq 3.5 \text{ V}$ , $T_J = 25^\circ\text{C}$ |                                                   | 0.04  | 0.07 | %V            |
|                                                                     |                              | $V_O + 1 \text{ V} < V_I \leq 10 \text{ V}$ , $V_I \geq 3.5 \text{ V}$                            |                                                   |       | 0.1  |               |
| $V_{IH}$                                                            | EN high level input          | See Note 2                                                                                        |                                                   | 1.4   | 2    | V             |
| $V_{IL}$                                                            | EN low level input           | See Note 2                                                                                        | 0.5                                               | 1.2   |      |               |
| $I_I$                                                               | EN input current             | $EN = 0 \text{ V}$                                                                                |                                                   | -0.01 | -0.5 | $\mu\text{A}$ |
|                                                                     |                              | $EN = IN$                                                                                         |                                                   | -0.01 | -0.5 |               |
| $V_{DO}$                                                            | Dropout voltage (see Note 5) | TPS76425                                                                                          | $I_O = 0 \text{ mA}$ , $T_J = 25^\circ\text{C}$   |       | 0.2  | mV            |
|                                                                     |                              |                                                                                                   | $I_O = 1 \text{ mA}$ , $T_J = 25^\circ\text{C}$   |       | 3    |               |
|                                                                     |                              |                                                                                                   | $I_O = 50 \text{ mA}$ , $T_J = 25^\circ\text{C}$  |       | 120  |               |
|                                                                     |                              |                                                                                                   | $I_O = 50 \text{ mA}$                             |       | 200  |               |
|                                                                     |                              |                                                                                                   | $I_O = 75 \text{ mA}$ , $T_J = 25^\circ\text{C}$  |       | 180  |               |
|                                                                     |                              |                                                                                                   | $I_O = 75 \text{ mA}$                             |       | 300  |               |
|                                                                     |                              |                                                                                                   | $I_O = 100 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |       | 240  |               |
|                                                                     |                              |                                                                                                   | $I_O = 100 \text{ mA}$                            |       | 400  |               |
|                                                                     |                              |                                                                                                   | $I_O = 150 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |       | 360  |               |
|                                                                     |                              |                                                                                                   | $I_O = 150 \text{ mA}$                            |       | 600  |               |
|                                                                     |                              | TPS76433                                                                                          | $I_O = 0 \text{ mA}$ , $T_J = 25^\circ\text{C}$   |       | 0.2  | mV            |
|                                                                     |                              |                                                                                                   | $I_O = 1 \text{ mA}$ , $T_J = 25^\circ\text{C}$   |       | 3    |               |
|                                                                     |                              |                                                                                                   | $I_O = 50 \text{ mA}$ , $T_J = 25^\circ\text{C}$  |       | 100  |               |
|                                                                     |                              |                                                                                                   | $I_O = 50 \text{ mA}$                             |       | 166  |               |
|                                                                     |                              |                                                                                                   | $I_O = 75 \text{ mA}$ , $T_J = 25^\circ\text{C}$  |       | 150  |               |
|                                                                     |                              |                                                                                                   | $I_O = 75 \text{ mA}$                             |       | 250  |               |
|                                                                     |                              |                                                                                                   | $I_O = 100 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |       | 200  |               |
|                                                                     |                              |                                                                                                   | $I_O = 100 \text{ mA}$                            |       | 333  |               |
|                                                                     |                              |                                                                                                   | $I_O = 150 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |       | 300  |               |
|                                                                     |                              |                                                                                                   | $I_O = 150 \text{ mA}$                            |       | 500  |               |

NOTES: 2. Minimum  $IN$  operating voltage is 2.7 V or  $V_{O(\text{typ})} + 1 \text{ V}$ , whichever is greater.

4. If  $V_O < 2.5 \text{ V}$  and  $V_{I\text{max}} = 10 \text{ V}$ ,  $V_{I\text{min}} = 3.5 \text{ V}$ :

$$\text{Line Reg. (mV)} = (\%/V) \times \frac{V_O(V_{I\text{max}} - 3.5 \text{ V})}{100} \times 1000$$

If  $V_O > 2.5 \text{ V}$  and  $V_{I\text{max}} = 10 \text{ V}$ ,  $V_{I\text{min}} = V_O + 1 \text{ V}$ :

$$\text{Line Reg. (mV)} = (\%/V) \times \frac{V_O(V_{I\text{max}} - (V_O + 1))}{100} \times 1000$$

5. Dropout voltage is defined as the differential voltage between  $V_O$  and  $V_I$  when  $V_O$  drops 100 mV below the value measured with  $V_I = V_O + 1.0 \text{ V}$ .



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# TPS76425, TPS76427, TPS76428, TPS76430, TPS76433

## LOW-POWER LOW-NOISE 150-mA LOW-DROPOUT LINEAR REGULATORS

SLVS180B – MARCH 1999 – REVISED MAY 2001

### TYPICAL CHARACTERISTICS

Table of Graphs

|          |                                      |                              | FIGURE  |
|----------|--------------------------------------|------------------------------|---------|
| $V_O$    | Output voltage                       | vs Output current            | 1       |
|          |                                      | vs Free-air temperature      | 2, 3, 4 |
| $V_n$    | Output noise                         | vs Frequency                 | 5       |
| $V_n$    | Output noise voltage                 | vs Bypass capacitance        | 6       |
|          |                                      | vs Load current              | 7       |
| $Z_O$    | Output impedance                     | vs Frequency                 | 8       |
| $V_{DO}$ | Dropout voltage                      | vs Free-air temperature      | 9       |
|          | Ripple rejection                     | vs Frequency                 | 10      |
|          | Line transient response              |                              | 11, 13  |
|          | Load transient response              |                              | 12, 14  |
|          | Compensation series resistance (CSR) | vs Output current            | 15, 17  |
|          |                                      | vs Added ceramic capacitance | 16, 18  |

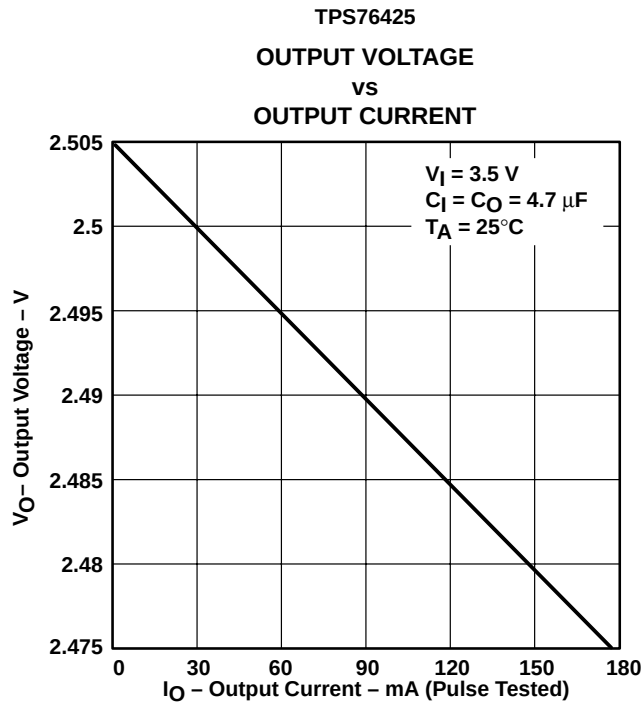


Figure 1

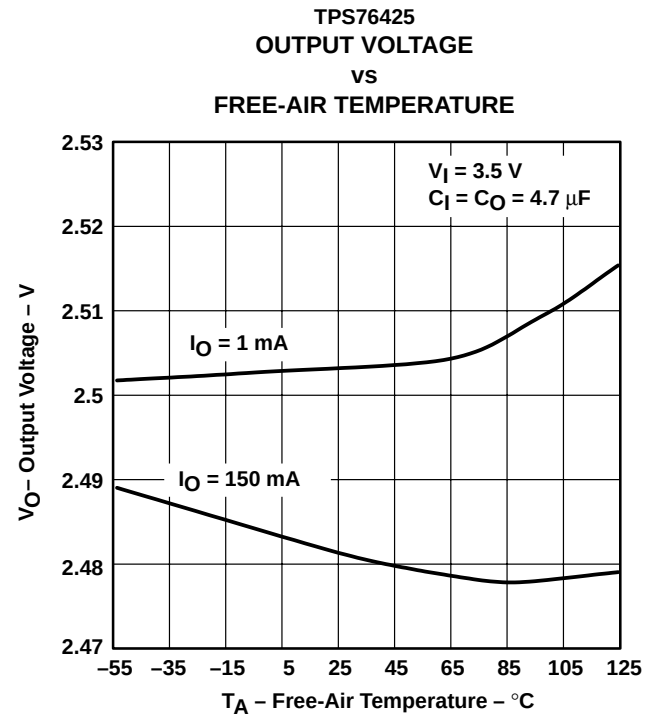


Figure 2

# TPS76425, TPS76427, TPS76428, TPS76430, TPS76433

## LOW-POWER LOW-NOISE 150-mA LOW-DROPOUT LINEAR REGULATORS

SLVS180B – MARCH 1999 – REVISED MAY 2001

### TYPICAL CHARACTERISTICS

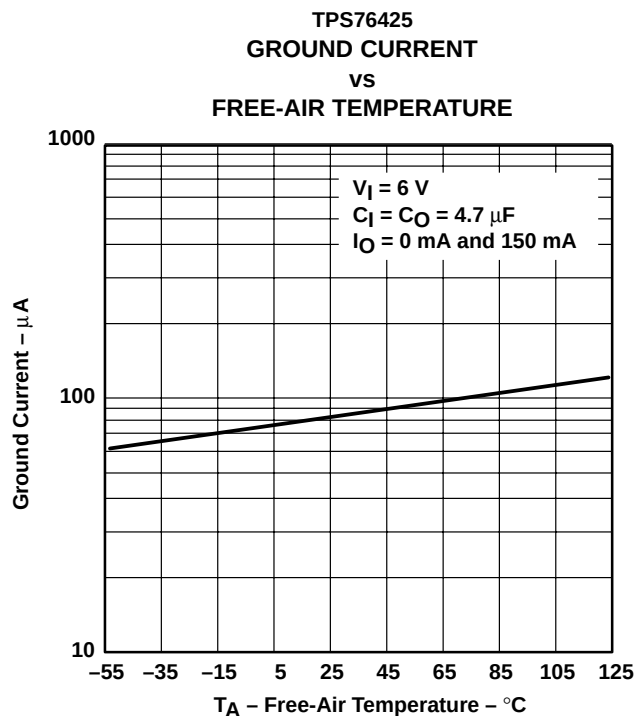


Figure 3

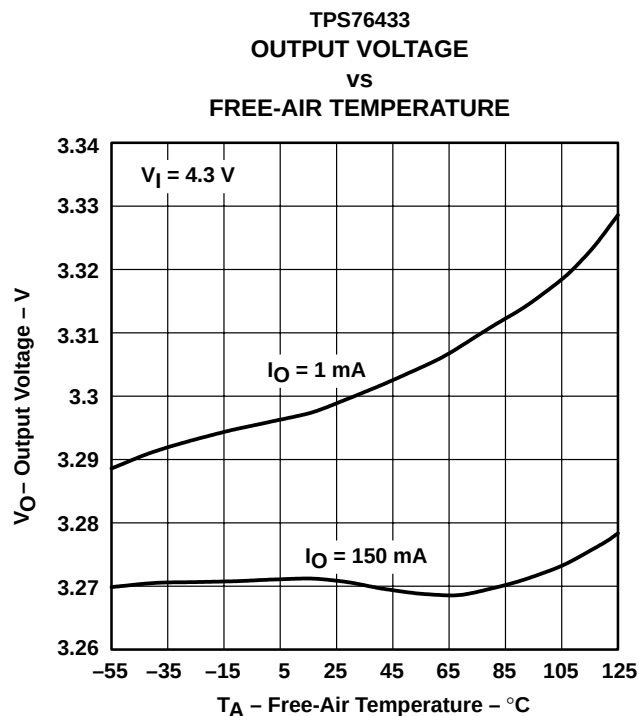


Figure 4

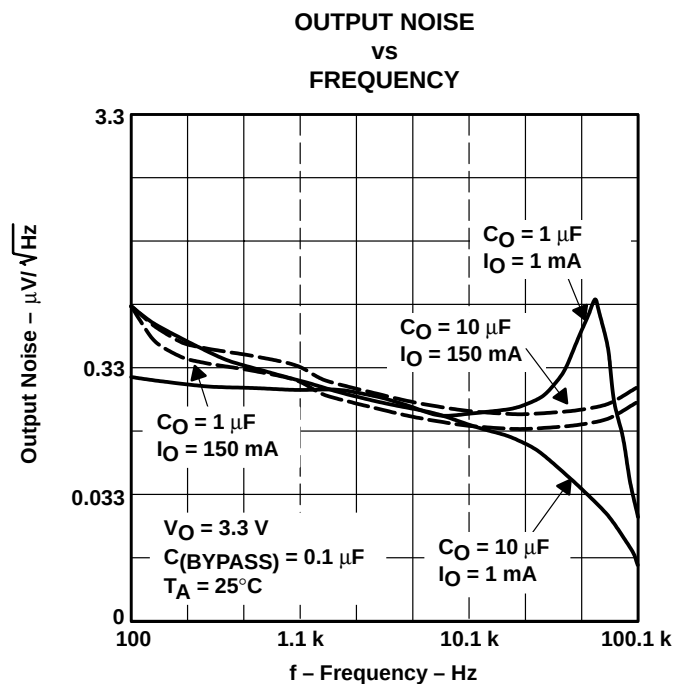


Figure 5

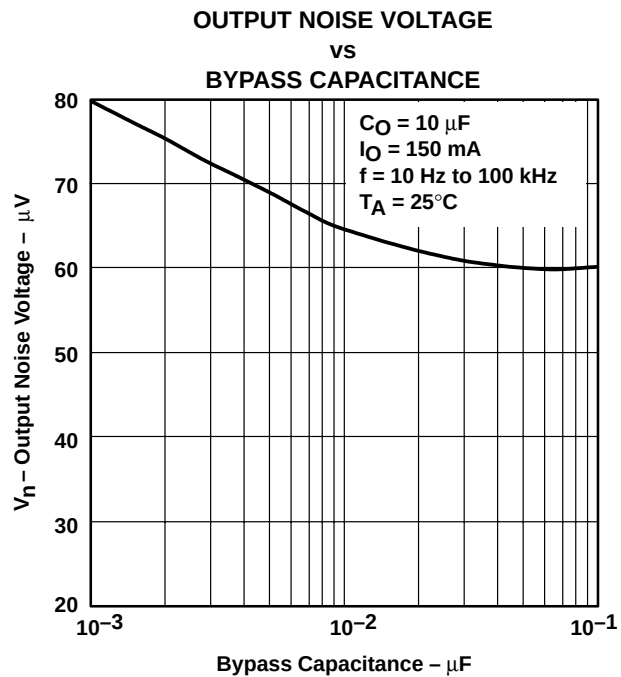


Figure 6

# TPS76425, TPS76427, TPS76428, TPS76430, TPS76433 LOW-POWER LOW-NOISE 150-mA LOW-DROPOUT LINEAR REGULATORS

SLVS180B – MARCH 1999 – REVISED MAY 2001

## TYPICAL CHARACTERISTICS

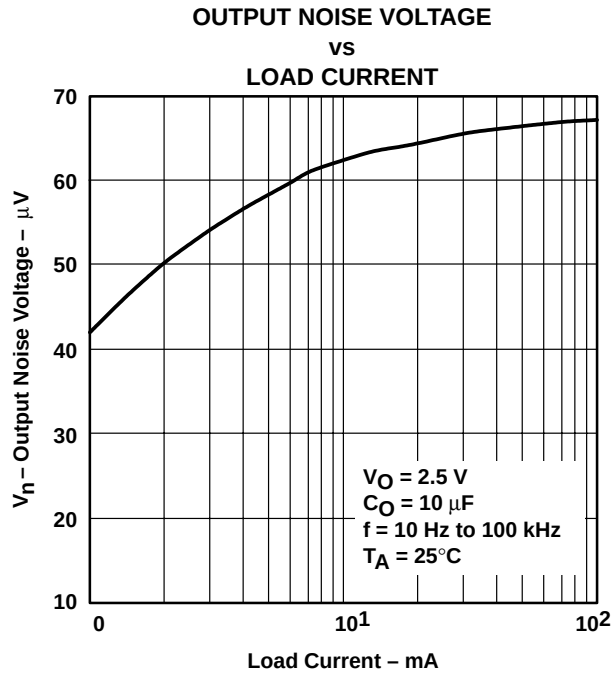


Figure 7

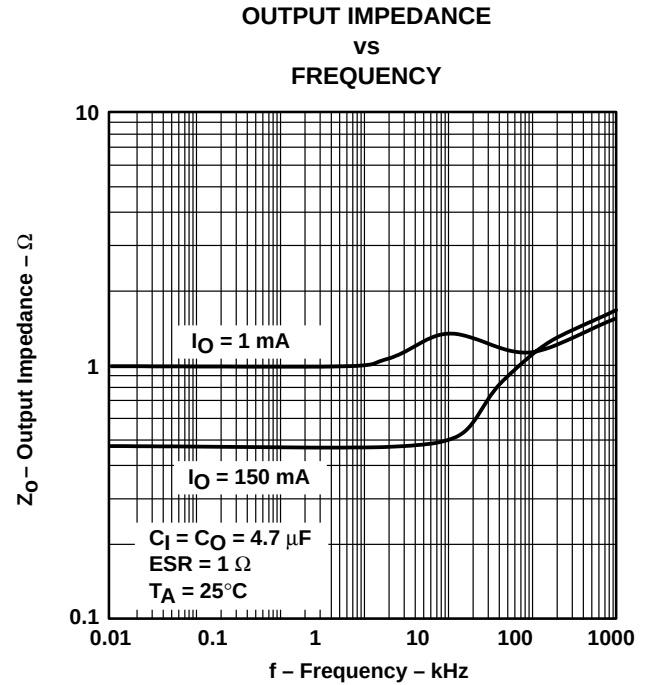


Figure 8

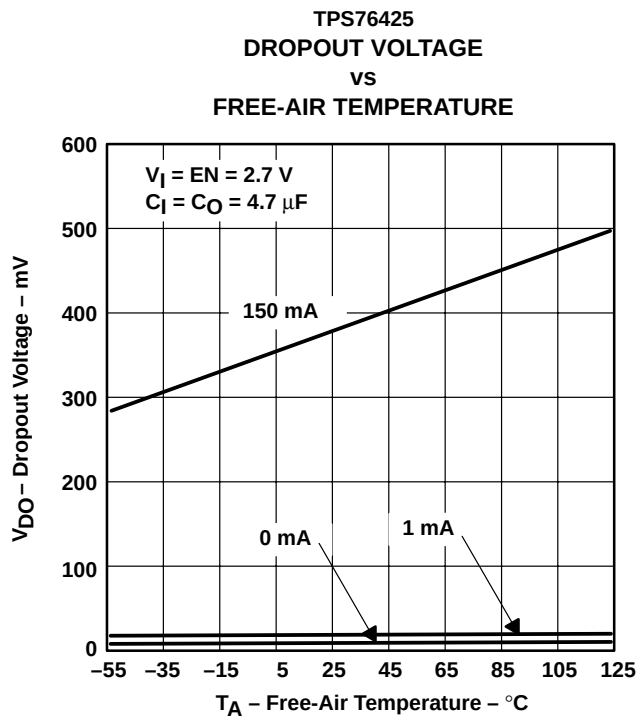


Figure 9

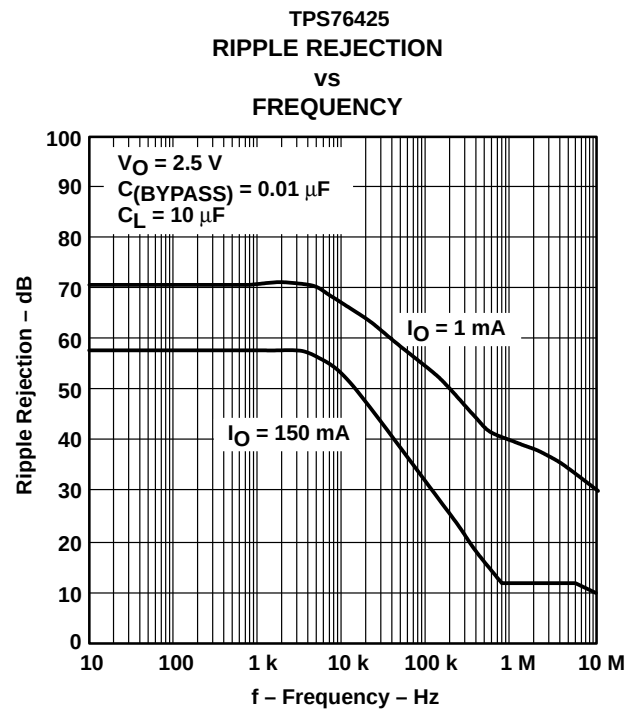


Figure 10

# TPS76425, TPS76427, TPS76428, TPS76430, TPS76433

## LOW-POWER LOW-NOISE 150-mA LOW-DROPOUT LINEAR REGULATORS

SLVS180B – MARCH 1999 – REVISED MAY 2001

### TYPICAL CHARACTERISTICS

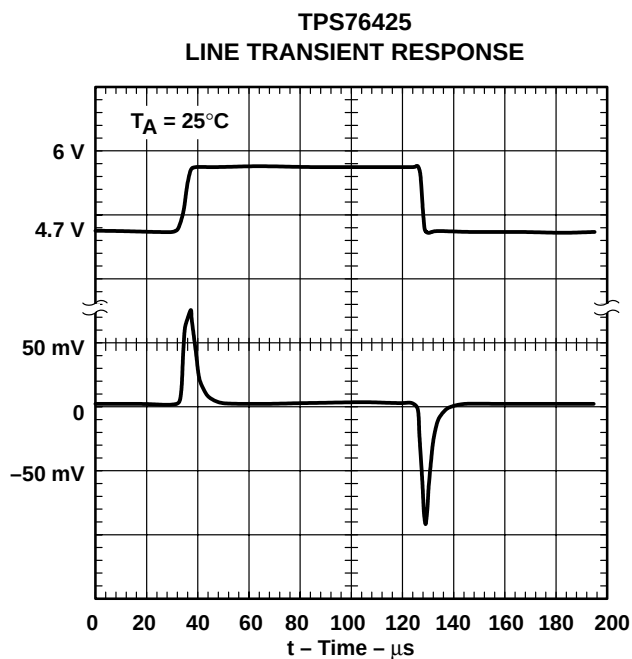


Figure 11

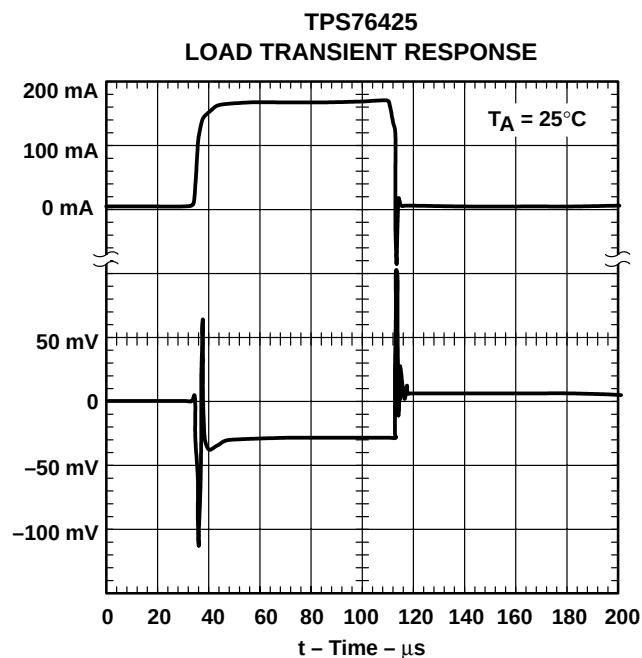


Figure 12

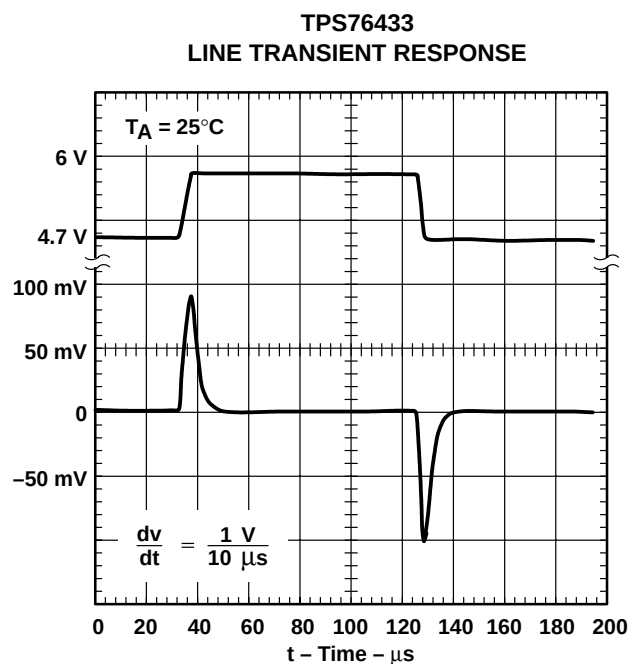


Figure 13

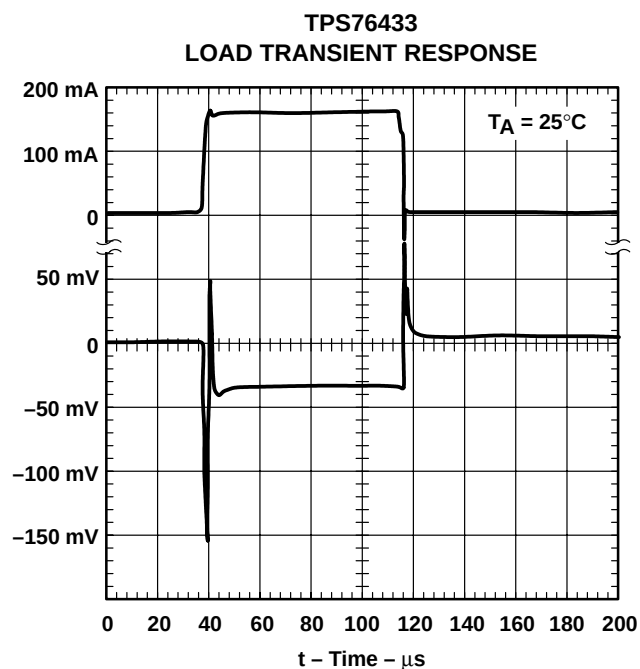


Figure 14



## TYPICAL CHARACTERISTICS

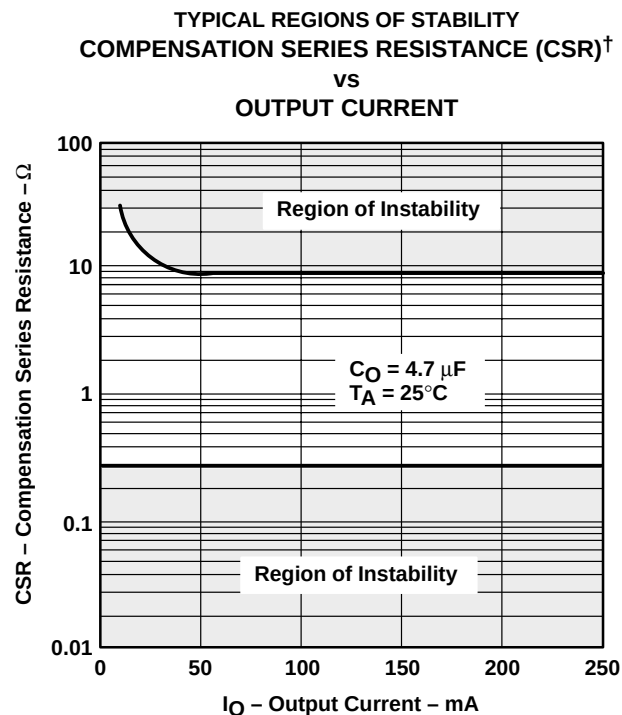


Figure 15

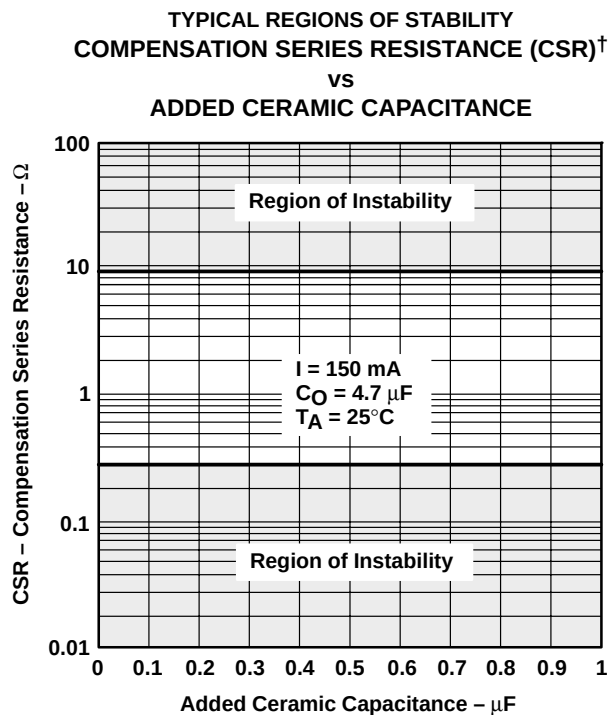


Figure 16

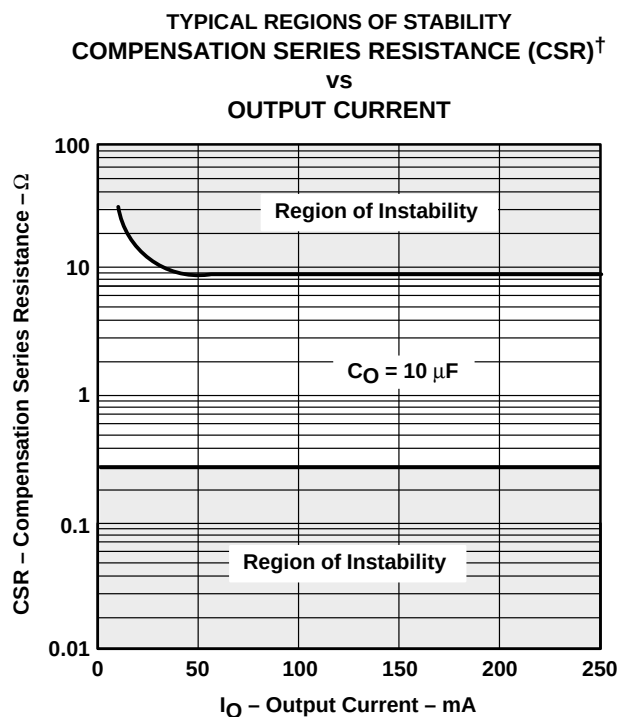


Figure 17

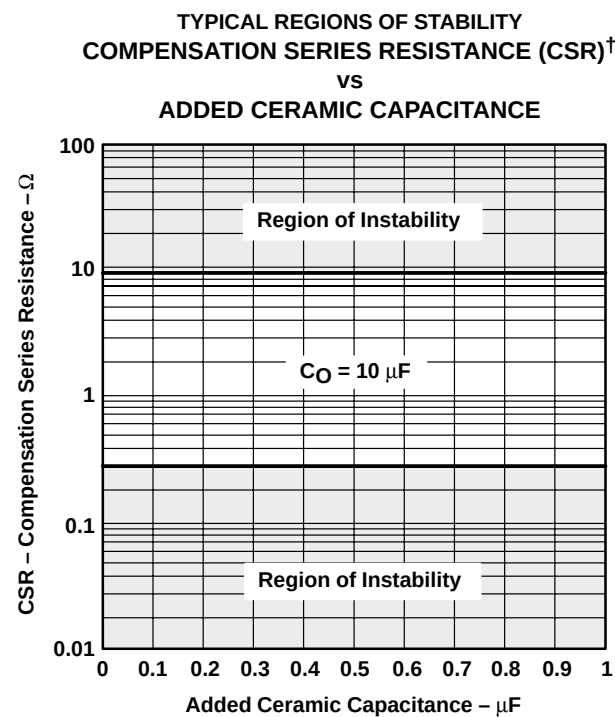


Figure 18

<sup>†</sup> CSR refers to the total series resistance, including the ESR of the capacitor, any series resistance added externally, and PWB trace resistance to  $C_O$ .

# TPS76425, TPS76427, TPS76428, TPS76430, TPS76433

## LOW-POWER LOW-NOISE 150-mA LOW-DROPOUT LINEAR REGULATORS

SLVS180B – MARCH 1999 – REVISED MAY 2001

### APPLICATION INFORMATION

The TPS764xx family of low-noise and low-dropout (LDO) regulators are optimized for use in battery-operated equipment. They feature extremely low noise (50  $\mu\text{V}$ ), low dropout voltages, low quiescent current (140  $\mu\text{A}$ ), and an enable input to reduce supply current to less than 2  $\mu\text{A}$  when the regulator is turned off.

#### device operation

The TPS764xx uses a PMOS pass element to dramatically reduce both dropout voltage and supply current over more conventional PNP-pass-element LDO designs. The PMOS pass element is a voltage-controlled device which, unlike a PNP transistor, does not require increased drive current as output current increases. Supply current in the TPS764xx is essentially constant from no-load to maximum load.

Current limiting and thermal protection prevent damage by excessive output current and/or power dissipation. The device switches into a constant-current mode at approximately 1 A; further load reduces the output voltage instead of increasing the output current. The thermal protection shuts the regulator off if the junction temperature rises above 165°C. Recovery is automatic when the junction temperature drops approximately 25°C below the high temperature trip point. The PMOS pass element includes a back diode that safely conducts reverse current when the input voltage level drops below the output voltage level.

An internal resistor, in conjunction with external 0.01- $\mu\text{F}$  bypass capacitor, creates a low-pass filter to further reduce the noise. The TPS764xx exhibits only 50  $\mu\text{V}$  of output voltage noise using 0.01  $\mu\text{F}$  bypass and 4.7- $\mu\text{F}$  output capacitors.

A logic low on the enable input, EN, shuts off the output and reduces the supply current to less than 2  $\mu\text{A}$ . EN should be tied high in applications where the shutdown feature is not used.

A typical application circuit is shown in Figure 19.

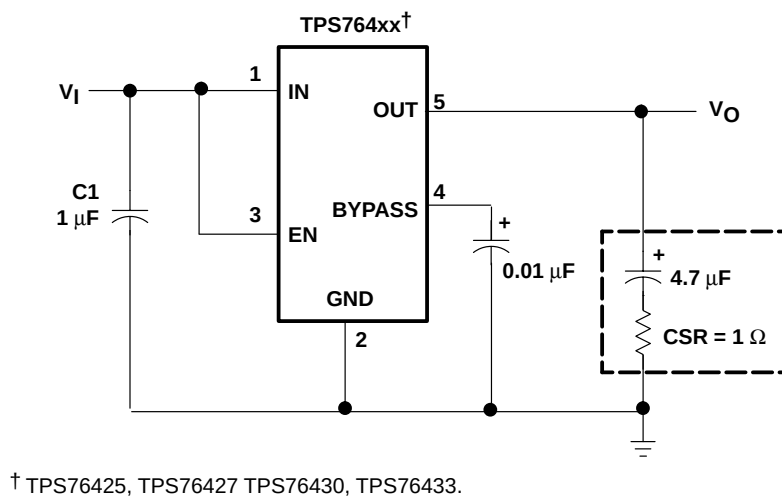


Figure 19. Typical Application Circuit

# TPS76425, TPS76427, TPS76428, TPS76430, TPS76433

## LOW-POWER LOW-NOISE 150-mA LOW-DROPOUT LINEAR REGULATORS

SLVS180B – MARCH 1999 – REVISED MAY 2001

### APPLICATION INFORMATION

#### external capacitor requirements

Although not required, a 0.047- $\mu$ F or larger ceramic bypass input capacitor, connected between IN and GND and located close to the TPS764xx, is recommended to improve transient response and noise rejection. A higher-value electrolytic input capacitor may be necessary if large, fast-rise-time load transients are anticipated and the device is located several inches from the power source.

Like all low dropout regulators, the TPS764xx requires an output capacitor connected between OUT and GND to stabilize the internal loop control. The minimum recommended capacitance value is 4.7  $\mu$ F and the ESR (equivalent series resistance) must be between 0.2  $\Omega$  and 10  $\Omega$ . Capacitor values 4.7  $\mu$ F or larger are acceptable, provided the ESR is less than 10  $\Omega$ . Solid tantalum electrolytic, aluminum electrolytic, and multilayer ceramic capacitors are all suitable, provided they meet the requirements described above. Most of the commercially available 4.7  $\mu$ F surface-mount solid tantalum capacitors, including devices from Sprague, Kemet, and Nichico, meet the ESR requirements previously stated. Multilayer ceramic capacitors should have minimum values of 1  $\mu$ F over the full operating temperature range of the equipment.

CAPACITOR SELECTION

| PART NO.         | MFR.    | VALUE       | MAX ESR <sup>†</sup> | SIZE (H $\times$ L $\times$ W) <sup>†</sup> |
|------------------|---------|-------------|----------------------|---------------------------------------------|
| T494B475K016AS   | KEMET   | 4.7 $\mu$ F | 1.5 $\Omega$         | 1.9 $\times$ 3.5 $\times$ 2.8               |
| 195D106x0016x2T  | SPRAGUE | 10 $\mu$ F  | 1.5 $\Omega$         | 1.3 $\times$ 7.0 $\times$ 2.7               |
| 695D106x003562T  | SPRAGUE | 10 $\mu$ F  | 1.3 $\Omega$         | 2.5 $\times$ 7.6 $\times$ 2.5               |
| TPSC475K035R0600 | AVX     | 4.7 $\mu$ F | 0.6 $\Omega$         | 2.6 $\times$ 6.0 $\times$ 3.2               |

<sup>†</sup> Size is in mm. ESR is maximum resistance in ohms at 100 kHz and  $T_A = 25^\circ\text{C}$ . Listings are sorted by height.

# TPS76425, TPS76427, TPS76428, TPS76430, TPS76433

## LOW-POWER LOW-NOISE 150-mA LOW-DROPOUT LINEAR REGULATORS

SLVS180B – MARCH 1999 – REVISED MAY 2001

---

### APPLICATION INFORMATION

#### power dissipation and junction temperature

Specified regulator operation is assured to a junction temperature of 125°C; the maximum junction temperature allowable without damaging the device is 150°C. This restriction limits the power dissipation the regulator can handle in any given application. To ensure the junction temperature is within acceptable limits, calculate the maximum allowable dissipation,  $P_{D(max)}$ , and the actual dissipation,  $P_D$ , which must be less than or equal to  $P_{D(max)}$ .

The maximum-power-dissipation limit is determined using the following equation:

$$P_{D(max)} = \frac{T_{Jmax} - T_A}{R_{\theta JA}}$$

Where:

$T_{Jmax}$  is the maximum allowable junction temperature

$R_{\theta JA}$  is the thermal resistance junction-to-ambient for the package, see the dissipation rating table.

$T_A$  is the ambient temperature.

The regulator dissipation is calculated using:

$$P_D = (V_I - V_O) \times I_O$$

Power dissipation resulting from quiescent current is negligible.

#### regulator protection

The TPS764xx pass element has a built-in back diode that safely conducts reverse current when the input voltage drops below the output voltage (e.g., during power down). Current is conducted from the output to the input and is not internally limited. If extended reverse voltage is anticipated, external limiting might be appropriate.

The TPS764xx also features internal current limiting and thermal protection. During normal operation, the TPS764xx limits output current to approximately 800 mA. When current limiting engages, the output voltage scales back linearly until the overcurrent condition ends. While current limiting is designed to prevent gross device failure, care should be taken not to exceed the power dissipation ratings of the package. If the temperature of the device exceeds 165°C, thermal-protection circuitry shuts it down. Once the device has cooled down to below 140°C, regulator operation resumes.


TPS76425, TPS76427, TPS76428, TPS76430, TPS76433  
 LOW-POWER LOW-NOISE 150-mA LOW-DROPOUT LINEAR REGULATORS

SLVS180B – MARCH 1999 – REVISED MAY 2001

MECHANICAL DATA

DBV (R-PDSO-G5)

PLASTIC SMALL-OUTLINE

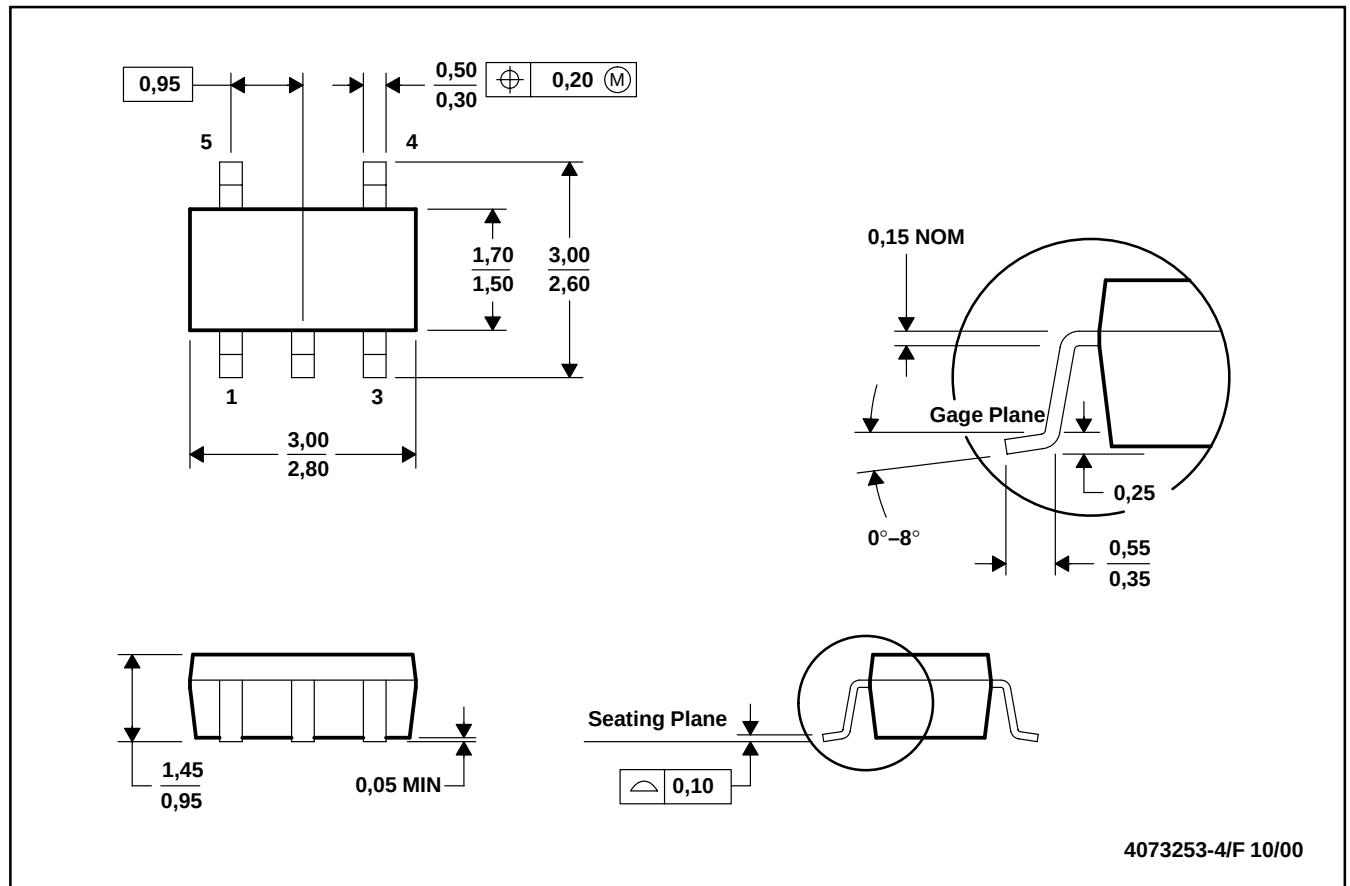

- NOTES: A. All linear dimensions are in millimeters.  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold flash or protrusion.  
 D. Falls within JEDEC MO-178

## PACKAGING INFORMATION

| Orderable part number        | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TPS76425DBVR</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -            | PBJI                |
| TPS76425DBVR.A               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PBJI                |
| <a href="#">TPS76425DBVT</a> | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -            | PBJI                |
| TPS76425DBVT.A               | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PBJI                |
| <a href="#">TPS76427DBVR</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -            | PBKI                |
| TPS76427DBVR.A               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PBKI                |
| <a href="#">TPS76427DBVT</a> | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -            | PBKI                |
| TPS76427DBVT.A               | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PBKI                |
| <a href="#">TPS76428DBVR</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -            | PCEI                |
| TPS76428DBVR.A               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PCEI                |
| <a href="#">TPS76428DBVT</a> | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -            | PCEI                |
| TPS76428DBVT.A               | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PCEI                |
| <a href="#">TPS76430DBVR</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -            | PBLI                |
| TPS76430DBVR.A               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PBLI                |
| <a href="#">TPS76430DBVT</a> | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -            | PBLI                |
| TPS76430DBVT.A               | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PBLI                |
| <a href="#">TPS76433DBVR</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU   NIPDAU                      | Level-1-260C-UNLIM                | -40 to 125   | PBMI                |
| TPS76433DBVR.A               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PBMI                |
| <a href="#">TPS76433DBVT</a> | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PBMI                |
| TPS76433DBVT.A               | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PBMI                |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.


(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

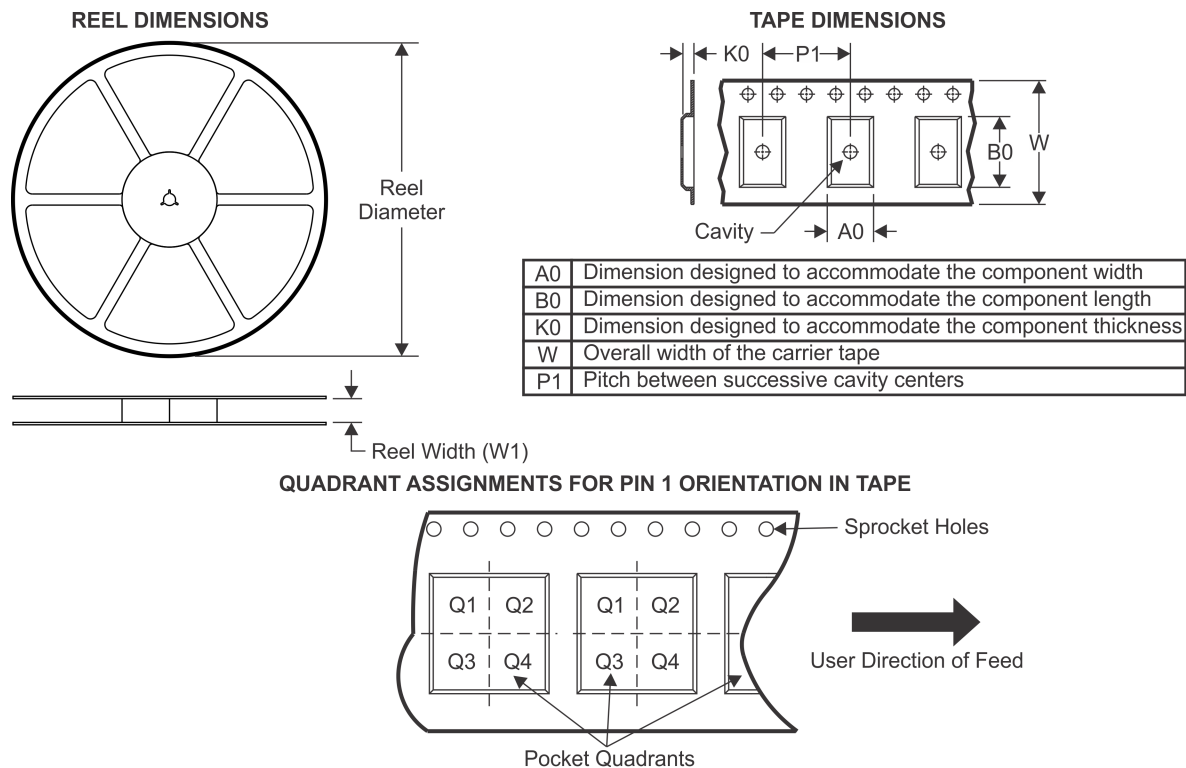
**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS76425DBVR | SOT-23       | DBV             | 5    | 3000 | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS76425DBVT | SOT-23       | DBV             | 5    | 250  | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS76427DBVR | SOT-23       | DBV             | 5    | 3000 | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS76427DBVT | SOT-23       | DBV             | 5    | 250  | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS76428DBVR | SOT-23       | DBV             | 5    | 3000 | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS76428DBVT | SOT-23       | DBV             | 5    | 250  | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS76430DBVR | SOT-23       | DBV             | 5    | 3000 | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS76430DBVT | SOT-23       | DBV             | 5    | 250  | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS76433DBVR | SOT-23       | DBV             | 5    | 3000 | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS76433DBVT | SOT-23       | DBV             | 5    | 250  | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |



## TAPE AND REEL BOX DIMENSIONS

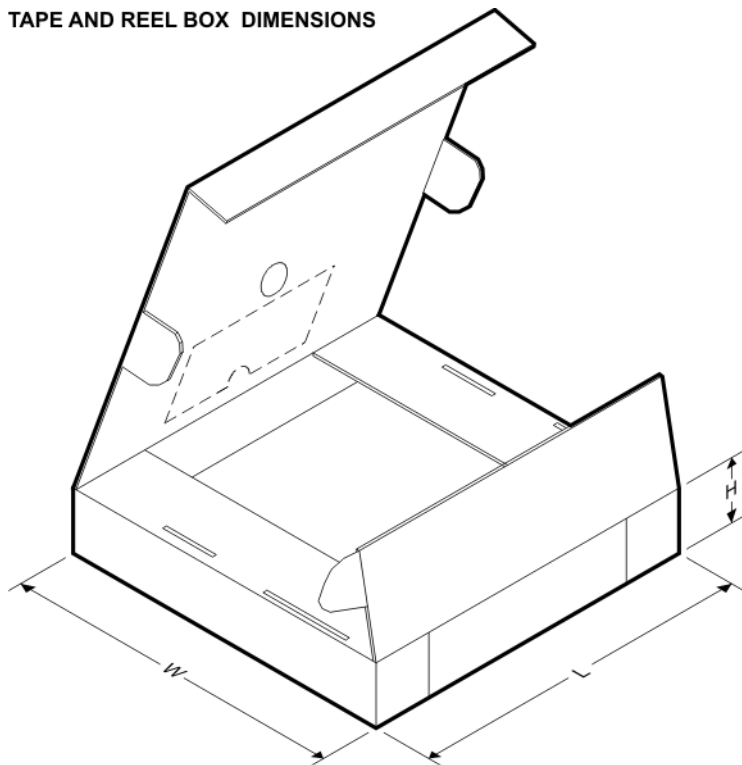

\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS76425DBVR | SOT-23       | DBV             | 5    | 3000 | 182.0       | 182.0      | 20.0        |
| TPS76425DBVT | SOT-23       | DBV             | 5    | 250  | 182.0       | 182.0      | 20.0        |
| TPS76427DBVR | SOT-23       | DBV             | 5    | 3000 | 182.0       | 182.0      | 20.0        |
| TPS76427DBVT | SOT-23       | DBV             | 5    | 250  | 182.0       | 182.0      | 20.0        |
| TPS76428DBVR | SOT-23       | DBV             | 5    | 3000 | 182.0       | 182.0      | 20.0        |
| TPS76428DBVT | SOT-23       | DBV             | 5    | 250  | 182.0       | 182.0      | 20.0        |
| TPS76430DBVR | SOT-23       | DBV             | 5    | 3000 | 182.0       | 182.0      | 20.0        |
| TPS76430DBVT | SOT-23       | DBV             | 5    | 250  | 182.0       | 182.0      | 20.0        |
| TPS76433DBVR | SOT-23       | DBV             | 5    | 3000 | 182.0       | 182.0      | 20.0        |
| TPS76433DBVT | SOT-23       | DBV             | 5    | 250  | 182.0       | 182.0      | 20.0        |

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated