

# TPS6223xx 2-MHz and 3-MHz Ultra Small Step-Down Converter in 1 x 1.5 USON Package

## 1 Features

- 2 MHz / 3 MHz Switching Frequency
- Up to 94% Efficiency
- Output Peak Current up to 500 mA
- Operating Junction Temperature of  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$
- High PSRR (up to 90 dB)
- Small External Output Filter Components 1  $\mu\text{H}$  and 4.7  $\mu\text{F}$
- $V_{\text{IN}}$  range from 2.05 V to 6 V
- Optimized Power-Save Mode for Low Output Ripple Voltage
- Forced PWM Mode Operation
- Typ. 22- $\mu\text{A}$  Quiescent Current
- 100% Duty Cycle for Lowest Dropout
- Small 1-mm  $\times$  1.5-mm  $\times$  0.6-mm USON Package
- 12-mm<sup>2</sup> Minimum Solution Size
- Supports 0.6-mm Maximum Solution Height

## 2 Applications

- LDO Replacement
- Portable Audio, Portable Media
- Low Power Wireless
- Low Power DSP Core Supply
- Digital Cameras

## 3 Description

The TPS6223x device family is a high-frequency, synchronous, step-down DC – DC converter optimized for battery powered portable applications. It supports up to 500-mA output current and allows the use of tiny and low-cost chip inductors and capacitors.

With a wide input voltage range of 2.05 V to 6 V, the device supports applications powered by Li-Ion batteries with extended voltage range. The minimum input voltage of 2.05 V allows as well the operation from Li-primary or two alkaline batteries. Different fixed output voltage versions are available from 1.0 V to 3.3 V.

The TPS6223x series features switch frequency up to 3.8 MHz. At medium to heavy loads, the converter operates in pulse width modulation (PWM) mode and automatically enters power-save mode operation at light load currents to maintain high efficiency over the entire load current range.

Because of its excellent power supply rejection ratio (PSRR) and AC load regulation performance, the device is also suitable to replace linear regulators to obtain better power conversion efficiency.

The power-save mode in TPS6223x reduces the quiescent current consumption down to 22  $\mu\text{A}$  during light load operation. It is optimized to achieve very low output voltage ripple even with small external component and features excellent AC load regulation.


For very noise-sensitive applications, the device can be forced to PWM mode operation over the entire load range by pulling the MODE pin high. In the shutdown mode, the current consumption is reduced to less than 1  $\mu\text{A}$ . The TPS6223x operates over a junction temperature range of  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . It is available in a 1 mm  $\times$  1.5 mm  $\times$  0.6 mm 6-pin SON package.

### Device Information<sup>(1)</sup>

| PART NUMBER | PACKAGE  | BODY SIZE (NOM)   |
|-------------|----------|-------------------|
| TPS6223xx   | USON (6) | 1.45 mm x 1.00 mm |


(1) For all available packages, see the orderable addendum at the end of the data sheet.

### Typical Application Schematic

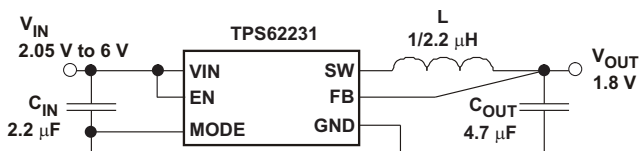

Copyright © 2016, Texas Instruments Incorporated

### Small PCB Layout Size

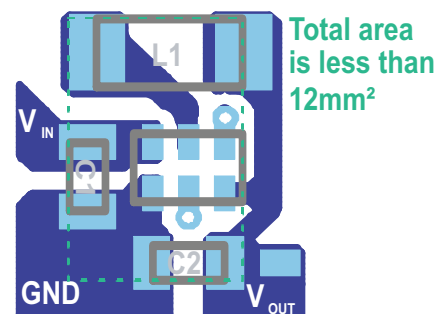

## Table of Contents

|                                                |          |                                                                  |           |
|------------------------------------------------|----------|------------------------------------------------------------------|-----------|
| <b>1 Features</b> .....                        | <b>1</b> | <b>9 Application and Implementation</b> .....                    | <b>13</b> |
| <b>2 Applications</b> .....                    | <b>1</b> | 9.1 Application Information.....                                 | 13        |
| <b>3 Description</b> .....                     | <b>1</b> | 9.2 Typical Application .....                                    | 13        |
| <b>4 Revision History</b> .....                | <b>2</b> | 9.3 System Examples .....                                        | 26        |
| <b>5 Device Comparison Table</b> .....         | <b>4</b> | <b>10 Power Supply Recommendations</b> .....                     | <b>27</b> |
| <b>6 Pin Configuration and Functions</b> ..... | <b>5</b> | <b>11 Layout</b> .....                                           | <b>27</b> |
| <b>7 Specifications</b> .....                  | <b>5</b> | 11.1 Layout Guidelines .....                                     | 27        |
| 7.1 Absolute Maximum Ratings .....             | 5        | 11.2 Layout Example .....                                        | 27        |
| 7.2 ESD Ratings.....                           | 5        | <b>12 Device and Documentation Support</b> .....                 | <b>28</b> |
| 7.3 Recommended Operating Conditions.....      | 6        | 12.1 Device Support.....                                         | 28        |
| 7.4 Thermal Information .....                  | 6        | 12.2 Related Links .....                                         | 28        |
| 7.5 Electrical Characteristics.....            | 7        | 12.3 Receiving Notification of Documentation Updates .....       | 28        |
| 7.6 Typical Characteristics .....              | 8        | 12.4 Community Resources.....                                    | 29        |
| <b>8 Detailed Description</b> .....            | <b>9</b> | 12.5 Trademarks .....                                            | 29        |
| 8.1 Overview .....                             | 9        | 12.6 Electrostatic Discharge Caution.....                        | 29        |
| 8.2 Functional Block Diagram .....             | 10       | 12.7 Glossary .....                                              | 29        |
| 8.3 Feature Description.....                   | 10       | <b>13 Mechanical, Packaging, and Orderable Information</b> ..... | <b>29</b> |
| 8.4 Device Functional Modes.....               | 11       |                                                                  |           |

## 4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| <b>Changes from Revision F (July 2015) to Revision G</b>                                     | <b>Page</b> |
|----------------------------------------------------------------------------------------------|-------------|
| • Added device TPS622319 .....                                                               | 4           |
| • Deleted Package information from <i>Device Comparison Table</i> , and added footnote ..... | 4           |
| • Added <i>Receiving Notification of Documentation Updates</i> section .....                 | 28          |

| <b>Changes from Revision E (December 2010) to Revision F</b>                                                                                                                                                                                                                                                                                                                                         | <b>Page</b> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| • Added <i>Pin Configuration and Functions</i> section, <i>ESD Ratings</i> table, <i>Feature Description</i> section, <i>Device Functional Modes</i> , <i>Application and Implementation</i> section, <i>Power Supply Recommendations</i> section, <i>Layout</i> section, <i>Device and Documentation Support</i> section, and <i>Mechanical, Packaging, and Orderable Information</i> section ..... | 1           |

| <b>Changes from Revision D (August 2010) to Revision E</b> | <b>Page</b> |
|------------------------------------------------------------|-------------|
| • Added device number TPS622318.....                       | 1           |

| <b>Changes from Revision C (April 2010) to Revision D</b>                 | <b>Page</b> |
|---------------------------------------------------------------------------|-------------|
| • Added device numbers TPS622315, TPS622316, and TPS622317.....           | 1           |
| • Changed data sheet status from "Product Mix" to "Production Data" ..... | 1           |
| • Deleted table footnote regarding "other voltage options" .....          | 4           |

| <b>Changes from Revision B (December 2009) to Revision C</b>    | <b>Page</b> |
|-----------------------------------------------------------------|-------------|
| • Added device numbers TPS622312, TPS622313, and TPS622314..... | 1           |

**Changes from Revision A (August 2009) to Revision B**
**Page**

|                                                                                                                                                                  |                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| • Added device numbers TPS62235, TPS62236, TPS62237, TPS622311.....                                                                                              | <a href="#">1</a>  |
| • Changed the Title From: 3 MHz Ultra Small Step Down Converter in 1x1.5 SON Package To: 2 MHz / 3 MHz Ultra Small Step Down Converter in 1x1.5 SON Package..... | <a href="#">1</a>  |
| • Changed Feature: From: 3 MHz switch frequency To: 2 MHz / 3 MHz switch frequency .....                                                                         | <a href="#">1</a>  |
| • Added <a href="#">Figure 6</a> , <a href="#">Figure 7</a> , and <a href="#">Figure 10</a> .....                                                                | <a href="#">16</a> |
| • Added <a href="#">Figure 15</a> .....                                                                                                                          | <a href="#">17</a> |
| • Added <a href="#">Figure 24</a> , and <a href="#">Figure 25</a> .....                                                                                          | <a href="#">19</a> |
| • Added <a href="#">Figure 32</a> .....                                                                                                                          | <a href="#">21</a> |
| • Added <a href="#">Figure 41</a> , and <a href="#">Figure 42</a> .....                                                                                          | <a href="#">23</a> |

**Changes from Original (April 2009) to Revision A**
**Page**


|                                                                                                      |                   |
|------------------------------------------------------------------------------------------------------|-------------------|
| • Added device numbers TPS62233, TPS62234, TPS62238, TPS62239, and TPS622310 to the data sheet ..... | <a href="#">1</a> |
|------------------------------------------------------------------------------------------------------|-------------------|

## 5 Device Comparison Table

| PART NUMBER <sup>(1)</sup> | OUTPUT VOLTAGE | FREQUENCY<br>[MHz] | Pulldown<br>EN, MODE | PACKAGE<br>MARKING |
|----------------------------|----------------|--------------------|----------------------|--------------------|
| TPS62230                   | 2.5 V          | 3                  | no                   | GV                 |
| TPS62231                   | 1.8 V          | 3                  | no                   | GW                 |
| TPS62232                   | 1.2 V          | 3                  | no                   | GX                 |
| TPS62239                   | 1.0 V          | 3                  | no                   | OP                 |
| TPS622311                  | 1.1V           | 2                  | no                   | PA                 |
| TPS622315                  | 1.15V          | 2                  | no                   | RI                 |
| TPS62235                   | 1.2V           | 2                  | no                   | OQ                 |
| TPS622318                  | 1.25V          | 3                  | no                   | ST                 |
| TPS622319                  | 1.2V           | 2                  | yes                  | 3O                 |
| TPS622313                  | 1.3 V          | 3                  | no                   | QF                 |
| TPS622314                  | 1.5 V          | 3                  | no                   | QG                 |
| TPS62236                   | 1.85V          | 2                  | no                   | OR                 |
| TPS622312                  | 2.0 V          | 3                  | no                   | QE                 |
| TPS62234                   | 2.1 V          | 3                  | no                   | OH                 |
| TPS62238                   | 2.25 V         | 3                  | no                   | ON                 |
| TPS622310                  | 2.3 V          | 3                  | no                   | OT                 |
| TPS622316                  | 2.7 V          | 3                  | no                   | RJ                 |
| TPS622317                  | 2.9 V          | 3                  | no                   | RK                 |
| TPS62233                   | 3.0 V          | 3                  | no                   | OG                 |
| TPS62237                   | 3.3 V          | 2                  | no                   | OS                 |

(1) For detailed ordering information see the PACKAGE OPTION ADDENDUM at the end of this data sheet.

## 6 Pin Configuration and Functions



### Pin Functions

| PIN  |    | TYPE   | DESCRIPTION                                                                                                                                                                                                                                                                                                                        |
|------|----|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME | NO |        |                                                                                                                                                                                                                                                                                                                                    |
| VIN  | 3  | Power  | V <sub>IN</sub> power supply pin                                                                                                                                                                                                                                                                                                   |
| GND  | 4  | Power  | GND supply pin                                                                                                                                                                                                                                                                                                                     |
| EN   | 5  | Input  | This is the enable pin of the device. Pulling this pin to low forces the device into shutdown mode. Pulling this pin to high enables the device. This pin must be terminated except for the TPS622319, which has an integrated 1M $\Omega$ always active pull-down resistor.                                                       |
| SW   | 2  | Output | This is the switch pin and is connected to the internal MOSFET switches. Connect the inductor to this terminal                                                                                                                                                                                                                     |
| FB   | 6  | Input  | Feedback pin for the internal regulation loop. Connect this pin directly to the output capacitor.                                                                                                                                                                                                                                  |
| MODE | 1  | Input  | MODE pin = High forces the device to operate in PWM mode. Mode = Low enables the power save mode with automatic transition from pulse frequency modulation (PFM) to pulse width modulation (PWM) mode. This pin must be terminated except for the TPS622319, which has an integrated 1M $\Omega$ always active pull-down resistor. |

## 7 Specifications

### 7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                     |                                          | MIN                | MAX                             | UNIT |
|---------------------|------------------------------------------|--------------------|---------------------------------|------|
| V <sub>IN</sub>     | Voltage at VIN and SW pin <sup>(2)</sup> | –0.3               | 7                               | V    |
|                     | Voltage at EN, MODE pin <sup>(2)</sup>   | –0.3               | V <sub>IN</sub> + 0.3, $\leq 7$ | V    |
|                     | Voltage at FB pin <sup>(2)</sup>         | –0.3               | 3.6                             | V    |
| Peak output current |                                          | Internally limited |                                 | A    |
| Power dissipation   |                                          | Internally limited |                                 |      |
| T <sub>J</sub>      | Operating junction Temperature Range     | –40                | 150                             | °C   |
| T <sub>stg</sub>    | Storage Temperature Range                | –65                | 150                             | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under [Recommended Operating Conditions](#) is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to network ground terminal.

### 7.2 ESD Ratings

|                    |                         | VALUE                                                                                    | UNIT |
|--------------------|-------------------------|------------------------------------------------------------------------------------------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>              | V    |
|                    |                         | Charge- device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(2)</sup> |      |
|                    |                         | ±2000                                                                                    |      |
|                    |                         | ±1000                                                                                    |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

## 7.3 Recommended Operating Conditions

over operating junction temperature range (unless otherwise noted)<sup>(1)</sup>

|                                        |                                                    |                                             | MIN  | NOM | MAX  | UNIT |
|----------------------------------------|----------------------------------------------------|---------------------------------------------|------|-----|------|------|
| Supply voltage $V_{IN}$ <sup>(2)</sup> |                                                    |                                             | 2.05 |     | 6    | V    |
| Effective inductance                   |                                                    |                                             |      | 2.2 |      | μH   |
| Effective capacitance                  |                                                    |                                             | 2    | 4.7 |      | μF   |
| Recommended minimum supply voltage     | $V_{OUT} \leq V_{IN} - 1 \text{ V}$ <sup>(3)</sup> | 500 mA maximum $I_{OUT}$ <sup>(4)</sup>     |      | 3   | 3.6  | V    |
|                                        |                                                    | 350 mA maximum $I_{OUT}$ <sup>(4)</sup>     |      | 2.5 | 2.7  |      |
|                                        | $V_{OUT} \leq 1.8 \text{ V}$                       | 60 mA maximum output current <sup>(4)</sup> |      |     | 2.05 |      |
| Operating junction temperature, $T_J$  |                                                    |                                             | –40  |     | 125  | °C   |

- (1) In applications where high power dissipation and/or poor package thermal resistance is present, the maximum ambient temperature may have to be derated. Maximum ambient temperature ( $T_{A(max)}$ ) is dependent on the maximum operating junction temperature ( $T_{J(max)}$ ), the maximum power dissipation of the device in the application ( $P_{D(max)}$ ), and the junction-to-ambient thermal resistance of the part/package in the application ( $R_{\theta JA}$ ), as given by the following equation:  $T_{A(max)} = T_{J(max)} - (R_{\theta JA} \times P_{D(max)})$ .
- (2) The minimum required supply voltage for startup is 2.05 V. The part is functional down to the falling undervoltage lockout (UVL) threshold.
- (3) For a voltage difference between minimum  $V_{IN}$  and  $V_{OUT}$  of  $\geq 1 \text{ V}$
- (4) Typical value applies for  $T_A = 25^\circ\text{C}$ , maximum value applies for  $T_J \leq 125^\circ\text{C}$ , PCB layout must support proper thermal performance.

## 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TPS6223x   | UNIT |
|-------------------------------|----------------------------------------------|------------|------|
|                               |                                              | DRY (USON) |      |
|                               |                                              | 6 PINS     |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | 294.5      | °C/W |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    | 166.5      | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 166.1      | °C/W |
| $\psi_{JT}$                   | Junction-to-top characterization parameter   | 27.3       | °C/W |
| $\psi_{JB}$                   | Junction-to-board characterization parameter | 159.9      | °C/W |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance | —          | °C/W |

- (1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).

## 7.5 Electrical Characteristics

$V_{IN} = 3.6\text{ V}$ ,  $V_{OUT} = 1.8\text{ V}$ ,  $EN = V_{IN}$ ,  $MODE = GND$ ,  $T_J = -40^\circ\text{C}$  to  $125^\circ\text{C}$  typical values are at  $T_J = 25^\circ\text{C}$  (unless otherwise noted),  $C_{IN} = 2.2\text{ }\mu\text{F}$ ,  $L = 2.2\text{ }\mu\text{H}$ ,  $C_{OUT} = 4.7\text{ }\mu\text{F}$ .<sup>(1)</sup>

| PARAMETER              |                                        | TEST CONDITIONS                                                                                                        |                                 | MIN   | TYP  | MAX  | UNIT |
|------------------------|----------------------------------------|------------------------------------------------------------------------------------------------------------------------|---------------------------------|-------|------|------|------|
| SUPPLY                 |                                        |                                                                                                                        |                                 |       |      |      |      |
| V <sub>IN</sub>        | Input voltage <sup>(2)</sup>           |                                                                                                                        |                                 | 2.05  | 6    |      | V    |
| I <sub>Q</sub>         | Operating quiescent current            | PFM operation (MODE = GND), I <sub>OUT</sub> = 0 mA, device not switching, T <sub>J</sub> = −40°C to 85°C              |                                 | 22    | 40   |      | μA   |
|                        |                                        | PFM operation (MODE = GND), I <sub>OUT</sub> = 0 mA, device switching, V <sub>OUT</sub> = 1.2 V                        |                                 | 25    |      |      | μA   |
|                        |                                        | PWM operation (MODE = V <sub>IN</sub> ), I <sub>OUT</sub> = 0 mA, device switching                                     |                                 | 3     |      |      | mA   |
| I <sub>SD</sub>        | Shutdown current                       | EN = GND, T <sub>J</sub> = −40°C to 85°C                                                                               |                                 | 0.1   | 1    |      | μA   |
| V <sub>UVLO</sub>      | Undervoltage lockout threshold         | Falling                                                                                                                |                                 | 1.8   | 1.9  |      | V    |
|                        |                                        | Rising                                                                                                                 |                                 | 1.9   | 2.05 |      | V    |
| ENABLE, MODE THRESHOLD |                                        |                                                                                                                        |                                 |       |      |      |      |
| V <sub>IH TH</sub>     | Threshold for detecting high EN, MODE  | 2.05 V ≤ V <sub>IN</sub> ≤ 6 V , rising edge                                                                           |                                 | 0.8   | 1    |      | V    |
| V <sub>IL TH HYS</sub> | Threshold for detecting low EN, MODE   | 2.05 V ≤ V <sub>IN</sub> ≤ 6 V , falling edge, T <sub>J</sub> = −40°C to 85°C                                          |                                 | 0.4   | 0.6  |      | V    |
| R <sub>pd</sub>        | Pull-down resistor EN, MODE            | TPS622319                                                                                                              |                                 | 1     |      |      | MΩ   |
| I <sub>IN</sub>        | Input bias current, EN, MODE           | EN, MODE = GND or V <sub>IN</sub> , T <sub>J</sub> = −40°C to 85°C, except TPS622319                                   |                                 | 0.01  | 0.5  |      | μA   |
| POWER SWITCH           |                                        |                                                                                                                        |                                 |       |      |      |      |
| R <sub>DS(ON)</sub>    | High side MOSFET ON-resistance         | V <sub>IN</sub> = 3.6 V, T <sub>J</sub> = −40°C to 85°C                                                                |                                 | 600   | 850  |      | mΩ   |
|                        | Low Side MOSFET ON-resistance          |                                                                                                                        |                                 | 350   | 480  |      |      |
| I <sub>LIMF</sub>      | Forward current limit MOSFET high-side | V <sub>IN</sub> = 3.6 V, open-loop                                                                                     |                                 | 690   | 850  | 1050 | mA   |
|                        | Forward current limit MOSFET low-side  |                                                                                                                        |                                 | 550   | 840  | 1220 | mA   |
| T <sub>JSD</sub>       | Thermal shutdown                       | Increasing junction temperature                                                                                        |                                 | 150   |      |      | °C   |
|                        | Thermal shutdown hysteresis            | Decreasing junction temperature                                                                                        |                                 | 20    |      |      | °C   |
| CONTROLLER             |                                        |                                                                                                                        |                                 |       |      |      |      |
| t <sub>ONmin</sub>     | Minimum ON-time                        | MODE = V <sub>IN</sub> , I <sub>OUT</sub> = 0 mA                                                                       |                                 | 135   |      |      | ns   |
| t <sub>OFFmin</sub>    | Minimum OFF-time                       |                                                                                                                        |                                 | 40    |      |      | ns   |
| OUTPUT                 |                                        |                                                                                                                        |                                 |       |      |      |      |
| V <sub>REF</sub>       | Internal reference voltage             |                                                                                                                        |                                 | 0.7   |      |      | V    |
| V <sub>OUT</sub>       | Output voltage accuracy <sup>(3)</sup> | MODE = GND, I <sub>OUT</sub> = 0 mA                                                                                    |                                 | 0%    |      |      |      |
|                        |                                        | MODE = V <sub>IN</sub> , I <sub>OUT</sub> = 0 mA                                                                       | T <sub>J</sub> = 25°C           | −2%   | 2%   |      |      |
|                        |                                        |                                                                                                                        | T <sub>J</sub> = −40°C to 125°C | −2.5% | 2.5% |      |      |
|                        | DC output voltage load regulation      | MODE = V <sub>IN</sub>                                                                                                 |                                 | 0.001 |      |      | %/mA |
|                        | DC output voltage line regulation      | MODE = V <sub>IN</sub> , I <sub>OUT</sub> = 0 mA, 2.05 V ≤ V <sub>IN</sub> ≤ 6 V                                       |                                 | 0     |      |      | %/V  |
| t <sub>Start</sub>     | Start-up time                          | Time from active EN to V <sub>OUT</sub> = 1.8 V, 10-Ω load                                                             |                                 | 100   |      |      | μs   |
| I <sub>LK_SW</sub>     | Leakage current into SW pin            | V <sub>IN</sub> = V <sub>OUT</sub> = V <sub>SW</sub> = 3.6 V, EN = GND <sup>(4)</sup> , T <sub>J</sub> = −40°C to 85°C |                                 | 0.1   | 0.5  |      | μA   |

- (1) In applications where high power dissipation and/or poor package thermal resistance is present, the maximum ambient temperature may have to be derated. Maximum ambient temperature ( $T_{A(max)}$ ) is dependent on the maximum operating junction temperature ( $T_{J(max)}$ ), the maximum power dissipation of the device in the application ( $P_{D(max)}$ ), and the junction-to-ambient thermal resistance of the part/package in the application ( $R_{\theta JA}$ ), as given by the following equation:  $T_{A(max)} = T_{J(max)} - (R_{\theta JA} \times P_{D(max)})$ .
- (2) The minimum required supply voltage for startup is 2.05 V. The part is functional down to the falling under voltage lockout (UVL) threshold.
- (3)  $V_{IN} = V_O + 1.0\text{ V}$
- (4) The internal resistor divider network is disconnected from FB pin.

## 7.6 Typical Characteristics

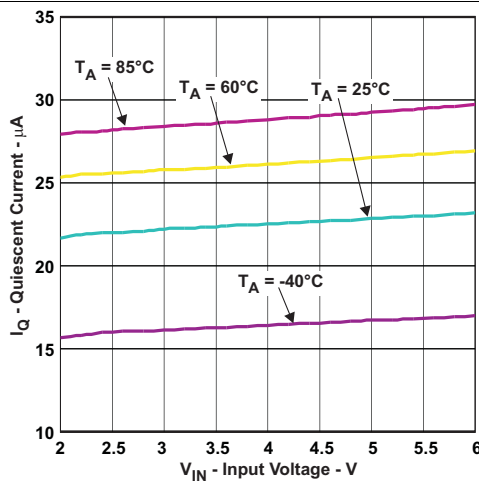


Figure 1. Quiescent Current  $I_Q$  vs Ambient Temperature  $T_A$

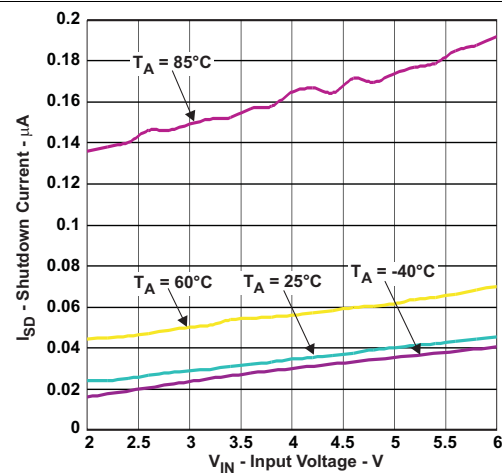


Figure 2. Shutdown Current  $I_{SD}$  vs Ambient Temperature  $T_A$

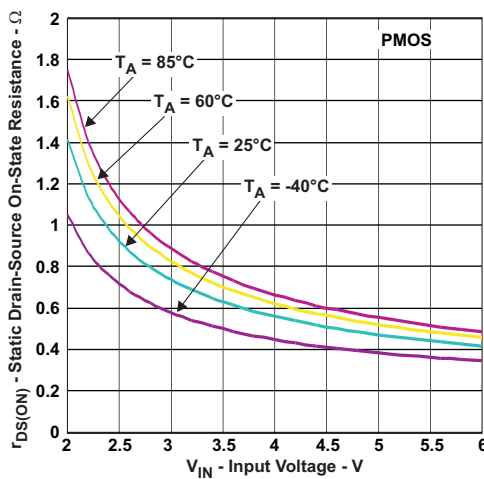


Figure 3. PMOS  $R_{DS(on)}$  vs Supply Voltage  $V_{IN}$  and Ambient Temperature  $T_A$

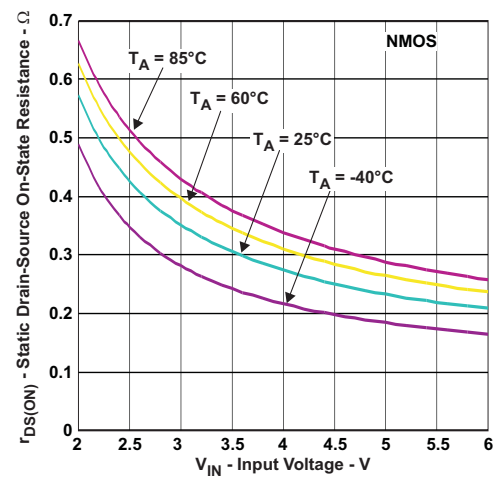


Figure 4. NMOS  $R_{DS(on)}$  vs Supply Voltage  $V_{IN}$  and Ambient Temperature  $T_A$



## 8 Detailed Description

### 8.1 Overview

The TPS6223x synchronous step-down DC – DC converter family includes a unique hysteretic PWM controller scheme which enables switch frequencies over 3 MHz, excellent transient and AC load regulation as well as operation with cost-competitive external components.

The controller topology supports forced PWM mode as well as power-save mode operation. Power-save mode operation reduces the quiescent current consumption down to 22  $\mu$ A and ensures high conversion efficiency at light loads by skipping switch pulses. In forced PWM mode, the device operates on a quasi-fixed frequency, avoids pulse skipping, and allows filtering of the switch noise by external filter components.

The TPS6223x devices offer fixed output voltage options featuring smallest solution size by using only three external components.


The internal switch current limit of typical 850 mA supports output currents of up to 500 mA, depending on the operating condition.

A significant advantage of TPS6223x compared to other hysteretic PWM controller topologies is its excellent DC and AC load regulation capability in combination with low-output voltage ripple over the entire load range which makes this part well suited for audio and RF applications.

Once the output voltage falls below the threshold of the error comparator, a switch pulse is initiated, and the high-side switch is turned on. It remains turned on until a minimum ON-time of  $t_{ONmin}$  expires and the output voltage trips the threshold of the error comparator or the inductor current reaches the high-side switch current limit. Once the high-side switch turns off, the low-side switch rectifier is turned on and the inductor current ramps down until the high-side switch turns on again or the inductor current reaches zero.

In forced PWM mode operation, negative inductor current is allowed to enable continuous conduction mode even at no load condition.

## 8.2 Functional Block Diagram

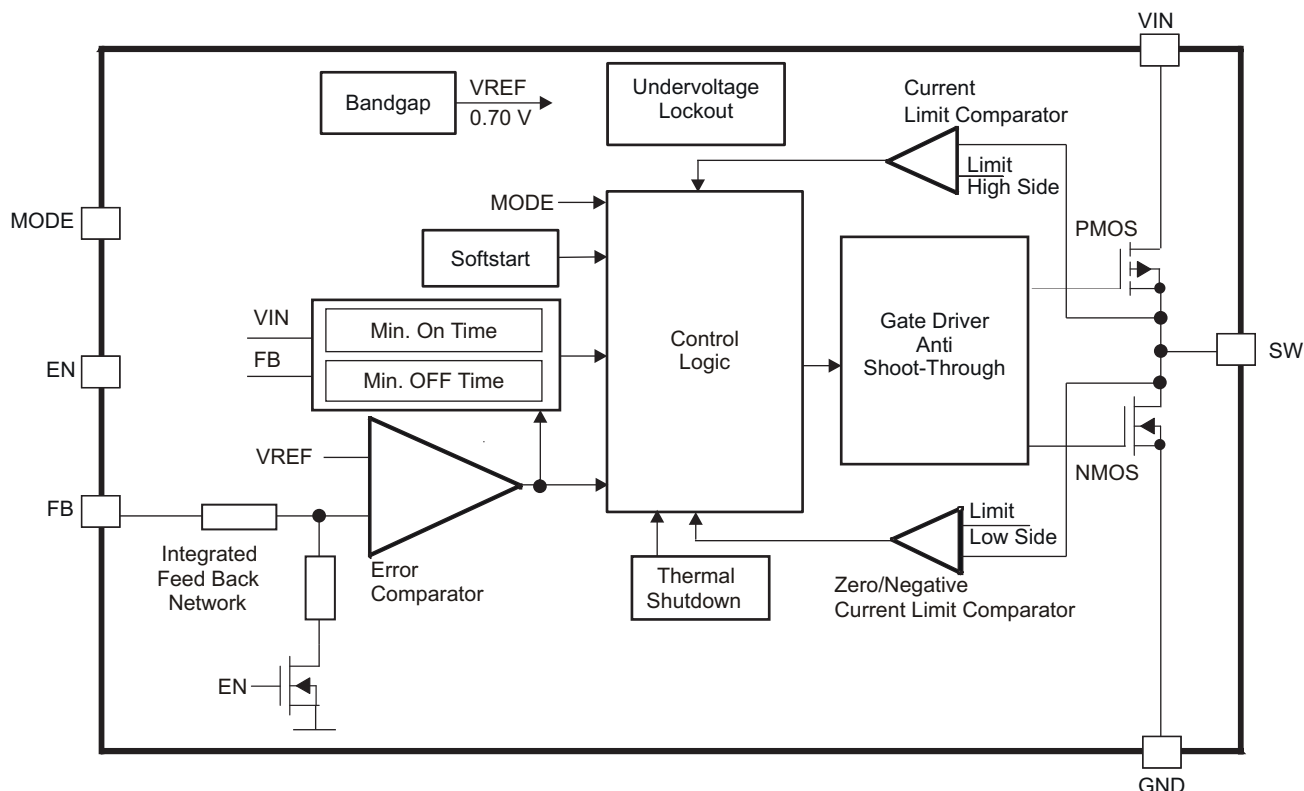

Copyright © 2016, Texas Instruments Incorporated

## 8.3 Feature Description

### 8.3.1 Undervoltage Lockout

The undervoltage lockout circuit prevents the device from misoperation at low input voltages. It prevents the converter from turning on the switch or rectifier MOSFET under undefined conditions. The TPS6223x devices have a UVLO threshold set to 1.8 V (typical). Fully functional operation is permitted for input voltage down to the falling UVLO threshold level. The converter starts operation again once the input voltage trips the rising UVLO threshold level.

### 8.3.2 Enable and Shutdown

The device starts operation when EN is set high and starts up with the soft-start as previously described. For proper operation, the EN pin must be terminated and must not be left floating, except for the TPS622319, which has an integrated 1M $\Omega$  always active pull-down resistor.

Pulling the EN pin low forces the device into shutdown, with a shutdown quiescent current of typically 0.1  $\mu$ A. In this mode, the P- and N-channel MOSFETs are turned off, the internal resistor feedback divider is disconnected, and the entire internal-control circuitry is switched off.

The EN input can be used to control power sequencing in a system with various DC – DC converters. The EN pin can be connected to the output of another converter, to drive the EN pin high and getting a sequencing of supply rails.

### 8.3.3 Thermal Shutdown

As soon as the junction temperature,  $T_J$ , exceeds 150°C (typical) the device goes into thermal shutdown. In this mode, the high-side and low-side MOSFETs are turned off. The device continues its operation when the junction temperature falls below the thermal shutdown hysteresis.

## 8.4 Device Functional Modes

### 8.4.1 Soft-Start

The TPS6223x has an internal soft start circuit that controls the ramp up of the output voltage and limits the inrush current during start-up. This limits input voltage drops when a battery or a high-impedance power source is connected to the input of the converter.

The soft-start system generates a monotonic ramp up of the output voltage and reaches the nominal output voltage typically 100 µs after EN pin was pulled high.

If the output voltage does not reached its target value by this time, such as in the case of heavy load, the converter then operates in a current limit mode set by its switch current limits.

TPS6223x is able to start into a prebiased output capacitor. The converter starts with the applied bias voltage and ramps the output voltage to its nominal value.

### 8.4.2 Power-Save Mode

Connecting the MODE pin to GND enables the automatic PWM and power-save mode operation. The converter operates in quasi-fixed frequency PWM mode at moderate to heavy loads and in the pulse frequency modulation (PFM) mode during light loads, which maintains high efficiency over a wide load current range. In PFM mode, the device starts to skip switch pulses and generates only single pulses with an ON-time of  $t_{ONmin}$ . The PFM mode frequency depends on the load current and the external inductor and output capacitor values. The PFM mode of TPS6223x is optimized for low-output voltage ripple if small external components are used. Even at low output currents, the PFM frequency is above the audible noise spectrum and makes this operation mode suitable for audio applications.

The ON-time  $t_{ONmin}$  can be estimated to:

$$t_{ONmin} = \frac{V_{OUT}}{V_{IN}} \times 260 \text{ ns} \quad (1)$$

Therefore, the peak inductor current in PFM mode is approximately:

$$I_{LPMpeak} = \frac{(V_{IN} - V_{OUT})}{L} \times t_{ONmin} \quad (2)$$

The transition from PFM into PWM mode and vice versa can be estimated to:

$$I_{OUT\_PFM/PWM} = 0.5 \times I_{LPMpeak}$$

where

- $t_{ON}$ : High-side switch ON-time [ns]
- $V_{IN}$ : Input voltage [V]
- $V_{OUT}$ : Output voltage [V]
- $L$ : Inductance [µH]
- $I_{LPMpeak}$ : PFM inductor peak current [mA]
- $I_{OUT\_PFM/PWM}$ : Output current for PFM to PWM mode transition and vice versa [mA]

### 8.4.3 Forced PWM Mode

Pulling the MODE pin high forces the converter to operate in a continuous conduction PWM mode even at light load currents. The advantage is that the converter operates with a quasi-fixed frequency that allows simple filtering of the switching frequency for noise-sensitive applications. In this mode, the efficiency is lower compared to the power save mode during light loads. This pin must be terminated except for the TPS622319, which has an integrated 1MΩ always active pull-down resistor.

For additional flexibility, it is possible to switch from power-save mode to forced PWM mode during operation. This allows efficient power management by adjusting the operation of the converter to the specific system requirements.

## Device Functional Modes (continued)

### 8.4.4 100% Duty Cycle Low Dropout Operation

The device starts to enter 100% duty cycle mode once the input voltage comes close to the nominal output voltage. To maintain the output voltage, the high side switch is turned on 100% for one or more cycles.

With further decreasing  $V_{IN}$  the high-side MOSFET switch is turned on completely. In this case the converter offers a low input-to-output voltage difference. This is particularly useful in battery-powered applications to achieve longest operation time by taking full advantage of the whole battery voltage range.

The minimum input voltage to maintain regulation depends on the load current and output voltage, and can be calculated as:

$$V_{INmin} = V_{OUTmax} + I_{OUTmax} \times (R_{DS(on)max} + R_L)$$

where

- $I_{OUTmax}$ : maximum output current plus inductor ripple current
- $R_{DS(on)max}$ : maximum P-channel switch  $R_{DS(on)}$
- $R_L$ : DC resistance of the inductor
- $V_{OUTmax}$ : nominal output voltage plus maximum output voltage tolerance (4)

### 8.4.5 Short Circuit Protection

The TPS6223x integrates a high-side and low-side MOSFET current limit to protect the device against heavy load or short circuit. The current in the switches is monitored by current limit comparators. When the current in the P-channel MOSFET reaches its current limit, the P-channel MOSFET is turned off and the N-channel MOSFET is turned on to ramp down the current in the inductor. The high-side MOSFET switch can only turn on again, once the current in the low side MOSFET switch has decreased below the threshold of its current limit comparator.

## 9 Application and Implementation


### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

The TPS6223x device family are high-frequency, synchronous, step-down DC-DC converters providing switch frequencies up to 3.8 MHz. Different fixed output voltage versions are available from 1.0 V to 3.3 V.

### 9.2 Typical Application

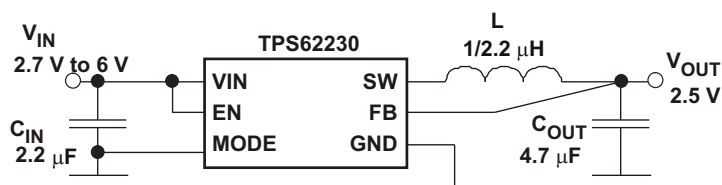

Copyright © 2016, Texas Instruments Incorporated

**Figure 5. TPS62230 2.5-V Output**

#### 9.2.1 Design Requirements

The device operates over an input voltage range from 2.05 V to 6 V. The device family offers a broad range of internally fixed output voltage options from 1 V to 3.3 V. The TPS6223x is easy to use and needs just three external components; however, the selection of external components and PCB layout must comply with the design guidelines to achieve specified performance.

#### 9.2.2 Detailed Design Procedure

##### 9.2.2.1 Output Filter Design (Inductor and Output Capacitor)

The TPS6223x is optimized to operate with effective inductance values in the range of 0.7  $\mu$ H to 4.3  $\mu$ H and with effective output capacitance in the range of 2.0  $\mu$ F to 15  $\mu$ F. The internal compensation is optimized to operate with an output filter of  $L = 1.0 \mu\text{H}/2.2 \mu\text{H}$  and  $C_{\text{OUT}} = 4.7 \mu\text{F}$ . Larger or smaller inductor/capacitor values can be used to optimize the performance of the device for specific operation conditions. For more details, see the [Checking Loop Stability](#) section.

## Typical Application (continued)

### 9.2.2.2 Inductor Selection

The inductor value affects its peak-to-peak ripple current, the PWM-to-PFM transition point, the output voltage ripple and the efficiency. The selected inductor has to be rated for its DC resistance and saturation current. The inductor ripple current ( $\Delta I_L$ ) decreases with higher inductance and increases with higher  $V_{IN}$  or  $V_{OUT}$ . Equation 5 calculates the maximum inductor current under static load conditions. The saturation current of the inductor must be rated higher than the maximum inductor current as calculated with Equation 6. This is recommended because during heavy load transient the inductor current will rise above the calculated value.

$$\Delta I_L = V_{out} \times \frac{1 - \frac{V_{out}}{V_{in}}}{L \times f} \quad (5)$$

$$I_{Lmax} = I_{outmax} + \frac{\Delta I_L}{2}$$

where

- $f$  = Switching frequency
  - $L$  = Inductor value
  - $\Delta I_L$  = Peak-to-peak inductor ripple current
  - $I_{Lmax}$  = Maximum inductor current
- (6)

In high-frequency converter applications, the efficiency is essentially affected by the inductor AC resistance (that is, quality factor) and to a smaller extent by the inductor DCR value. To achieve high-efficiency operation, take care in selecting inductors featuring a quality factor above 25 at the switching frequency. Increasing the inductor value produces lower RMS currents, but degrades transient response. For a given physical inductor size, increased inductance usually results in an inductor with lower saturation current.

The total losses of the coil consist of both the losses in the DC resistance,  $R_{(DC)}$ , and the following frequency-dependent components:

- The losses in the core material (magnetic hysteresis loss, especially at high switching frequencies)
- Additional losses in the conductor from the skin effect (current displacement at high frequencies)
- Magnetic field losses of the neighboring windings (proximity effect)
- Radiation losses

The following inductor series from different suppliers have been used with the TPS6223x converters.

**Table 1. List of Inductors**

| INDUCTANCE<br>( $\mu$ H) | DIMENSIONS<br>(mm <sup>3</sup> ) | INDUCTOR TYPE   | SUPPLIER <sup>(1)</sup> |
|--------------------------|----------------------------------|-----------------|-------------------------|
| 1.0 / 2.2                | 2.5 × 2.0 × 1.2                  | LQM2HPN1R0MJ0   | Murata                  |
| 2.2                      | 2.0 × 1.2 × 0.55                 | LQM21PN2R2      | Murata                  |
| 1.0 / 2.2                | 2.0 × 1.2 × 1.0                  | MIPSZ2012       | FDK                     |
| 1.0 / 2.2                | 2.0 × 2.5 × 1.2                  | MIPSA2520       | FDK                     |
| 1.0 / 2.2                | 2.0 × 1.2 × 1.0                  | KSLI2012 series | Hitachi Metal           |

(1) See [Third-Party Products Disclaimer](#)

### 9.2.2.3 Output Capacitor Selection

The unique hysteretic PWM control scheme of the TPS62230 allows the use of tiny ceramic capacitors. Ceramic capacitors with low ESR values have the lowest output voltage ripple and are recommended. The output capacitor requires either an X7R or X5R dielectric. Y5V and Z5U dielectric capacitors, aside from their wide variation in capacitance over temperature, become resistive at high frequencies.

At light load currents, the converter operate in power save mode and the output voltage ripple is dependent on the output capacitor value and the PFM peak inductor current. Higher output capacitor values minimize the voltage ripple in PFM mode and tighten DC output accuracy in PFM mode.

### 9.2.2.4 Input Capacitor Selection

Because of the nature of the buck converter having a pulsating input current, a low-ESR input capacitor is required for best input voltage filtering and minimizing the interference with other circuits caused by high input voltage spikes. For most applications a 2.2- $\mu$ F to 4.7- $\mu$ F ceramic capacitor is recommended. The input capacitor can be increased without any limit for better input voltage filtering. Because ceramic capacitor loses up to 80% of its initial capacitance at 5 V, TI recommends using 4.7  $\mu$ F input capacitors for input voltages > 4.5 V.

Take care when using only small ceramic input capacitors. When a ceramic capacitor is used at the input and the power is being supplied through long wires, such as from a wall adapter, a load step at the output or  $V_{IN}$  step on the input can induce ringing at the VIN pin. This ringing can couple to the output and be mistaken as loop instability or could even damage the part by exceeding the maximum ratings.

Table 2 shows a list of tested input and output capacitors.

**Table 2. List of Capacitors**

| CAPACITANCE [ $\mu$ F] | SIZE | CAPACITOR TYPE  | SUPPLIER <sup>(1)</sup> |
|------------------------|------|-----------------|-------------------------|
| 2.2                    | 0402 | GRM155R60J225   | Murata                  |
| 4.7                    | 0402 | AMK105BJ475MV   | Taiyo Yuden             |
| 4.7                    | 0402 | GRM155R60J475   | Murata                  |
| 4.7                    | 0402 | CL05A475MQ5NRNC | Samsung                 |
| 4.7                    | 0603 | GRM188R60J475   | Murata                  |

(1) See [Third-Party Products Disclaimer](#)

### 9.2.2.5 Checking Loop Stability

The first step of circuit and stability evaluation is to look from a steady-state perspective at the following signals:

- Switching node, SW
- Inductor current,  $I_L$
- Output ripple voltage,  $V_{OUT(AC)}$

These are the basic signals that need to be measured when evaluating a switching converter. When the switching waveform shows large duty cycle jitter or the output voltage or inductor current shows oscillations, the regulation loop may be unstable. This is often a result of board layout and/or L-C combination.

As a next step in the evaluation of the regulation loop, the load transient response is tested. The time between the application of the load transient and the turn on of the P-channel MOSFET, the output capacitor must supply all of the current required by the load.  $V_{OUT}$  immediately shifts by an amount equal to  $\Delta I_{(LOAD)} \times ESR$ , where ESR is the effective series resistance of  $C_{OUT}$ .  $\Delta I_{(LOAD)}$  begins to charge or discharge  $C_O$  generating a feedback error signal used by the regulator to return  $V_{OUT}$  to its steady-state value. The results are most easily interpreted when the device operates in PWM mode.

During this recovery time,  $V_{OUT}$  can be monitored for settling time, overshoot or ringing that helps judge the converter's stability. Without any ringing, the loop has usually more than 45° of phase margin.

Because the damping factor of the circuitry is directly related to several resistive parameters (for example, MOSFET  $r_{DS(on)}$ ) that are temperature dependant, the loop stability analysis has to be done over the input voltage range, load current range, and temperature range.

## 9.2.3 Application Curves

### 9.2.3.1 $V_{OUT} = 1.1\text{ V}$ – TPS622311

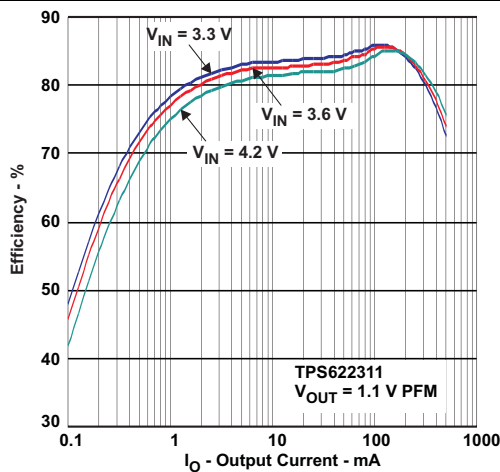


Figure 6. Efficiency vs  $I_{OUT}$ , PFM Mode – TPS622311

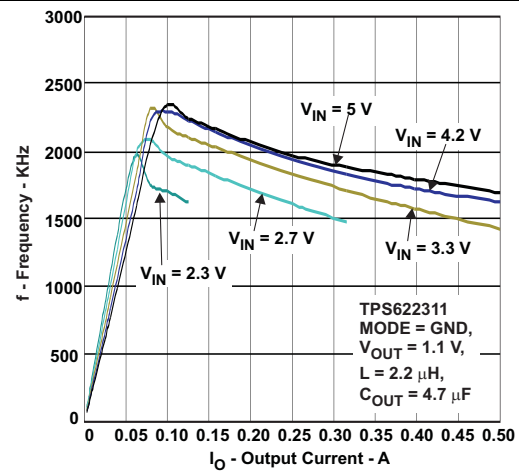


Figure 7. Switching Frequency vs Output Current, 1.1-V Output Voltage, PFM Mode – TPS622311

### 9.2.3.2 $V_{OUT} = 1.2\text{ V}$ – TPS62232/TPS62235

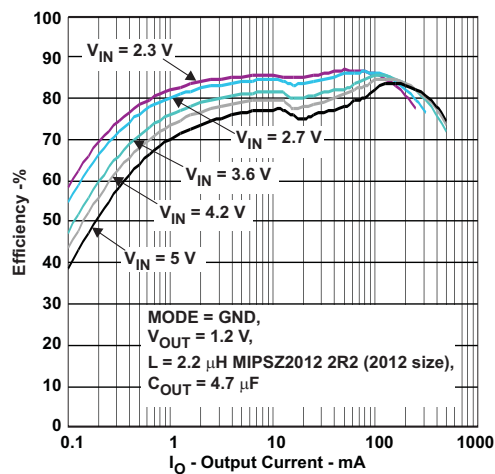


Figure 8. Efficiency PFM / PWM Mode, 1.2-V Output Voltage – TPS62232

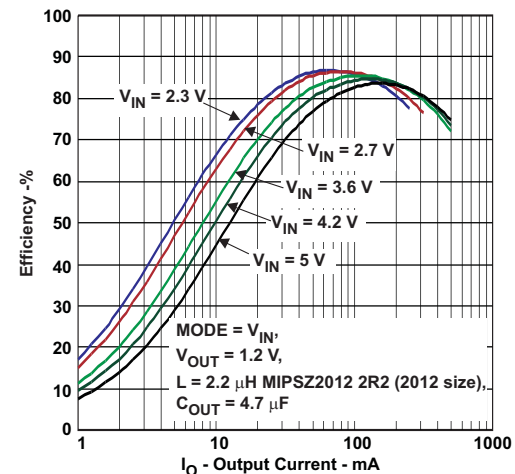


Figure 9. Efficiency Forced PWM Mode, 1.2-V Output Voltage – TPS62232



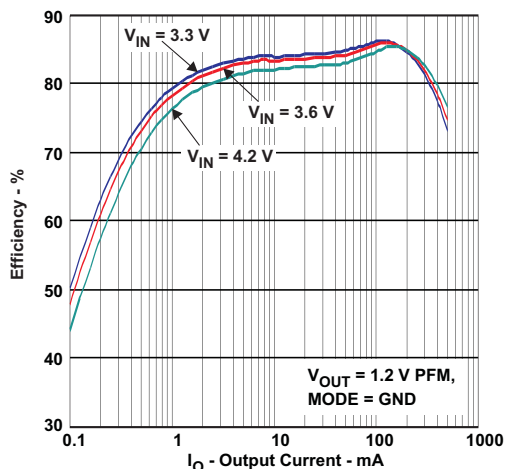


Figure 10. Efficiency vs  $I_{OUT}$ , PFM / PWM Mode – TPS62235

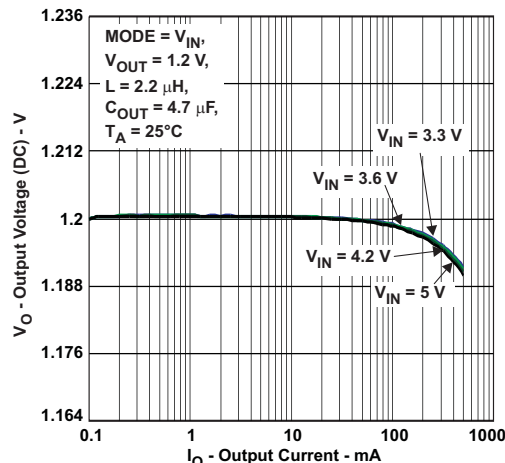


Figure 11. 1.2-V Output Voltage Accuracy Forced PWM Mode – TPS62232

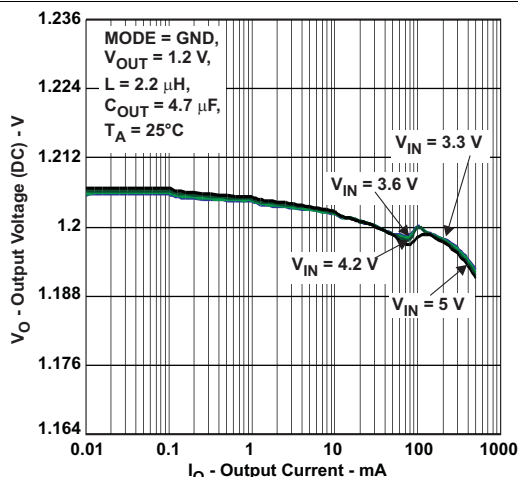


Figure 12. 1.2-V Output Voltage Accuracy PFM/PWM Mode – TPS62232

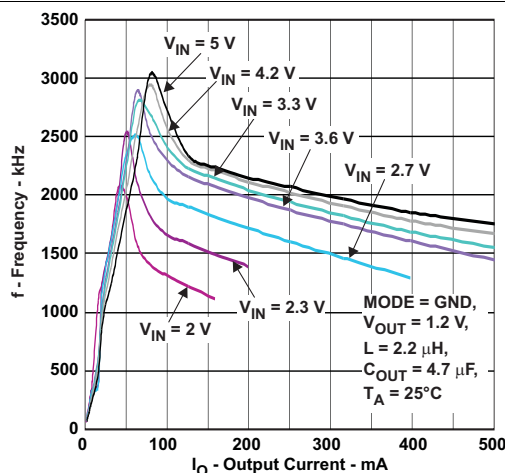


Figure 13. Switching Frequency vs Output Current, 1.2-V Output Voltage, PFM/PWM Mode – TPS62232

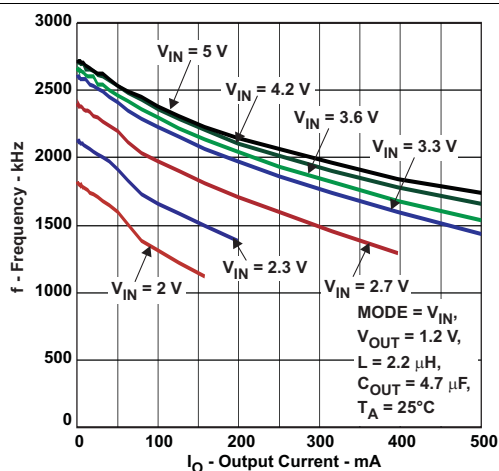


Figure 14. Switching Frequency vs Output Current, 1.2-V Output Voltage, Forced PWM Mode – TPS62232

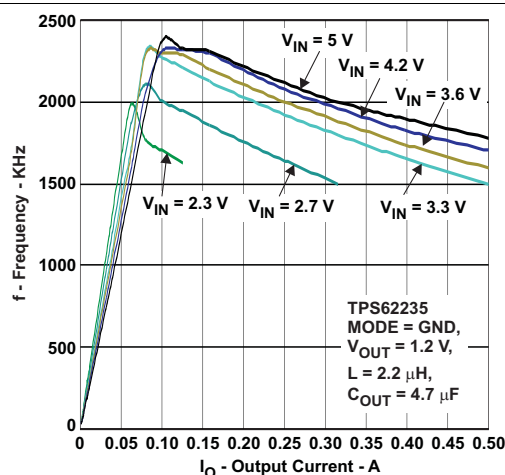


Figure 15. Switching Frequency vs Output Current, 1.2-V Output Voltage, PFM/PWM Mode – TPS62235

### 9.2.3.3 $V_{OUT} = 1.8\text{ V}$ – TPS62231

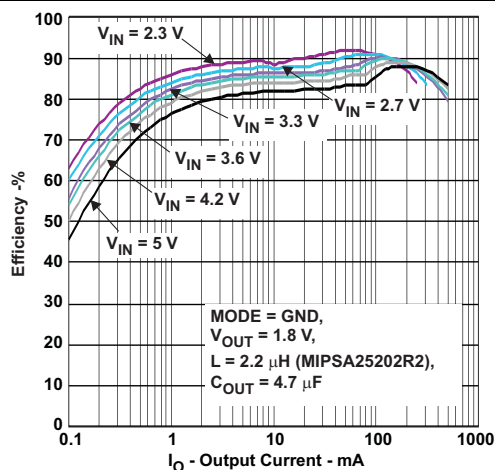


Figure 16. Efficiency PFM/PWM Mode, 1.8-V Output Voltage – TPS62231

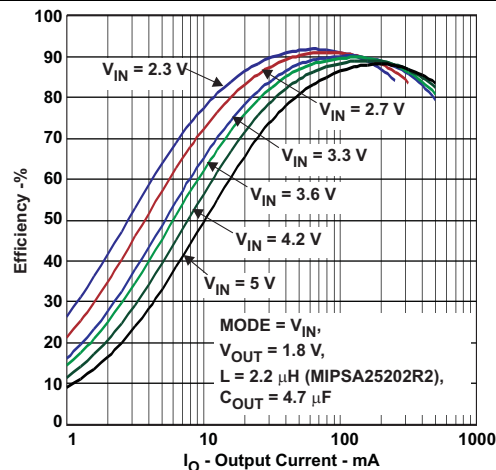


Figure 17. Efficiency Forced PWM Mode, 1.8-V Output Voltage – TPS62231

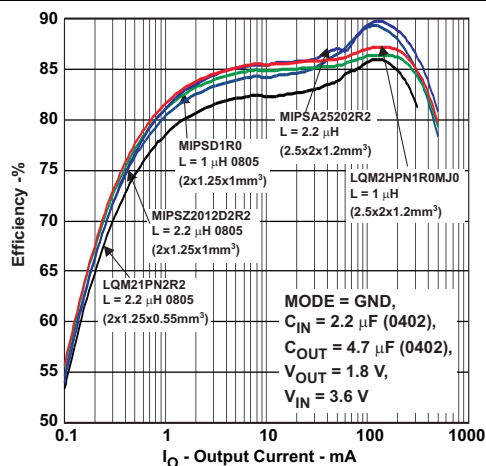


Figure 18. Comparison Efficiency vs Inductor Value and Size – TPS62231

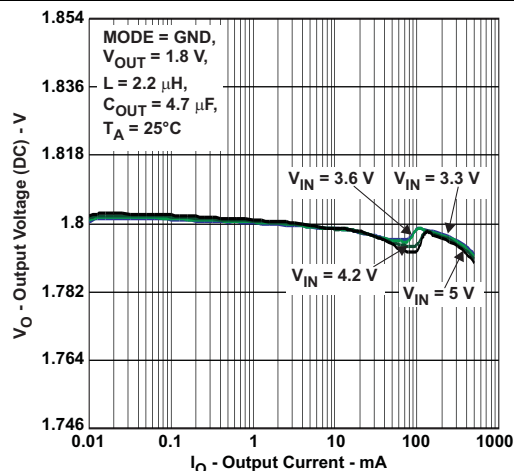


Figure 19. 1.8-V Output Voltage Accuracy PFM / PWM Mode – TPS62231

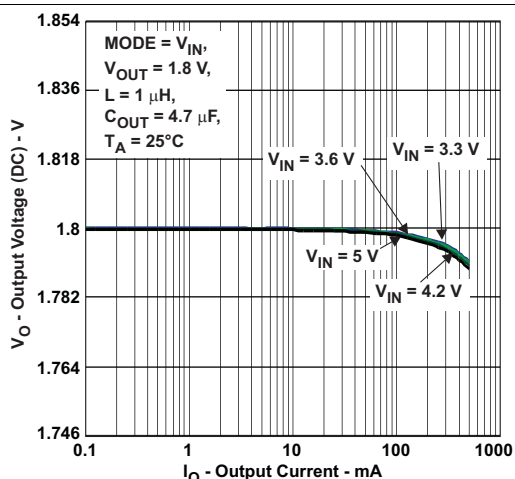


Figure 20. 1.8-V Output Voltage Accuracy Forced PWM Mode – TPS62231

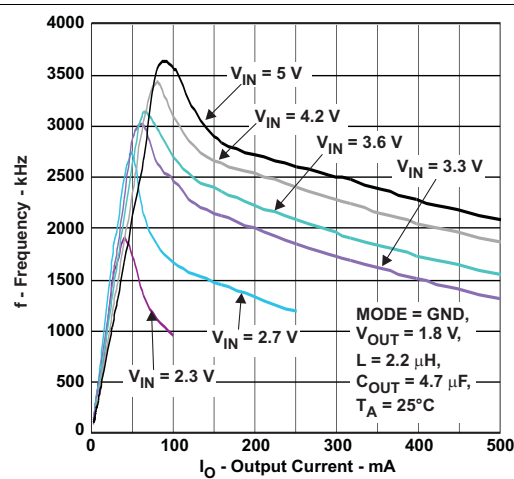


Figure 21. Switching Frequency vs Output Current, 1.8-V Output Voltage, PFM/PWM Mode – TPS62231

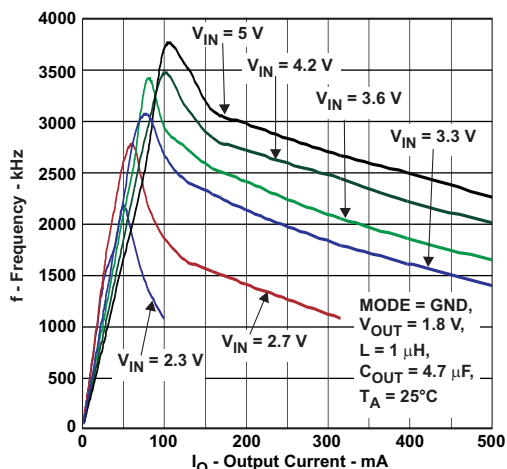


Figure 22. Switching Frequency vs Output Current, 1.8-V Output Voltage, PFM/PWM Mode – TPS62231

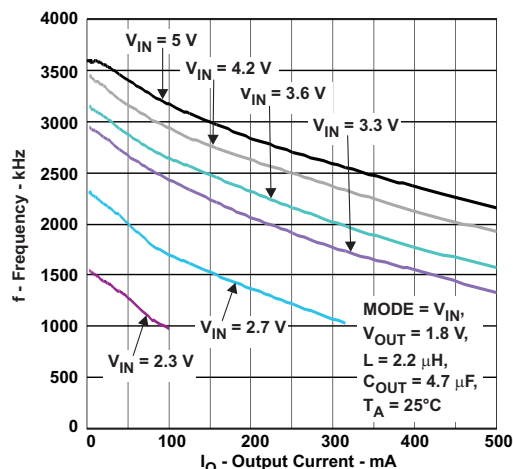


Figure 23. Switching Frequency vs Output Current, 1.8-V Output Voltage, Forced PWM Mode – TPS62231

#### 9.2.3.4 $V_{OUT} = 1.85\text{ V}$ – TPS62236

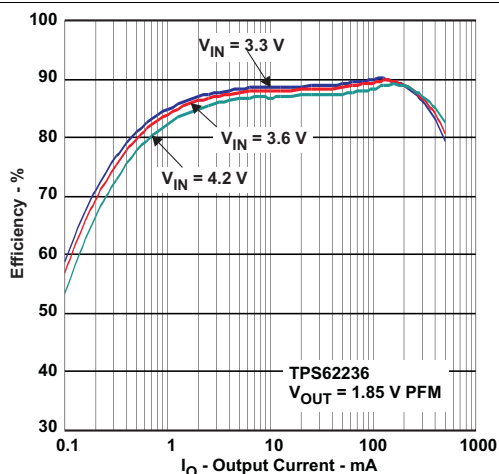


Figure 24. Efficiency vs  $I_{OUT}$ , PFM/PWM Mode – TPS62236

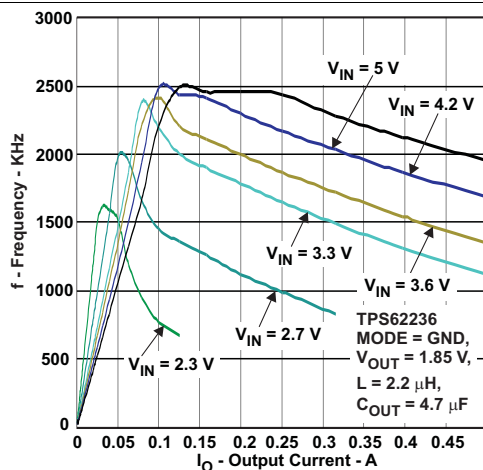


Figure 25. Switching Frequency vs Output Current, 1.85-V Output Voltage, PFM/PWM Mode – TPS62236

### 9.2.3.5 $V_{OUT} = 2.5\text{ V}$ – TPS62230

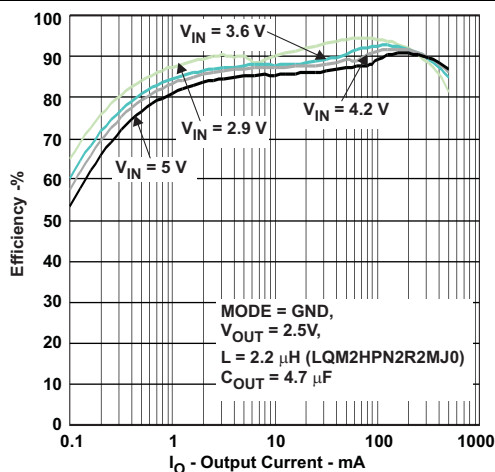


Figure 26. Efficiency PFM/PWM Mode, 2.5-V Output Voltage – TPS62230

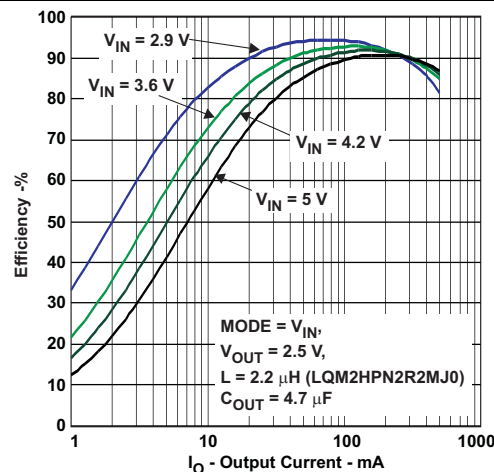


Figure 27. Efficiency Forced PWM Mode, 2.5-V Output Voltage – TPS62230

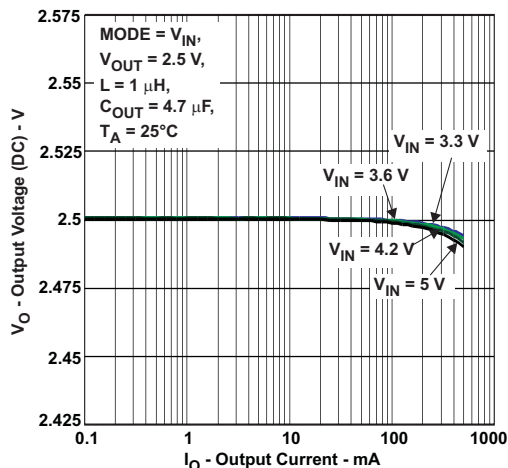


Figure 28. 2.5V Output Voltage Accuracy Forced PWM Mode – TPS62230

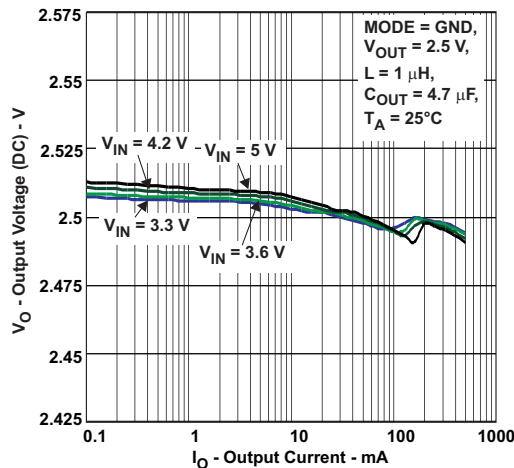


Figure 29. 2.5-V Output Voltage Accuracy PFM/PWM Mode – TPS62230

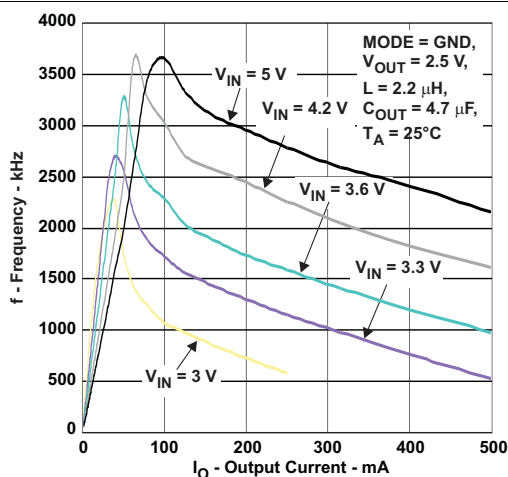


Figure 30. Switching Frequency vs Output Current, 2.5-V Output Voltage, PFM/PWM Mode – TPS62230

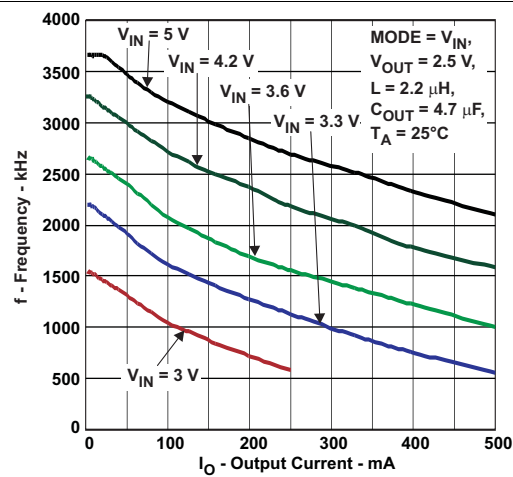


Figure 31. Switching Frequency vs Output Current, 2.5-V Output Voltage, Forced PWM Mode – TPS62230

### 9.2.3.6 $V_{OUT} = 3.0\text{ V}$ – TPS62233

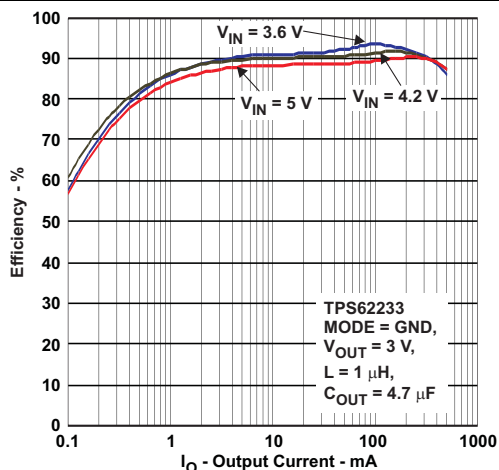


Figure 32. Efficiency vs  $I_{OUT}$  – TPS62233

### 9.2.3.7 Start-Up

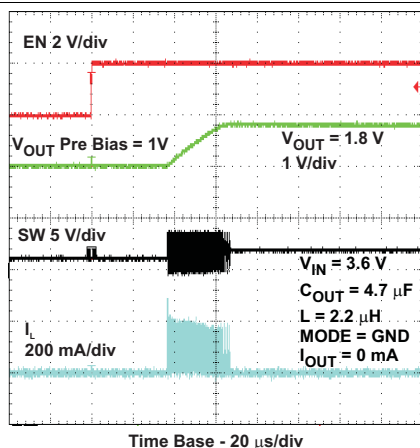


Figure 33. Start-Up in 1-V Prebiased Output – TPS62231

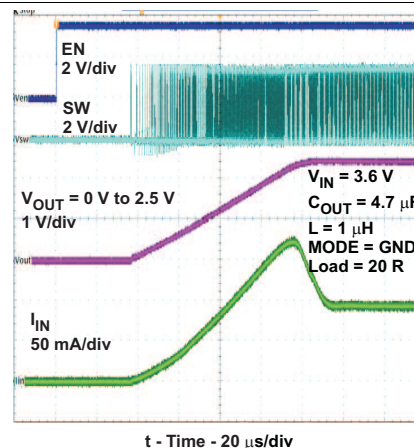


Figure 34. Start-Up into 20  $\Omega$  Load,  $V_{OUT}$  2.5 V – TPS62230

### 9.2.3.8 PFM / PWM Operation

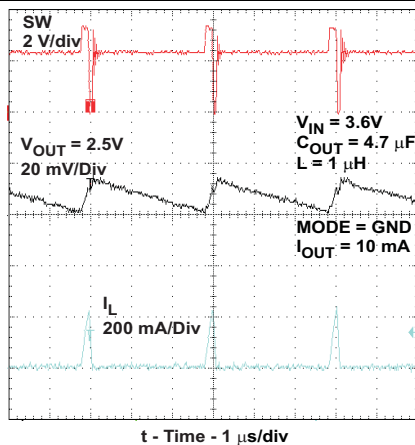


Figure 35. PFM Mode Operation, L = 1.0  $\mu$ H,  $I_{OUT}$  = 10 mA – TPS62230

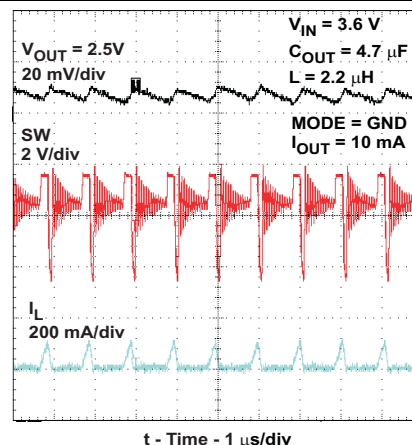


Figure 36. PFM Mode Operation, L = 2.2  $\mu$ H,  $I_{OUT}$  = 10 mA – TPS62230

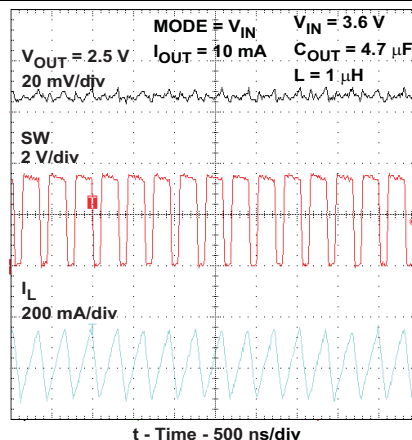


Figure 37. Forced PWM Mode Operation  $I_{OUT}$  = 10 mA – TPS62230

### 9.2.3.9 Peak-to-Peak Output Ripple Voltage

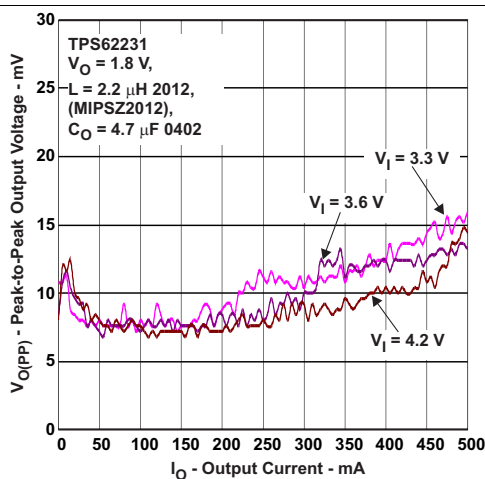


Figure 38. Output Voltage, Peak-to-Peak vs Output Current – TPS62231

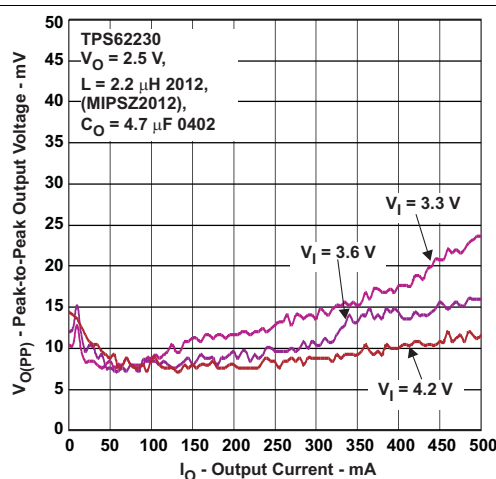


Figure 39. Output Voltage, Peak-to-Peak vs Output Current – TPS62230

### 9.2.3.10 Power-Supply Rejection

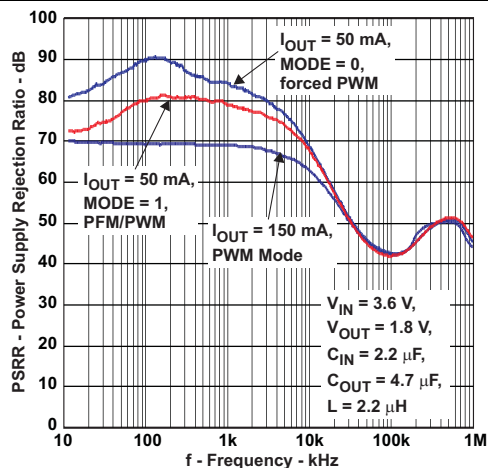


Figure 40. 1.8-V Power-Supply Rejection Ratio – TPS62231

### 9.2.3.11 Spurious Output Noise

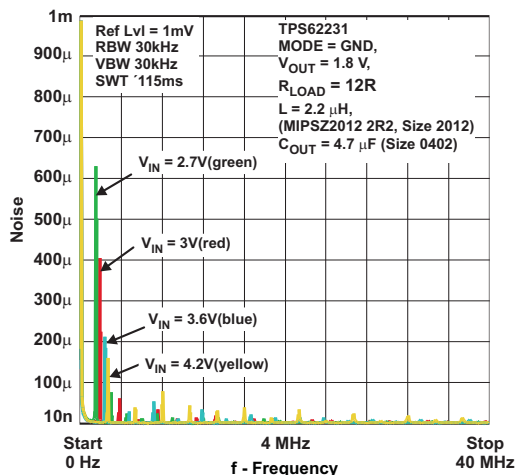


Figure 41. Spurious Output Noise, 12R Load – TPS62231

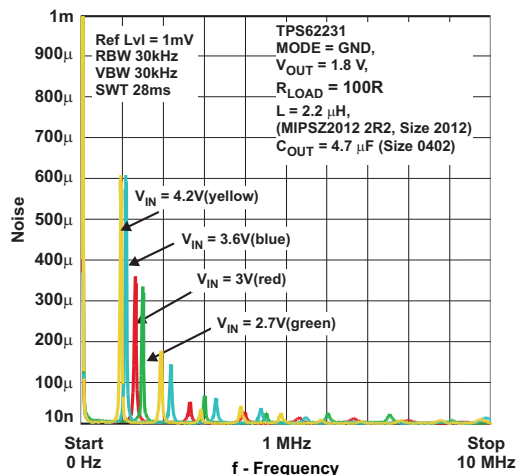


Figure 42. Spurious Output Noise, 100R Load – TPS62231



### 9.2.3.12 Line Transient Response

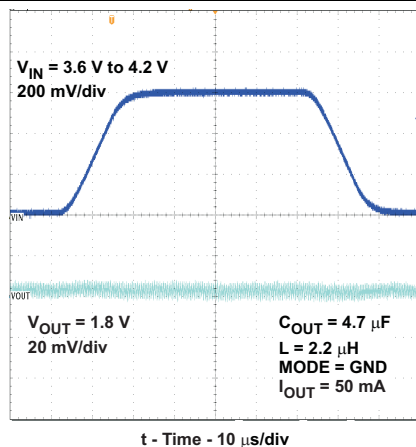


Figure 43. Line Transient Response, PFM Mode – TPS62231

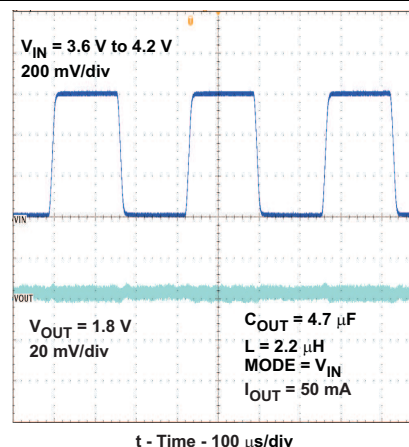


Figure 44. Line Transient Response, PWM Mode – TPS62231

### 9.2.3.13 Mode Transition

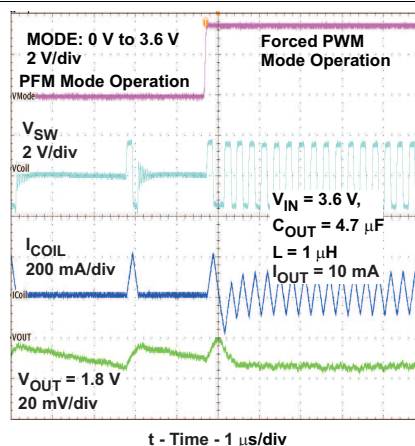


Figure 45. Mode Transition PFM / Forced PWM Mode – TPS62231



### 9.2.3.14 AC-Load Regulation

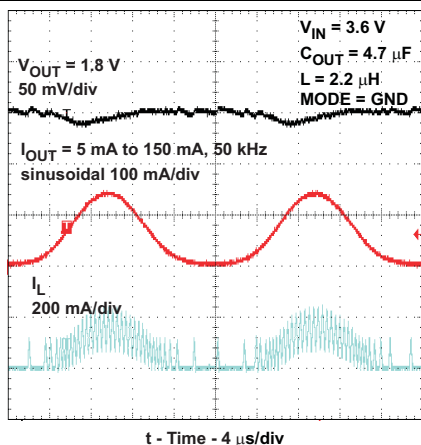


Figure 46. AC – Load Regulation Performance 1.8-V  $V_{OUT}$ , PFM Mode – TPS62231

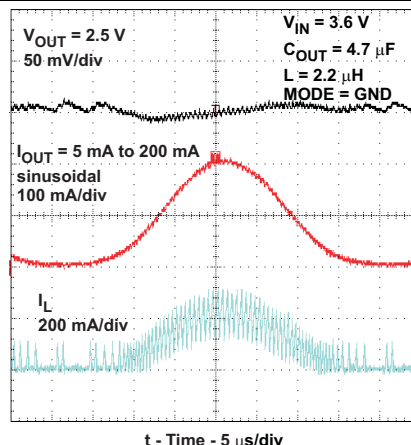


Figure 47. AC – Load Regulation Performance 2.5-V  $V_{OUT}$ , PFM Mode – TPS62230

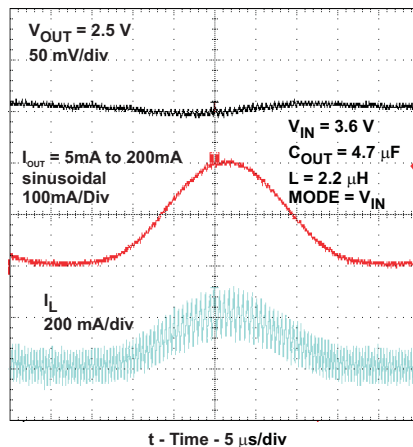


Figure 48. AC – Load Regulation Performance 2.5-V  $V_{OUT}$ , PWM Mode – TPS62230

### 9.2.3.15 Load Transient Response

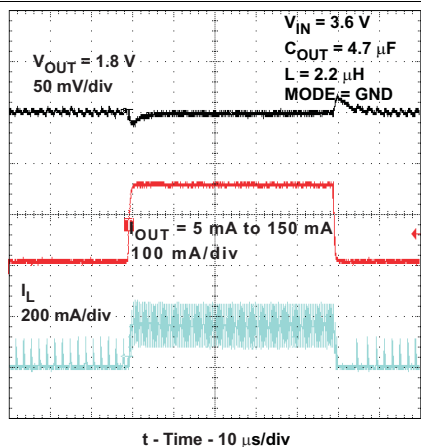


Figure 49. Load Transient Response 5 mA to 150 mA, PFM to PWM Mode,  $V_{OUT}$  1.8 V – TPS62231

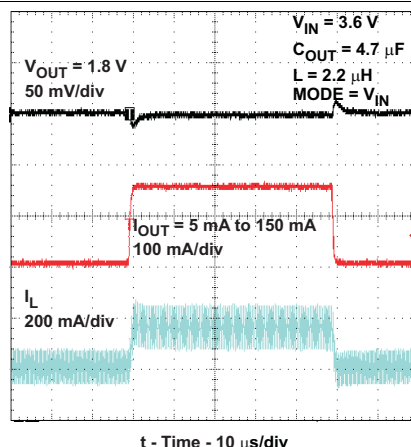


Figure 50. Load Transient Response 5 mA to 150 mA, Forced PWM Mode,  $V_{OUT}$  1.8 V – TPS62231

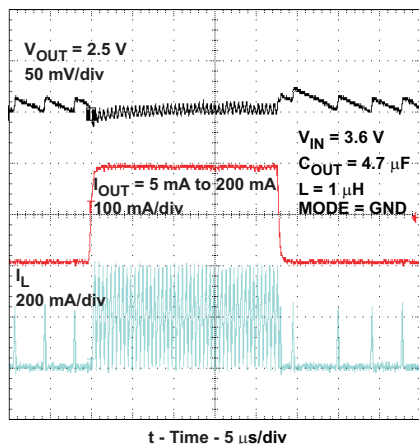


Figure 51. Load Transient Response 5 mA to 200 mA, PFM to PWM Mode,  $V_{OUT}$  2.5 V – TPS62230

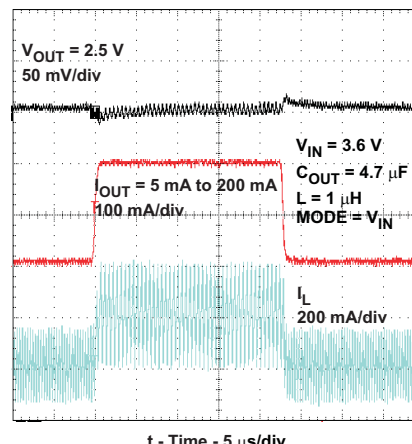


Figure 52. Load Transient Response 5 mA to 200 mA, Forced PWM Mode,  $V_{OUT}$  2.5 V – TPS62230

### 9.3 System Examples

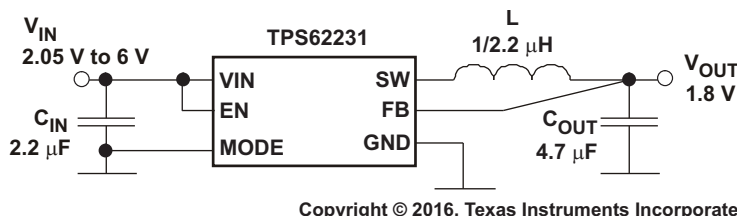


Figure 53. TPS62231 1.8-V Output

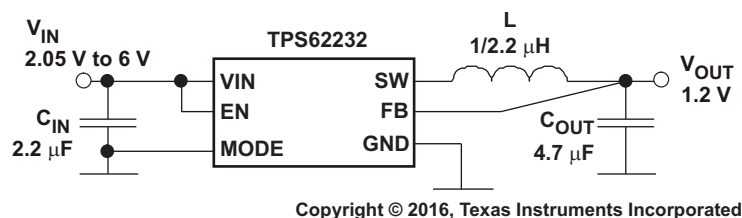


Figure 54. TPS62232 1.2-V Output

## 10 Power Supply Recommendations

The TPS6223x device family has no special requirements for its input power supply. The output current of the input power supply must be rated according to the supply voltage, output voltage and output current of the TPS6223x.

## 11 Layout

### 11.1 Layout Guidelines

As for all switching power supplies, the layout is an important step in the design. Proper function of the device demands careful attention to PCB layout. Take care in the board layout to get the specified performance. If the layout is not carefully done, the regulator could show poor line and/or load regulation, stability issues, as well as EMI problems. It is critical to provide a low-inductance, impedance ground path. Therefore, use wide and short traces for the main current paths. The input capacitor must be placed as close as possible to the IC pins as well as the inductor and output capacitor.

Use a common power GND node and a different node for the signal GND to minimize the effects of ground noise. Keep the common path to the GND pin, which returns the small signal components and the high current of the output capacitors as short as possible to avoid ground noise. The FB line must be connected to the output capacitor and routed away from noisy components and traces (for example, SW line).

### 11.2 Layout Example

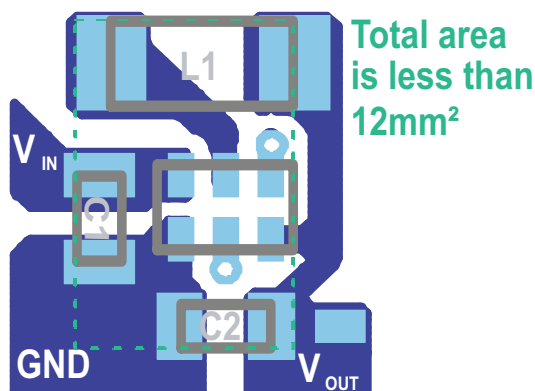


Figure 55. Recommended PCB Layout for TPS6223x

## 12 Device and Documentation Support

### 12.1 Device Support

#### 12.1.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

### 12.2 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

**Table 3. Related Links**

| PARTS     | PRODUCT FOLDER             | SAMPLE & BUY               | TECHNICAL DOCUMENTS        | TOOLS & SOFTWARE           | SUPPORT & COMMUNITY        |
|-----------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| TPS62230  | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS62231  | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS62232  | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS62233  | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS62234  | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS62235  | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS62236  | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS62237  | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS62238  | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS62239  | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS622310 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS622311 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS622312 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS622313 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS622314 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS622315 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS622316 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS622317 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS622318 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS622319 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |

### 12.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

## 12.4 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At [e2e.ti.com](http://e2e.ti.com), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

## 12.5 Trademarks

E2E is a trademark of Texas Instruments.  
All other trademarks are the property of their respective owners.

## 12.6 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## 12.7 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable part number         | Status<br>(1) | Material type<br>(2) | Package   Pins | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-------------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TPS62230DRYR</a>  | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | GV                  |
| TPS62230DRYR.A                | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | GV                  |
| <a href="#">TPS62230DRYT</a>  | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | GV                  |
| TPS62230DRYT.A                | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | GV                  |
| <a href="#">TPS622310DRYR</a> | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OT                  |
| TPS622310DRYR.A               | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OT                  |
| <a href="#">TPS622310DRYT</a> | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OT                  |
| TPS622310DRYT.A               | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OT                  |
| <a href="#">TPS622311DRYR</a> | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PA                  |
| TPS622311DRYR.A               | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PA                  |
| <a href="#">TPS622311DRYT</a> | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PA                  |
| TPS622311DRYT.A               | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PA                  |
| <a href="#">TPS622312DRYR</a> | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | QE                  |
| TPS622312DRYR.A               | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | QE                  |
| <a href="#">TPS622312DRYT</a> | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | QE                  |
| TPS622312DRYT.A               | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | QE                  |
| <a href="#">TPS622313DRYR</a> | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | QF                  |
| TPS622313DRYR.A               | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | QF                  |
| <a href="#">TPS622313DRYT</a> | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | QF                  |
| TPS622313DRYT.A               | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | QF                  |
| <a href="#">TPS622314DRYR</a> | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAU   NIPDAUAG                    | Level-1-260C-UNLIM                | -40 to 125   | QG                  |
| TPS622314DRYR.A               | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | QG                  |
| TPS622314DRYRG4.A             | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | QG                  |
| <a href="#">TPS622314DRYT</a> | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAU   NIPDAUAG                    | Level-1-260C-UNLIM                | -40 to 125   | QG                  |
| TPS622314DRYT.A               | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | QG                  |
| <a href="#">TPS622315DRYR</a> | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | RI                  |
| TPS622315DRYR.A               | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | RI                  |
| <a href="#">TPS622315DRYT</a> | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | RI                  |
| TPS622315DRYT.A               | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | RI                  |

| Orderable part number         | Status<br>(1) | Material type<br>(2) | Package   Pins | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-------------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TPS622316DRYR</a> | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | RJ                  |
| TPS622316DRYR.A               | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | RJ                  |
| <a href="#">TPS622316DRYT</a> | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | RJ                  |
| TPS622316DRYT.A               | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | RJ                  |
| <a href="#">TPS622317DRYR</a> | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | RK                  |
| TPS622317DRYR.A               | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | RK                  |
| <a href="#">TPS622317DRYT</a> | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | RK                  |
| TPS622317DRYT.A               | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | RK                  |
| <a href="#">TPS622318DRYR</a> | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAU   NIPDAUAG                    | Level-1-260C-UNLIM                | -40 to 125   | ST                  |
| TPS622318DRYR.A               | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | ST                  |
| <a href="#">TPS622318DRYT</a> | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAU   NIPDAUAG                    | Level-1-260C-UNLIM                | -40 to 125   | ST                  |
| TPS622318DRYT.A               | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | ST                  |
| <a href="#">TPS622319DRYR</a> | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | 3O                  |
| TPS622319DRYR.B               | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | 3O                  |
| <a href="#">TPS622319DRYT</a> | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | 3O                  |
| TPS622319DRYT.B               | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | 3O                  |
| <a href="#">TPS62231DRYR</a>  | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAU   NIPDAUAG                    | Level-1-260C-UNLIM                | -40 to 125   | GW                  |
| TPS62231DRYR.A                | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | GW                  |
| TPS62231DRYRG4.A              | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | GW                  |
| <a href="#">TPS62231DRYT</a>  | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAU   NIPDAUAG                    | Level-1-260C-UNLIM                | -40 to 125   | GW                  |
| TPS62231DRYT.A                | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | GW                  |
| <a href="#">TPS62232DRYR</a>  | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | GX                  |
| TPS62232DRYR.A                | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | GX                  |
| TPS62232DRYRG4.A              | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | GX                  |
| <a href="#">TPS62232DRYT</a>  | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | GX                  |
| TPS62232DRYT.A                | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | GX                  |
| <a href="#">TPS62233DRYR</a>  | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAU   NIPDAUAG                    | Level-1-260C-UNLIM                | -40 to 125   | OG                  |
| TPS62233DRYR.A                | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | OG                  |
| <a href="#">TPS62233DRYT</a>  | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAU   NIPDAUAG                    | Level-1-260C-UNLIM                | -40 to 125   | OG                  |
| TPS62233DRYT.A                | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | OG                  |
| <a href="#">TPS62234DRYR</a>  | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OH                  |



| Orderable part number        | Status<br>(1) | Material type<br>(2) | Package   Pins | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|------------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| TPS62234DRYR.A               | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OH                  |
| <a href="#">TPS62234DRYT</a> | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OH                  |
| TPS62234DRYT.A               | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OH                  |
| <a href="#">TPS62235DRYR</a> | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OQ                  |
| TPS62235DRYR.A               | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OQ                  |
| <a href="#">TPS62235DRYT</a> | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OQ                  |
| TPS62235DRYT.A               | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OQ                  |
| <a href="#">TPS62236DRYR</a> | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OR                  |
| TPS62236DRYR.A               | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OR                  |
| <a href="#">TPS62236DRYT</a> | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OR                  |
| TPS62236DRYT.A               | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OR                  |
| <a href="#">TPS62237DRYR</a> | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAU   NIPDAUAG                    | Level-1-260C-UNLIM                | -40 to 125   | OS                  |
| TPS62237DRYR.A               | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OS                  |
| TPS62237DRYRG4.A             | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | OS                  |
| <a href="#">TPS62237DRYT</a> | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAU   NIPDAUAG                    | Level-1-260C-UNLIM                | -40 to 125   | OS                  |
| TPS62237DRYT.A               | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OS                  |
| <a href="#">TPS62238DRYR</a> | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAU   NIPDAUAG                    | Level-1-260C-UNLIM                | -40 to 125   | ON                  |
| TPS62238DRYR.A               | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | ON                  |
| <a href="#">TPS62238DRYT</a> | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAU   NIPDAUAG                    | Level-1-260C-UNLIM                | -40 to 125   | ON                  |
| TPS62238DRYT.A               | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | ON                  |
| <a href="#">TPS62239DRYR</a> | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OP                  |
| TPS62239DRYR.A               | Active        | Production           | SON (DRY)   6  | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OP                  |
| <a href="#">TPS62239DRYT</a> | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OP                  |
| TPS62239DRYT.A               | Active        | Production           | SON (DRY)   6  | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | OP                  |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.



<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.


**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION

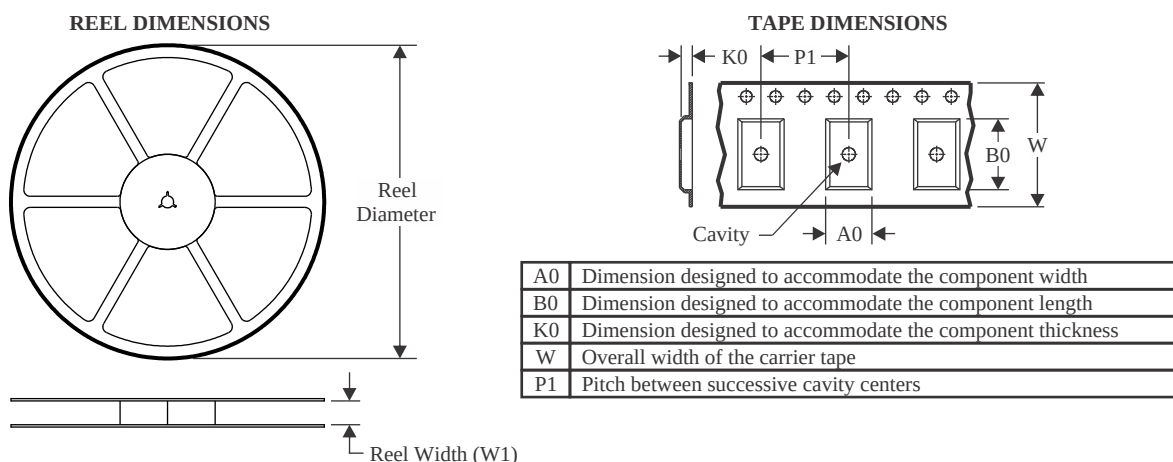

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

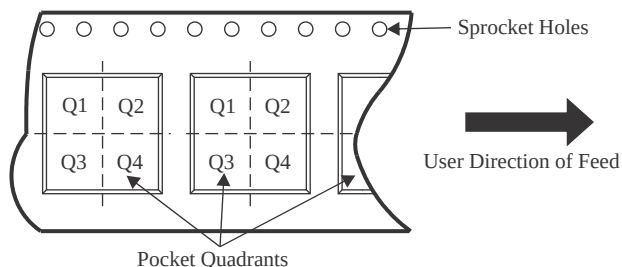

\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS62230DRYR  | SON          | DRY             | 6    | 5000 | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62230DRYT  | SON          | DRY             | 6    | 250  | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622310DRYR | SON          | DRY             | 6    | 5000 | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622310DRYT | SON          | DRY             | 6    | 250  | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622311DRYR | SON          | DRY             | 6    | 5000 | 180.0              | 9.5                | 1.2     | 1.65    | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622311DRYT | SON          | DRY             | 6    | 250  | 180.0              | 9.5                | 1.2     | 1.65    | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622312DRYR | SON          | DRY             | 6    | 5000 | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622312DRYT | SON          | DRY             | 6    | 250  | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622313DRYR | SON          | DRY             | 6    | 5000 | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622313DRYT | SON          | DRY             | 6    | 250  | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622314DRYR | SON          | DRY             | 6    | 5000 | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622314DRYT | SON          | DRY             | 6    | 250  | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622314DRYT | SON          | DRY             | 6    | 250  | 180.0              | 9.5                | 1.2     | 1.65    | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622315DRYR | SON          | DRY             | 6    | 5000 | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622315DRYT | SON          | DRY             | 6    | 250  | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |

| Device        | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS622316DRYR | SON          | DRY             | 6    | 5000 | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622316DRYT | SON          | DRY             | 6    | 250  | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622317DRYR | SON          | DRY             | 6    | 5000 | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622317DRYT | SON          | DRY             | 6    | 250  | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622318DRYR | SON          | DRY             | 6    | 5000 | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622318DRYT | SON          | DRY             | 6    | 250  | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622319DRYR | SON          | DRY             | 6    | 5000 | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS622319DRYT | SON          | DRY             | 6    | 250  | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62231DRYR  | SON          | DRY             | 6    | 5000 | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62231DRYR  | SON          | DRY             | 6    | 5000 | 180.0              | 9.5                | 1.2     | 1.65    | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62231DRYT  | SON          | DRY             | 6    | 250  | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62231DRYT  | SON          | DRY             | 6    | 250  | 180.0              | 9.5                | 1.2     | 1.65    | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62232DRYR  | SON          | DRY             | 6    | 5000 | 180.0              | 9.5                | 1.2     | 1.65    | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62232DRYT  | SON          | DRY             | 6    | 250  | 180.0              | 9.5                | 1.2     | 1.65    | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62233DRYR  | SON          | DRY             | 6    | 5000 | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62233DRYT  | SON          | DRY             | 6    | 250  | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62234DRYR  | SON          | DRY             | 6    | 5000 | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62234DRYT  | SON          | DRY             | 6    | 250  | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62235DRYR  | SON          | DRY             | 6    | 5000 | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62235DRYT  | SON          | DRY             | 6    | 250  | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62236DRYR  | SON          | DRY             | 6    | 5000 | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62236DRYT  | SON          | DRY             | 6    | 250  | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62237DRYR  | SON          | DRY             | 6    | 5000 | 180.0              | 9.5                | 1.2     | 1.65    | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62237DRYT  | SON          | DRY             | 6    | 250  | 180.0              | 9.5                | 1.2     | 1.65    | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62237DRYT  | SON          | DRY             | 6    | 250  | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62238DRYR  | SON          | DRY             | 6    | 5000 | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62238DRYT  | SON          | DRY             | 6    | 250  | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62239DRYR  | SON          | DRY             | 6    | 5000 | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |
| TPS62239DRYT  | SON          | DRY             | 6    | 250  | 180.0              | 8.4                | 1.25    | 1.6     | 0.7     | 4.0     | 8.0    | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS62230DRYR  | SON          | DRY             | 6    | 5000 | 183.0       | 183.0      | 20.0        |
| TPS62230DRYT  | SON          | DRY             | 6    | 250  | 183.0       | 183.0      | 20.0        |
| TPS622310DRYR | SON          | DRY             | 6    | 5000 | 202.0       | 201.0      | 28.0        |
| TPS622310DRYT | SON          | DRY             | 6    | 250  | 202.0       | 201.0      | 28.0        |
| TPS622311DRYR | SON          | DRY             | 6    | 5000 | 189.0       | 185.0      | 36.0        |
| TPS622311DRYT | SON          | DRY             | 6    | 250  | 189.0       | 185.0      | 36.0        |
| TPS622312DRYR | SON          | DRY             | 6    | 5000 | 183.0       | 183.0      | 20.0        |
| TPS622312DRYT | SON          | DRY             | 6    | 250  | 183.0       | 183.0      | 20.0        |
| TPS622313DRYR | SON          | DRY             | 6    | 5000 | 202.0       | 201.0      | 28.0        |
| TPS622313DRYT | SON          | DRY             | 6    | 250  | 202.0       | 201.0      | 28.0        |
| TPS622314DRYR | SON          | DRY             | 6    | 5000 | 202.0       | 201.0      | 28.0        |
| TPS622314DRYT | SON          | DRY             | 6    | 5000 | 189.0       | 185.0      | 36.0        |
| TPS622314DRYT | SON          | DRY             | 6    | 250  | 202.0       | 201.0      | 28.0        |
| TPS622314DRYT | SON          | DRY             | 6    | 250  | 189.0       | 185.0      | 36.0        |
| TPS622315DRYR | SON          | DRY             | 6    | 5000 | 202.0       | 201.0      | 28.0        |
| TPS622315DRYT | SON          | DRY             | 6    | 250  | 202.0       | 201.0      | 28.0        |
| TPS622316DRYR | SON          | DRY             | 6    | 5000 | 202.0       | 201.0      | 28.0        |
| TPS622316DRYT | SON          | DRY             | 6    | 250  | 202.0       | 201.0      | 28.0        |

| Device        | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS622317DRYR | SON          | DRY             | 6    | 5000 | 202.0       | 201.0      | 28.0        |
| TPS622317DRYT | SON          | DRY             | 6    | 250  | 202.0       | 201.0      | 28.0        |
| TPS622318DRYR | SON          | DRY             | 6    | 5000 | 202.0       | 201.0      | 28.0        |
| TPS622318DRYT | SON          | DRY             | 6    | 250  | 202.0       | 201.0      | 28.0        |
| TPS622319DRYR | SON          | DRY             | 6    | 5000 | 183.0       | 183.0      | 20.0        |
| TPS622319DRYT | SON          | DRY             | 6    | 250  | 183.0       | 183.0      | 20.0        |
| TPS62231DRYR  | SON          | DRY             | 6    | 5000 | 183.0       | 183.0      | 20.0        |
| TPS62231DRYR  | SON          | DRY             | 6    | 5000 | 189.0       | 185.0      | 36.0        |
| TPS62231DRYT  | SON          | DRY             | 6    | 250  | 183.0       | 183.0      | 20.0        |
| TPS62231DRYT  | SON          | DRY             | 6    | 250  | 189.0       | 185.0      | 36.0        |
| TPS62232DRYR  | SON          | DRY             | 6    | 5000 | 189.0       | 185.0      | 36.0        |
| TPS62232DRYT  | SON          | DRY             | 6    | 250  | 189.0       | 185.0      | 36.0        |
| TPS62233DRYR  | SON          | DRY             | 6    | 5000 | 202.0       | 201.0      | 28.0        |
| TPS62233DRYT  | SON          | DRY             | 6    | 250  | 202.0       | 201.0      | 28.0        |
| TPS62234DRYR  | SON          | DRY             | 6    | 5000 | 183.0       | 183.0      | 20.0        |
| TPS62234DRYT  | SON          | DRY             | 6    | 250  | 183.0       | 183.0      | 20.0        |
| TPS62235DRYR  | SON          | DRY             | 6    | 5000 | 183.0       | 183.0      | 20.0        |
| TPS62235DRYT  | SON          | DRY             | 6    | 250  | 183.0       | 183.0      | 20.0        |
| TPS62236DRYR  | SON          | DRY             | 6    | 5000 | 183.0       | 183.0      | 20.0        |
| TPS62236DRYT  | SON          | DRY             | 6    | 250  | 183.0       | 183.0      | 20.0        |
| TPS62237DRYR  | SON          | DRY             | 6    | 5000 | 189.0       | 185.0      | 36.0        |
| TPS62237DRYT  | SON          | DRY             | 6    | 250  | 189.0       | 185.0      | 36.0        |
| TPS62237DRYT  | SON          | DRY             | 6    | 250  | 183.0       | 183.0      | 20.0        |
| TPS62238DRYR  | SON          | DRY             | 6    | 5000 | 202.0       | 201.0      | 28.0        |
| TPS62238DRYT  | SON          | DRY             | 6    | 250  | 202.0       | 201.0      | 28.0        |
| TPS62239DRYR  | SON          | DRY             | 6    | 5000 | 183.0       | 183.0      | 20.0        |
| TPS62239DRYT  | SON          | DRY             | 6    | 250  | 183.0       | 183.0      | 20.0        |

## GENERIC PACKAGE VIEW

**DRY 6**

**USON - 0.6 mm max height**


PLASTIC SMALL OUTLINE - NO LEAD



Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

4207181/G


DRY0006A



## PACKAGE OUTLINE

USON - 0.6 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

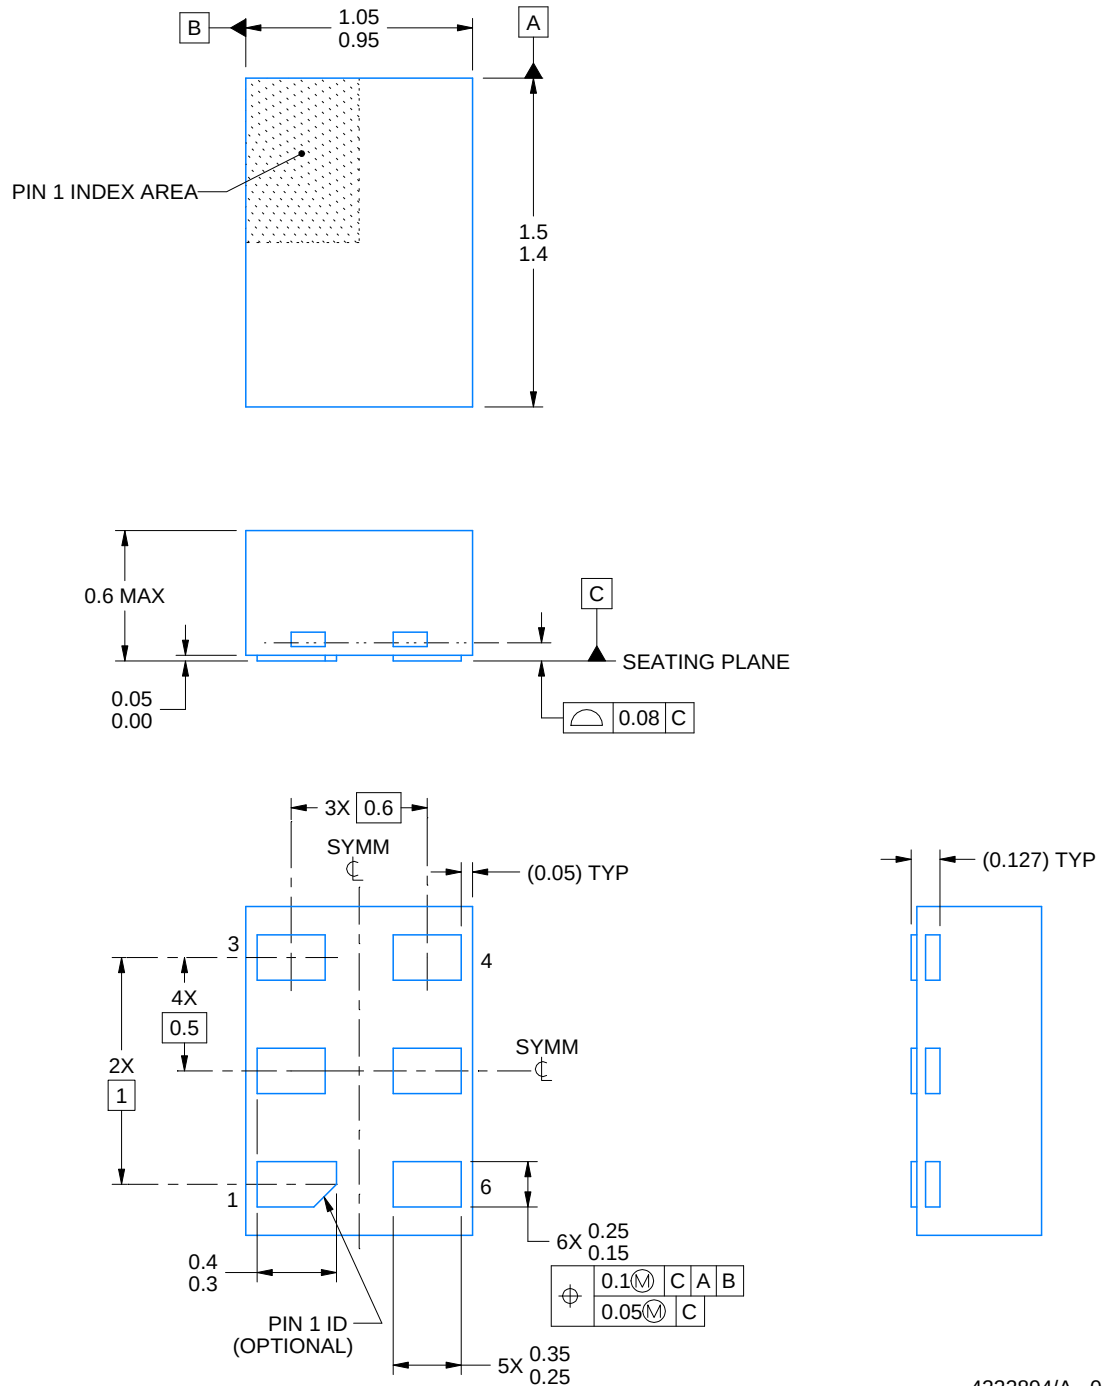

4222894/A 01/2018

### NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

# EXAMPLE BOARD LAYOUT


DRY0006A

USON - 0.6 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

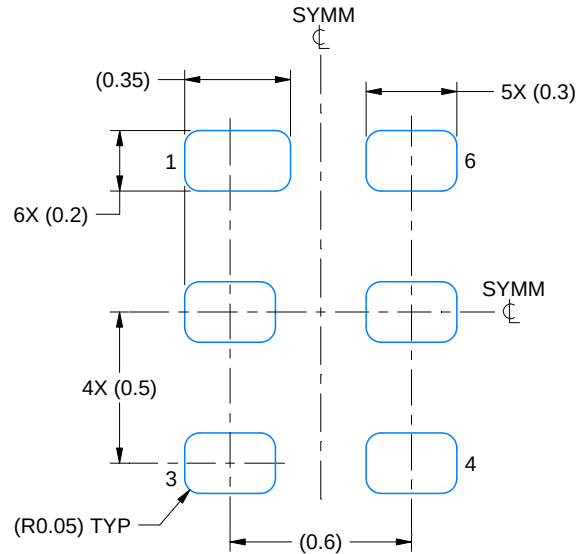

**LAND PATTERN EXAMPLE**  
1:1 RATIO WITH PKG SOLDER PADS  
EXPOSED METAL SHOWN  
SCALE:40X

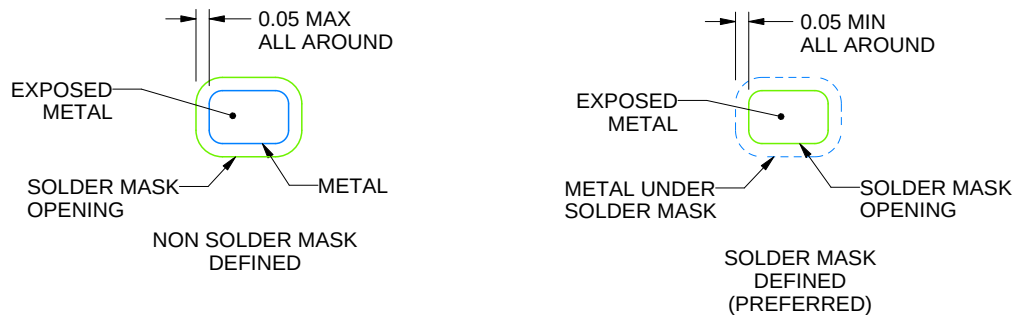

**SOLDER MASK DETAILS**

4222894/A 01/2018

NOTES: (continued)

3. For more information, see QFN/SON PCB application report in literature No. SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).




## EXAMPLE STENCIL DESIGN

DRY0006A

USON - 0.6 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

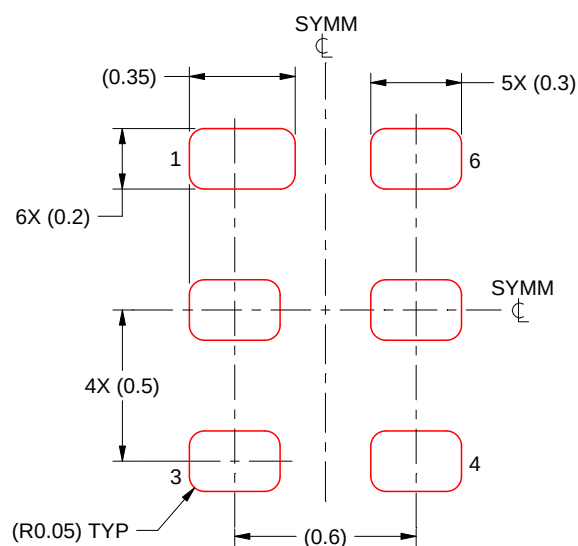

SOLDER PASTE EXAMPLE  
BASED ON 0.075 - 0.1 mm THICK STENCIL  
SCALE:40X

4222894/A 01/2018

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated