

TPS22990 5.5-V, 10-A, 3.9-mΩ On-Resistance Load Switch

1 Features

- Integrated Single Channel Load Switch
- VBIAS Voltage Range: 2.5 V to 5.5 V
- VIN Voltage Range: 0.6 V to V_{BIAS}
- On-Resistance
 - $R_{ON} = 3.9\text{ m}\Omega$ (typical) at $V_{IN} = 5\text{ V}$ ($V_{BIAS} = 5\text{ V}$)
 - $R_{ON} = 3.9\text{ m}\Omega$ (typical) at $V_{IN} = 3.3\text{ V}$ ($V_{BIAS} = 3.3\text{ V}$)
- 10-A Maximum Continuous Switch Current
- Quiescent Current
 - $I_{Q,VBIAS} = 63\text{ }\mu\text{A}$ at $V_{BIAS} = 5\text{ V}$
- Shutdown Current
 - $I_{SD,VBIAS} = 5.5\text{ }\mu\text{A}$ at $V_{BIAS} = 5\text{ V}$
 - $I_{SD,VIN} = 4\text{ nA}$ at $V_{BIAS} = 5\text{ V}$, $V_{IN} = 5\text{ V}$
- Controlled and Adjustable Slew Rate through CT
- Power Good (PG) Indicator
- Quick Output Discharge (QOD) (TPS22990 Only)
- 3-mm × 2-mm SON 10-pin Package with Thermal Pad
- ESD Performance Tested per JESD 22
 - 2-kV HBM and 1-kV CDM

2 Applications

- Notebooks, Chromebooks and Tablets
- Desktop PC and Industrial PC
- Solid State Drives (SSDs)
- Servers
- Telecom systems

3 Description

The TPS22990 product family consists of two devices: TPS22990 and TPS22990N. Each device is a 3.9-mΩ, single-channel load switch with a controlled and adjustable turn on and integrated PG indicator.

The devices contain an N-channel MOSFET that can operate over an input voltage range of 0.6 V to 5.5 V and can support a maximum continuous current of 10 A. The wide input voltage range and high current capability enable the devices to be used across multiple designs and end equipments. 3.9-mΩ On-resistance minimizes the voltage drop across the load switch and power loss from the load switch.

The controlled rise time for the device greatly reduces inrush current caused by large bulk load capacitances, thereby reducing or eliminating power supply droop. The adjustable slew rate through CT provides the design flexibility to trade off inrush current and power up timing requirements. Integrated PG indicator notifies the system about the status of the load switch to facilitate seamless power sequencing.

The TPS22990 has an optional 218-Ω On-chip resistor for quick discharge of the output when switch is disabled to avoid any unknown state caused by floating supply to the downstream load.


The TPS22990 is available in a small, space-saving 3-mm × 2-mm 10-SON package with integrated thermal pad allowing for high power dissipation. The device is characterized for operation over the free-air temperature range of -40°C to +105°C.

Device Information⁽¹⁾


| PART NUMBER | PACKAGE | BODY SIZE (NOM) |
|-----------------------|-----------|-------------------|
| TPS22990 TPS22990N | WSON (10) | 3.00 mm × 2.00 mm |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

Typical Application

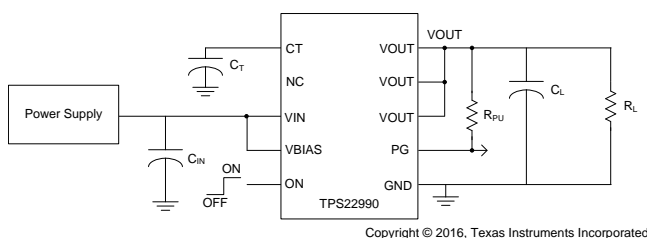

On-Resistance vs Input Voltage

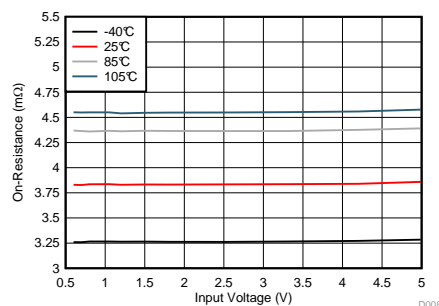

$V_{BIAS} = 5\text{ V}$, $I_{OUT} = -200\text{ mA}$



Table of Contents

| | | | |
|---|-----------|--|-----------|
| 1 Features | 1 | 9.2 Functional Block Diagram | 16 |
| 2 Applications | 1 | 9.3 Feature Description | 16 |
| 3 Description | 1 | 9.4 Device Functional Modes | 18 |
| 4 Revision History | 2 | 10 Application and Implementation | 19 |
| 5 Device Comparison Table | 3 | 10.1 Application Information | 19 |
| 6 Pin Configuration and Functions | 3 | 10.2 Typical Application | 22 |
| 7 Specifications | 4 | 11 Power Supply Recommendations | 25 |
| 7.1 Absolute Maximum Ratings | 4 | 12 Layout | 25 |
| 7.2 ESD Ratings | 4 | 12.1 Layout Guidelines | 25 |
| 7.3 Recommended Operating Conditions | 4 | 12.2 Layout Example | 25 |
| 7.4 Thermal Information | 5 | 13 Device and Documentation Support | 26 |
| 7.5 Electrical Characteristics— $V_{BIAS} = 5\text{ V}$ | 5 | 13.1 Documentation Support | 26 |
| 7.6 Electrical Characteristics— $V_{BIAS} = 3.3\text{ V}$ | 6 | 13.2 Receiving Notification of Documentation Updates | 26 |
| 7.7 Switching Characteristics | 7 | 13.3 Community Resources | 26 |
| 7.8 Typical Characteristics | 9 | 13.4 Trademarks | 26 |
| 8 Parameter Measurement Information | 15 | 13.5 Electrostatic Discharge Caution | 26 |
| 9 Detailed Description | 16 | 13.6 Glossary | 26 |
| 9.1 Overview | 16 | 14 Mechanical, Packaging, and Orderable Information | 26 |


4 Revision History

| Changes from Revision B (September 2016) to Revision C | Page |
|---|----------|
| • Updated V_{IH} in Recommended Operating Conditions | 4 |
| Changes from Revision A (July 2016) to Revision B | Page |
| • Removed the status column from <i>Device Comparison Table</i> | 3 |
| • Added the comment “(TPS22990 Only)” to the “ R_{PD} ” cell in both <i>Electrical Characteristics</i> tables | 7 |
| Changes from Original (May 2016) to Revision A | Page |
| • Changed device status from <i>Product Preview</i> to <i>Production Data</i> | 1 |

5 Device Comparison Table

| DEVICE | R_{ON} at $V_{BIAS} = 5\text{ V}$ | QOD | I_{MAX} | ENABLE |
|-----------|-------------------------------------|-----|-----------|-------------|
| TPS22990 | 3.9 mΩ | Yes | 10 A | Active high |
| TPS22990N | 3.9 mΩ | No | 10 A | Active high |

6 Pin Configuration and Functions

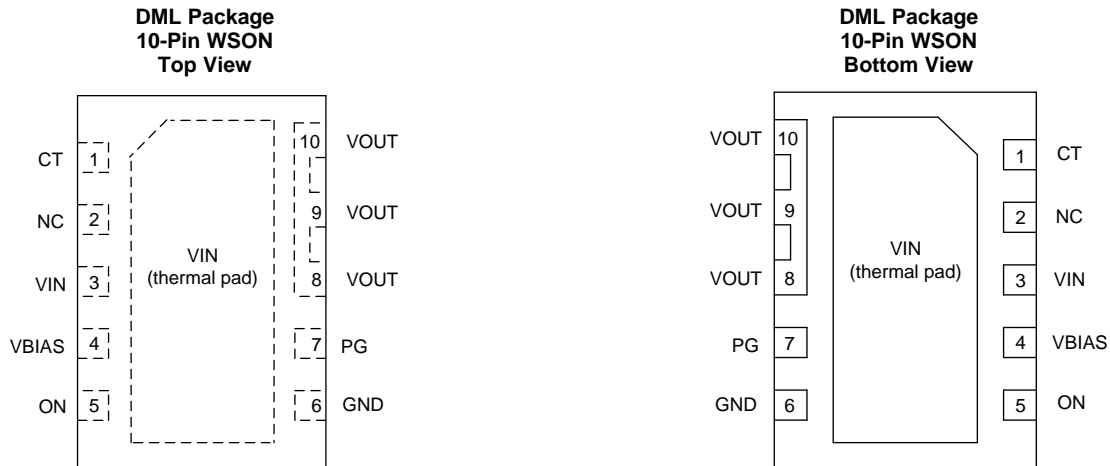

Pin Functions

| PIN | | TYPE | DESCRIPTION |
|-----|-------------------|------|--|
| NO. | NAME | | |
| 1 | CT | O | VOUT slew rate control |
| 2 | NC | — | Not internally connected |
| 3 | VIN | I | Switch input. Bypass this input with a ceramic capacitor to GND |
| 4 | VBIAS | P | Bias voltage. Power supply to the device |
| 5 | ON | I | Active high switch control input. Do not leave floating |
| 6 | GND | GND | Device ground |
| 7 | PG | O | Power good. Active high, open drain output. Tie to GND if not used |
| 8 | VOUT | O | Switch output |
| 9 | | | |
| 10 | | | |
| — | VIN (Thermal Pad) | I | Switch input. VIN and thermal pad (exposed center pad) to alleviate thermal stress. See the Layout section for layout guidelines |

7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

| | | MIN | MAX | UNIT |
|-------------------|--|------|-----|------|
| V _{IN} | Input voltage | −0.3 | 6 | V |
| V _{BIAS} | Bias voltage | −0.3 | 6 | V |
| V _{OUT} | Output voltage | −0.3 | 6 | V |
| V _{ON} | ON voltage | −0.3 | 6 | V |
| V _{PG} | PG voltage | −0.3 | 6 | V |
| V _{CT} | CT voltage | −0.3 | 15 | V |
| I _{MAX} | Maximum continuous switch current at T _J = 125°C | | 10 | A |
| I _{PLS} | Maximum pulsed switch current, pulse < 300 μs, 2% duty cycle | | 12 | A |
| T _J | Maximum junction temperature | | 125 | °C |
| T _{LEAD} | Maximum lead temperature (10-s soldering time) | | 300 | °C |
| T _{stg} | Storage temperature | −65 | 150 | °C |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

7.2 ESD Ratings

| | | VALUE | UNIT |
|--------------------|-------------------------|--|-------|
| V _(ESD) | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾ | ±2000 |
| | | Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾ | ±1000 |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

| | | | MIN | MAX | UNIT |
|---------------------|--------------------------------|--|------------------|-------------------|------|
| V _{IN} | Input voltage | | 0.6 | V _{BIAS} | V |
| V _{BIAS} | Bias voltage | | 2.5 | 5.5 | V |
| V _{OUT} | Output voltage | | | V _{IN} | V |
| V _{ON} | ON voltage | | 0 | 5.5 | V |
| V _{PG} | PG voltage | | 0 | 5.5 | V |
| V _{IH, ON} | High-level input voltage, ON | V _{BIAS} = 2.5 V to 5 V, T _A < 85°C | 1.05 | 5.5 | V |
| | | V _{BIAS} = 2.5 V to 5.5 V, T _A < 105°C | 1.2 | 5.5 | |
| V _{IL, ON} | Low-level input voltage, ON | | 0 | 0.5 | V |
| C _{IN} | Input capacitor | | 1 ⁽¹⁾ | | μF |
| T _A | Operating free-air temperature | | −40 | 105 | °C |

- (1) See the [Application Information](#) section.

7.4 Thermal Information

| THERMAL METRIC ⁽¹⁾ | | TPS22990 | UNIT |
|-------------------------------|--|------------|------|
| | | DML (WSON) | |
| | | 10 PINS | |
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | 51.4 | °C/W |
| $R_{\theta JC(top)}$ | Junction-to-case (top) thermal resistance | 65 | °C/W |
| $R_{\theta JB}$ | Junction-to-board thermal resistance | 17 | °C/W |
| Ψ_{JT} | Junction-to-top characterization parameter | 2.1 | °C/W |
| Ψ_{JB} | Junction-to-board characterization parameter | 17 | °C/W |
| $R_{\theta JC(bot)}$ | Junction-to-case (bottom) thermal resistance | 3.7 | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

7.5 Electrical Characteristics— $V_{BIAS} = 5\text{ V}$

Unless otherwise noted, the specification in the following table applies over the operating ambient temp $-40^{\circ}\text{C} \leq T_A \leq +105^{\circ}\text{C}$ (full) and $V_{BIAS} = 5\text{ V}$. Typical values are for $T_A = 25^{\circ}\text{C}$ (unless otherwise noted).

| PARAMETER | | TEST CONDITIONS | T_A | MIN | TYP | MAX | UNIT |
|------------------------------------|------------------------------|--|---|---|-------|-----|---------------|
| POWER SUPPLIES AND CURRENTS | | | | | | | |
| I_Q, V_{BIAS} | V_{BIAS} quiescent current | $I_{OUT} = 0\text{ A}$, $V_{IN} = V_{ON} = 5\text{ V}$ | -40°C to $+85^{\circ}\text{C}$ | | 63 | 76 | μA |
| | | | -40°C to $+105^{\circ}\text{C}$ | | | 77 | |
| I_{SD}, V_{BIAS} | V_{BIAS} shutdown current | $V_{ON} = 0\text{ V}$, $V_{OUT} = 0\text{ V}$ | -40°C to $+85^{\circ}\text{C}$ | | 5.5 | 7 | μA |
| | | | -40°C to $+105^{\circ}\text{C}$ | | | 7 | |
| I_{SD}, V_{IN} | V_{IN} shutdown current | $V_{ON} = 0\text{ V}$, $V_{OUT} = 0\text{ V}$ | $V_{IN} = 5\text{ V}$ | -40°C to $+85^{\circ}\text{C}$ | 0.004 | 4 | μA |
| | | | $V_{IN} = 5\text{ V}$ | -40°C to $+105^{\circ}\text{C}$ | | 10 | |
| | | | $V_{IN} = 3.3\text{ V}$ | -40°C to $+85^{\circ}\text{C}$ | 0.003 | 3 | |
| | | | $V_{IN} = 3.3\text{ V}$ | -40°C to $+105^{\circ}\text{C}$ | | 7 | |
| | | | $V_{IN} = 2.5\text{ V}$ | -40°C to $+85^{\circ}\text{C}$ | 0.002 | 2 | |
| | | | $V_{IN} = 2.5\text{ V}$ | -40°C to $+105^{\circ}\text{C}$ | | 5 | |
| | | | $V_{IN} = 1.8\text{ V}$ | -40°C to $+85^{\circ}\text{C}$ | 0.002 | 2 | |
| | | | $V_{IN} = 1.8\text{ V}$ | -40°C to $+105^{\circ}\text{C}$ | | 4 | |
| | | | $V_{IN} = 1.05\text{ V}$ | -40°C to $+85^{\circ}\text{C}$ | 0.001 | 1 | |
| | | | $V_{IN} = 1.05\text{ V}$ | -40°C to $+105^{\circ}\text{C}$ | | 3 | |
| I_{ON} | ON pin input leakage current | $V_{ON} = 5.5\text{ V}$ | -40°C to $+85^{\circ}\text{C}$ | | | 0.1 | μA |
| | | | -40°C to $+105^{\circ}\text{C}$ | | | | |
| $V_{HYS,ON}$ | ON pin hysteresis | $V_{IN} = 5\text{ V}$ | 25°C | | 123 | | mV |
| $I_{PG, LKG}$ | Leakage current into PG pin | $V_{PG} = 5\text{ V}$ | -40°C to $+105^{\circ}\text{C}$ | | | 0.5 | μA |
| $V_{PG,OL}$ | PG output low voltage | $V_{ON} = 0\text{ V}$, $I_{PG} = 1\text{ mA}$ | -40°C to $+105^{\circ}\text{C}$ | | | 0.2 | V |
| RESISTANCE CHARACTERISTICS | | | | | | | |

Electrical Characteristics— $V_{BIAS} = 5\text{ V}$ (continued)

Unless otherwise noted, the specification in the following table applies over the operating ambient temp $-40^{\circ}\text{C} \leq T_A \leq +105^{\circ}\text{C}$ (full) and $V_{BIAS} = 5\text{ V}$. Typical values are for $T_A = 25^{\circ}\text{C}$ (unless otherwise noted).

| PARAMETER | TEST CONDITIONS | T_A | MIN | TYP | MAX | UNIT |
|--|--|--------------------------|-----------------|-----|-----|------|
| R_{ON} On-state resistance | $I_{OUT} = -200\text{ mA}$, $V_{ON} = 5\text{ V}$ | $V_{IN} = 5\text{ V}$ | 25°C | 3.9 | 4.8 | mΩ |
| | | | -40°C to +85°C | | 5.7 | |
| | | | -40°C to +105°C | | 6 | |
| | | $V_{IN} = 3.3\text{ V}$ | 25°C | 3.9 | 4.8 | |
| | | | -40°C to +85°C | | 5.7 | |
| | | | -40°C to +105°C | | 6 | |
| | | $V_{IN} = 2.5\text{ V}$ | 25°C | 3.9 | 4.8 | |
| | | | -40°C to +85°C | | 5.7 | |
| | | | -40°C to +105°C | | 6 | |
| | | $V_{IN} = 1.8\text{ V}$ | 25°C | 3.9 | 4.8 | |
| | | | -40°C to +85°C | | 5.7 | |
| | | | -40°C to +105°C | | 6 | |
| | | $V_{IN} = 1.05\text{ V}$ | 25°C | 3.9 | 4.8 | |
| | | | -40°C to +85°C | | 5.7 | |
| | | | -40°C to +105°C | | 6 | |
| | | $V_{IN} = 0.6\text{ V}$ | 25°C | 3.9 | 4.8 | |
| | | | -40°C to +85°C | | 5.7 | |
| | | | -40°C to +105°C | | 6 | |
| R_{PD} Output pull-down resistance (TPS22990 Only) | $V_{IN} = V_{OUT} = 5\text{ V}$, $V_{ON} = 0\text{ V}$ | -40°C to +105°C | | 218 | 253 | Ω |

7.6 Electrical Characteristics— $V_{BIAS} = 3.3\text{ V}$

Unless otherwise noted, the specification in the following table applies over the operating ambient temp $-40^{\circ}\text{C} \leq T_A \leq +105^{\circ}\text{C}$ (full) and $V_{BIAS} = 3.3\text{ V}$. Typical values are for $T_A = 25^{\circ}\text{C}$ (unless otherwise noted).

| PARAMETER | TEST CONDITIONS | T_A | MIN | TYP | MAX | UNIT |
|---|--|--------------------------|-----------------|-------|-----|------|
| POWER SUPPLIES AND CURRENTS | | | | | | |
| I_Q , V_{BIAS} V_{BIAS} quiescent current | $I_{OUT} = 0\text{ A}$, $V_{IN} = V_{ON} = 3.3\text{ V}$ | -40°C to +85°C | | 48 | 58 | μA |
| | | -40°C to +105°C | | | 59 | |
| I_{SD} , V_{BIAS} V_{BIAS} shutdown current | $V_{ON} = 0\text{ V}$, $V_{OUT} = 0\text{ V}$ | -40°C to +85°C | | 4.5 | 6 | μA |
| | | -40°C to +105°C | | | 7 | |
| I_{SD} , V_{IN} V_{IN} shutdown current | $V_{ON} = 0\text{ V}$, $V_{OUT} = 0\text{ V}$ | $V_{IN} = 3.3\text{ V}$ | -40°C to +85°C | 0.003 | 3 | μA |
| | | | -40°C to +105°C | | 7 | |
| | | $V_{IN} = 2.5\text{ V}$ | -40°C to +85°C | 0.002 | 2 | |
| | | | -40°C to +105°C | | 5 | |
| | | $V_{IN} = 1.8\text{ V}$ | -40°C to +85°C | 0.002 | 2 | |
| | | | -40°C to +105°C | | 4 | |
| | | $V_{IN} = 1.05\text{ V}$ | -40°C to +85°C | 0.001 | 1 | |
| | | | -40°C to +105°C | | 3 | |
| I_{SD} , V_{IN} V_{IN} shutdown current | $V_{ON} = 0\text{ V}$, $V_{OUT} = 0\text{ V}$ | $V_{IN} = 0.6\text{ V}$ | -40°C to +85°C | 0.001 | 1 | μA |
| | | | -40°C to +105°C | | 2 | |
| I_{ON} ON pin input leakage current | $V_{ON} = 5.5\text{ V}$ | -40°C to +105°C | | | 0.1 | μA |
| $V_{HYS,ON}$ ON pin hysteresis | $V_{IN} = 3.3\text{ V}$ | 25°C | | 100 | | mV |
| $I_{PG, LKG}$ Leakage current into PG pin | $V_{PG} = 5\text{ V}$ | -40°C to +105°C | | | 0.5 | μA |
| $V_{PG,OL}$ PG output low voltage | $V_{ON} = 0\text{ V}$, $I_{PG} = 1\text{ mA}$ | -40°C to +105°C | | | 0.2 | V |
| RESISTANCE CHARACTERISTICS | | | | | | |

Electrical Characteristics— $V_{BIAS} = 3.3\text{ V}$ (continued)

Unless otherwise noted, the specification in the following table applies over the operating ambient temp $-40^{\circ}\text{C} \leq T_A \leq +105^{\circ}\text{C}$ (full) and $V_{BIAS} = 3.3\text{ V}$. Typical values are for $T_A = 25^{\circ}\text{C}$ (unless otherwise noted).

| PARAMETER | TEST CONDITIONS | T_A | MIN | TYP | MAX | UNIT |
|--|--|--------------------------|-----------------|-----|-----|------|
| R_{ON} On-state resistance | $I_{OUT} = -200\text{ mA}$, $V_{ON} = 5\text{ V}$ | $V_{IN} = 3.3\text{ V}$ | 25°C | 3.9 | 4.8 | mΩ |
| | | | -40°C to +85°C | | 5.7 | |
| | | | -40°C to +105°C | | 6 | |
| | | $V_{IN} = 2.5\text{ V}$ | 25°C | 3.9 | 4.8 | |
| | | | -40°C to +85°C | | 5.7 | |
| | | | -40°C to +105°C | | 6 | |
| | | $V_{IN} = 1.8\text{ V}$ | 25°C | 3.9 | 4.8 | |
| | | | -40°C to +85°C | | 5.7 | |
| | | | -40°C to +105°C | | 6 | |
| | | $V_{IN} = 1.05\text{ V}$ | 25°C | 3.9 | 4.8 | |
| | | | -40°C to +85°C | | 5.7 | |
| | | | -40°C to +105°C | | 6 | |
| | | $V_{IN} = 0.6\text{ V}$ | 25°C | 3.9 | 4.8 | |
| | | | -40°C to +85°C | | 5.7 | |
| | | | -40°C to +105°C | | 6 | |
| R_{PD} Output pull-down resistance (TPS22990 Only) | $V_{IN} = V_{OUT} = 3.3\text{ V}$, $V_{ON} = 0\text{ V}$ | -40°C to +105°C | | 219 | 256 | Ω |

7.7 Switching Characteristics

over operating free-air temperature range (unless otherwise noted)

| PARAMETER ⁽¹⁾ | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--|----------------------------|--|-----|-----|-----|------|
| V_{IN} = 5 V, V_{ON} = V_{BIAS} = 5 V, T_A = 25°C (unless otherwise noted) | | | | | | |
| t _{ON} | Turnon time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 34 | | μs |
| t _{OFF} | Turnoff time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 5.4 | | |
| t _R | VO _{UT} rise time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 31 | | |
| t _F | VO _{UT} fall time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 2.3 | | |
| t _D | ON delay time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 21 | | |
| t _{PG,ON} | PG turnon time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 152 | | |
| t _{PG,OFF} | PG turnoff time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 1.3 | | |
| V_{IN} = 1.05 V, V_{ON} = V_{BIAS} = 5 V, T_A = 25°C (unless otherwise noted) | | | | | | |
| t _{ON} | Turnon time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 30 | | μs |
| t _{OFF} | Turnoff time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 8 | | |
| t _R | VO _{UT} rise time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 13 | | |
| t _F | VO _{UT} fall time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 2.2 | | |
| t _D | ON delay time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 24 | | |
| t _{PG,ON} | PG turnon time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 134 | | |
| t _{PG,OFF} | PG turnoff time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 1.3 | | |
| V_{IN} = 0.6 V, V_{ON} = V_{BIAS} = 5 V, T_A = 25°C (unless otherwise noted) | | | | | | |
| t _{ON} | Turnon time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 29 | | μs |
| t _{OFF} | Turnoff time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 8.8 | | |
| t _R | VO _{UT} rise time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 10 | | |
| t _F | VO _{UT} fall time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 2.2 | | |
| t _D | ON delay time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 24 | | |
| t _{PG,ON} | PG turnon time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 131 | | |
| t _{PG,OFF} | PG turnoff time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 1.3 | | |

(1) Turnoff time and fall time are dependent on the time constant at the load. For TPS22990N, there is no QOD. The time constant is $R_L \times C_L$. For TPS22990, internal pull down R_{PD} is enabled when the switch is disabled. The time constant is $(R_{PD}/R_L) \times C_L$.

Switching Characteristics (continued)

over operating free-air temperature range (unless otherwise noted)

| PARAMETER ⁽¹⁾ | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--|-----------------|--|-----|-----|-----|------|
| V _{IN} = 3.3 V, V _{ON} = 5 V, V _{BIAS} = 3.3 V, T _A = 25°C (unless otherwise noted) | | | | | | |
| t _{ON} | Turnon time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 33 | | μs |
| t _{OFF} | Turnoff time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 6.2 | | |
| t _R | VOUT rise time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 24 | | |
| t _F | VOUT fall time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 2.4 | | |
| t _D | ON delay time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 22 | | |
| t _{PG,ON} | PG turnon time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 132 | | |
| t _{PG,OFF} | PG turnoff time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 1.5 | | |
| V _{IN} = 1.05 V, V _{ON} = 5 V, V _{BIAS} = 3.3 V, T _A = 25°C (unless otherwise noted) | | | | | | |
| t _{ON} | Turnon time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 30 | | μs |
| t _{OFF} | Turnoff time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 8.7 | | |
| t _R | VOUT rise time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 12 | | |
| t _F | VOUT fall time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 2.3 | | |
| t _D | ON delay time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 24 | | |
| t _{PG,ON} | PG turnon time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 122 | | |
| t _{PG,OFF} | PG turnoff time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 1.5 | | |
| V _{IN} = 0.6 V, V _{ON} = 5 V, V _{BIAS} = 3.3 V, T _A = 25°C (unless otherwise noted) | | | | | | |
| t _{ON} | Turnon time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 30 | | μs |
| t _{OFF} | Turnoff time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 9.4 | | |
| t _R | VOUT rise time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 9 | | |
| t _F | VOUT fall time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 2.3 | | |
| t _D | ON delay time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 25 | | |
| t _{PG,ON} | PG turnon time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 119 | | |
| t _{PG,OFF} | PG turnoff time | R _L = 10 Ω, C _L = 0.1 μF, C _T = 0 pF, R _{PU} = 10 kΩ, C _{IN} = 1 μF | | 1.5 | | |

7.8 Typical Characteristics

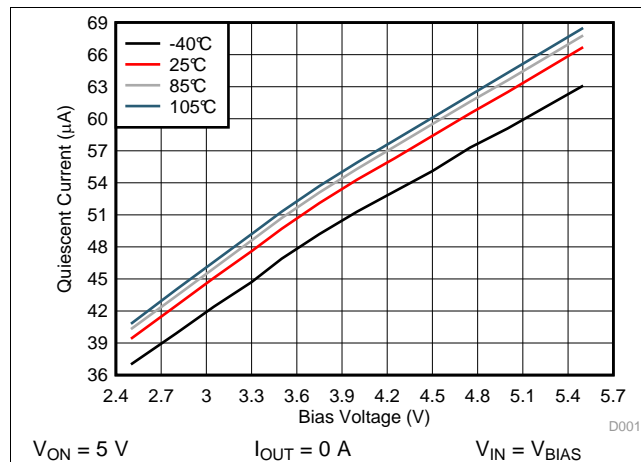


Figure 1. Quiescent Current vs Bias Voltage

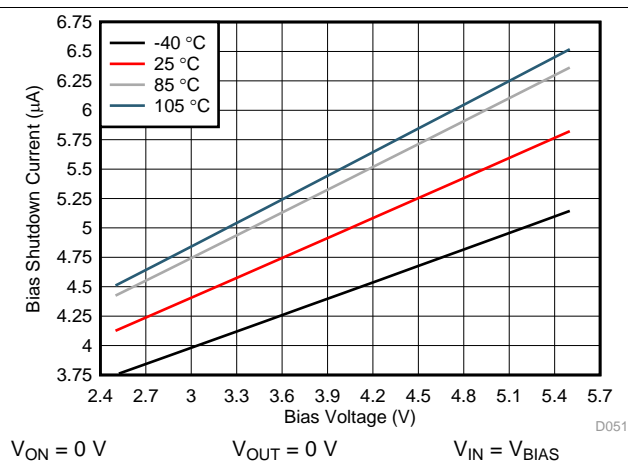


Figure 2. Bias Shutdown Current vs Bias Voltage

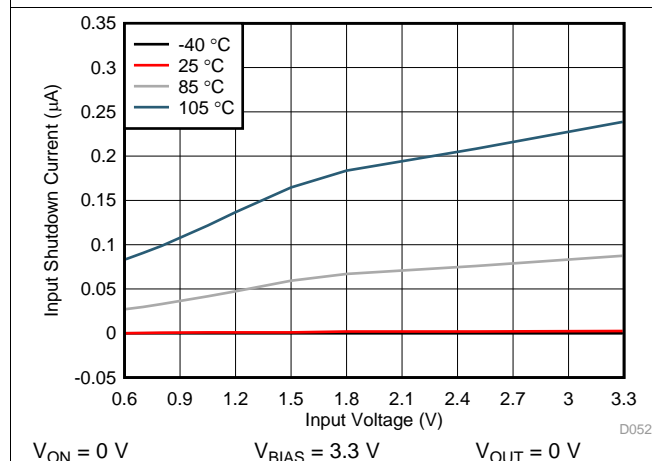


Figure 3. Input Shutdown Current vs Input Voltage

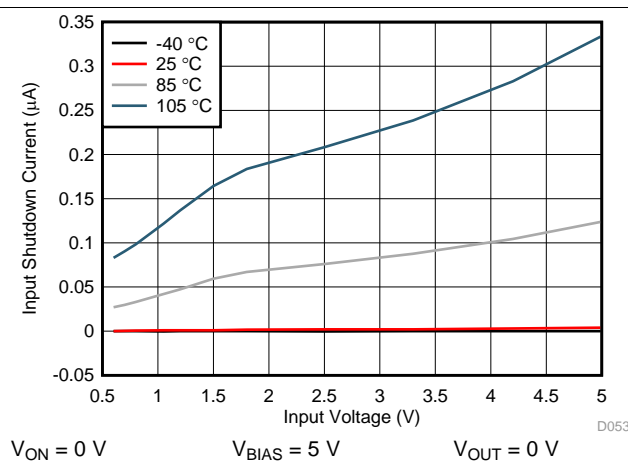


Figure 4. Input Shutdown Current vs Input Voltage

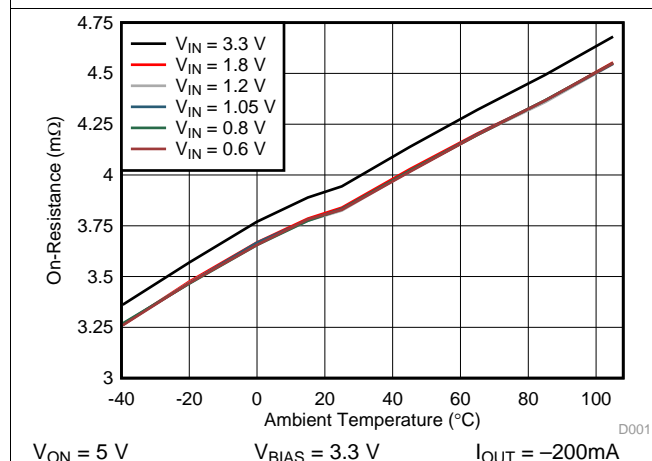


Figure 5. On-Resistance vs Ambient Temperature

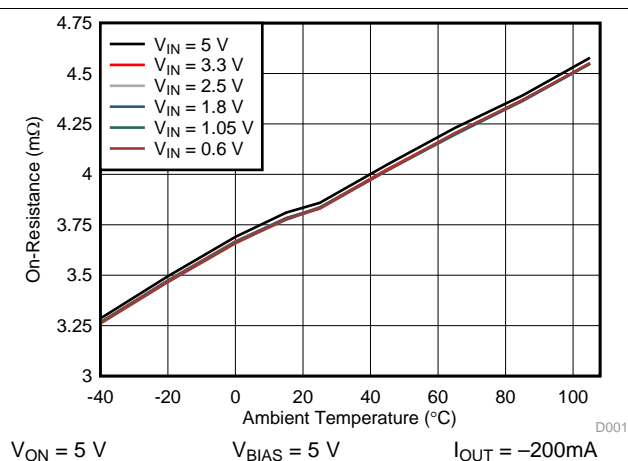


Figure 6. On-Resistance vs Ambient Temperature

Typical Characteristics (continued)

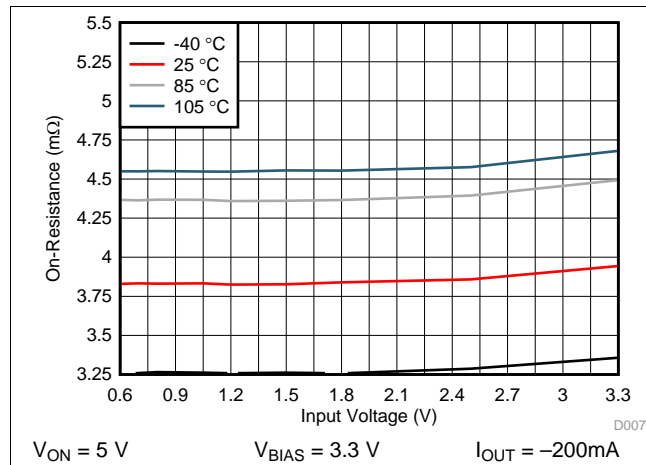


Figure 7. On-Resistance vs Input Voltage

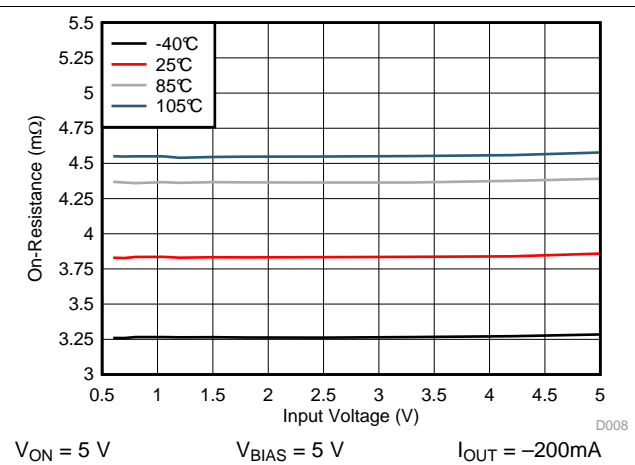


Figure 8. On-Resistance vs Input Voltage

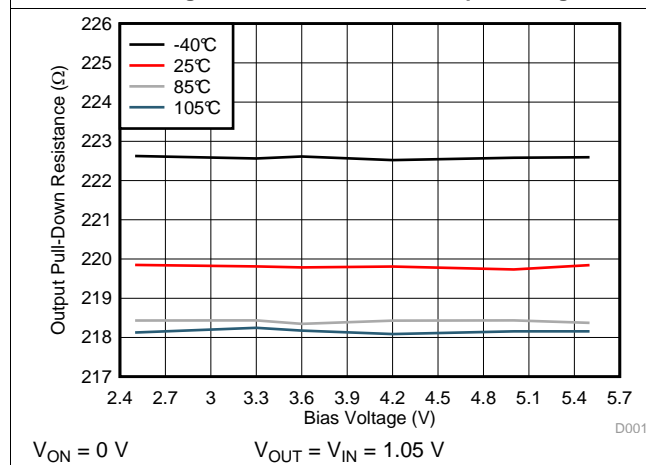


Figure 9. Output Pull-Down Resistance vs Bias Voltage

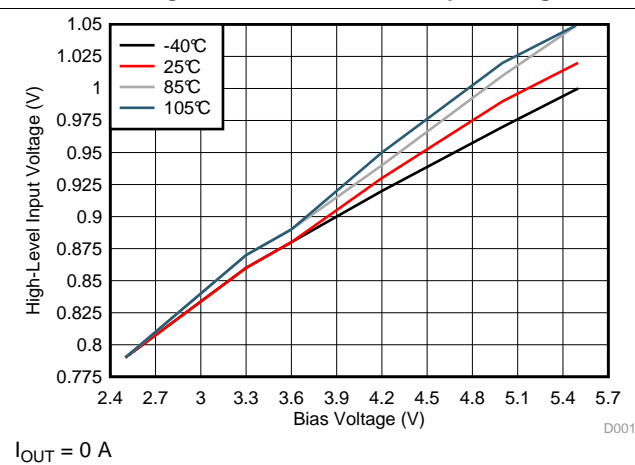


Figure 10. High-Level Input Voltage vs Bias Voltage

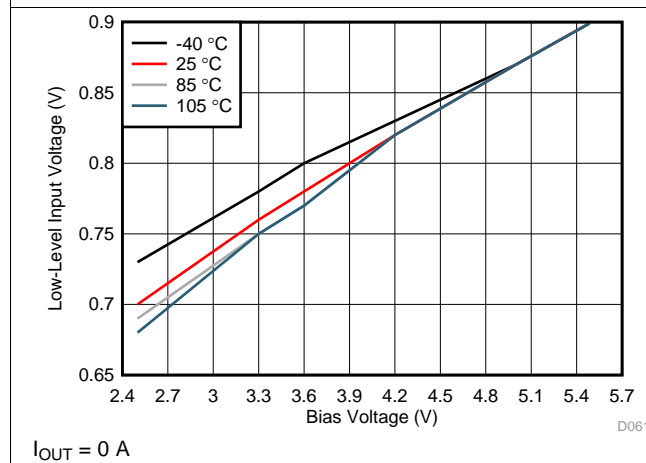


Figure 11. Low-Level Input Voltage vs Bias Voltage

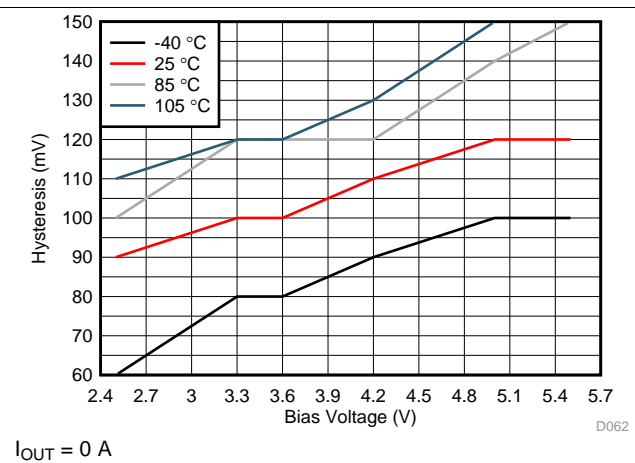


Figure 12. Hysteresis vs Bias Voltage

Typical Characteristics (continued)

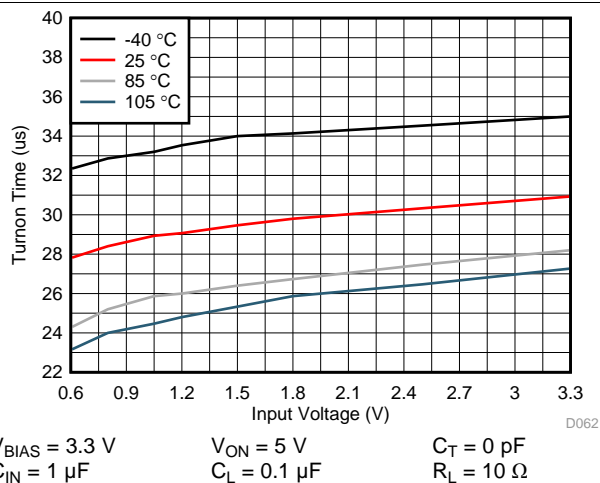


Figure 13. Turnon Time vs Input Voltage

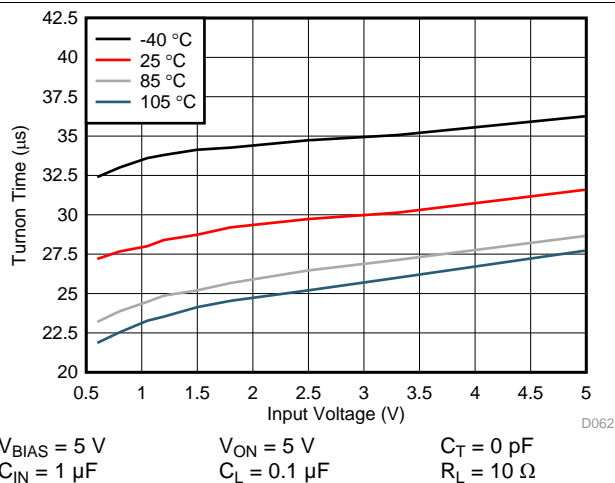


Figure 14. Turnon Time vs Input Voltage

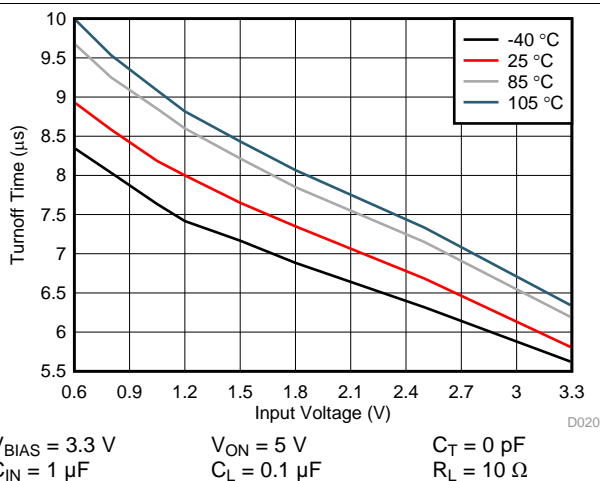


Figure 15. Turnoff Time vs Input Voltage

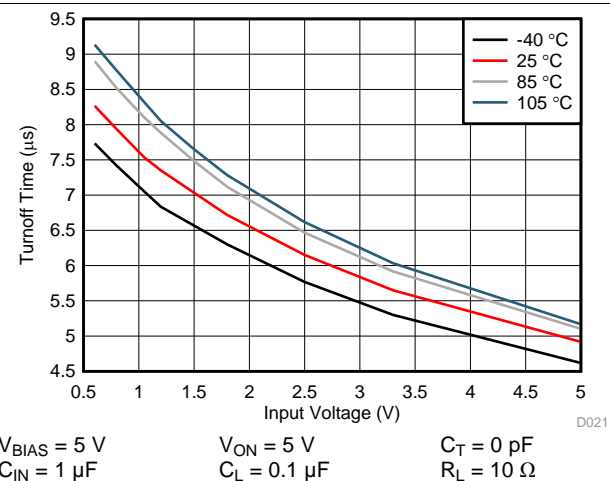


Figure 16. Turnoff Time vs Input Voltage

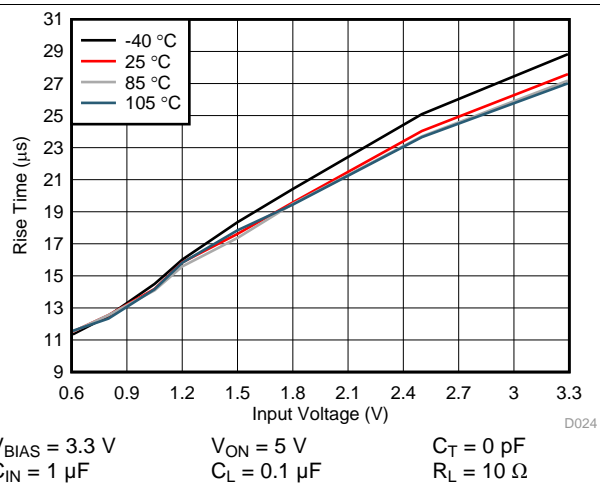


Figure 17. Rise Time vs Input Voltage

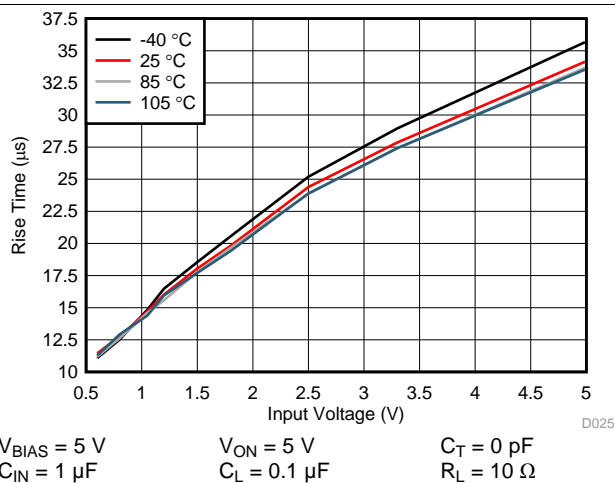
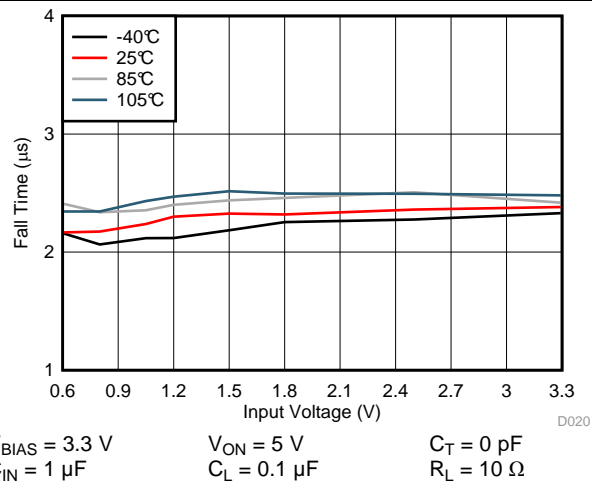
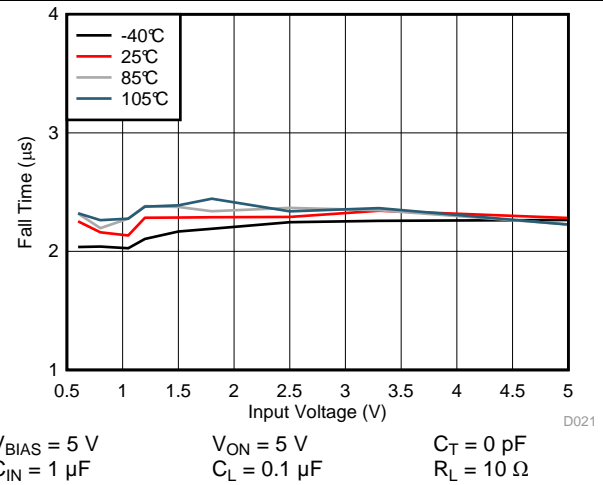
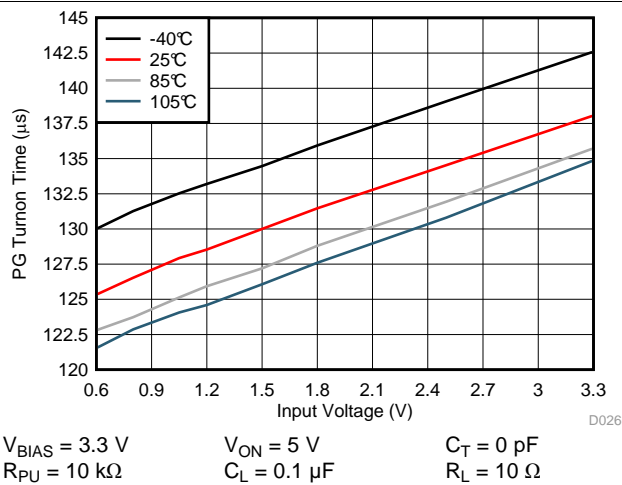
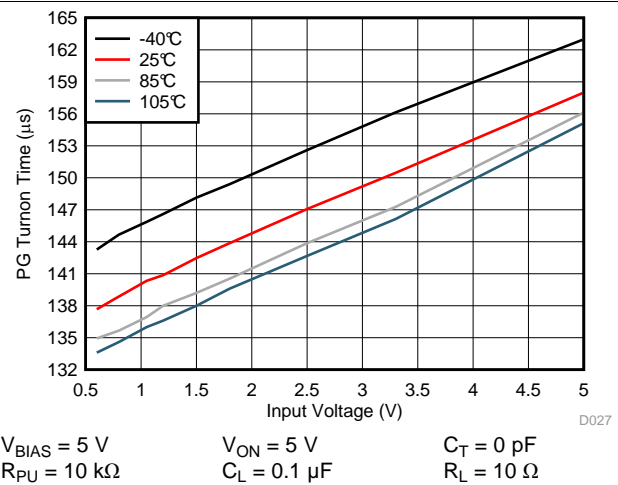
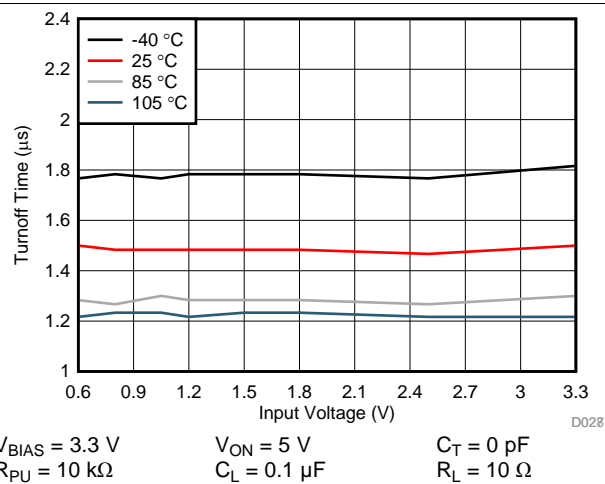
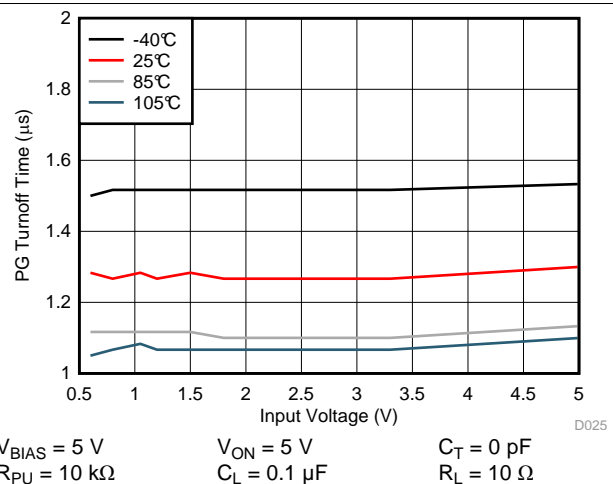


Figure 18. Rise Time vs Input Voltage

Typical Characteristics (continued)


Figure 19. Fall Time vs Input Voltage

Figure 20. Fall Time vs Input Voltage

Figure 21. PG Turnon Time vs Input Voltage

Figure 22. PG Turnon Time vs Input Voltage

Figure 23. PG Turnoff Time vs Input Voltage

Figure 24. PG Turnoff Time vs Input Voltage

Typical Characteristics (continued)

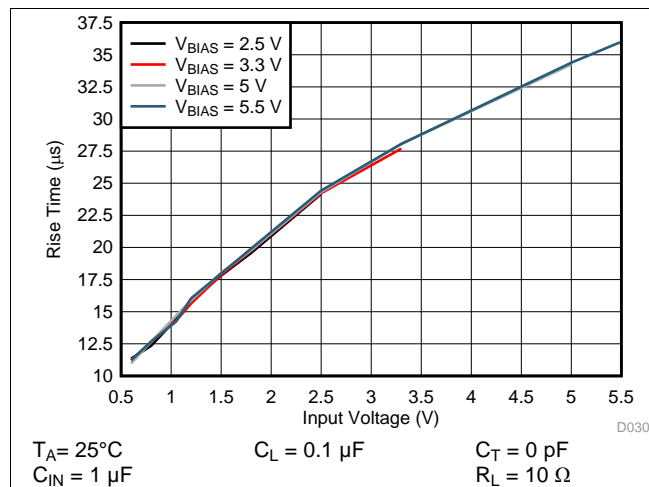


Figure 25. Rise Time vs Input Voltage

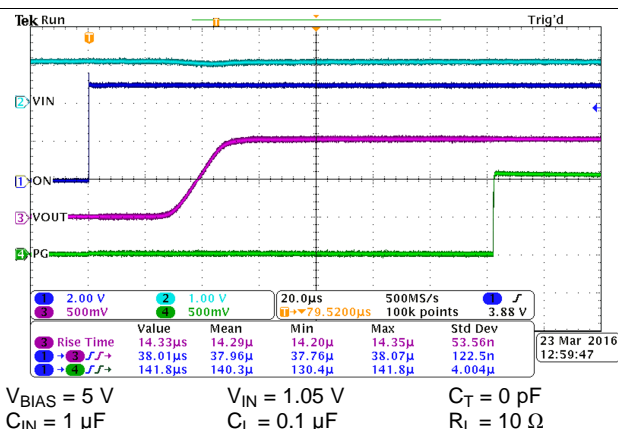


Figure 26. Turnon Response

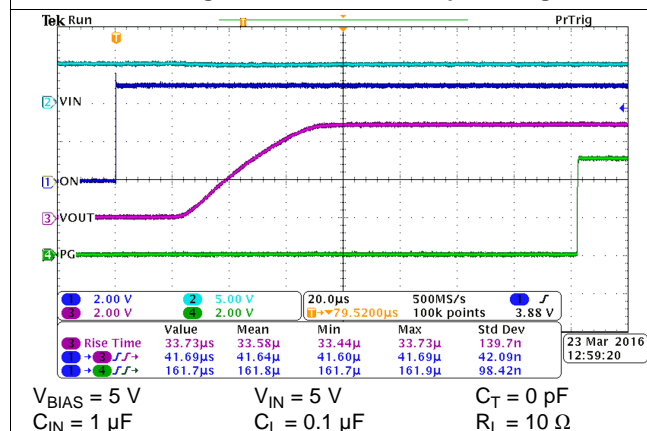


Figure 27. Turnon Response

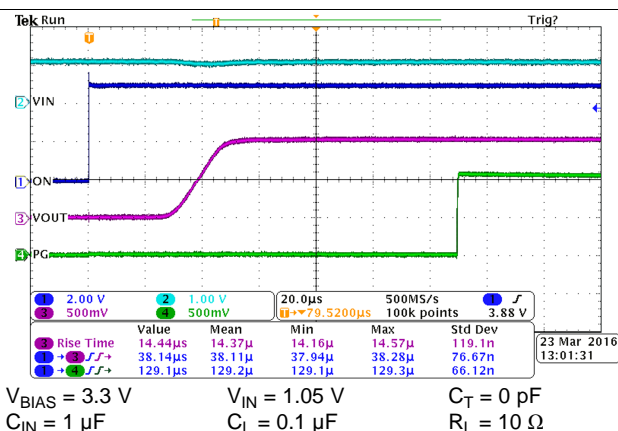


Figure 28. Turnon Response

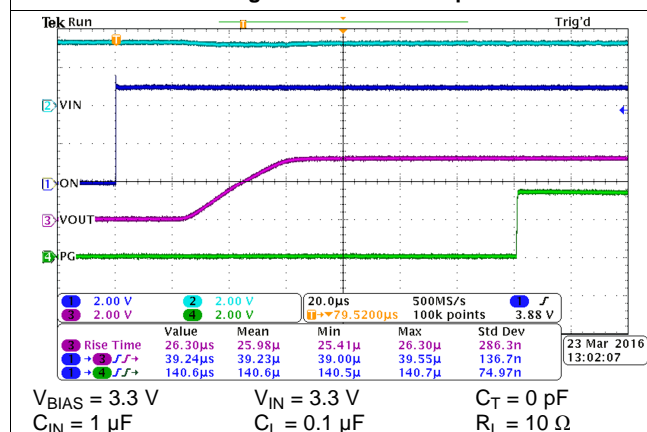


Figure 29. Turnon Response

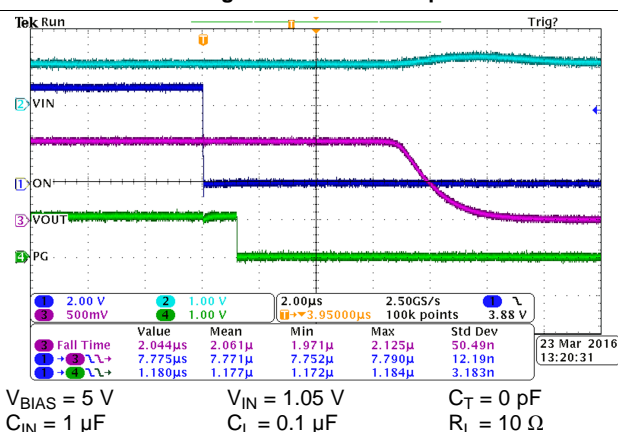


Figure 30. Turnon Response

Typical Characteristics (continued)

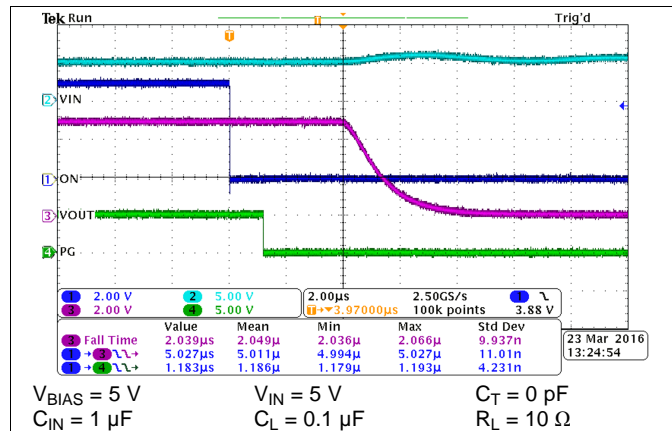


Figure 31. Turnoff Response

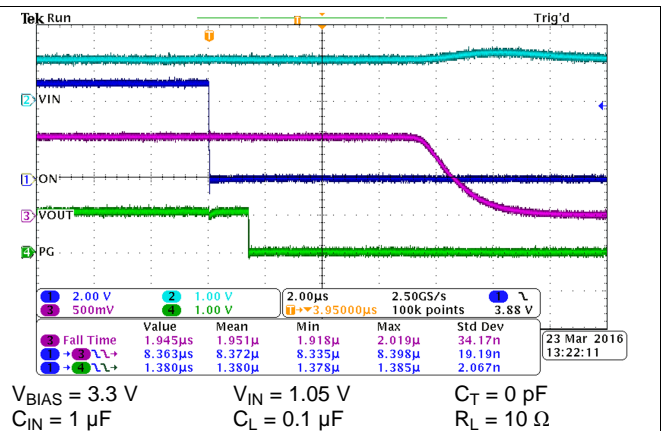


Figure 32. Turnoff Response


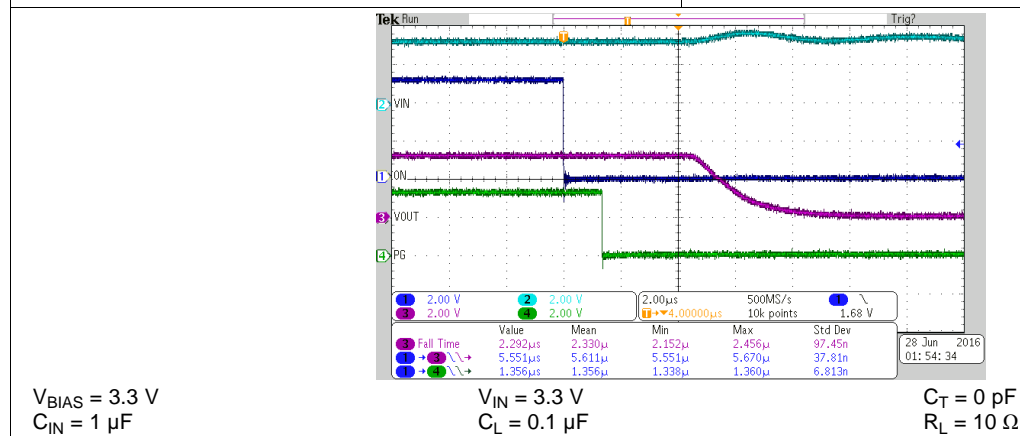



Figure 33. Turnoff Response

8 Parameter Measurement Information

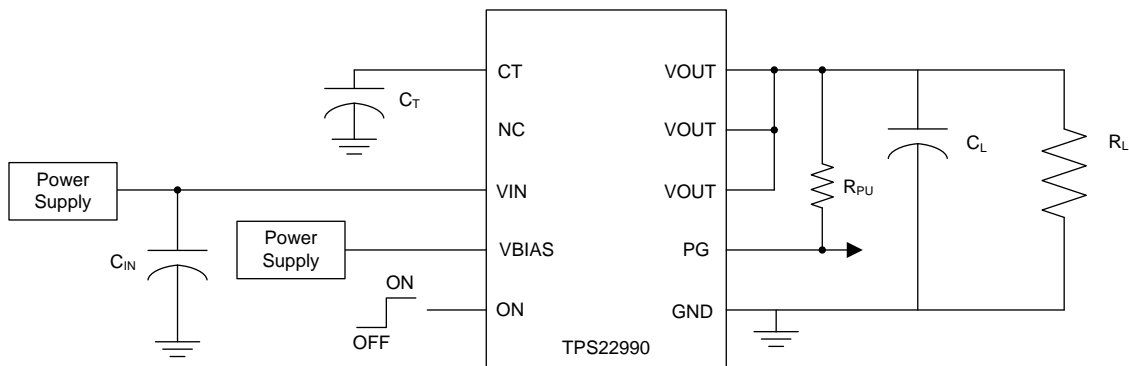

Copyright © 2016, Texas Instruments Incorporated

Figure 34. Timing Test Circuit

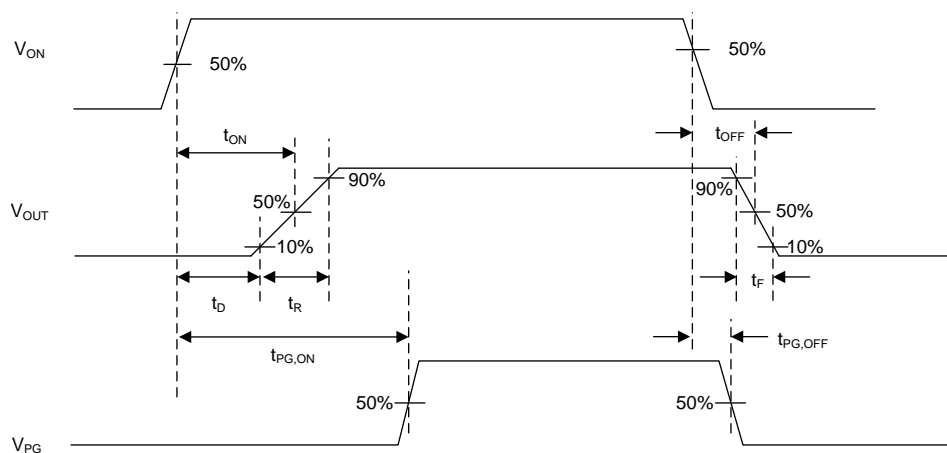

Rise and fall times of the control signals is 100 ns.

Figure 35. Timing Waveforms

9 Detailed Description


9.1 Overview

The TPS22990 device is a single channel load switch with a controlled adjustable turnon and integrated PG indicator. The device contains an N-channel MOSFET that can operate over an input voltage range of 0.6 V to 5.5 V and can support a maximum continuous current of 10 A. The wide input voltage range and high current capability enable the devices to be used across multiple designs and end equipment. 3.9-mΩ On-resistance minimizes the voltage drop across the load switch and power loss from the load switch.

The controlled rise time for the device greatly reduces inrush current caused by large bulk load capacitances, thereby reducing or eliminating power supply droop. The adjustable slew rate through CT provides the design flexibility to trade off the inrush current and power up timing requirements. Integrated PG indicator notifies the system about the status of the load switch to facilitate seamless power sequencing.

During shutdown, the device has very low leakage current, thereby reducing unnecessary leakages for downstream modules during standby. The TPS22990 has an optional 218-Ω On-chip resistor for quick discharge of the output when switch is disabled.

9.2 Functional Block Diagram

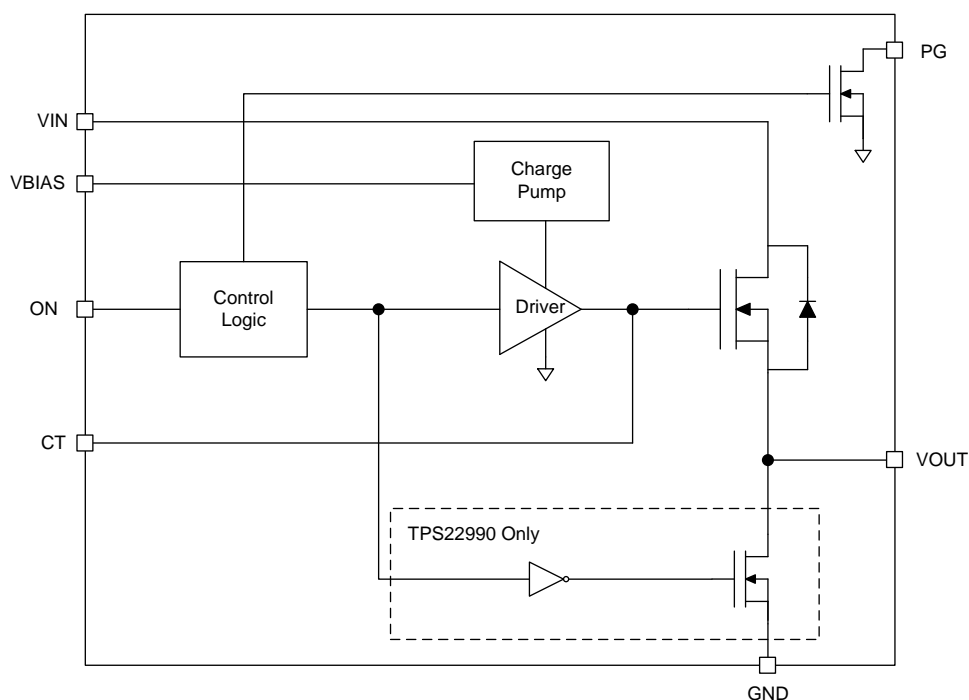

Copyright © 2016, Texas Instruments Incorporated

9.3 Feature Description

9.3.1 On and Off Control

The ON pin controls the state of the load switch. Asserting the pin high enables the switch. The minimum voltage that guarantees logic high is 1.2 V. This pin cannot be left floating and must be tied either high or low for proper functionality.

Feature Description (continued)

9.3.2 Adjustable Rise Time

The TPS22990 has controlled rise time for inrush current control. A capacitor to GND on the CT pin adjusts the rise time. Without any capacitor on the CT, the rise time is at its minimum for fastest timing. The voltage on the CT pin can be as high as 15 V; therefore the minimum voltage rating for the CT capacitor must be 25 V for optimal performance. An approximate equation for the relationship between C_T , V_{IN} and rise time when V_{BIAS} is set to 5 V is shown in Equation 1. As shown in Figure 35, rise time is defined as from 10% to 90% measurement on V_{OUT} .

$$t_R = (0.011 \times V_{IN} + 0.002) \times C_T + 4.7 \times V_{IN} + 7.8$$

where

- t_R is the rise time (in μs)
 - V_{IN} is the input voltage (in V)
 - C_T is the capacitance value on the CT pin (in pF)
- (1)

Table 1 contains rise time values measured on a typical device. Rise times shown below are only valid for the power-up sequence where V_{IN} and V_{BIAS} are already in steady state condition before the ON pin is asserted high.

Table 1. Rise Time vs CT Capacitor

| C_T (pF) | Rise Time (μs) at 25°C $C_L = 0.1 \mu F$, $C_{IN} = 1 \mu F$, $R_L = 10 \Omega$, $V_{BIAS} = 5 V$ | | | | |
|------------|--|------------------|------------------|-------------------|------------------|
| | $V_{IN} = 5 V$ | $V_{IN} = 3.3 V$ | $V_{IN} = 1.8 V$ | $V_{IN} = 1.05 V$ | $V_{IN} = 0.6 V$ |
| 0 | 30.5 | 24.8 | 17.5 | 12.6 | 9.5 |
| 220 | 44.6 | 34 | 22.7 | 15.8 | 11.4 |
| 470 | 56.6 | 42.2 | 27.1 | 18.8 | 13.2 |
| 1000 | 85 | 61.1 | 38.9 | 25.2 | 17.9 |
| 2200 | 154.6 | 107 | 64.7 | 40.9 | 27.7 |
| 4700 | 284.6 | 193.5 | 114.4 | 72.8 | 48.1 |
| 10000 | 598.5 | 404.8 | 233.2 | 146.9 | 98.6 |

9.3.3 Power Good (PG)

The TPS22990 has a power good (PG) output signal to indicate the gate of the pass FET is driven high and the switch is on with the On-resistance close to its final value (full load ready). The signal is an active high and open drain output which can be connected to a voltage source through an external pull up resistor, R_{PU} . This voltage source can be V_{OUT} from the TPS22990 or another external voltage. V_{BIAS} is required for PG to have a valid output. Equation 2 below shows the approximate equation for the relationship between C_T , V_{IN} and PG turnon time ($t_{PG,ON}$) when V_{BIAS} is set to 5 V.

$$t_{PG,ON} = (0.013 \times V_{IN} + 0.04) \times C_T + 4.7 \times V_{IN} + 129$$

where

- $t_{PG,ON}$ is the PG turnon time (in μs)
 - V_{IN} is the input voltage (in V)
 - C_T is the capacitance value on the CT pin (in pF)
- (2)

Table 2 contains PG turnon time values measured on a typical device.

Table 2. PG Turnon Time vs CT Capacitor

| C _T (pF) | Typical PG turnon time (us) at 25°C C _L = 0.1 uF, C _{IN} = 1 uF, R _L = 10 Ω, V _{BIAS} = 5 V, R _{PU} = 10 kΩ | | | | |
|---------------------|---|-------------------------|-------------------------|--------------------------|-------------------------|
| | V _{IN} = 5 V | V _{IN} = 3.3 V | V _{IN} = 1.8 V | V _{IN} = 1.05 V | V _{IN} = 0.6 V |
| 0 | 151.9 | 144.4 | 137.5 | 133.9 | 131.3 |
| 220 | 177.7 | 164.6 | 153.3 | 147.1 | 143.5 |
| 470 | 200.9 | 183.2 | 167.4 | 159.2 | 154.4 |
| 1000 | 257.2 | 227.8 | 202.5 | 189.5 | 181.3 |
| 2200 | 390.6 | 332.3 | 282.4 | 257.1 | 241.6 |
| 4700 | 636.4 | 525.6 | 429.8 | 382.7 | 353.3 |
| 10000 | 1239 | 999.8 | 792.4 | 689.4 | 627.4 |

9.3.4 Quick Output Discharge (QOD) (TPS22990 Only)

The TPS22990 family includes an optional QOD feature. When the switch is disabled, a discharge resistor is connected between VOUT and GND. This resistor has a typical value of 218 Ω and prevents the output from floating while the switch is disabled.

9.4 Device Functional Modes

Table 3 shows the function table for TPS22990.

Table 3. Function Table

| ON | VIN to VOUT | OUTPUT DISCHARGE ⁽¹⁾ |
|----|-------------|---------------------------------|
| L | OFF | ENABLED |
| H | ON | DISABLED |

(1) This feature is in the TPS22990 only (not in TPS22990N).

10 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

10.1 Application Information

10.1.1 Input to Output Voltage Drop

The input to output voltage drop in the device is determined by the R_{ON} of the device and the load current. The R_{ON} of the device depends upon the V_{IN} and V_{BIAS} condition of the device. See the R_{ON} specification in the [Electrical Characteristics— \$V_{BIAS} = 5\text{ V}\$](#) table of this datasheet. Once the R_{ON} of the device is determined based upon the V_{IN} and V_{BIAS} conditions, use [Equation 3](#) to calculate the input to output voltage drop.

$$\Delta V = I_{LOAD} \times R_{ON}$$

where

- ΔV is the voltage drop from VIN to VOUT
- I_{LOAD} is the load current
- R_{ON} is the on-resistance of the device for a specific VIN and VBIAS
- An appropriate I_{LOAD} must be chosen such that the IMAX specification of the device is not violated (3)

10.1.2 Input Capacitor

It is recommended to use a capacitor between VIN and GND close to the device pins. This helps limit the voltage drop on the input supply caused by transient inrush currents when the switch is turned on into a discharged capacitor at the load. A 1- μF ceramic capacitor, C_{IN} , is usually sufficient. Higher values of C_{IN} can be used to further reduce the voltage drop. A C_{IN} to C_L ratio of 10 to 1 is recommended for minimizing VIN dip caused by inrush currents during startup, where C_L is the load capacitance.

10.1.3 Thermal Consideration

The maximum junction temperature should be limited to below 125°C. Use [Equation 4](#) to calculate the maximum allowable dissipation, $P_{D(max)}$ for a given output load current and ambient temperature. $R_{\theta JA}$ is highly dependent upon board layout.

$$P_{D(max)} = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$

where

- $P_{D(max)}$ is the maximum allowable power dissipation
- $T_{J(max)}$ is the maximum allowable junction temperature
- T_A is the ambient temperature
- $R_{\theta JA}$ is the junction-to-air thermal impedance (4)

10.1.4 PG Pull Up Resistor

The PG output is an open drain signal which connects to a voltage source through a pull up resistor R_{PU} . The PG signal can be used to drive the enable pins of downstream devices, EN. PG is active high, and its voltage is given by [Equation 5](#).

Application Information (continued)

$$V_{PG} = V_{OUT} - (I_{PG,LK} + I_{EN,LK}) \times R_{PU}$$

where

- V_{OUT} is the voltage where PG is tied to
- $I_{PG,LK}$ is the leakage current into PG pin
- $I_{EN,LK}$ is the leakage current into the EN pin driven by PG
- R_{PU} is the pull up resistance

(5)

V_{PG} needs to be higher than $V_{IH, MIN}$ of the EN pin to be treated as logic high. The maximum R_{PU} is determined by [Equation 6](#).

$$R_{PU,MAX} = \frac{V_{OUT} - V_{IH,MIN}}{I_{PG,LK} + I_{EN,LK}}$$

(6)

When PG is disabled, with 1 mA current into PG pin ($I_{PG} = 1 \text{ mA}$), $V_{PG,OL}$ is less than 0.2 V and treated as logic low as long as $V_{IL,MAX}$ of the EN pin is greater than 0.2 V. The minimum R_{PU} is determined by [Equation 7](#).

$$R_{PU,MIN} = \frac{V_{OUT}}{I_{PG} + I_{EN,LK}}$$


(7)

R_{PU} can be chosen within the range defined by $R_{PU,MIN}$ and $R_{PU,MAX}$. $R_{PU} = 10 \text{ k}\Omega$ is used for characterization.

10.1.5 Power Sequencing

The TPS22990 has an integrated power good indicator which can be used for power sequencing. As shown in [Figure 36](#), the switch to the second load is controlled by the PG signal from the first switch. This ensures that the power to load 2 is only enabled after the power to load 1 is enabled and the first switch is full load ready.

Application Information (continued)

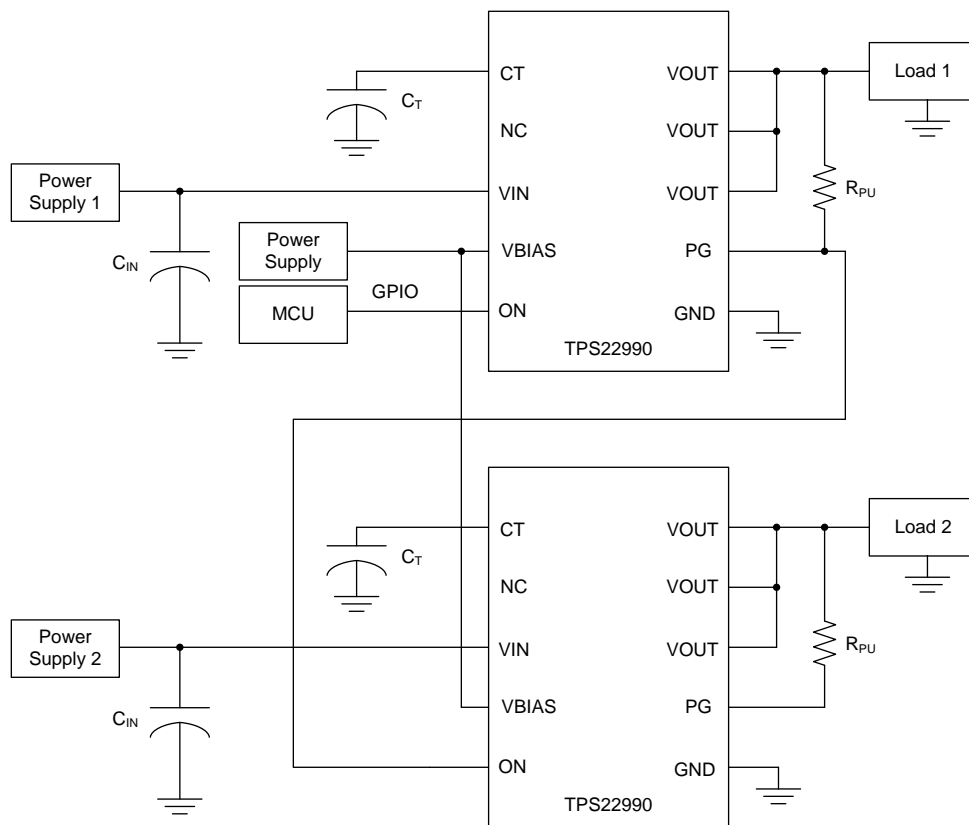

Copyright © 2016, Texas Instruments Incorporated

Figure 36. Power Sequencing

10.1.6 Standby Power Reduction

Any end equipment that is being powered from a battery has a need to reduce current consumption in order to maintain the battery charge for a longer time. The TPS22990 devices help to accomplish this reduction by turning off the supply to the downstream modules that are in standby state and significantly reduce the leakage current overhead of the standby modules as shown in [Figure 37](#).

Application Information (continued)

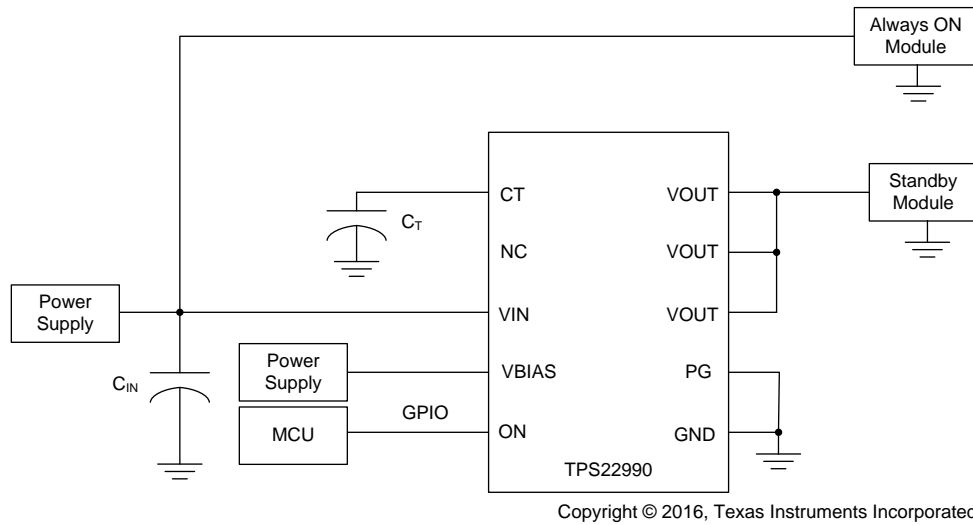


Figure 37. Standby Power Reduction

10.2 Typical Application

Figure 38 demonstrates how to use TPS22990 to limit inrush current to output capacitance.

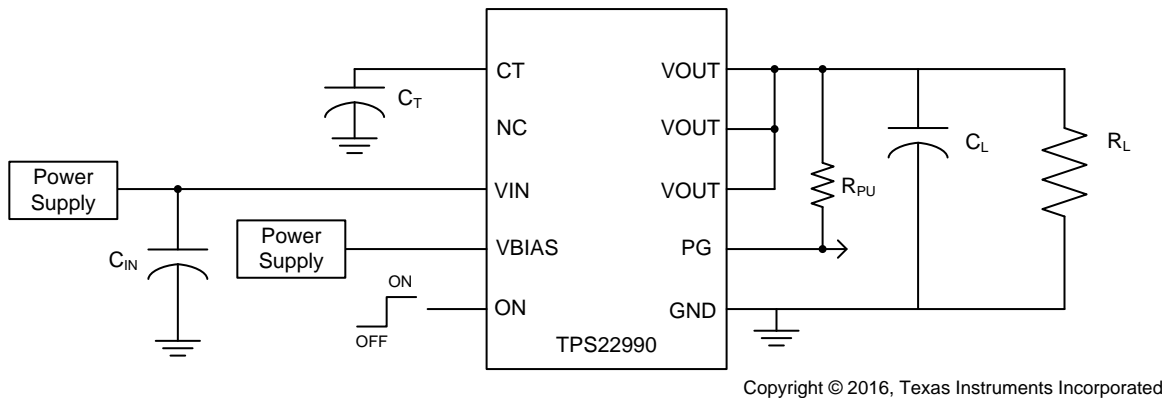


Figure 38. Powering a Downstream Module

Typical Application (continued)

10.2.1 Design Requirements

For this design example, use the input parameters shown in [Table 4](#).

Table 4. Design Parameters

| DESIGN PARAMETER | EXAMPLE VALUE |
|-----------------------------------|---------------|
| V _{BIAS} | 3.3 V |
| V _{IN} | 1.05 V |
| C _L | 10 μF |
| R _L | None |
| Maximum acceptable inrush current | 100 mA |

10.2.2 Detailed Design Procedure

10.2.2.1 Managing Inrush Current

When the switch is enabled, the output capacitors must be charged up from 0 V to V_{IN}. This charge arrives in the form of inrush current. Inrush current can be calculated using [Equation 8](#).

$$I_{INRUSH} = C_L \times \frac{dV}{dt} \approx C_L \times \frac{0.8 \times V_{IN}}{t_R}$$

where

- I_{INRUSH} is the Inrush current
 - C_L is the Load capacitance
 - dV/dt is the Output slew rate
 - V_{IN} is the Input voltage
 - t_R is the rise time
- (8)

Minimum acceptable rise time can be calculated using the design requirements and the inrush current equation. See [Equation 9](#).

$$t_R = \frac{0.8 \times V_{IN} \times C_L}{I_{INRUSH}} = 84 \mu s$$

(9)

The TPS22990 has very fast timing without a CT capacitor (C_T). The typical rise time is 12 μs at V_{BIAS} = 3.3 V, V_{IN} = 1.05 V, R_L = 10 Ω, and C_L = 0.1 μF. As shown in [Figure 39](#), the rise time is much smaller than 84 μs and the inrush current is 460 mA without C_T. The C_T for the required rise time must be calculated using [Equation 1](#). For 84 μs, the calculated C_T = 5259 pF. [Figure 40](#) shows the inrush current is less than 100 mA with C_T = 6800 pF.

TPS22990

SLVSDK1C – MAY 2016 – REVISED SEPTEMBER 2017

www.ti.com

10.2.3 Application Curves

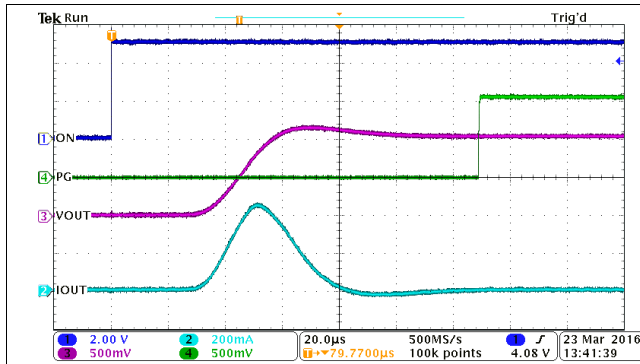


Figure 39. . Inrush Current with $C_T = 0$ pF

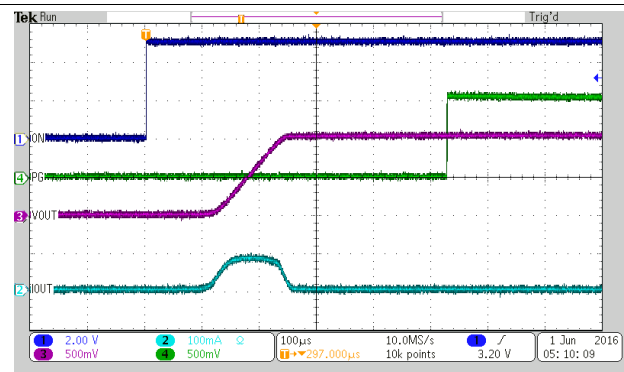


Figure 40. Inrush Current with $C_T = 6800$ pF

11 Power Supply Recommendations


The device is designed to operate with a V_{BIAS} range of 2.5 V to 5.5 V, and a V_{IN} range of 0.6 V to V_{BIAS} . The supply must be well regulated and placed as close to the device terminal as possible with the recommended 1- μ F bypass capacitor. If the supply is located more than a few inches from the device terminals, additional bulk capacitance may be required in addition to the ceramic bypass capacitors. In the case where the power supply is slow to respond to a large load current step, additional bulk may also be required. If additional bulk capacitance is required, an electrolytic, tantalum, or ceramic capacitor of 10 μ F may be sufficient.

12 Layout

12.1 Layout Guidelines

For best performance, all traces must be as short as possible. To be most effective, the input and output capacitors must be placed close to the device terminal as possible to minimize the effects that parasitic trace inductances may have on normal operation. Using wide traces for V_{IN} , V_{OUT} , and GND helps minimize the parasitic electrical effects. The CT trace must be as short as possible to reduce parasitic capacitance.

12.2 Layout Example

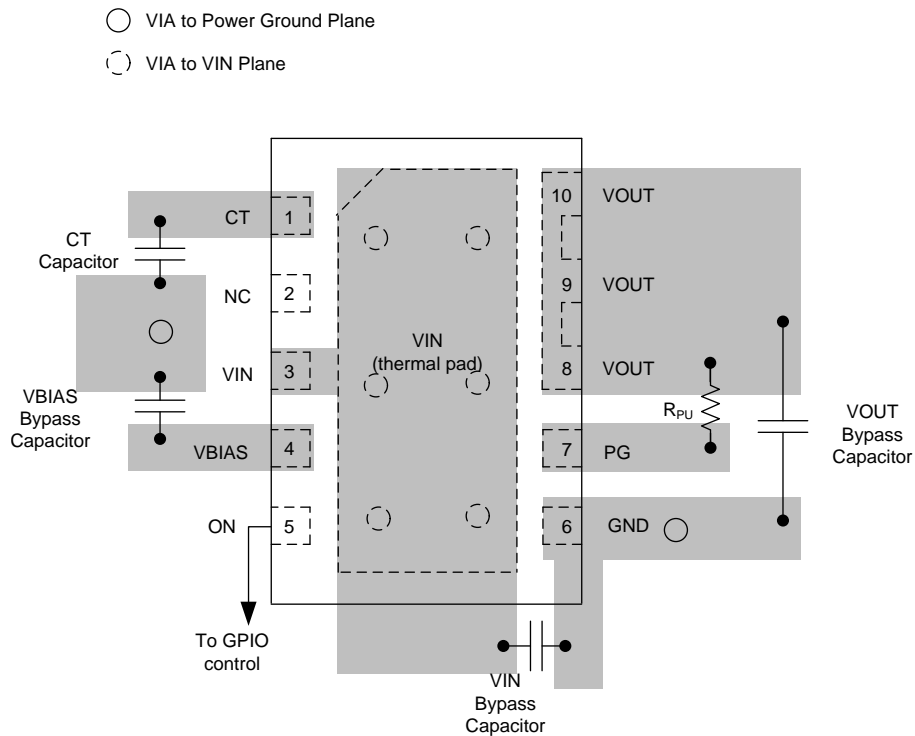

Copyright © 2016, Texas Instruments Incorporated

Figure 41. Layout Example

13 Device and Documentation Support

13.1 Documentation Support

13.1.1 Related Documentation

For related documentation see the following:

- *TPS22990 Load Switch Evaluation Module*, [SLVUAS2](#)
- *Fundamentals of On-Resistance in Load Switches*, [SLVA771](#)

13.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

13.3 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

13.4 Trademarks

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

13.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

13.6 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

14 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|-------------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| TPS22990DMLR | Active | Production | WSO (DML) 10 | 3000 LARGE T&R | Yes | NIPDAU NIPDAUAG | Level-2-260C-1 YEAR | -40 to 105 | RB990 |
| TPS22990DMLR.A | Active | Production | WSO (DML) 10 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | RB990 |
| TPS22990DMLR.B | Active | Production | WSO (DML) 10 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | RB990 |
| TPS22990DMLT | Active | Production | WSO (DML) 10 | 250 SMALL T&R | Yes | NIPDAU NIPDAUAG | Level-2-260C-1 YEAR | -40 to 105 | RB990 |
| TPS22990DMLT.A | Active | Production | WSO (DML) 10 | 250 SMALL T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | RB990 |
| TPS22990DMLT.B | Active | Production | WSO (DML) 10 | 250 SMALL T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | RB990 |
| TPS22990NDMLR | Active | Production | WSO (DML) 10 | 3000 LARGE T&R | Yes | Call TI Nipdauag | Level-2-260C-1 YEAR | -40 to 105 | RB990N |
| TPS22990NDMLR.A | Active | Production | WSO (DML) 10 | 3000 LARGE T&R | Yes | NIPDAUAG | Level-2-260C-1 YEAR | -40 to 105 | RB990N |
| TPS22990NDMLR.B | Active | Production | WSO (DML) 10 | 3000 LARGE T&R | Yes | NIPDAUAG | Level-2-260C-1 YEAR | -40 to 105 | RB990N |
| TPS22990NDMLT | Active | Production | WSO (DML) 10 | 250 SMALL T&R | Yes | Call TI Nipdauag | Level-2-260C-1 YEAR | -40 to 105 | RB990N |
| TPS22990NDMLT.A | Active | Production | WSO (DML) 10 | 250 SMALL T&R | Yes | NIPDAUAG | Level-2-260C-1 YEAR | -40 to 105 | RB990N |
| TPS22990NDMLT.B | Active | Production | WSO (DML) 10 | 250 SMALL T&R | Yes | NIPDAUAG | Level-2-260C-1 YEAR | -40 to 105 | RB990N |

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal



| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS22990DMLR | WSO | DML | 10 | 3000 | 180.0 | 8.4 | 2.3 | 3.2 | 1.0 | 4.0 | 8.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS22990DMLR | WSO | DML | 10 | 3000 | 213.0 | 191.0 | 35.0 |

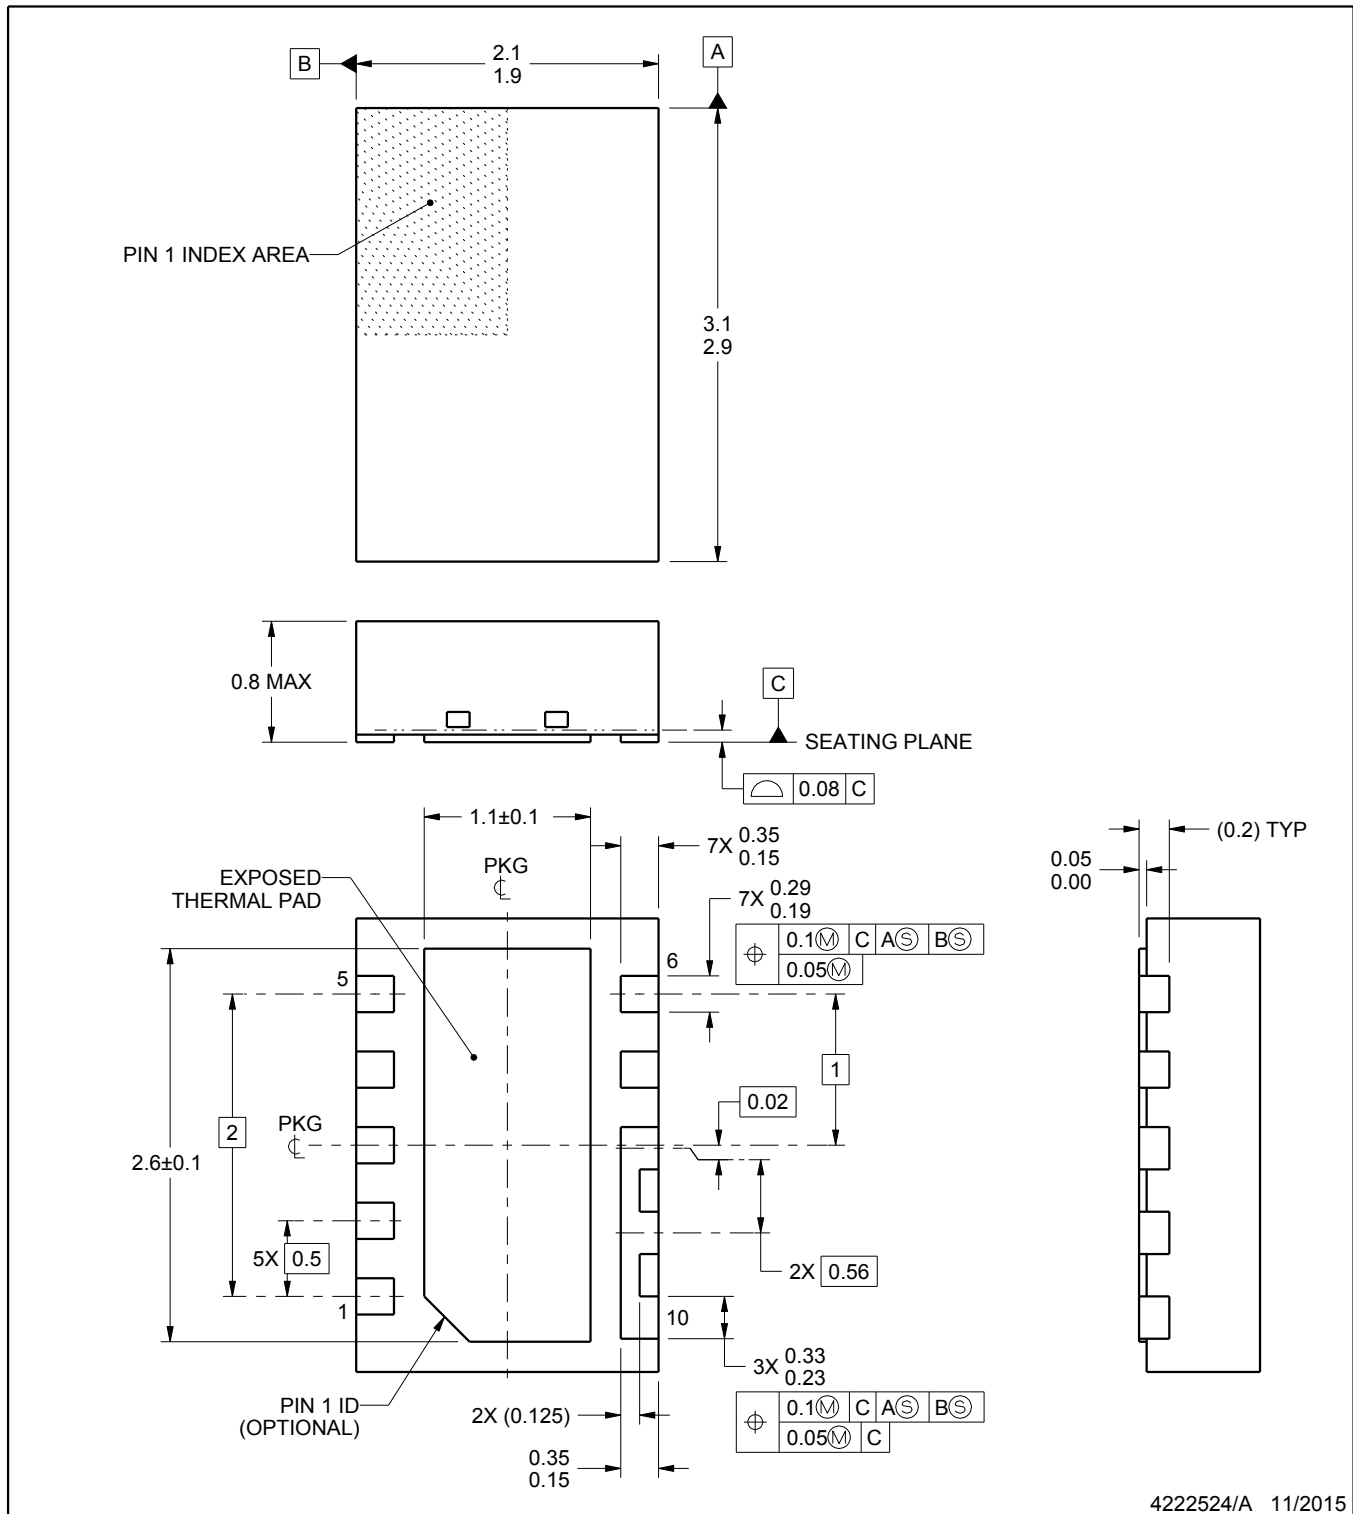

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

EXAMPLE STENCIL DESIGN

DML0010A

WSN - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

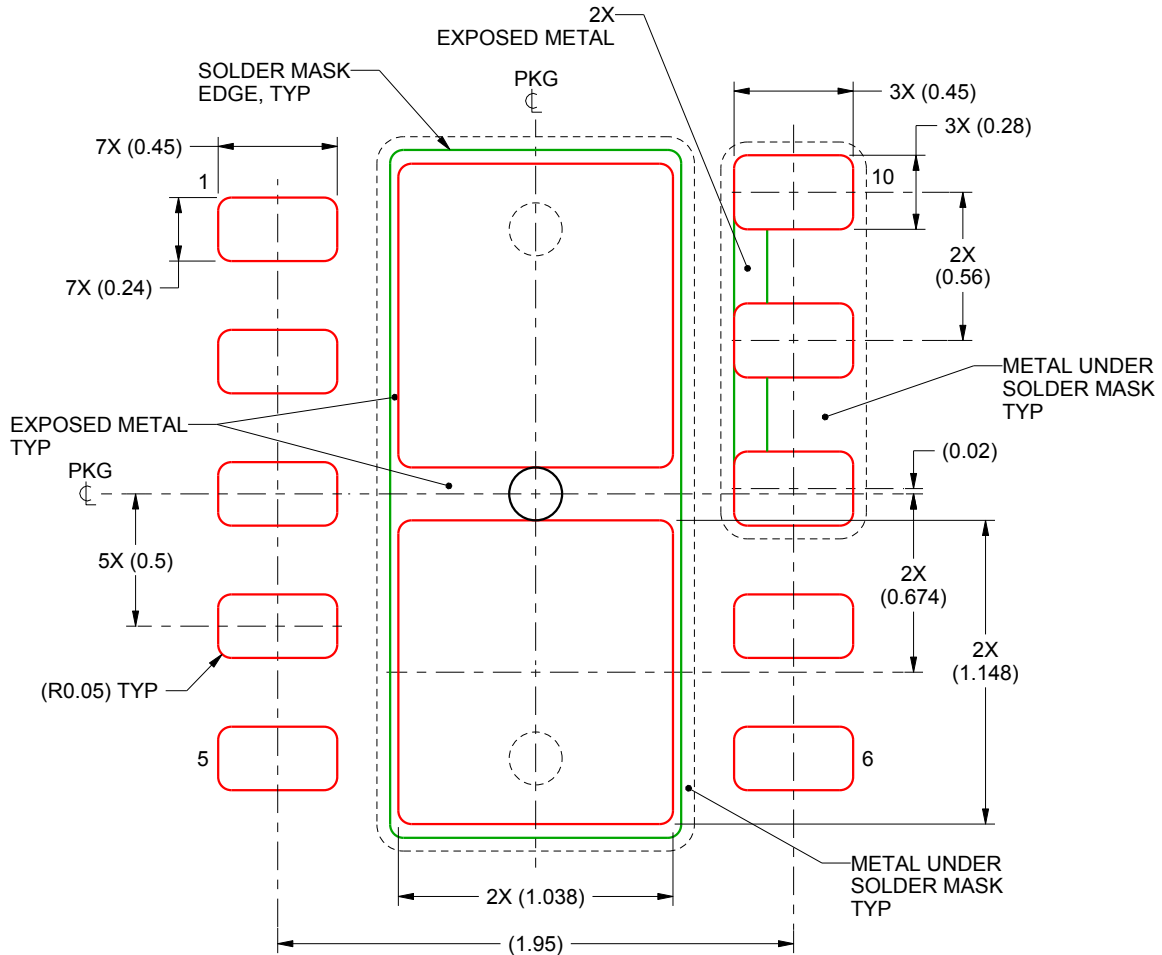

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD
83% PRINTED SOLDER COVERAGE BY AREA
SCALE:35X

4222524/A 11/2015

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated