



TPS7A92

2A、高精度、低ノイズLDO電圧レギュレータ

1 特長

- ライン、負荷、温度の範囲全体にわたって1.0%の精度
- 低い出力ノイズ: $4.6\mu\text{V}_{\text{RMS}}$ (10Hz~100kHz)
- 低いドロップアウト: 2Aで180mV (標準値)
- 広い入力電圧範囲: 1.4V~6.5V
- 広い出力電圧範囲: 0.8V~5.2V
- 高い電源リップル除去(PSRR)
 - DC時に60dB
 - 100kHz時に40dB
 - 1MHz時に40dB
- 高速な過渡応答
- スタートアップ時の突入電流の可変制御と、ソフトスタート時の充電電流の選択
- オープン・ドレインのパワー・グッド(PG)出力
- $R_{\theta\text{JC}} = 3.2^{\circ}\text{C/W}$
- 22 μF 以上のセラミック出力コンデンサで安定
- 2.5mmx2.5mmの10ピンWSOパッケージ

2 アプリケーション

- 高速アナログ回路
 - VCO、ADC、DAC、LVDS
- イメージング: CMOSセンサ、ビデオASIC
- 試験/測定機器
- 計測、医療、オーディオ機器
- デジタル負荷: SerDes、FPGA、DSP

3 概要

TPS7A92デバイスは低ノイズ($4.8\mu\text{V}_{\text{RMS}}$)、低ドロップアウト(LDO)の電圧レギュレータで、2Aを供給でき、ドロップアウトはわずか180mVです。

TPS7A92の出力は外付けの抵抗により0.8V~5.2Vの範囲で調整可能です。TPS7A92は広い入力電圧範囲に対応し、最低1.4V、最高6.5Vで動作します。

1%の出力電圧精度(ライン、負荷、温度の変動に対して)と、ソフトスタート機能による突入電流の低減から、TPS7A92は感受性の高い低電圧のアナログ・デバイス(電圧制御発振器(VCO)、アナログ/デジタル・コンバータ(ADC)、デジタル/アナログ・コンバータ(DAC)、ハイエンド・プロセッサ、フィールド・プログラマブル・ゲート・アレイ(FPGA)など)の電源に理想的です。


TPS7A92は、高速度通信、ビデオ、医療、試験および計測用途など、ノイズに敏感な部品に電力を供給するよう設計されています。出力ノイズが $4.6\mu\text{V}_{\text{RMS}}$ と非常に低く、広帯域のPSRR (1MHzにおいて40dB)を持つため、位相ノイズとクロック・ジッタが最小化されます。これらの機能により、クロッキング・デバイス、ADC、DACの性能が最大化されます。

製品情報⁽¹⁾


| 型番 | パッケージ | 本体サイズ(公称) |
|---------|----------|---------------|
| TPS7A92 | WSO (10) | 2.50mmx2.50mm |

(1) 利用可能なすべてのパッケージについては、このデータシートの末尾にある注文情報を参照してください。

代表的なアプリケーション回路

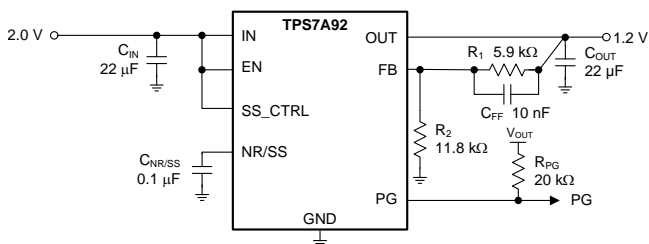

代表的なアプリケーションの図

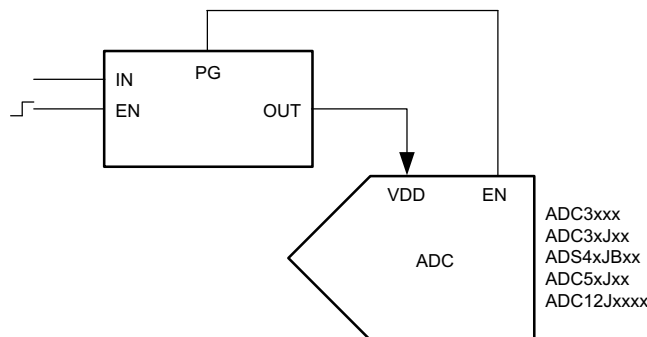

目次

| | | | | | |
|----------|--|-----------|-----------|---|-----------|
| 1 | 特長 | 1 | 8 | Application and Implementation | 17 |
| 2 | アプリケーション | 1 | 8.1 | Application Information..... | 17 |
| 3 | 概要 | 1 | 8.2 | Typical Application | 21 |
| 4 | 改訂履歴 | 2 | 9 | Power Supply Recommendations | 22 |
| 5 | Pin Configuration and Functions | 3 | 10 | Layout | 22 |
| 6 | Specifications | 3 | 10.1 | Layout Guidelines | 22 |
| 6.1 | Absolute Maximum Ratings | 3 | 10.2 | Layout Example | 23 |
| 6.2 | ESD Ratings..... | 4 | 11 | デバイスおよびドキュメントのサポート | 24 |
| 6.3 | Recommended Operating Conditions..... | 4 | 11.1 | デバイス・サポート | 24 |
| 6.4 | Thermal Information | 4 | 11.2 | ドキュメントのサポート | 24 |
| 6.5 | Electrical Characteristics..... | 4 | 11.3 | ドキュメントの更新通知を受け取る方法..... | 24 |
| 6.6 | Typical Characteristics | 6 | 11.4 | コミュニティ・リソース | 25 |
| 7 | Detailed Description | 12 | 11.5 | 商標 | 25 |
| 7.1 | Overview | 12 | 11.6 | 静電気放電に関する注意事項 | 25 |
| 7.2 | Functional Block Diagram | 12 | 11.7 | Glossary | 25 |
| 7.3 | Feature Description..... | 12 | 12 | メカニカル、パッケージ、および注文情報 | 25 |
| 7.4 | Device Functional Modes..... | 16 | | | |

4 改訂履歴

Revision A (April 2018) から Revision B に変更

Page


- Added footnotes to *Recommended Operating Conditions* table 4

2017年7月発行のものから更新

Page

- 変更 value of $C_{NR/SS}$ capacitor from 10 nF to 100 nF in *Application Example* figure 21

5 Pin Configuration and Functions

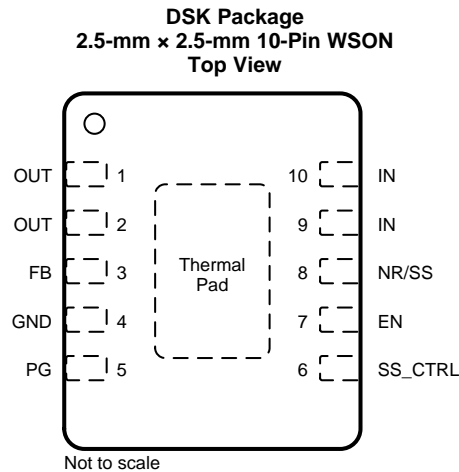

Pin Functions

| PIN | | | DESCRIPTION |
|-------------|-------|-----|---|
| NAME | NO. | I/O | |
| EN | 7 | I | Enable pin. This pin turns the LDO on and off. If $V_{EN} \geq V_{IH(EN)}$, the regulator is enabled. If $V_{EN} \leq V_{IL(EN)}$, the regulator is disabled. The EN pin must be connected to IN if the enable function is not used. |
| FB | 3 | I | Feedback pin. This pin is the input to the control loop error amplifier and is used to set the output voltage of the device. |
| GND | 4 | — | Device GND. Connect to the device thermal pad. |
| IN | 9, 10 | I | Input pin. A 10 μ F or greater input capacitor is required. |
| NR/SS | 8 | — | Noise reduction pin. Connect this pin to an external capacitor to bypass the noise generated by the internal band-gap reference. The capacitor reduces the output noise to very low levels and sets the output ramp rate to limit inrush current. |
| OUT | 1, 2 | O | Regulated output. A 22 μ F or greater capacitor must be connected from this pin to GND for stability. |
| PG | 5 | O | Open-drain power-good indicator pin for the LDO output voltage. A 10-k Ω to 100-k Ω external pullup resistor is required. This pin can be left floating or connected to GND if not used. |
| SS_CTRL | 6 | I | Soft-start control pin. Connect this pin either to GND or IN to change the NR/SS capacitor charging current. If a $C_{NR/SS}$ capacitor is not used, SS_CTRL must be connected to GND to avoid output overshoot. |
| Thermal pad | | — | Connect the thermal pad to the printed circuit board (PCB) ground plane, for an example layout see Figure 42 . |

6 Specifications

6.1 Absolute Maximum Ratings

over operating junction temperature range and all voltages with respect to GND (unless otherwise noted)⁽¹⁾

| | | MIN | MAX | UNIT |
|-------------|--|--------------------|----------------------|------|
| Voltage | IN, PG, EN | –0.3 | 7.0 | V |
| | IN, PG, EN (5% duty cycle, pulse duration = 200 μ s) | –0.3 | 7.5 | |
| | OUT | –0.3 | $V_{IN} + 0.3^{(2)}$ | |
| | SS_CTRL | –0.3 | $V_{IN} + 0.3^{(2)}$ | |
| | NR/SS, FB | –0.3 | 3.6 | |
| Current | OUT | Internally limited | | A |
| | PG (sink current into device) | | 5 | mA |
| Temperature | Operating junction, T_J | –55 | 150 | °C |
| | Storage, T_{stg} | –55 | 150 | |

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) The absolute maximum rating is $V_{IN} + 0.3$ V or 7.0 V, whichever is smaller.

6.2 ESD Ratings

| | | | VALUE | UNIT |
|------------------|-------------------------|--|-------|------|
| V_{ESD} | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾ | ±2000 | V |
| | | Charged device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾ | ±500 | |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating junction temperature range (unless otherwise noted)

| | | MIN | MAX | UNIT |
|--------------------|------------------------------------|----------|----------|------|
| V_{IN} | Input supply voltage range | 1.4 | 6.5 | V |
| V_{OUT} | Output voltage range | 0.8 - 1% | 5.2 + 1% | V |
| I_{OUT} | Output current | 0 | 2 | A |
| C_{IN} | Input capacitor, each input | 10 | | μF |
| C_{OUT} | Output capacitor ⁽¹⁾⁽²⁾ | 22 | | μF |
| $C_{\text{NR/SS}}$ | Noise-reduction capacitor | | 1 | μF |
| R_{PG} | Power-good pullup resistance | 10 | 100 | kΩ |
| T_{J} | Junction temperature range | −40 | 125 | °C |

(1) When $I_{\text{OUT}} \leq 1$ A, the C_{OUT} minimum is 10 μF and the effective output capacitance of 5 μF (minimum) is required for stability.

(2) Effective output capacitance of 11 μF (minimum) is required for stability.

6.4 Thermal Information

| THERMAL METRIC ⁽¹⁾ | | TPS7A92 | UNIT |
|-------------------------------|--|------------|------|
| | | DSK (WSON) | |
| | | 10 PINS | |
| $R_{\theta\text{JA}}$ | Junction-to-ambient thermal resistance | 56.9 | °C/W |
| $R_{\theta\text{JC(top)}}$ | Junction-to-case (top) thermal resistance | 46.3 | °C/W |
| $R_{\theta\text{JB}}$ | Junction-to-board thermal resistance | 29.1 | °C/W |
| Ψ_{JT} | Junction-to-top characterization parameter | 0.8 | °C/W |
| Ψ_{JB} | Junction-to-board characterization parameter | 29.4 | °C/W |
| $R_{\theta\text{JC(bot)}}$ | Junction-to-case (bottom) thermal resistance | 3.2 | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.5 Electrical Characteristics

over operating temperature range ($T_{\text{J}} = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$), $V_{\text{IN}} = 1.4$ V, $V_{\text{OUT(TARGET)}} = 0.8$ V, $I_{\text{OUT}} = 50$ mA, $V_{\text{EN}} = 1.4$ V, $C_{\text{OUT}} = 22$ μF, $C_{\text{NR/SS}} = 0$ nF, $C_{\text{FF}} = 0$ nF, SS_CTRL = GND, PG pin pulled up to V_{INx} with 100 kΩ, and for each channel (unless otherwise noted); typical values are at $T_{\text{J}} = 25^{\circ}\text{C}$

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--|---|---|-------|------------|------|
| V_{IN} | Input supply voltage range | 1.4 | | 6.5 | V |
| V_{REF} | Reference voltage | | 0.8 | | V |
| V_{UVLO} | Input supply UVLO | V_{IN} rising | 1.31 | 1.39 | V |
| V_{HYS} | V_{UVLO} | | 290 | | mV |
| V_{OUT} | Output voltage range | 0.8 - 1.0% | | 5.2 + 1.0% | V |
| | Output voltage accuracy ⁽¹⁾⁽²⁾ | $0.8 \text{ V} \leq V_{\text{OUT}} \leq 5 \text{ V}$, $5 \text{ mA} \leq I_{\text{OUT}} \leq 2 \text{ A}$ | −1.0% | 1.0% | |
| $\Delta V_{\text{OUT}(\Delta V_{\text{IN}})}$ | Line regulation | $I_{\text{OUT}} = 5 \text{ mA}$, $1.4 \text{ V} \leq V_{\text{IN}} \leq 6.5 \text{ V}$ | 0.003 | | %/V |
| $\Delta V_{\text{OUT}(\Delta I_{\text{OUT}})}$ | Load regulation | $5 \text{ mA} \leq I_{\text{OUT}} \leq 2 \text{ A}$ | 0.03 | | %/A |
| V_{DO} | Dropout voltage | $V_{\text{IN}} \geq 1.4 \text{ V}$, $0.8 \text{ V} \leq V_{\text{OUT}} \leq 5.0 \text{ V}$, $I_{\text{OUT}} = 2 \text{ A}$, $V_{\text{FB}} = 0.8 \text{ V} - 3\%$ | | 400 | mV |

(1) When the device is connected to external feedback resistors at the FB pin, external resistor tolerances are not included.

(2) The device is not tested under conditions where $V_{\text{IN}} > V_{\text{OUT}} + 2.5$ V and $I_{\text{OUT}} = 2$ A because the power dissipation is higher than the maximum rating of the package. Also, this accuracy specification does not apply on any application condition that exceeds the power dissipation limit of the package under test.

Electrical Characteristics (continued)

over operating temperature range ($T_J = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$), $V_{IN} = 1.4\text{ V}$, $V_{OUT(TARGET)} = 0.8\text{ V}$, $I_{OUT} = 50\text{ mA}$, $V_{EN} = 1.4\text{ V}$, $C_{OUT} = 22\text{ }\mu\text{F}$, $C_{NR/SS} = 0\text{ nF}$, $C_{FF} = 0\text{ nF}$, $SS_CTRL = \text{GND}$, PG pin pulled up to V_{INx} with $100\text{ k}\Omega$, and for each channel (unless otherwise noted); typical values are at $T_J = 25^{\circ}\text{C}$

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|----------------------|---|--|------|-------|-----|-------------------|
| I _{LIM} | Output current limit | V _{OUT} forced at 0.9 × V _{OUT(TARGET)} , V _{IN} = V _{OUT(TARGET)} + 300 mV | 2.3 | 2.6 | 2.9 | A |
| I _{GND} | GND pin current | Both channels enabled, per channel, V _{IN} = 6.5 V, I _{OUT} = 5 mA | | 2.1 | 3.5 | mA |
| | | Both channels enabled, per channel, V _{IN} = 1.4 V, I _{OUT} = 2 A | | | 4 | |
| I _{SDN} | Shutdown GND pin current | Both channels shutdown, per channel, PGx = (open), V _{IN} = 6.5 V, V _{EN} = 0.5 V | | 0.1 | 15 | μA |
| I _{EN} | EN pin current | V _{IN} = 6.5 V, 0 V ≤ V _{EN} ≤ 6.5 V | −0.2 | | 0.2 | μA |
| V _{IL(EN)} | EN pin low-level input voltage (device disabled) | | 0 | | 0.4 | V |
| V _{IH(EN)} | EN pin high-level input voltage (device enabled) | | 1.1 | | 6.5 | V |
| I _{SS_CTRL} | SS_CTRL pin current | V _{IN} = 6.5 V, 0 V ≤ V _{SS_CTRL} ≤ 6.5 V | −0.2 | | 0.2 | μA |
| V _{IT(PG)} | PG pin threshold | For PG transitioning low with falling V _{OUT} , expressed as a percentage of V _{OUT(TARGET)} | 82% | 88.9% | 93% | |
| V _{hys(PG)} | PG pin hysteresis | For PG transitioning high with rising V _{OUT} , expressed as a percentage of V _{OUT(TARGET)} | | 1% | | |
| V _{OL(PG)} | PG pin low-level output voltage | V _{OUT} < V _{IT(PG)} , I _{PG} = −1 mA (current into device) | | | 0.4 | V |
| I _{kg(PG)} | PG pin leakage current | V _{OUT} > V _{IT(PG)} , V _{PG} = 6.5 V | | | 1 | μA |
| I _{NR/SS} | NR/SS pin charging current | V _{NR/SS} = GND, 1.4 V ≤ V _{IN} ≤ 6.5 V, V _{SS_CTRL} = GND | 4.0 | 6.2 | 9.0 | μA |
| | | V _{NR/SS} = GND, 1.4 V ≤ V _{IN} ≤ 6.5 V, V _{SS_CTRL} = V _{IN} | 65 | 100 | 150 | |
| I _{FB} | FB pin leakage current | V _{IN} = 6.5 V, V _{FB} = 0.8 V | −100 | | 100 | nA |
| PSRR | Power-supply ripple rejection | f = 500 kHz, V _{INx} = 2.0 V, V _{OUT} = 1.2 V, I _{OUT} = 2 A, C _{NR/SS} = 10 nF, C _{FF} = 10 nF | | 40 | | dB |
| V _n | Output noise voltage | BW = 10 Hz to 100 kHz, V _{IN} = 1.8 V, V _{OUT} = 0.8 V, I _{OUT} = 2.0 A, C _{NR/SS} = 10 nF, C _{FF} = 10 nF | | 4.6 | | μV _{RMS} |
| | Noise spectral density | f = 10 kHz, V _{IN} = 1.8 V, V _{OUT} = 0.8 V, I _{OUT} = 2.0 A, C _{NR/SS} = 10 nF, C _{FF} = 10 nF | | 15 | | nV/√Hz |
| R _{diss} | Output active discharge resistance | V _{EN} = GND | | 250 | | Ω |
| T _{sd} | Thermal shutdown temperature | Shutdown, temperature increasing | | 160 | | °C |
| | | Reset, temperature decreasing | | 140 | | |

6.6 Typical Characteristics

at $T_J = 25^\circ\text{C}$, $1.4\text{ V} \leq V_{IN} \leq 6.5\text{ V}$, $V_{IN} \geq V_{OUT(\text{NOM})} + 0.3\text{ V}$, $V_{OUT} = 0.8\text{ V}$, $\text{SS_CTRL} = \text{GND}$, $I_{OUT} = 5\text{ mA}$, $V_{EN} = 1.1\text{ V}$, $C_{OUT} = 22\text{ }\mu\text{F}$, $C_{NR/SS} = C_{FF} = 0\text{ nF}$, PG pin pulled up to V_{OUT} with $100\text{ k}\Omega$, and $\text{SS_CTRL} = \text{GND}$ (unless otherwise noted)

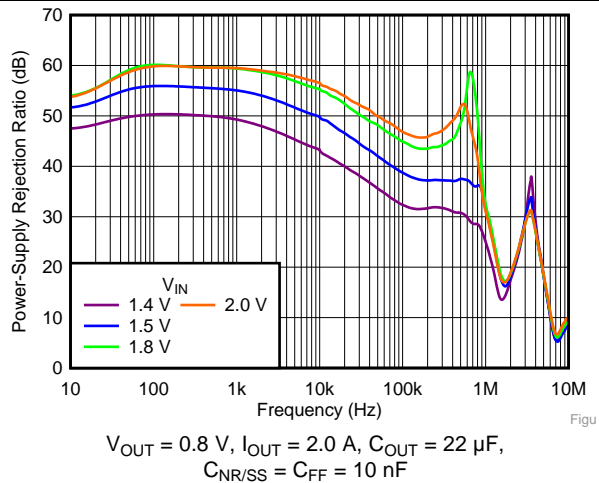


FIG 1. PSRR vs Frequency and Input Voltage

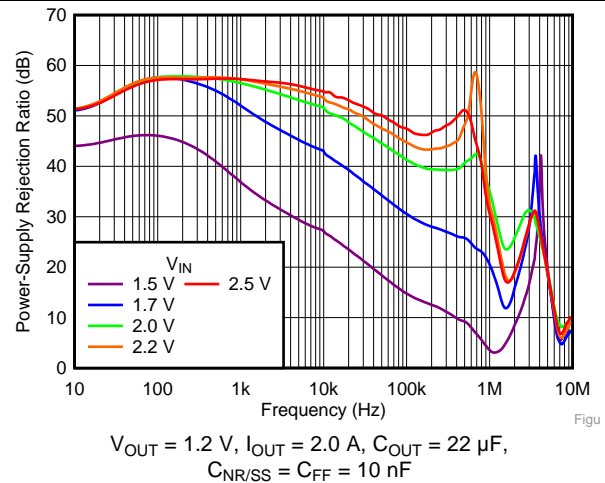


FIG 2. PSRR vs Frequency and Input Voltage

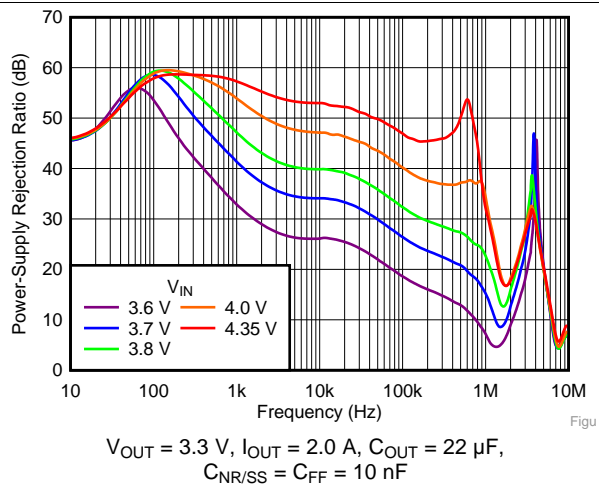


FIG 3. PSRR vs Frequency and Input Voltage

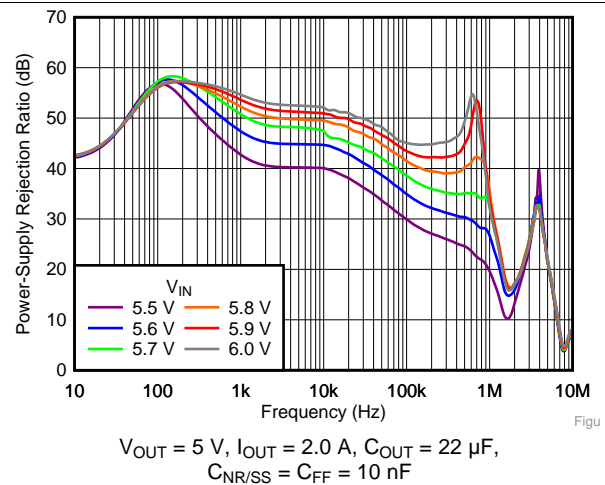


FIG 4. PSRR vs Frequency and Input Voltage

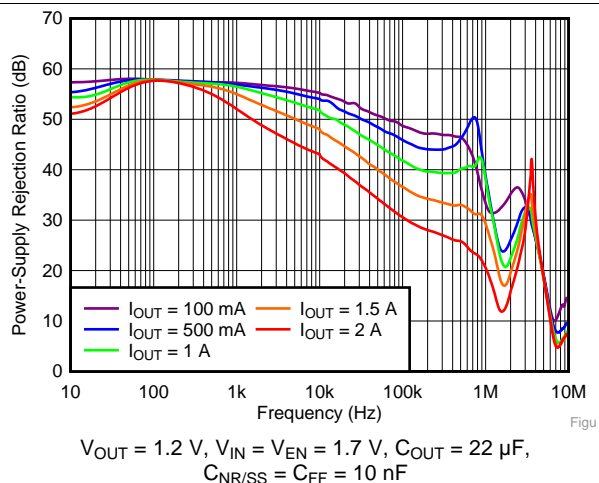


FIG 5. PSRR vs Frequency and Output Current

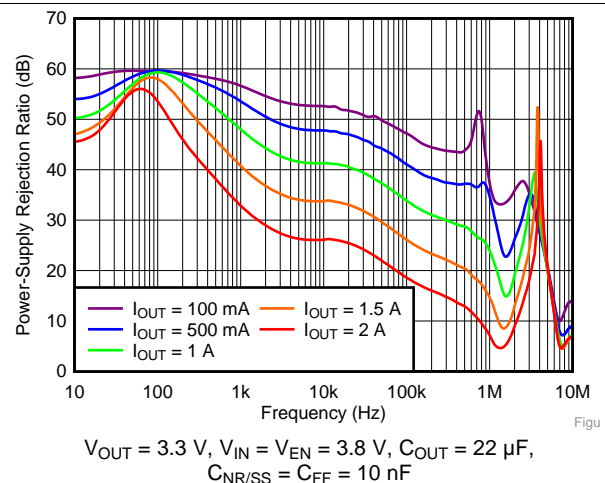


FIG 6. PSRR vs Frequency and Output Current

Typical Characteristics (continued)

at $T_J = 25^\circ\text{C}$, $1.4\text{ V} \leq V_{IN} \leq 6.5\text{ V}$, $V_{IN} \geq V_{OUT(NOM)} + 0.3\text{ V}$, $V_{OUT} = 0.8\text{ V}$, $SS_CTRL = \text{GND}$, $I_{OUT} = 5\text{ mA}$, $V_{EN} = 1.1\text{ V}$, $C_{OUT} = 22\text{ }\mu\text{F}$, $C_{NR/SS} = C_{FF} = 0\text{ nF}$, PG pin pulled up to V_{OUT} with $100\text{ k}\Omega$, and $SS_CTRL = \text{GND}$ (unless otherwise noted)

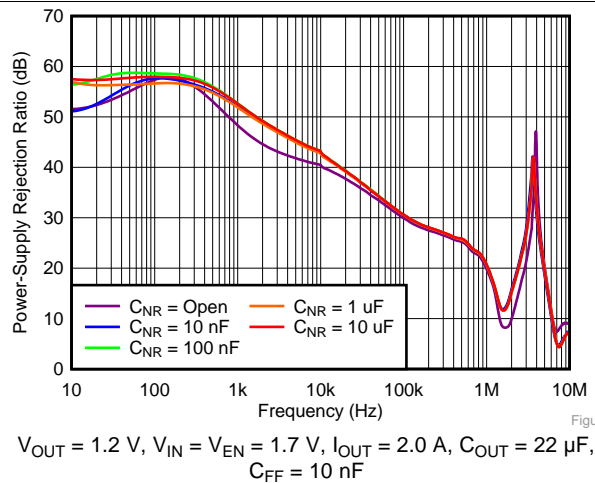


FIG 7. PSRR vs Frequency and $C_{NR/SS}$

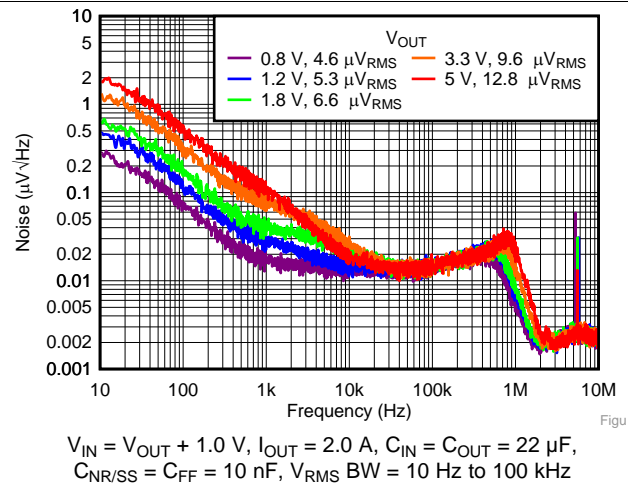


FIG 8. Spectral Noise Density vs Frequency and Output Voltage

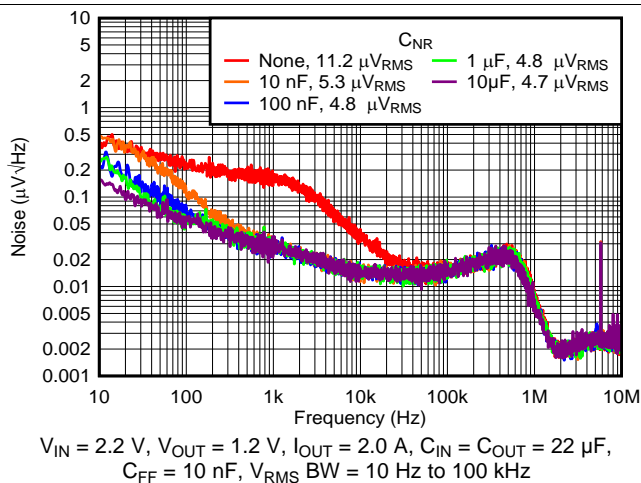


FIG 9. Spectral Noise Density vs Frequency and $C_{NR/SS}$

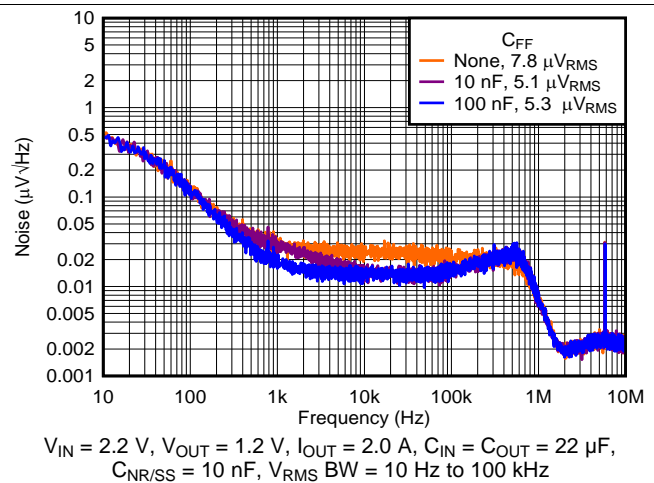


FIG 10. Spectral Noise Density vs Frequency and C_{FF}

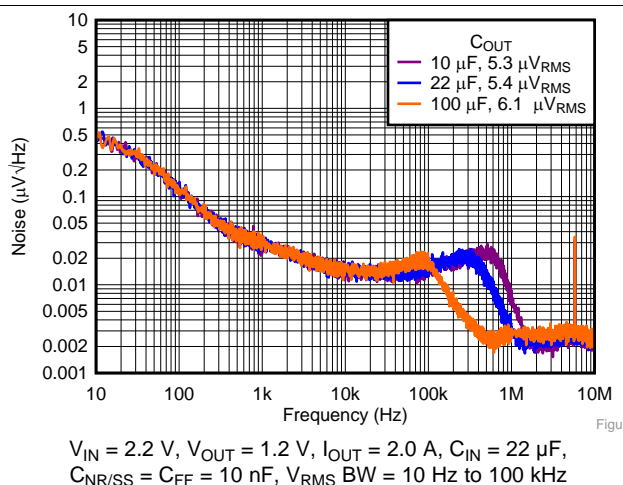


FIG 11. Spectral Noise Density vs Frequency and C_{OUT}

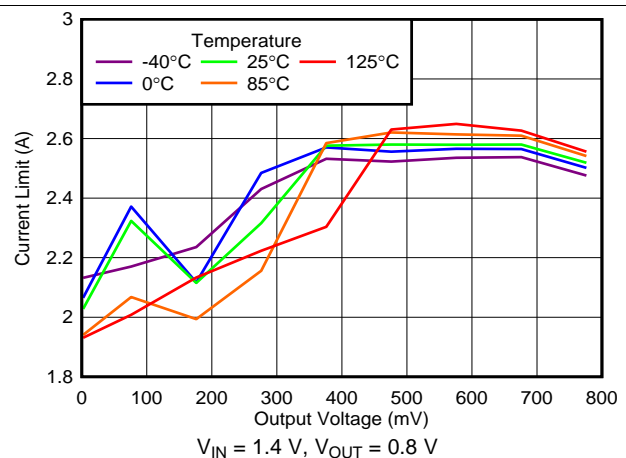


FIG 12. Current Limit Foldback

Typical Characteristics (continued)

at $T_J = 25^\circ\text{C}$, $1.4\text{ V} \leq V_{IN} \leq 6.5\text{ V}$, $V_{IN} \geq V_{OUT(NOM)} + 0.3\text{ V}$, $V_{OUT} = 0.8\text{ V}$, $SS_CTRL = \text{GND}$, $I_{OUT} = 5\text{ mA}$, $V_{EN} = 1.1\text{ V}$, $C_{OUT} = 22\text{ }\mu\text{F}$, $C_{NR/SS} = C_{FF} = 0\text{ nF}$, PG pin pulled up to V_{OUT} with $100\text{ k}\Omega$, and $SS_CTRL = \text{GND}$ (unless otherwise noted)

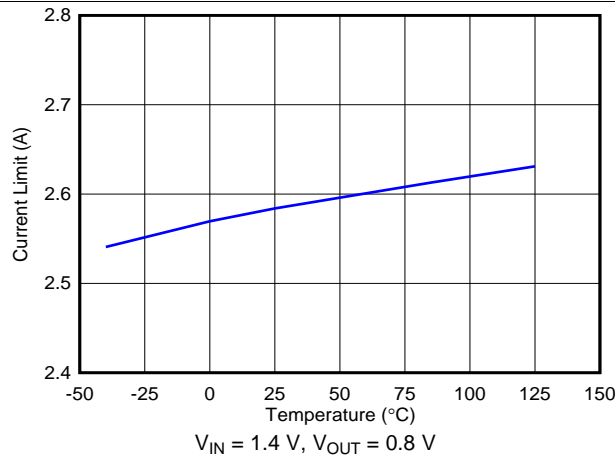


Figure 13. Current Limit vs Temperature

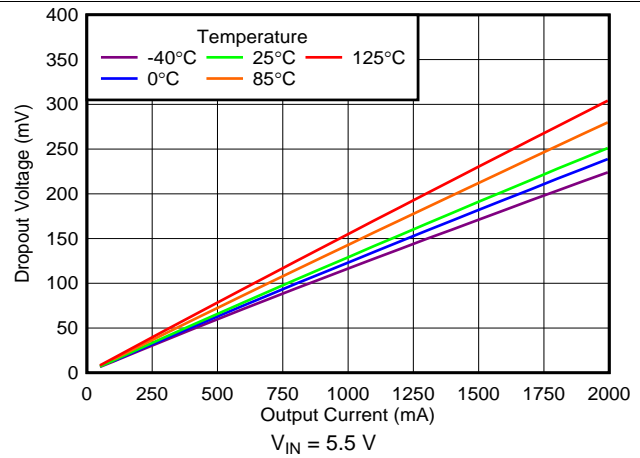


Figure 14. Dropout Voltage vs Output Current

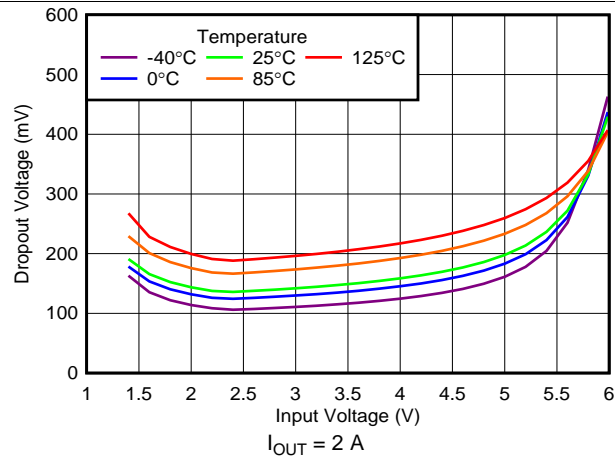


Figure 15. Dropout Voltage vs Input Voltage

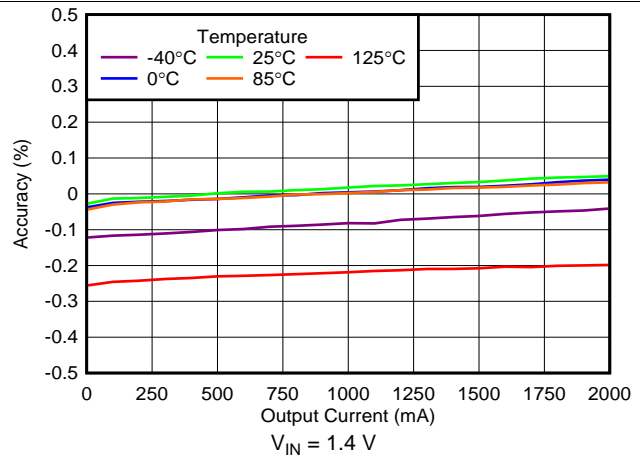


Figure 16. Load Regulation

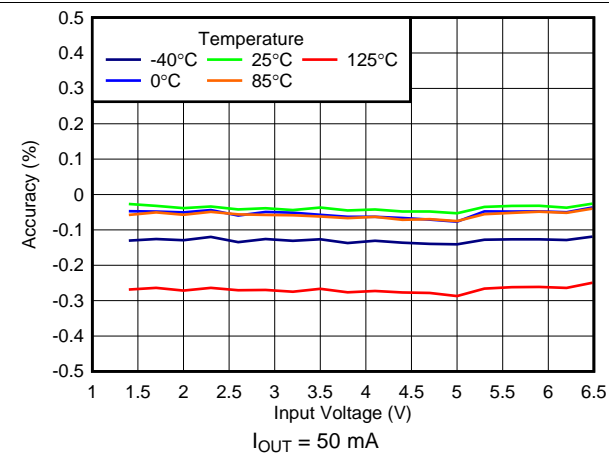


Figure 17. Line Regulation

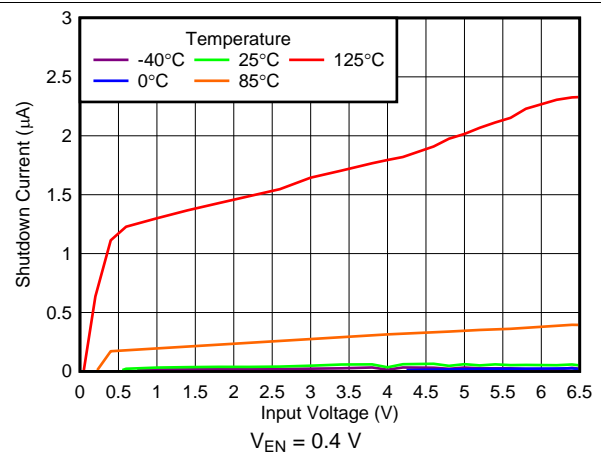


Figure 18. Shutdown Current vs Input Voltage

Typical Characteristics (continued)

at $T_J = 25^\circ\text{C}$, $1.4\text{ V} \leq V_{IN} \leq 6.5\text{ V}$, $V_{IN} \geq V_{OUT(NOM)} + 0.3\text{ V}$, $V_{OUT} = 0.8\text{ V}$, $SS_CTRL = \text{GND}$, $I_{OUT} = 5\text{ mA}$, $V_{EN} = 1.1\text{ V}$, $C_{OUT} = 22\text{ }\mu\text{F}$, $C_{NR/SS} = C_{FF} = 0\text{ nF}$, PG pin pulled up to V_{OUT} with $100\text{ k}\Omega$, and $SS_CTRL = \text{GND}$ (unless otherwise noted)

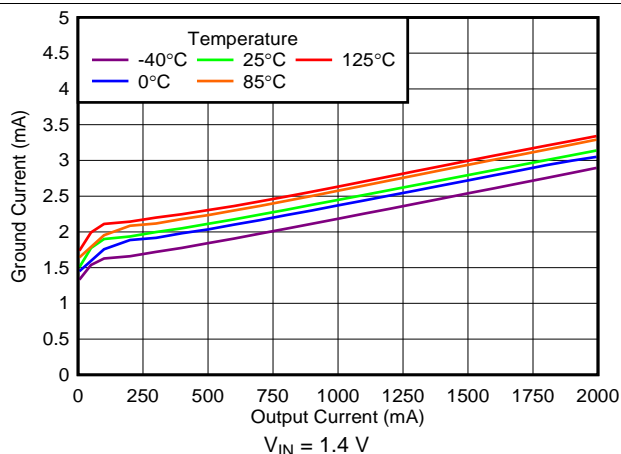


FIG 19. Ground Current vs Output Current

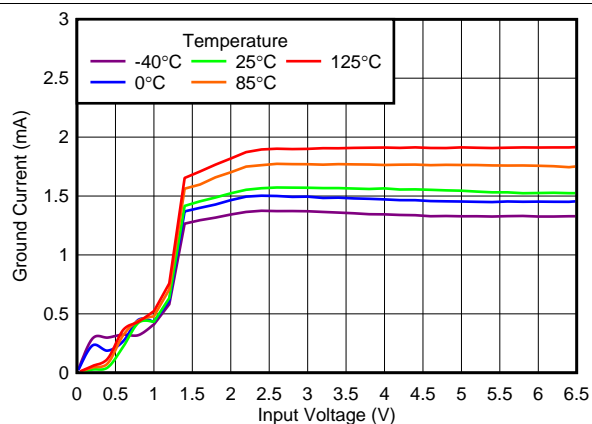


FIG 20. Ground Current vs Input Voltage

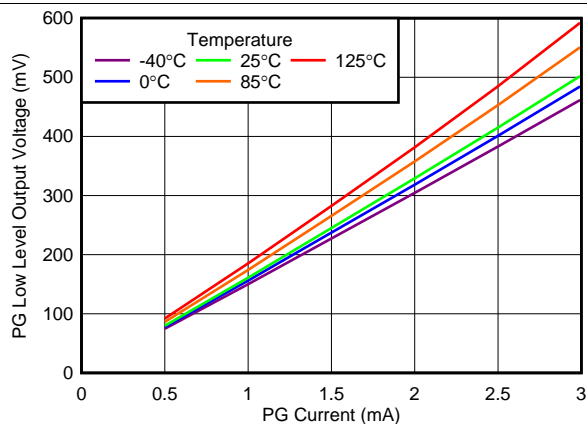


FIG 21. PG Low Level Voltage vs PG Current
($V_{IN} = 1.4\text{ V}$)

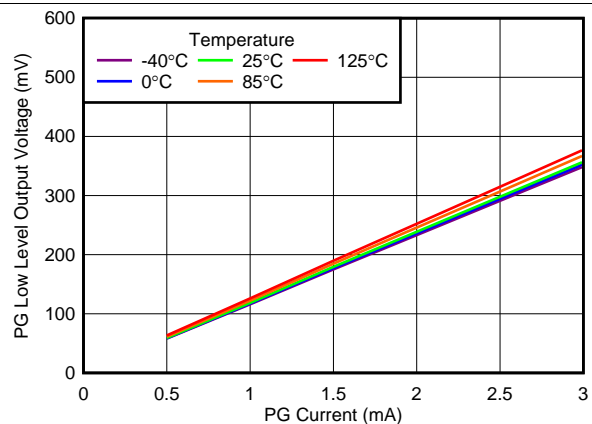


FIG 22. PG Low Level Voltage vs PG Current
($V_{IN} = 6.5\text{ V}$)

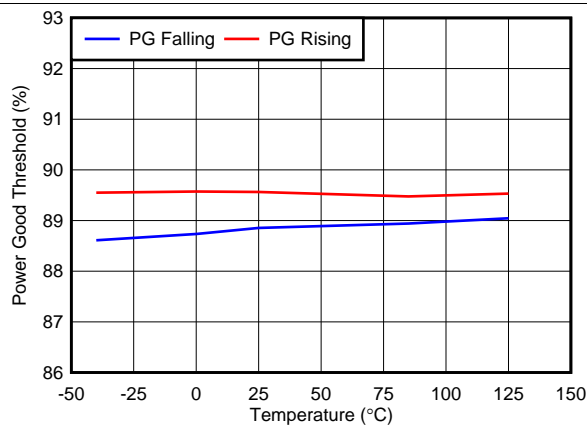


FIG 23. PG Threshold vs Temperature

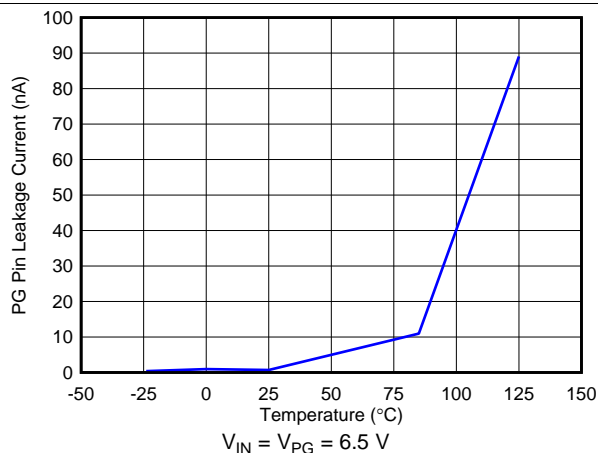


FIG 24. PG Leakage Current vs Temperature

Typical Characteristics (continued)

at $T_J = 25^\circ\text{C}$, $1.4\text{ V} \leq V_{IN} \leq 6.5\text{ V}$, $V_{IN} \geq V_{OUT(NOM)} + 0.3\text{ V}$, $V_{OUT} = 0.8\text{ V}$, $SS_CTRL = \text{GND}$, $I_{OUT} = 5\text{ mA}$, $V_{EN} = 1.1\text{ V}$, $C_{OUT} = 22\text{ }\mu\text{F}$, $C_{NR/SS} = C_{FF} = 0\text{ nF}$, PG pin pulled up to V_{OUT} with $100\text{ k}\Omega$, and $SS_CTRL = \text{GND}$ (unless otherwise noted)

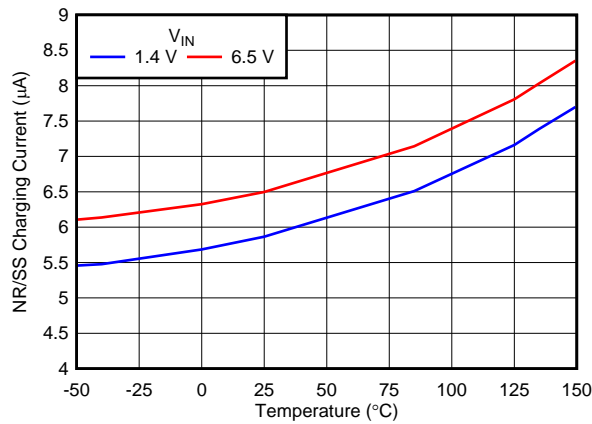


FIG 25. Soft-Start Current vs Temperature (SS_CTRL = GND)

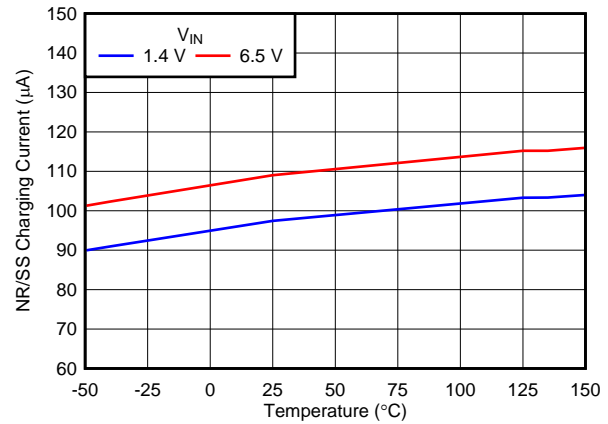


FIG 26. Soft-Start Current vs Temperature (SS_CTRL = V_{IN})

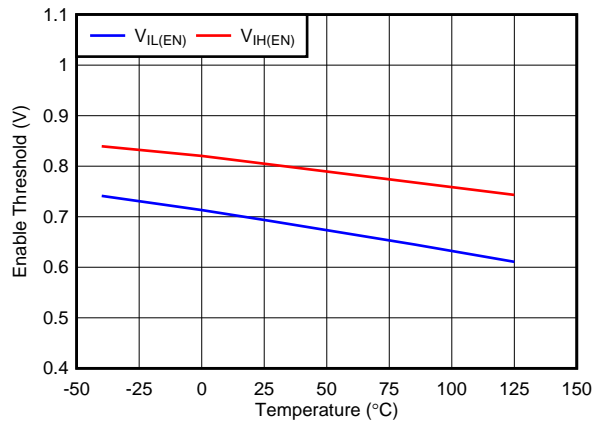


FIG 27. Enable Threshold vs Temperature



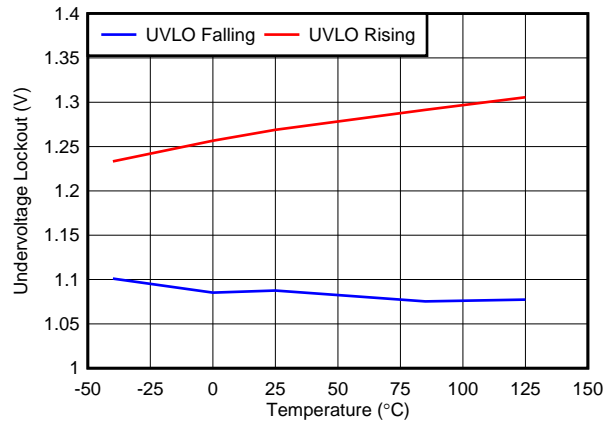


FIG 28. Input UVLO Threshold vs Temperature

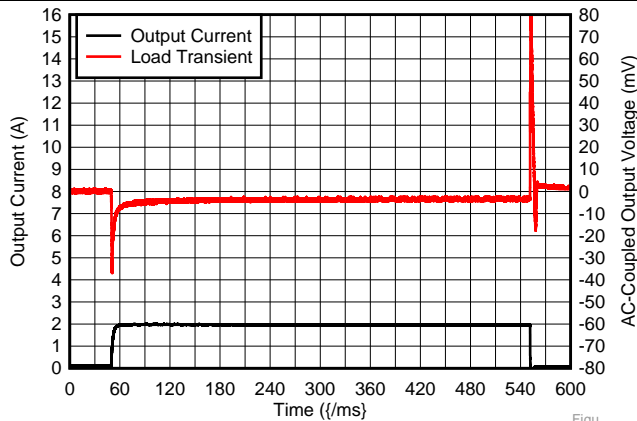

$V_{IN} = 1.5\text{ V}$, $I_{OUT} = 100\text{ mA to } 2\text{ A to } 100\text{ mA at } 1\text{ A}/\mu\text{s}$, $C_{OUT} = 22\text{ }\mu\text{F}$, $V_{PG} = V_{OUT}$

FIG 29. Load Transient Response ($V_{OUT} = 1.2\text{ V}$)

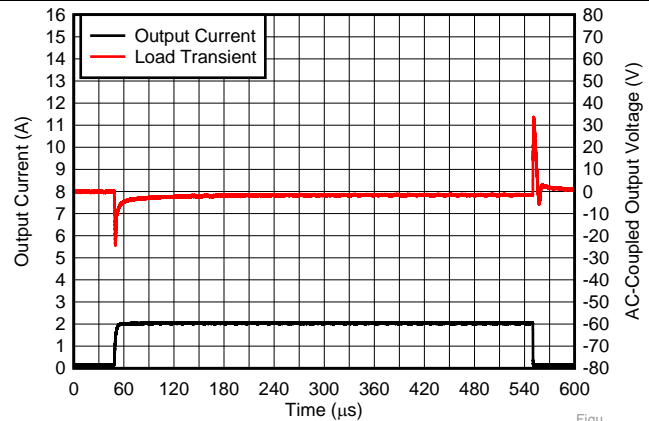


$V_{IN} = 5.5\text{ V}$, $I_{OUT} = 100\text{ mA to } 2\text{ A to } 100\text{ mA at } 1\text{ A}/\mu\text{s}$, $C_{OUT} = 22\text{ }\mu\text{F}$, $V_{PG} = V_{OUT}$

FIG 30. Load Transient Response ($V_{OUT} = 5.0\text{ V}$)

Typical Characteristics (continued)


at $T_J = 25^\circ\text{C}$, $1.4\text{ V} \leq V_{IN} \leq 6.5\text{ V}$, $V_{IN} \geq V_{OUT(NOM)} + 0.3\text{ V}$, $V_{OUT} = 0.8\text{ V}$, $SS_CTRL = \text{GND}$, $I_{OUT} = 5\text{ mA}$, $V_{EN} = 1.1\text{ V}$, $C_{OUT} = 22\text{ }\mu\text{F}$, $C_{NR/SS} = C_{FF} = 0\text{ nF}$, PG pin pulled up to V_{OUT} with $100\text{ k}\Omega$, and $SS_CTRL = \text{GND}$ (unless otherwise noted)

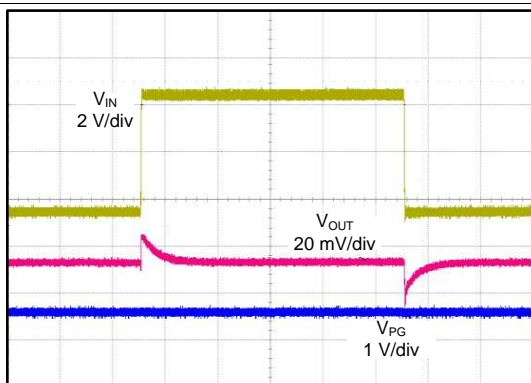

Time (200 $\mu\text{s}/\text{div}$)

$V_{IN} = 1.4\text{ V}$ to 6.5 V to 1.4 V at $2\text{ V}/\mu\text{s}$, $V_{OUT} = 0.8\text{ V}$,
 $I_{OUT} = 2\text{ A}$, $C_{NR/SS} = C_{FF} = 10\text{ nF}$, $V_{PG} = V_{OUT}$


FIG 31. Line Transient

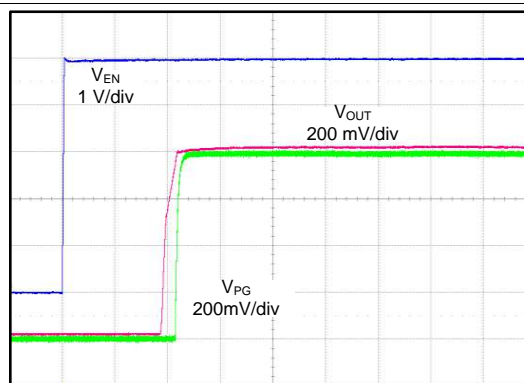

Time (50 $\mu\text{s}/\text{div}$)

$V_{IN} = 1.4\text{ V}$, $V_{PG} = V_{OUT}$


FIG 32. Start-Up ($SS_CTRL = \text{GND}$, $C_{NR/SS} = 0\text{ nF}$)

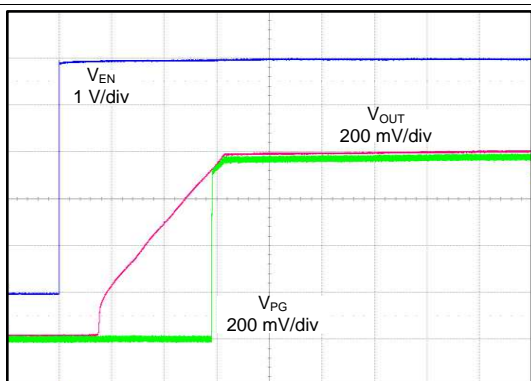

Time (500 $\mu\text{s}/\text{div}$)

$V_{IN} = 1.4\text{ V}$, $V_{PG} = V_{OUT}$


FIG 33. Start-Up ($SS_CTRL = \text{GND}$, $C_{NR/SS} = 10\text{ nF}$)

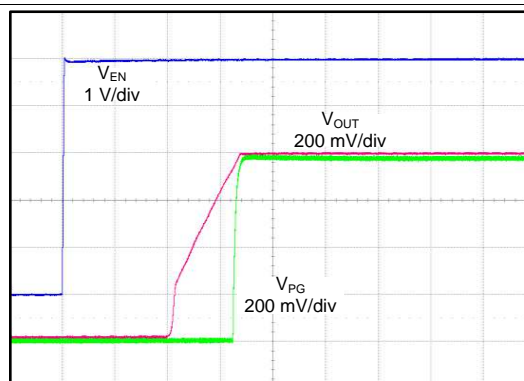

Time (50 $\mu\text{s}/\text{div}$)

$V_{IN} = 1.4\text{ V}$, $V_{PG} = V_{OUT}$

FIG 34. Start-Up ($SS_CTRL = V_{IN}$, $C_{NR/SS} = 10\text{ nF}$)

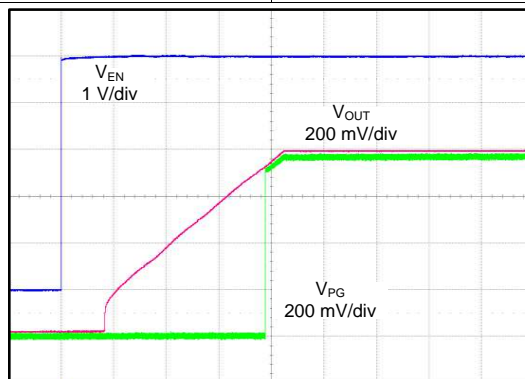

Time (2 ms/div)

$V_{IN} = 1.4\text{ V}$, $V_{PG} = V_{OUT}$

FIG 35. Start-Up ($SS_CTRL = V_{IN}$, $C_{NR/SS} = 1\text{ }\mu\text{F}$)


7 Detailed Description

7.1 Overview

The TPS7A92 is a low-noise, high PSRR, low dropout (LDO) regulator capable of sourcing a 2-A load with only 400 mV of maximum dropout. The TPS7A92 can operate down to a 1.4-V input voltage and a 0.8-V output voltage. This combination of low-noise, high PSRR, and low dropout voltage makes the device an ideal LDO to power a multitude of loads from noise-sensitive communication components in high-speed communications applications to high-end microprocessors or field-programmable gate arrays (FPGAs).

As shown in the [Functional Block Diagram](#) section, the TPS7A92 linear regulator features a low-noise, 0.8-V internal reference that can be filtered externally to obtain even lower output noise. The internal protection circuitry (such as the undervoltage lockout) prevents the device from turning on before the input is high enough to ensure accurate regulation. Foldback current limiting is also included, allowing the output to source the rated output current when the output voltage is in regulation but reduces the allowable output current during short-circuit conditions. The internal power-good detection circuit allows users to sequence down-stream supplies and be alerted if the output voltage is below a regulation threshold.

7.2 Functional Block Diagram

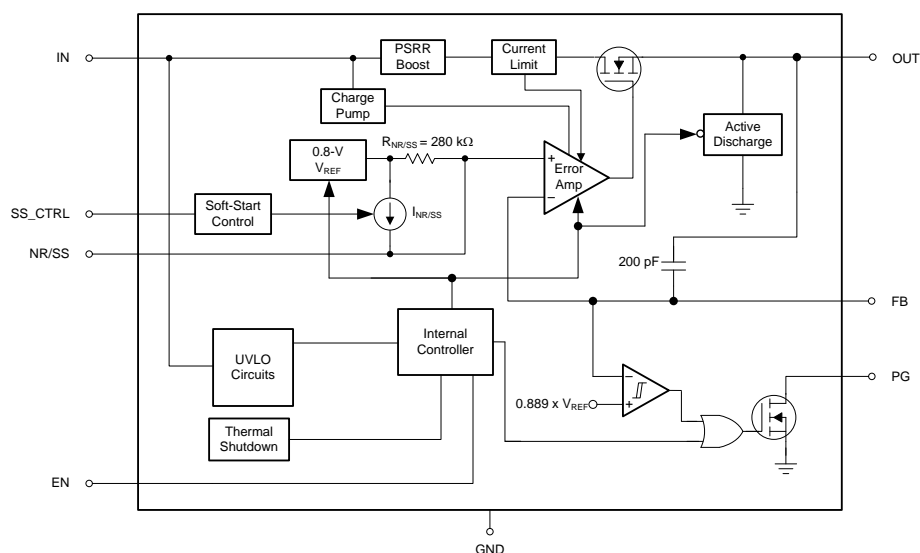

7.3 Feature Description

7.3.1 Output Enable

The enable pin for the TPS7A92 is active high. The output voltage is enabled when the enable pin voltage is greater than $V_{IH(EN)}$ and disabled when the enable pin voltage is less than $V_{IL(EN)}$. If independent control of the output voltage is not needed, then connect the enable pin to the input.

The TPS7A92 has an internal pulldown MOSFET that connects a discharge resistor from V_{OUT} to ground when the device is disabled to actively discharge the output voltage.

7.3.2 Dropout Voltage (V_{DO})

Dropout voltage (V_{DO}) is defined as the $V_{IN} - V_{OUT}$ voltage at the rated current (I_{RATED}) of 2 A, where the pass-FET is fully on and in the ohmic region of operation. V_{DO} indirectly specifies a minimum input voltage above the nominal programmed output voltage at which the output voltage is expected to remain in regulation. If the input falls below the nominal output regulation, then the output follows the input.

Feature Description (continued)

Dropout voltage is determined by the $R_{DS(ON)}$ of the pass-FET. Therefore, if the LDO operates below the rated current, then the V_{DO} for that current scales accordingly. The $R_{DS(ON)}$ for the TPS7A92 can be calculated using 式 1:

$$R_{DS(ON)} = \frac{V_{DO}}{I_{RATED}} \quad (1)$$

7.3.3 Output Voltage Accuracy

Output voltage accuracy specifies minimum and maximum output voltage error, relative to the expected nominal output voltage stated as a percent. The TPS7A92 features an output voltage accuracy of 1% that includes the errors introduced by the internal reference, load regulation, and line regulation variance across the full range of rated load and line operating conditions over temperature, as specified by the [Electrical Characteristics](#) table. Output voltage accuracy also accounts for all variations between manufacturing lots.

7.3.4 High Power-Supply Ripple Rejection (PSRR)

PSRR is a measure of how well the LDO control loop rejects noise from the input source to make the dc output voltage as noise-free as possible across the frequency spectrum (usually measured from 10 Hz to 10 MHz). Even though PSRR is a loss in noise signal amplitude, the PSRR curves in the [Typical Characteristics](#) section are shown as positive values in decibels (dB) for convenience. 式 2 gives the PSRR calculation as a function of frequency where input noise voltage $[V_{IN}(f)]$ and output noise voltage $[V_{OUT}(f)]$ are the amplitudes of the respective sinusoidal signals.

$$PSRR \text{ (dB)} = 20 \text{ Log}_{10} \left(\frac{V_{IN}(f)}{V_{OUT}(f)} \right) \quad (2)$$

Noise that couples from the input to the internal reference voltage is a primary contributor to reduced PSRR performance. Using a noise-reduction capacitor is recommended to filter unwanted noise from the input voltage, which creates a low-pass filter with an internal resistor to improve PSRR performance at lower frequencies.

LDOs are often employed not only as a step-down regulators, but also to provide exceptionally clean power rails for noise-sensitive components. This usage is especially true for the TPS7A92, which features an innovative circuit to boost the PSRR between 200 kHz and 1 MHz. This boost circuit helps further filter switching noise from switching-regulators that operate in this region; see 図 1. To achieve the maximum benefit of this PSRR boost circuit, using a capacitor with a minimum impedance in the 100-kHz to 1-MHz band is recommended.

7.3.5 Low Output Noise

LDO noise is defined as the internally-generated intrinsic noise created by the semiconductor circuits. The TPS7A92 is designed for system applications where minimizing noise on the power-supply rail is critical to system performance. This scenario is the case for phase-locked loop (PLL)-based clocking circuits where minimum phase noise is all important, or in test and measurement systems where even small power-supply noise fluctuations can distort instantaneous measurement accuracy.

The TPS7A92 includes a low-noise reference ensuring minimal output noise in normal operation. Further improvements can be made by adding a noise reduction capacitor ($C_{NR/SS}$), a feedforward capacitor (C_{FF}), or a combination of the two. See the [Noise-Reduction and Soft-Start Capacitor \(\$C_{NR/SS}\$ \)](#) and [Feed-Forward Capacitor \(\$C_{FF}\$ \)](#) sections for additional design information.

For more information on noise and noise measurement, see the [How to Measure LDO Noise white paper](#).

7.3.6 Output Soft-Start Control

Soft-start refers to the ramp-up characteristic of the output voltage during LDO turn-on after the EN and UVLO thresholds are exceeded. The noise-reduction capacitor ($C_{NR/SS}$) serves a dual purpose of both governing output noise reduction and programming the soft-start ramp during turn-on. Larger values for the noise-reduction capacitors decrease the noise but also result in a slower output turn-on ramp rate.

Feature Description (continued)

The TPS7A92 features an SS_CTRL pin. When the SS_CTRL pin is grounded, the charging current for the NR/SS pin is 6.2 μA (typ); when this pin is connected to IN, the charging current for the NR/SS pin is increased to 100 μA (typ). The higher current allows the use of a much larger noise-reduction capacitor and maintains a reasonable startup time. [Figure 36](#) shows a simplified block diagram of the soft-start circuit. The switch SW is opened to turn off the $I_{\text{NR/SS}}$ current source after V_{FB} reaches approximately 97% of V_{REF} . The final 3% of $V_{\text{NR/SS}}$ is charged through the noise reduction resistor (R_{NR}), which creates an RC delay. R_{NR} is approximately 280 $\text{k}\Omega$ and applications that require the highest accuracy when using a large value $C_{\text{NR/SS}}$ must take this RC delay into account.

If a noise-reduction capacitor is not used on the NR/SS pin, tying the SS_CTRL pin to the IN pin can result in output voltage overshoot of approximately 10%. This overshoot is minimized by either connecting the SS_CTRL pin to GND or using a capacitor on the NR/SS pin.

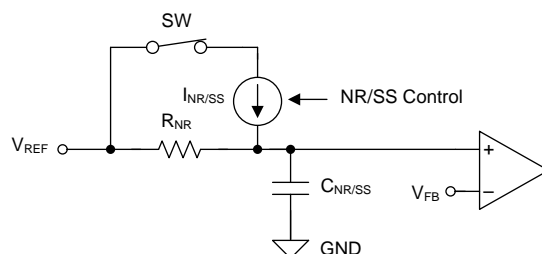


Figure 36. Simplified Soft-Start Circuit

7.3.7 Power-Good Function

The power-good circuit monitors the voltage at the feedback pin to indicate the status of the output voltage. When the feedback pin voltage falls below the PG threshold voltage ($V_{\text{IT(PG)}}$), the PG pin open-drain output engages and pulls the PG pin close to GND. When the feedback voltage exceeds the $V_{\text{IT(PG)}}$ threshold by an amount greater than $V_{\text{HYS(PG)}}$, the PG pin becomes high impedance. By connecting a pullup resistor to an external supply, any downstream device can receive power-good as a logic signal that can be used for sequencing. Make sure that the external pullup supply voltage results in a valid logic signal for the receiving device or devices. Using a pullup resistor from 10 $\text{k}\Omega$ to 100 $\text{k}\Omega$ is recommended. Using an external reset device such as the [TPS3890](#) is also recommended in applications where high accuracy is needed or in applications where microprocessor induced resets are needed.

When using a feed-forward capacitor (C_{FF}), the time constant for the LDO startup is increased whereas the power-good output time constant stays the same, possibly resulting in an invalid status of the power-good output. To avoid this issue and to receive a valid PG output, make sure that the time constant of both the LDO startup and the power-good output are matching, which can be done by adding a capacitor in parallel with the power-good pullup resistor. For more information, see the [Pros and Cons of Using a Feedforward Capacitor with a Low-Dropout Regulator application report](#).

The state of PG is only valid when the device is operating above the minimum input voltage of the device and power good is asserted regardless of the output voltage state when the input voltage falls below the UVLO threshold minus the UVLO hysteresis. [Figure 37](#) illustrates a simplified block diagram of the power-good circuit. When the input voltage falls below approximately 0.8 V, there is not enough gate drive voltage to keep the open-drain, power-good device turned on and the power-good output is pulled high. Connecting the power-good pullup resistor to the output voltage can help minimize this effect.

Feature Description (continued)

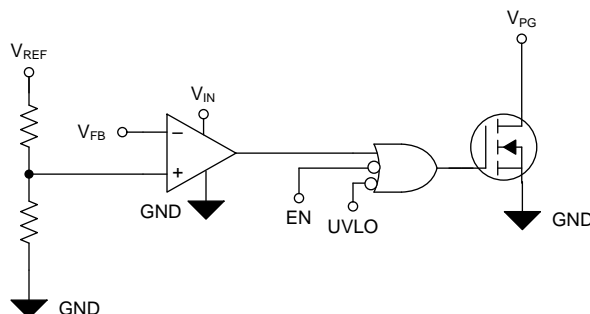


图 37. Simplified PG Circuit

7.3.8 Internal Protection Circuitry

7.3.8.1 Undervoltage Lockout (UVLO)

The TPS7A92 has an independent undervoltage lockout (UVLO) circuit that monitors the input voltage, allowing a controlled and consistent turn on and off of the output voltage. To prevent the device from turning off if the input drops during turn on, the UVLO has approximately 290 mV of hysteresis.

The UVLO circuit responds quickly to glitches on V_{IN} and disables the output of the device if this rail starts to collapse too quickly. Use an input capacitor that is large enough to slow input transients to less than two volts per microsecond.

7.3.8.2 Internal Current Limit (I_{CL})

The internal current-limit circuit is used to protect the LDO against transient high-load current faults or shorting events. The LDO is not designed to operate in current limit under steady-state conditions. During an overcurrent event where the output voltage is pulled 10% below the regulated output voltage, the LDO sources a constant current as specified in the [Electrical Characteristics](#) table. When the output voltage falls, the amount of output current is reduced to better protect the device. During a hard short-circuit event, the current is reduced to approximately 2.2 A. See [图 12](#) in the [Typical Characteristics](#) section for more information about the current-limit foldback behavior. Note also that when a current-limit event occurs, the LDO begins to heat up because of the increase in power dissipation. The increase in heat can trigger the integrated thermal shutdown protection circuit.

7.3.8.3 Thermal Protection

The TPS7A92 contains a thermal shutdown protection circuit to turn off the output current when excessive heat is dissipated in the LDO. Thermal shutdown occurs when the thermal junction temperature (T_J) of the pass-FET exceeds 160°C (typical). Thermal shutdown hysteresis assures that the LDO again resets (turns on) when the temperature falls to 140°C (typical). The thermal time-constant of the semiconductor die is fairly short, and thus the output turns on and off at a high rate when thermal shutdown is reached until power dissipation is reduced.

The internal protection circuitry of the TPS7A92 is designed to protect against thermal overload conditions. The circuitry is not intended to replace proper heat sinking. Continuously running the TPS7A92 into thermal shutdown degrades device reliability.

For reliable operation, limit junction temperature to a maximum of 125°C. To estimate the thermal margin in a given layout, increase the ambient temperature until the thermal protection shutdown is triggered using worst-case load and highest input voltage conditions. For good reliability, thermal shutdown must occur at least 35°C above the maximum expected ambient temperature condition for the application. This configuration produces a worst-case junction temperature of 125°C at the highest expected ambient temperature and worst-case load.

7.4 Device Functional Modes

表 1 provides a quick comparison between the normal, dropout, and disabled modes of operation.

表 1. Device Functional Modes Comparison

| OPERATING MODE | PARAMETER | | | |
|-------------------------|----------------------------------|-----------------------|--------------------|----------------|
| | V_{IN} | EN | I_{OUT} | T_J |
| Normal ⁽¹⁾ | $V_{IN} > V_{OUT(nom)} + V_{DO}$ | $V_{EN} > V_{IH(EN)}$ | $I_{OUT} < I_{CL}$ | $T_J < T_{sd}$ |
| Dropout ⁽¹⁾ | $V_{IN} < V_{OUT(nom)} + V_{DO}$ | $V_{EN} > V_{IH(EN)}$ | $I_{OUT} < I_{CL}$ | $T_J < T_{sd}$ |
| Disabled ⁽²⁾ | $V_{IN} < V_{UVLO}$ | $V_{EN} < V_{IL(EN)}$ | — | $T_J > T_{sd}$ |

(1) All table conditions must be met.

(2) The device is disabled when any condition is met.

7.4.1 Normal Operation

The device regulates to the nominal output voltage when all of the following conditions are met.

- The input voltage is greater than the nominal output voltage plus the dropout voltage ($V_{OUT(nom)} + V_{DO}$)
- The enable voltage has previously exceeded the enable rising threshold voltage and has not yet decreased below the enable falling threshold
- The output current is less than the current limit ($I_{OUT} < I_{CL}$)
- The device junction temperature is less than the thermal shutdown temperature ($T_J < T_{sd}$)

7.4.2 Dropout Operation

If the input voltage is lower than the nominal output voltage plus the specified dropout voltage, but all other conditions are met for normal operation, the device operates in dropout. In this mode, the output voltage tracks the input voltage. During this mode, the transient performance of the device becomes significantly degraded because the pass device is in a triode state and no longer controls the current through the LDO. Line or load transients in dropout can result in large output-voltage deviations.

When the device is in a steady dropout state (defined as when the device is in dropout, $V_{IN} < V_{OUT(NOM)} + V_{DO}$, right after being in a normal regulation state, but *not* during startup), the pass-FET is driven as hard as possible. When the input voltage returns to $V_{IN} \geq V_{OUT(NOM)} + V_{DO}$, V_{OUT} can overshoot for a short period of time if the input voltage slew rate is greater than 0.1 V/ μ s.

7.4.3 Disabled

The output of the TPS7A92 can be shutdown by forcing the enable pin below 0.4 V. When disabled, the pass device is turned off, internal circuits are shutdown, and the output voltage is actively discharged to ground by an internal resistor from the output to ground.

8 Application and Implementation

注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

8.1 Application Information

The TPS7A92 is a linear voltage regulator operating from 1.4 V to 6.5 V on the input and regulates voltages between 0.8 V to 5.0 V within 1% accuracy and a 2-A maximum output current. Efficiency is defined by the ratio of output voltage to input voltage because the TPS7A92 is a linear voltage regulator. To achieve high efficiency, the dropout voltage ($V_{IN} - V_{OUT}$) must be as small as possible, thus requiring a very low dropout LDO. Successfully implementing an LDO in an application depends on the application requirements. This section discusses key device features and how to best implement them to achieve a reliable design.

8.1.1 Adjustable Output

The output voltage of the TPS7A9201 can be adjusted from 0.8 V to 5.2 V by using a resistor divider network as shown in 図 38.

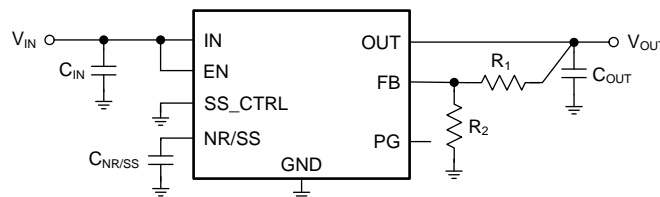


図 38. Adjustable Operation

R_1 and R_2 can be calculated for any output voltage range using 式 3. This resistive network must provide a current greater than or equal to 5 μ A for optimum noise performance.

$$R_1 = R_2 \left(\frac{V_{OUT}}{V_{REF}} - 1 \right), \quad \text{where } \frac{|V_{REF(max)}|}{R_2} > 5 \mu A \quad (3)$$

If greater voltage accuracy is required, take into account the output voltage offset contribution resulting from the feedback pin current (I_{FB}) and use 0.1%-tolerance resistors.

表 2 lists the resistor combination required to achieve a few of the most common rails using commercially-available, 0.1%-tolerance resistors to maximize nominal voltage accuracy and also abiding to the formula given in 式 3.

Application Information (continued)

表 2. Recommended Feedback-Resistor Values

| $V_{OUT(TARGET)}$ (V) | FEEDBACK RESISTOR VALUES ⁽¹⁾ | | CALCULATED OUTPUT VOLTAGE (V) |
|--------------------------|---|---------------------|----------------------------------|
| | R_1 (k Ω) | R_2 (k Ω) | |
| 0.8 | Short | Open | 0.800 |
| 1.00 | 2.55 | 10.2 | 1.000 |
| 1.20 | 5.9 | 11.8 | 1.200 |
| 1.50 | 9.31 | 10.7 | 1.496 |
| 1.80 | 1.87 | 1.5 | 1.797 |
| 1.90 | 15.8 | 11.5 | 1.899 |
| 2.50 | 2.43 | 1.15 | 2.490 |
| 3.00 | 3.16 | 1.15 | 2.998 |
| 3.30 | 3.57 | 1.15 | 3.283 |
| 5.00 | 10.5 | 2 | 5.00 |

(1) R_1 is connected from OUT to FB; R_2 is connected from FB to GND; see [图 38](#).

8.1.2 Start-Up

8.1.2.1 Enable (EN) and Undervoltage Lockout (UVLO)

The TPS7A92 only turns on when EN and UVLO are above the respective voltage thresholds. The TPS7A92 has an independent UVLO circuit that monitors the input voltage to allow a controlled and consistent turn on and off. The UVLO has approximately 290 mV of hysteresis to prevent the device from turning off if the input drops during turn on. The EN signal allows independent logic-level turn-on and shutdown of the LDO when the input voltage is present. Connecting EN directly to IN is recommended if independent turn-on is not needed.

The TPS7A92 has an internal pulldown MOSFET that connects a discharge resistor from V_{OUT} to ground when the device is disabled to actively discharge the output voltage.

8.1.2.2 Noise-Reduction and Soft-Start Capacitor ($C_{NR/SS}$)

The $C_{NR/SS}$ capacitor serves a dual purpose of both reducing output noise and setting the soft-start ramp during turn-on.

8.1.2.2.1 Noise Reduction

For low-noise applications, the $C_{NR/SS}$ capacitor forms an RC filter for filtering output noise that is otherwise amplified by the control loop. For low-noise applications, a $C_{NR/SS}$ of between 10 nF to 10 μ F is recommended. Larger values for $C_{NR/SS}$ can be used; however, above 1 μ F there is little benefit in lowering the output voltage noise for frequencies above 10 Hz.

8.1.2.2.2 Soft-Start and Inrush Current

Soft-start refers to the gradual ramp-up characteristic of the output voltage after the EN and UVLO thresholds are exceeded. Reducing how quickly the output voltage increases during startup also reduces the amount of current needed to charge the output capacitor, referred to as inrush current. Inrush current is defined as the current going into the LDO during start-up. Inrush current consists of the load current, the current used to charge the output capacitor, and the ground pin current (that contributes very little to inrush current). This current is difficult to measure because the input capacitor must be removed, which is not recommended. However, the inrush current can be estimated by [式 4](#):

$$I_{OUT}(t) = \left(\frac{C_{OUT} \times dV_{OUT}(t)}{dt} \right) + \left(\frac{V_{OUT}(t)}{R_{LOAD}} \right)$$

where:

- $V_{OUT}(t)$ is the instantaneous output voltage of the turn-on ramp
- $dV_{OUT}(t)/dt$ is the slope of the V_{OUT} ramp and
- R_{LOAD} is the resistive load impedance

(4)

The TPS7A92 features a monotonic, voltage-controlled soft-start that is set by the user with an external capacitor ($C_{NR/SS}$). This soft-start helps reduce inrush current, minimizing load transients to the input power bus that can cause potential start-up initialization problems when powering FPGAs, digital signal processors (DSPs), or other high current loads.

To achieve a monotonic start-up, the TPS7A92 error amplifier tracks the voltage ramp of the external soft-start capacitor until the voltage exceeds approximately 97% of the internal reference. The final 3% of $V_{NR/SS}$ is charged through the noise-reduction resistor (R_{NR}), creating an RC delay. R_{NR} is approximately 280 k Ω and applications that require the highest accuracy when using a large value $C_{NR/SS}$ must take this RC delay into account.

The soft-start ramp time depends on the soft-start charging current ($I_{NR/SS}$), the soft-start capacitance ($C_{NR/SS}$), and the internal reference (V_{REF}). The approximate soft-start ramp time (t_{SS}) can be calculated with 式 5:

$$t_{SS} = (V_{REF} \times C_{NR/SS}) / I_{NR/SS} \quad (5)$$

The value for $I_{NR/SS}$ is determined by the state of the SS_CTRL pin. When the SS_CTRL pin is connected to GND, the typical value for the $I_{NR/SS}$ current is 6.2 μ A. Connecting the SS_CTRL pin to IN increases the typical soft-start charging current to 100 μ A. The larger charging current for $I_{NR/SS}$ is useful if shorter start-up times are needed (such as when using a large noise-reduction capacitor).

8.1.3 Capacitor Recommendation

The TPS7A92 is designed to be stable using low equivalent series resistance (ESR) ceramic capacitors at the input, output, and noise-reduction pin. Multilayer ceramic capacitors have become the industry standard for these types of applications and are recommended, but must be used with good understanding of their limitations. Ceramic capacitors that employ X7R-, X5R-, and COG-rated dielectric materials provide relatively good capacitive stability across temperature, whereas the use of Y5V-rated capacitors is discouraged precisely because the capacitance varies so widely. In all cases, ceramic capacitors vary a great deal with operating voltage and temperature and the design engineer must be aware of these characteristics. As a rule of thumb, ceramic capacitors are recommended to be derated by 50%. The input and output capacitors recommended herein account for a capacitance derating of 50%.

8.1.3.1 Input and Output Capacitor Requirements (C_{IN} and C_{OUT})

The TPS7A92 is designed and characterized for operation with ceramic capacitors of 10 μ F or greater at the input and 22 μ F or greater at the output. Locate the input and output capacitors as near as practical to the input and output pins to minimize the trace inductance from the capacitor to the device.

Attention must be given to the input capacitance to minimize transient input droop during startup and load current steps. Simply using very large ceramic input capacitances can cause unwanted ringing at the output if the input capacitor (in combination with the wire-lead inductance) creates a high-Q peaking effect during transients, which is why short, well-designed interconnect traces to the upstream supply are needed to minimize ringing. Damping of unwanted ringing can be accomplished by using a tantalum capacitor, with a few hundred milliohms of ESR, in parallel with the ceramic input capacitor. The UVLO circuit responds quickly to glitches on V_{IN} and disables the output of the device if this rail starts to collapse too quickly. Use an input capacitor that is large enough to slow input transients to less than two volts per microsecond.

8.1.3.1.1 Load-Step Transient Response

The load-step transient response is the output voltage response by the LDO to a step change in load current. The depth of charge depletion immediately after the load step is directly proportional to the amount of output capacitance. However, although larger output capacitances decrease any voltage dip or peak occurring during a load step, the control-loop bandwidth is also decreased, thereby slowing the response time.

The LDO cannot sink charge, therefore when the output load is removed or greatly reduced, the control loop must turn off the pass-FET and wait for any excess charge to deplete.

8.1.3.2 Feed-Forward Capacitor (C_{FF})

Although a feed-forward capacitor (C_{FF}), from the FB pin to the OUT pin is not required to achieve stability, a 10-nF, feed-forward capacitor improves the noise and PSRR performance. A higher capacitance C_{FF} can be used; however, the startup time is longer and the power-good signal can incorrectly indicate that the output voltage has settled. For a detailed description, see the [Pros and Cons of Using a Feedforward Capacitor with a Low-Dropout Regulator application report](#).

8.1.4 Power Dissipation (P_D)

Circuit reliability demands that proper consideration be given to device power dissipation, location of the circuit on the printed circuit board (PCB), and correct sizing of the thermal plane. The PCB area around the regulator must be as free as possible of other heat-generating devices that cause added thermal stresses.

To first-order approximation, power dissipation in the regulator depends on the input-to-output voltage difference and load conditions. P_D can be calculated using 式 6:

$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT} \quad (6)$$

An important note is that power dissipation can be minimized, and thus greater efficiency achieved, by proper selection of the system voltage rails. For the lowest power dissipation use the minimum input voltage necessary for proper output regulation.

The primary heat conduction path for the DSK package is through the thermal pad to the PCB. Solder the thermal pad to a copper pad area under the device. This pad area should contain an array of plated vias that conduct heat to additional copper planes for increased heat dissipation.

The maximum power dissipation determines the maximum allowable ambient temperature (T_A) for the device. Power dissipation and junction temperature are most often related by the junction-to-ambient thermal resistance ($R_{\theta JA}$) of the combined PCB and device package and the temperature of the ambient air (T_A), according to 式 7.

$$T_J = T_A + (R_{\theta JA} \times P_D) \quad (7)$$

Unfortunately, the thermal resistance (θ_{JA}) is highly dependent on the heat-spreading capability built into the particular PCB design, and therefore varies according to the total copper area, copper weight, and location of the planes. The $R_{\theta JA}$ recorded in the [Thermal Information](#) table is determined by the JEDEC standard, PCB, and copper-spreading area and is only used as a relative measure of package thermal performance.

8.1.5 Estimating Junction Temperature

The JEDEC standard now recommends the use of psi (Ψ) thermal metrics to estimate the junction temperatures of the LDO when in-circuit on a typical PCB board application. These metrics are not strictly speaking thermal resistances, but rather offer practical and relative means of estimating junction temperatures. These psi metrics are determined to be significantly independent of the copper-spreading area. The key thermal metrics (Ψ_{JT} and Ψ_{JB}) are given in the [Thermal Information](#) table and are used in accordance with 式 8.

$$\Psi_{JT}: T_J = T_T + \Psi_{JT} \times P_D$$

$$\Psi_{JB}: T_J = T_B + \Psi_{JB} \times P_D$$

where:

- P_D is the power dissipated as explained in 式 6
 - T_T is the temperature at the center-top of the device package and
 - T_B is the PCB surface temperature measured 1 mm from the device package and centered on the package edge
- (8)

For a more detailed discussion on thermal metrics and how to use them, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

8.2 Typical Application

This section discusses the implementation of the TPS7A92 to regulate from a 2-V input voltage to a 1.2-V output voltages for noise-sensitive loads. The schematic for this application circuit is provided in [Figure 39](#).

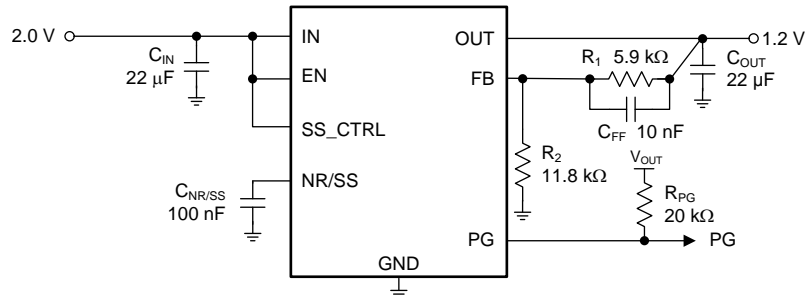


Figure 39. Application Example

8.2.1 Design Requirements

For the design example shown in [Figure 39](#), use the parameters listed in [Table 3](#) as the input parameters.

Table 3. Design Parameters

| PARAMETER | APPLICATION REQUIREMENTS | DESIGN RESULTS |
|---------------------------------------|---|--|
| Input voltages (V_{IN}) | 2 V, $\pm 3\%$, provided by the dc-dc converter switching at 700 kHz | 1.4 V to 6.5 V |
| Maximum ambient operating temperature | 55°C | 124°C junction temperature |
| Output voltages (V_{OUT}) | 1.2 V, $\pm 1\%$ | 1.2 V, $\pm 1\%$ |
| Output currents (I_{OUT}) | 1.5 A (max), 50 mA (min) | 2.0 A (max), 5 mA (min) |
| RMS noise | $< 5 \mu V_{RMS}$, bandwidth = 10 Hz to 100 kHz | 4.8 μV_{RMS} , bandwidth = 10 Hz to 100 kHz |
| PSRR at 700 kHz | > 40 dB | 42 dB |
| Startup time | < 2 ms | 800 μs (typ) 1.48 μs (max) |

8.2.2 Detailed Design Procedure

The output voltage can be set to 1.2 V by selecting the correct values for R_1 and R_2 ; see [Equation 3](#).

Input and output capacitors are selected in accordance with the [Capacitor Recommendation](#) section. Ceramic capacitances of 22 μF for both input and output are selected to help balance the charge needed during startup when charging the output capacitor, thus reducing the input voltage drop.


To satisfy the required startup time (t_{SS}) and still maintain low-noise performance, a 0.1- μF $C_{NR/SS}$ is selected for with SS_CTRL connected to V_{IN} . This value is calculated with [Equation 9](#). Using the $I_{NR/SS(MAX)}$ and the smallest $C_{NR/SS}$ capacitance resulting from manufacturing variance (often $\pm 20\%$) provides the fastest startup time, whereas using the $I_{NR/SS(MIN)}$ and the largest $C_{NR/SS}$ capacitance resulting from manufacturing variance provides the slowest startup time.

$$t_{SS} = (V_{REF} \times C_{NR/SS}) / I_{NR/SS} \quad (9)$$


With a 1.5-A maximum load, the internal power dissipation is 1.2 W, corresponding to a 91°C junction temperature rise. With a 55°C maximum ambient temperature, the junction temperature is at 124°C on the JEDEC standard high-K board. Connecting the thermal pad to more metal on the PCB than the standard JEDEC high-K board decreases the thermal resistance to the board and causes a decrease in the junction temperature of the device for a given power dissipation. To minimize noise, a feed-forward capacitance (C_{FF}) of 10 nF is selected.

See the [Layout](#) section for an example of how to layout the TPS7A92 to achieve best PSRR and noise.

8.2.3 Application Curves

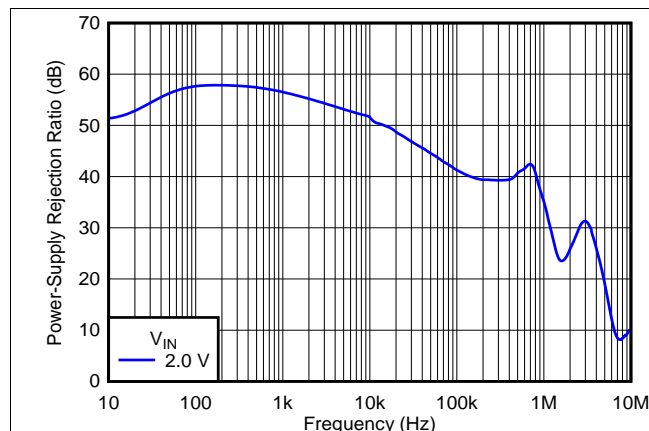

✎ 40. PSRR vs Frequency

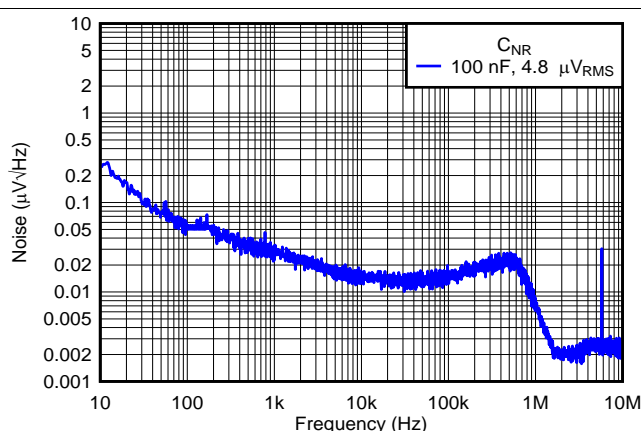

✎ 41. Output Noise vs Frequency

9 Power Supply Recommendations

The input of the TPS7A92 is designed to operate from an input voltage range between 1.4 V and 6.5 V and with an input capacitor of 10 μ F. The input voltage range must provide adequate headroom in order for the device to have a regulated output. This input supply must be well regulated. If the input supply is noisy, additional input capacitors can be used to improve the output noise performance.

10 Layout

10.1 Layout Guidelines

General guidelines for linear regulator designs are to place all circuit components on the same side of the circuit board and as near as practical to the respective LDO pin connections. Place ground return connections to the input and output capacitors, and to the LDO ground pin as close to each other as possible, connected by a wide, component-side, copper surface. The use of vias and long traces to create LDO circuit connections is strongly discouraged and negatively affects system performance.

10.1.1 Board Layout

To maximize the ac performance of the TPS7A92, following the layout example illustrated in ✎ 42 is recommended. This layout isolates the analog ground (AGND) from the noisy power ground. Components that must be connected to the quiet analog ground are the noise reduction capacitor ($C_{NR/SS}$) and the lower feedback resistor (R_2). These components must have a separate connection back to the power pad of the device for optimal output noise performance. Connect the GND pin directly to the thermal pad and not to any external plane.

To maximize the output voltage accuracy, the connection from the output voltage back to top output divider resistors (R_1) must be made as close as possible to the load. This method of connecting the feedback trace eliminates the voltage drop from the device output to the load.

To improve thermal performance, use an array of thermal vias to connect the thermal pad to the ground planes. Larger ground planes improve the thermal performance of the device and lowering the operating temperature of the device.

11 デバイスおよびドキュメントのサポート

11.1 デバイス・サポート

11.1.1 開発サポート

11.1.1.1 評価モジュール

TPS7A92を使用する回路の性能の初期評価に役立てるため、評価モジュール(EVM)を利用可能です。この機器の概要情報を、表 4に示します。

表 4. 設計キットと評価モジュール⁽¹⁾

| 名前 | 型番 |
|--------------------------------|----------------|
| TPS7A92低ドロップアウト電圧レギュレータ評価モジュール | TPS7A92EVM-776 |

(1) 最新のパッケージと発注情報については、このデータシートの末尾にあるパッケージ・オプションの付録を参照するか、www.ti.comにあるデバイスの製品フォルダをご覧ください。

このEVMは、テキサス・インスツルメンツのWebサイト(www.ti.com)のTPS7A92製品フォルダで請求できます。

11.1.1.2 SPICEモデル

SPICEによる回路性能のコンピュータ・シミュレーションは、アナログ回路やシステムのパフォーマンスを分析するため多くの場合に有用です。TPS7A92用のSPICEモデルは、TPS7A92製品フォルダの「シミュレーション・モデル」で入手できます。

11.1.2 デバイスの項目表記

表 5. 製品情報⁽¹⁾

| 製品名 | 概要 |
|----------------|---|
| TPS7A92xxYYYYZ | YYYはパッケージ指定子です。 XXは出力電圧を表します。01は可変出力バージョンです。 Zはパッケージ数量です。 |

(1) 最新のパッケージと発注情報については、このデータシートの末尾にあるパッケージ・オプションの付録を参照するか、www.ti.comにあるデバイスの製品フォルダをご覧ください。

11.2 ドキュメントのサポート

11.2.1 関連資料

テキサス・インスツルメンツ、『[TPS37xx デュアル・チャネル、低電力、高精度電圧検出器](#)』データシート

テキサス・インスツルメンツ、『[TPS7A88評価モジュール](#)』ユーザー・ガイド

テキサス・インスツルメンツ『[低ドロップアウト・レギュレータでフィードフォワード・コンデンサを使用することの長所と短所](#)』アプリケーション・レポート

テキサス・インスツルメンツ、『[LDOノイズの測定方法](#)』ホワイト・ペーパー

11.3 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、ti.comのデバイス製品フォルダを開いてください。右上の「アラートを受け取る」をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取れます。変更の詳細については、修正されたドキュメントに含まれている改訂履歴をご覧ください。

11.4 コミュニティ・リソース

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™オンライン・コミュニティ *TIのE2E (Engineer-to-Engineer)* コミュニティ。エンジニア間の共同作業を促進するために開設されたものです。e2e.ti.comでは、他のエンジニアに質問し、知識を共有し、アイデアを検討して、問題解決に役立てることができます。

設計サポート *TIの設計サポート* 役に立つE2Eフォーラムや、設計サポート・ツールをすばやく見つけることができます。技術サポート用の連絡先情報も参照できます。

11.5 商標

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

11.6 静電気放電に関する注意事項



すべての集積回路は、適切なESD保護方法を用いて、取扱いと保存を行うようにして下さい。

静電気放電はわずかな性能の低下から完全なデバイスの故障に至るまで、様々な損傷を与えます。高精度の集積回路は、損傷に対して敏感であり、極めてわずかなパラメータの変化により、デバイスに規定された仕様に適合しなくなる場合があります。

11.7 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

12 メカニカル、パッケージ、および注文情報

以降のページには、メカニカル、パッケージ、および注文に関する情報が記載されています。この情報は、そのデバイスについて利用可能な最新のデータです。このデータは予告なく変更されることがあり、ドキュメントが改訂される場合もあります。本データシートのブラウザ版を使用されている場合は、画面左側の説明をご覧ください。

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|-------------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| TPS7A9201DSKR | Active | Production | SON (DSK) 10 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | 1CFP |
| TPS7A9201DSKR.A | Active | Production | SON (DSK) 10 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | 1CFP |
| TPS7A9201DSKRG4 | Active | Production | SON (DSK) 10 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | 1CFP |
| TPS7A9201DSKRG4.A | Active | Production | SON (DSK) 10 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | 1CFP |
| TPS7A9201DSKT | Active | Production | SON (DSK) 10 | 250 SMALL T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | 1CFP |
| TPS7A9201DSKT.A | Active | Production | SON (DSK) 10 | 250 SMALL T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | 1CFP |

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


TAPE AND REEL INFORMATION



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS7A9201DSKR | SON | DSK | 10 | 3000 | 178.0 | 8.4 | 2.75 | 2.75 | 0.95 | 4.0 | 8.0 | Q2 |
| TPS7A9201DSKRG4 | SON | DSK | 10 | 3000 | 178.0 | 8.4 | 2.75 | 2.75 | 0.95 | 4.0 | 8.0 | Q2 |
| TPS7A9201DSKT | SON | DSK | 10 | 250 | 178.0 | 8.4 | 2.75 | 2.75 | 0.95 | 4.0 | 8.0 | Q2 |

TAPE AND REEL BOX DIMENSIONS

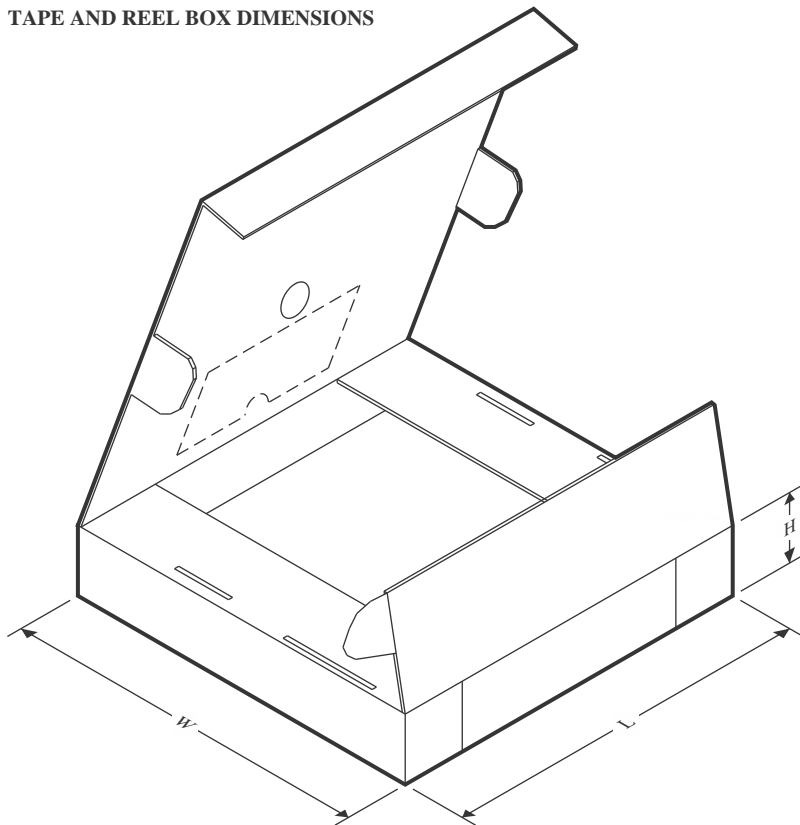

*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS7A9201DSKR | SON | DSK | 10 | 3000 | 205.0 | 200.0 | 33.0 |
| TPS7A9201DSKRG4 | SON | DSK | 10 | 3000 | 205.0 | 200.0 | 33.0 |
| TPS7A9201DSKT | SON | DSK | 10 | 250 | 205.0 | 200.0 | 33.0 |


GENERIC PACKAGE VIEW

DSK 10

WSON - 0.8 mm max height



2.5 x 2.5 mm, 0.5 mm pitch

PLASTIC SMALL OUTLINE - NO LEAD

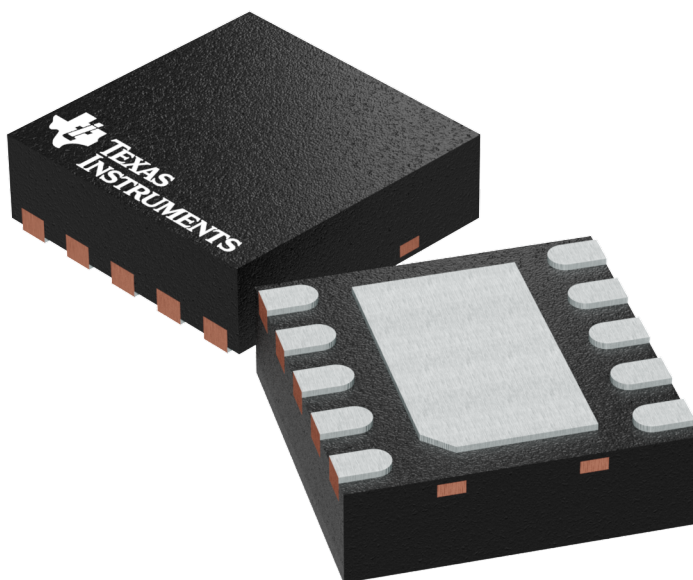

Images above are just a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

4225304/A

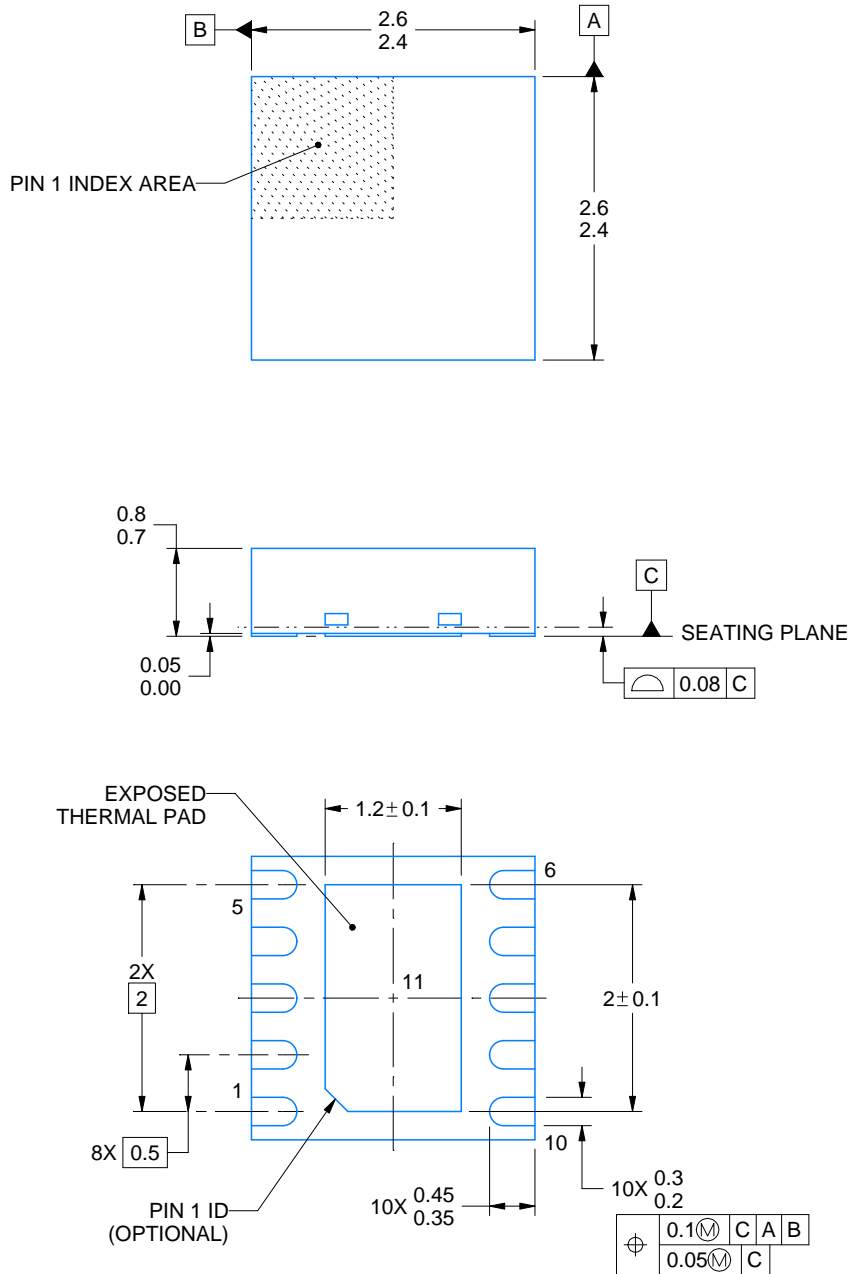

4218903/B 10/2020

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

EXAMPLE BOARD LAYOUT


DSK0010A

WSN - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

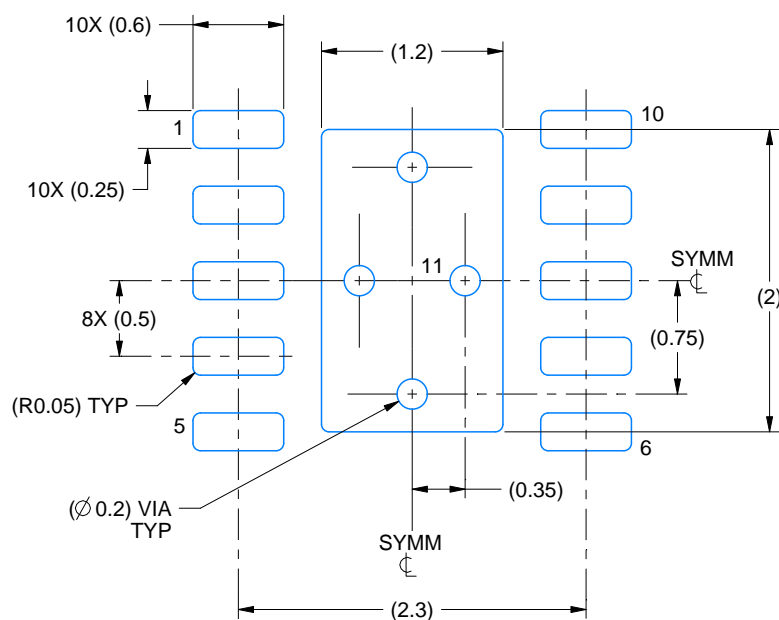

LAND PATTERN EXAMPLE
SCALE:20X

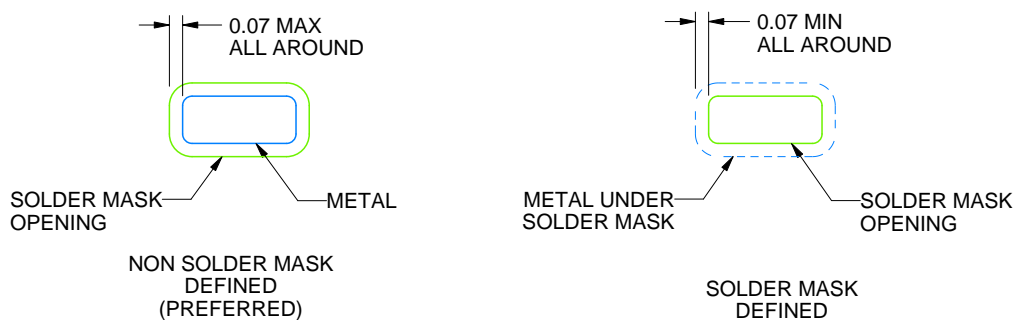

SOLDER MASK DETAILS

4218903/B 10/2020

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slue271).
5. Vias are optional depending on application, refer to device data sheet. If some or all are implemented, recommended via locations are shown.

EXAMPLE STENCIL DESIGN

DSK0010A

WSN - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

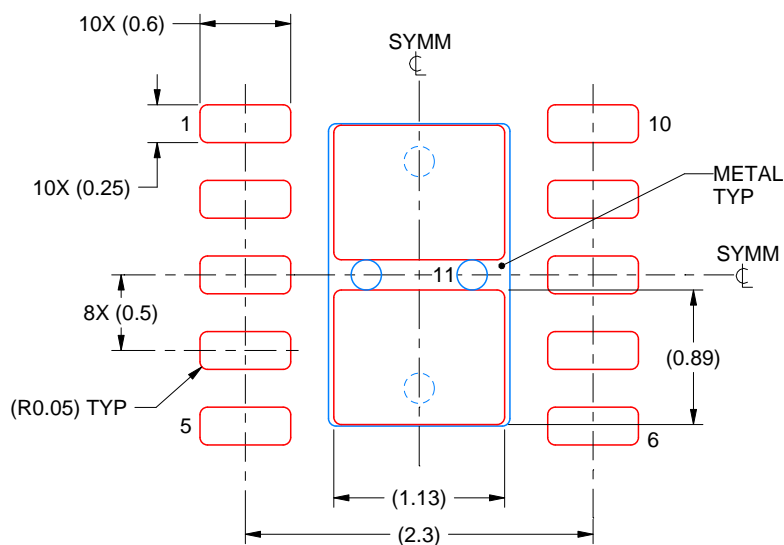

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 11
84% PRINTED SOLDER COVERAGE BY AREA
SCALE:20X

4218903/B 10/2020

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適したテキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されているテキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、[テキサス・インスツルメンツの販売条件](#)、または [ti.com](https://www.ti.com) やかかるテキサス・インスツルメンツ製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用されるテキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated