



TS5MP645 4データ・レーン、2:1 MIPIスイッチ(10チャンネル、2:1アナログ・スイッチ)

1 特長

- 電源電圧範囲: 1.65V~5.5V
- 10チャンネルの2:1スイッチ
- 電源オフ保護
 $V_{DD} = 0V$ のときI/OはHi-Z
- 低い R_{ON} : 標準値2.45 Ω
- 低い C_{ON} : 1.5pF
- 最小帯域幅1.5GHz
- 非常に低いクロストーク: -40dB
- 低消費電力のディセーブル・モード
- 1.8V互換のロジック入力
- JESD 22を超えるESD保護
 - 人体モデル(HBM) 2000V

2 アプリケーション

- 携帯電話
- タブレット
- PC/ノートPC
- 仮想現実
- 拡張現実

3 概要

TS5MP645は、4データ・レーンのMIPIスイッチです。このデバイスは最適化された10チャンネル(5差動)の単極双投スイッチで、高速アプリケーションで使用されます。

TS5MP645は、複数のMIPI準拠デバイスを単一のCSI/DSI、C-PHY/D-PHYモジュールに接続しやすくするように設計されています。


このデバイスは帯域幅が非常に優れており、チャンネル間のスキューが低く、信号の劣化が小さく、レイアウト損失を補償するため広いマージンがあります。消費電流が小さいため、低消費電力アプリケーションの要求を満たすことができます。

製品情報⁽¹⁾

型番	パッケージ	本体サイズ(公称)
TS5MP645	DSBGA (YFP)	2.42mm×2.42mm

(1) 提供されているすべてのパッケージについては、巻末の注文情報を参照してください。

概略回路図

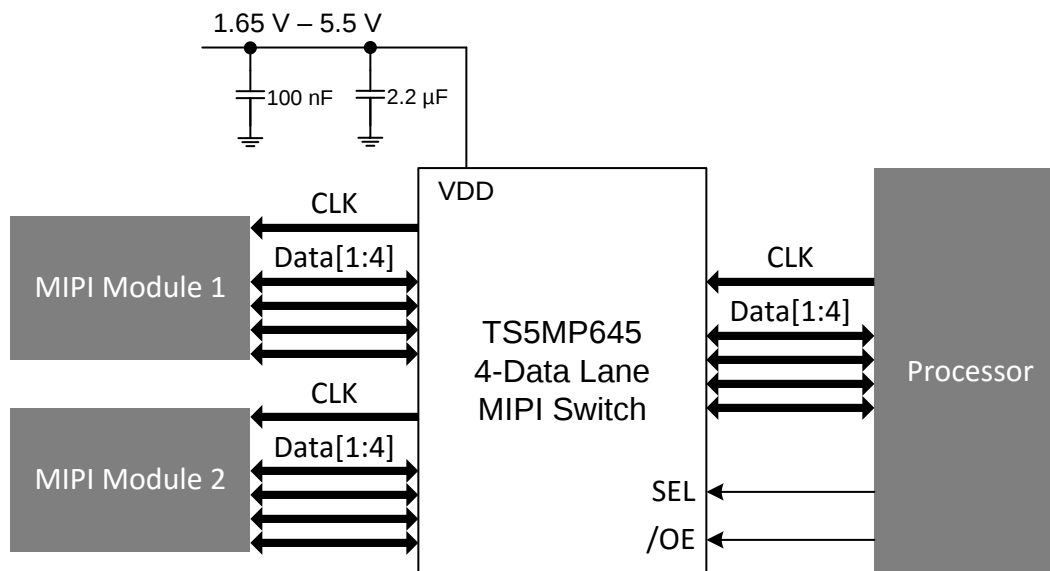

Copyright © 2018, Texas Instruments Incorporated



目次


1	特長	1	8.4	Device Functional Modes.....	19
2	アプリケーション	1	9	Application and Implementation	20
3	概要	1	9.1	Application Information.....	20
4	改訂履歴.....	2	9.2	Typical Application	20
5	Pin Configuration and Functions	3	10	Power Supply Recommendations	21
6	Specifications.....	5	11	Layout.....	22
6.1	Absolute Maximum Ratings	5	11.1	Layout Guidelines	22
6.2	ESD Ratings.....	5	11.2	Layout Example	22
6.3	Recommended Operating Conditions.....	5	12	デバイスおよびドキュメントのサポート	23
6.4	Thermal Information	5	12.1	ドキュメントのサポート	23
6.5	Electrical Characteristics.....	6	12.2	ドキュメントの更新通知を受け取る方法.....	23
6.6	Typical Characteristics.....	9	12.3	コミュニティ・リソース	23
7	Parameter Measurement Information	10	12.4	商標	23
8	Detailed Description	16	12.5	静電気放電に関する注意事項	23
8.1	Overview	16	12.6	Glossary	23
8.2	Functional Block Diagram	16	13	メカニカル、パッケージ、および注文情報	23
8.3	Feature Description.....	17			

4 改訂履歴

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Revision A (March 2018) から Revision B に変更	Page
Changed the I_{OFF} Test conditions From: $V_{DD} = 1.65\text{ V to }5.5\text{ V}$ To: $V_{DD} = 0\text{ V, }1.65\text{ V to }5.5\text{ V}$ in the <i>Electrical Characteristics</i> table	6
2018年1月発行のものから更新	Page
「製品情報」で本体サイズ(公称)を2.459×2.459から2.42×2.42に変更	1

5 Pin Configuration and Functions

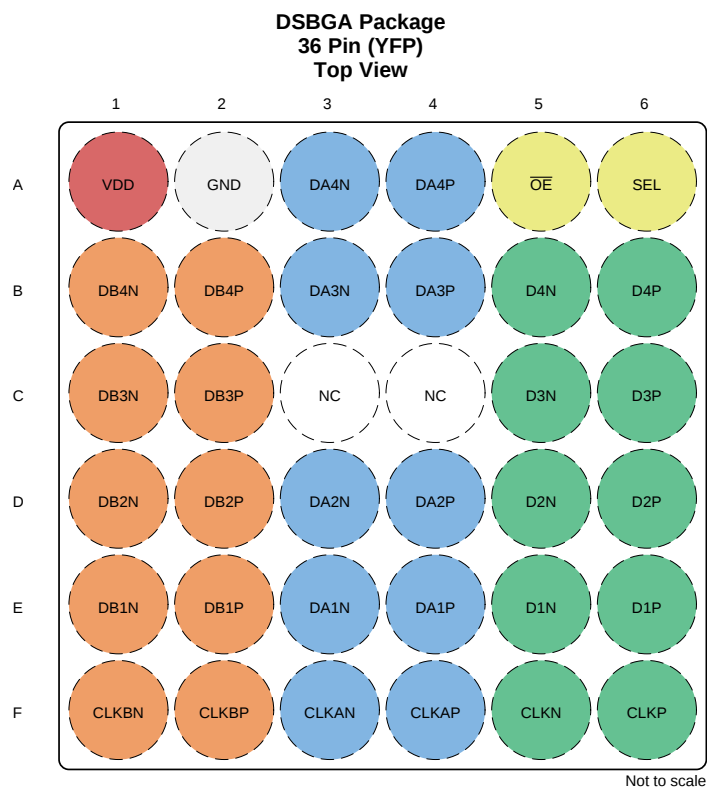

Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
VDD	A1	PWR	Power supply input
GND	A2	GND	Device Ground
DA4N	A3	I/O	Differential I/O
DA4P	A4	I/O	Differential I/O
$\overline{\text{OE}}$	A5	I	Output enable (Active Low)
SEL	A6	I	Channel Select
DB4N	B1	I/O	Differential I/O
DB4P	B2	I/O	Differential I/O
DA3N	B3	I/O	Differential I/O
DA3P	B4	I/O	Differential I/O
D4N	B5	I/O	Differential I/O
D4P	B6	I/O	Differential I/O
DB3N	C1	I/O	Differential I/O
DB3P	C2	I/O	Differential I/O
NC	C3	-	No connect
NC	C4	-	No connect
D3N	C5	I/O	Differential I/O
D3P	C6	I/O	Differential I/O
DB2N	D1	I/O	Differential I/O
DB2P	D2	I/O	Differential I/O
DA2N	D3	I/O	Differential I/O

TS5MP645

JAJSEK0B – JANUARY 2018 – REVISED JULY 2018

www.ti.com
Pin Functions (continued)

PIN		I/O	DESCRIPTION
NAME	NO.		
DA2P	D4	I/O	Differential I/O
D2N	D5	I/O	Differential I/O
D2P	D6	I/O	Differential I/O
DB1N	E1	I/O	Differential I/O
DB1P	E2	I/O	Differential I/O
DA1N	E3	I/O	Differential I/O
DA1P	E4	I/O	Differential I/O
D1N	E5	I/O	Differential I/O
D1P	E6	I/O	Differential I/O
CLKBN	F1	I/O	Differential I/O
CLKBP	F2	I/O	Differential I/O
CLKAN	F3	I/O	Differential I/O
CLKAP	F4	I/O	Differential I/O
CLKN	F5	I/O	Differential I/O
CLKP	F6	I/O	Differential I/O

6 Specifications

6.1 Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted)^{(1) (2)}

		MIN	MAX	UNIT
V _{DD}	Supply Voltage	-0.5	6	V
V _{I/O}	Analog voltage range (DxN, CLKN, DxP, CLKP, DAxN, CLKAN, DAxP, CLKAP, DBxN, CLKBN, DBxP, CLKBP)	-0.5	4	V
V _{SEL} , V _{OE}	Digital Input Voltage (SEL, OE)	-0.5	6	V
T _J	Junction temperature	-65	150	°C
T _{stg}	Storage temperature	-65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Rating* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Condition*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage are with respect to ground, unless otherwise specified

6.2 ESD Ratings

		VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins ⁽¹⁾	±2000
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽²⁾	±250

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

Over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V _{DD}	Supply Voltage	1.65		5.5	V
V _{I/O}	Analog voltage range (DxN, CLKN, DxP, CLKP, DAxN, CLKAN, DAxP, CLKAP, DBxN, CLKBN, DBxP, CLKBP)	0		3.6	V
V _{SEL} , V _{OE}	Digital Input Voltage (SEL, OE)	0		5.5	V
I _{I/O}	Continuous I/O current	-35		35	mA
T _A	Operating ambient temperature	-40		85	°C
T _J	Junction temperature	-65		150	°C

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TS5MP645	UNIT
		YFP	
		36	
R _{θJA}	Junction-to-ambient thermal resistance	57.6	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	0.3	°C/W
R _{θJB}	Junction-to-board thermal resistance	12.6	°C/W
Ψ _{JT}	Junction-to-top characterization parameter	0.2	°C/W
Ψ _{JB}	Junction-to-board characterization parameter	12.7	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.5 Electrical Characteristics

Over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
POWER SUPPLY						
I_{DD}	Active Supply Current	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 0\text{ V}$ $SEL = 0\text{ V to }5.5\text{ V}$ $Dn, CLKn = 0\text{ V}$	0	30	60	μA
I_{DD_PD}	Power-down Supply current	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = V_{DD}$ $SEL = 0\text{ V to }5.5\text{ V}$ $Dn, CLKn = 0\text{ V}$	0	0.1	1	μA
$I_{DD_PD_1.8}$	Power-down Supply current	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 1.8\text{ V}$ $SEL = 0\text{ V to }5.5\text{ V}$ $Dn, CLKn = 0\text{ V}$	0	0.1	10	μA
DC CHARACTERISTICS						
R_{ON_HS}	On-state resistance	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 0\text{ V}$ $Dn, CLKn = -8\text{ mA}, 0.2\text{ V}$ $DAn, DBn, CLKAn, CLKBn = 0.2\text{ V}, -8\text{ mA}$		2.45	5.5	Ω
R_{ON_LP}	On-state resistance	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 0\text{ V}$ $Dn, CLKn = -8\text{ mA}, 1.2\text{ V}$ $DAn, DBn, CLKAn, CLKBn = 1.2\text{ V}, -8\text{ mA}$		2.65	6.5	Ω
$R_{ON_flat_HS}$	On-state resistance flatness	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 0\text{ V}$ $Dn, CLKn = -8\text{ mA}, 0\text{ V to }0.3\text{ V}$ $DAn, DBn, CLKAn, CLKBn = 0\text{ V to }0.3\text{ V}, -8\text{ mA}$		0.1		Ω
$R_{ON_flat_LP}$	On-state resistance flatness	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 0\text{ V}$ $Dn, CLKn = -8\text{ mA}, 0\text{ V to }1.3\text{ V}$ $DAn, DBn, CLKAn, CLKBn = 0\text{ V to }1.3\text{ V}, -8\text{ mA}$		0.9		Ω
ΔR_{ON_HS}	On-state resistance match between+and - paths	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 0\text{ V}$ $Dn, CLKn = -8\text{ mA}, 0.2\text{ V}$ $DAn, DBn, CLKAn, CLKBn = 0.2\text{ V}, -8\text{ mA}$		0.1		Ω
ΔR_{ON_LP}	On-state resistance match between+and - paths	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 0\text{ V}$ $Dn, CLKn = -8\text{ mA}, 1.2\text{ V}$ $DAn, DBn, CLKAn, CLKBn = 1.2\text{ V}, -8\text{ mA}$		0.1		Ω
I_{OFF}	Switch off leakage current	$V_{DD} = 0\text{ V}, 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 0\text{ V to }5.5\text{ V}$ $SEL = 0\text{ V to }5.5\text{ V}$ $Dn, CLKn = 0\text{ V to }1.3\text{ V}$ $DAn, DBn, CLKAn, CLKBn = 0\text{ V to }1.3\text{ V}$	-0.5		0.5	μA
I_{ON}	Switch on leakage current	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 0\text{ V}$ $SEL = 0\text{ V to }5.5\text{ V}$ $Dn, CLKn = 0\text{ V to }1.3\text{ V}$ $DAn, DBn, CLKAn, CLKBn = 0\text{ V to }1.3\text{ V}$	-0.5		0.5	μA
DYNAMIC CHARACTERISTICS						
t_{SWITCH}	Switching time between channels	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 0\text{ V}$ $Dn, CLKn = 0.6\text{ V}$ $DAn, DBn, CLKAn, CLKBn: R_L=50\ \Omega, C_L = 5\text{ pF}$			1.5	μs
f_{SEL_MAX}	Maximum toggling frequency for the SEL line	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $Dn, CLKn = 0.6\text{ V}$ $DAn, DBn, CLKAn, CLKBn: R_L = 50\ \Omega, C_L=1\text{ pF}$			100	kHz
t_{ON_OE}	Device enable time $\overline{OE}$ to switch on	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $Dn, CLKn = 0.6\text{ V}$ $DAn, DBn, CLKAn, CLKBn: R_L = 50\ \Omega, C_L = 1\text{ pF}$		50	300	μs
t_{ON_VDD}	Device enable time V_{DD} to switch on	$V_{DD} = 0\text{ V to }1.65\text{ V}$ $Dn, CLKn = 0.6\text{ V}$ $DAn, DBn, CLKAn, CLKBn: R_L = 50\ \Omega, C_L = 1\text{ pF}$		50	300	μs

Electrical Characteristics (continued)

Over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{OFF_OE} Device disable time $\overline{OE}$ to switch off	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $Dn, CLKn = 0.6\text{ V}$ $DAn, DBn, CLKAn, CLKBn: R_L = 50\ \Omega, C_L = 1\text{ pF}$		0.5	1	μs
t_{OFF_VDD} Device disable time V_{DD} to switch off	$V_{DD} = 5\text{ V to }0\text{ V}$ VDD ramp rate = 250 μs $Dn, CLKn = 0.6\text{ V}$ $DAn, DBn, CLKAn, CLKBn: R_L = 50\ \Omega, C_L = 1\text{ pF}$		0.5	1	ms
t_{MIN_OE} Minimum pulse width for $\overline{OE}$	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $Dn, CLKn = 0.6\text{ V}$ $DAn, DBn, CLKAn, CLKBn: R_L = 50\ \Omega, C_L = 1\text{ pF}$	500			ns
t_{BBM} Break before make time	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 0\text{ V}$ $Dn, CLKn = R_L = 50\ \Omega, C_L = 1\text{ pF}$ $DAn, DBn, CLKAn, CLKBn: 0.6\text{ V}$	50			ns
t_{SKEW} Intrapair skew	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 0\text{ V}$ $Dn, CLKn = 0.3\text{ V}$ $DAn, DBn, CLKAn, CLKBn: R_L = 50\ \Omega, C_L = 1\text{ pF}$		1		ps
t_{SKEW} Interpair Skew	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 0\text{ V}$ $Dn, CLKn = 0.3\text{ V}$ $DAn, DBn, CLKAn, CLKBn: R_L = 50\ \Omega, C_L = 1\text{ pF}$		4		ps
t_{PD} Propagation delay with 100 ps rise time	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 0\text{ V}$ $Dn, CLKn = 0.6\text{ V}$ $DAn, DBn, CLKAn, CLKBn: R_L = 50\ \Omega, C_L = 1\text{ pF}$ $t_{RISE} = 100\text{ ps}$		40		ps
O_{ISO} Differential off isolation	$V_{DD} = 1.65\text{ V}$ $\overline{OE} = 0\text{ V}, V_{DD}$ $SEL = 0\text{ V}, V_{DD}$ $Dn, CLKn, DAn, DBn, CLKAn, CLKBn: R_S = 50\ \Omega,$ $R_L = 50\ \Omega, C_L = 1\text{ pF}$ $V_{IO} = 200\text{ mV} + 200\text{ mV}_{PP}$ (differential) $f = 1250\text{ MHz}$		-20		dB
X_{TALK} Differential channel to channel crosstalk	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 0\text{ V}, V_{DD}$ $SEL = 0\text{ V}, V_{DD}$ $Dn, CLKn, DAn, DBn, CLKAn, CLKBn: R_S = 50\ \Omega,$ $R_L = 50\ \Omega, C_L = 1\text{ pF}$ $V_{IO} = 200\text{ mV} + 200\text{ mV}_{PP}$ (differential) $f = 1250\text{ MHz}$		-40		dB
BW Differential Bandwidth	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 0\text{ V}$ $SEL = 0\text{ V}, V_{DD}$ $Dn, CLKn, DAn, DBn, CLKAn, CLKBn: R_S = 50\ \Omega,$ $R_L = 50\ \Omega, C_L = 1\text{ pF}$ $V_{IO} = 200\text{ mV} + 200\text{ mV}_{PP}$ (differential)	1.5	2		GHz
I_{LOSS} Insertion Loss	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 0\text{ V}$ $SEL = 0\text{ V}, V_{DD}$ $Dn, CLKn, DAn, DBn, CLKAn, CLKBn: R_S = 50\ \Omega,$ $R_L = 50\ \Omega, C_L = 1\text{ pF}$ $V_{IO} = 200\text{ mV} + 200\text{ mV}_{PP}$ (differential) $f = 100\text{ kHz}$	-0.4			dB
C_{OFF} Off capacitance	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = 0\text{ V}, V_{DD}$ $SEL = 0\text{ V}, V_{DD}$ $Dn, CLKn, DAn, DBn, CLKAn, CLKBn = 0\text{ V}, 0.2\text{ V}$ $f = 1250\text{ MHz}$		1.5		pF
C_{ON} On capacitance	$V_{DD} = 1.65\text{ V to }5.5\text{ V}$ $\overline{OE} = V_{DD}$ $SEL = 0\text{ V}, V_{DD}$ $Dn, CLKn, DAn, DBn, CLKAn, CLKBn = 0\text{ V}, 0.2\text{ V}$ $f = 1250\text{ MHz}$		1.5		pF

Electrical Characteristics (continued)

Over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
DIGITAL CHARACTERISTICS						
V_{IH}	Input logic high (SEL, $\overline{OE}$)	$V_{IO} = 0.6\text{ V}$, $R_L = 50\ \Omega$, $C_L = 5\text{ pF}$	1.425		5.5	V
V_{IL}	Input logic low (SEL, $\overline{OE}$)	$V_{IO} = 0.6\text{ V}$, $R_L = 50\ \Omega$, $C_L = 5\text{ pF}$	0		0.5	V
I_{IH}	Input high leakage current (SEL, $\overline{OE}$)	$V_{IO} = 0.6\text{ V}$, $R_L = 50\ \Omega$, $C_L = 5\text{ pF}$	-5		5	μA
I_{IL}	Input low leakage current (SEL, $\overline{OE}$)	$V_{IO} = 0.6\text{ V}$, $R_L = 50\ \Omega$, $C_L = 5\text{ pF}$	-5		5	μA
R_{PD}	Internal pull-down resistance on digital input pins	$V_{IO} = 0.6\text{ V}$, $R_L = 50\ \Omega$, $C_L = 5\text{ pF}$		6		$\text{M}\Omega$
C_{SEL} , $C_{\overline{OE}}$	Digital Input capacitance (SEL, $\overline{OE}$)	$f = 1\text{ MHz}$		5		pF

6.6 Typical Characteristics

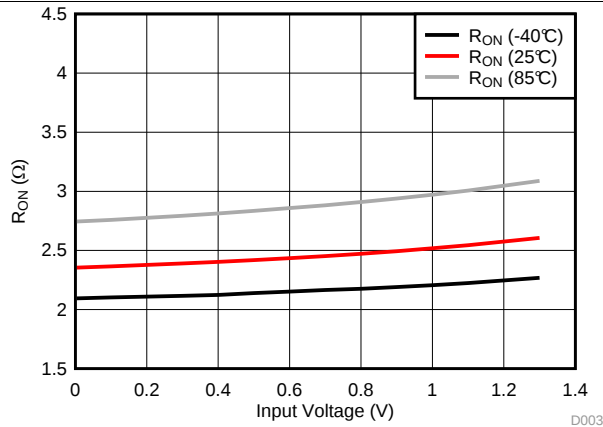


Figure 1. R_{ON} vs Input Voltage. $V_{DD} = 1.65$ V

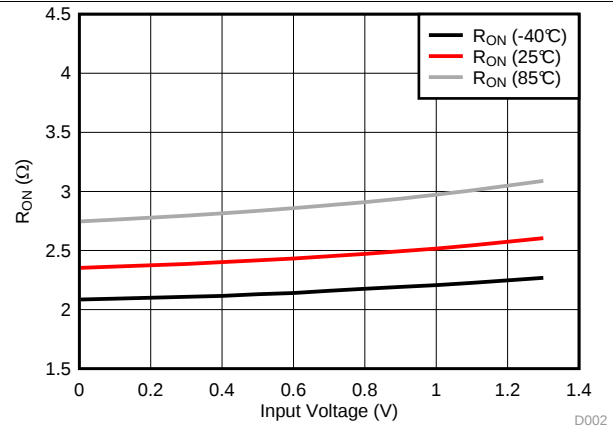


Figure 2. R_{ON} vs Input Voltage. $V_{DD} = 3.3$ V

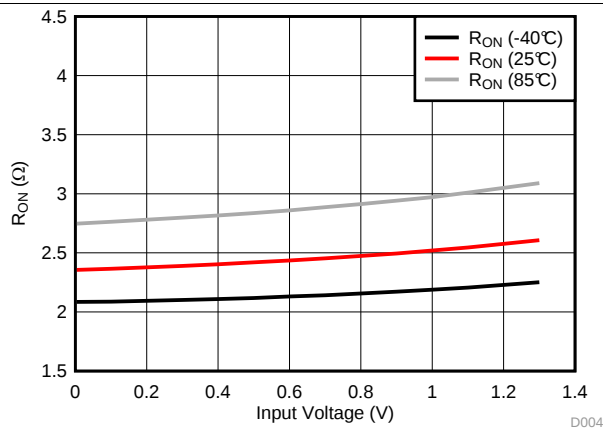


Figure 3. R_{ON} vs Input Voltage. $V_{DD} = 5.5$ V

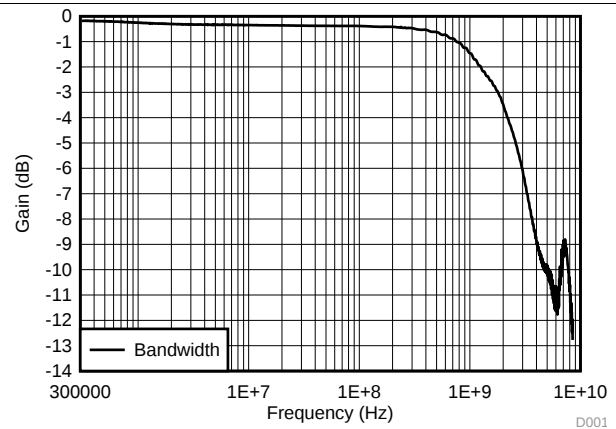


Figure 4. Differential Bandwidth

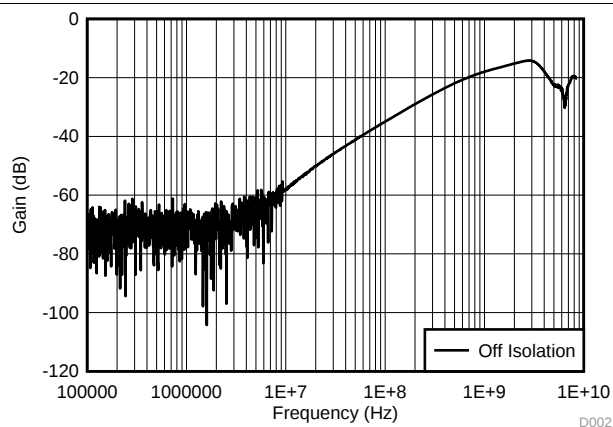


Figure 5. Off Isolation


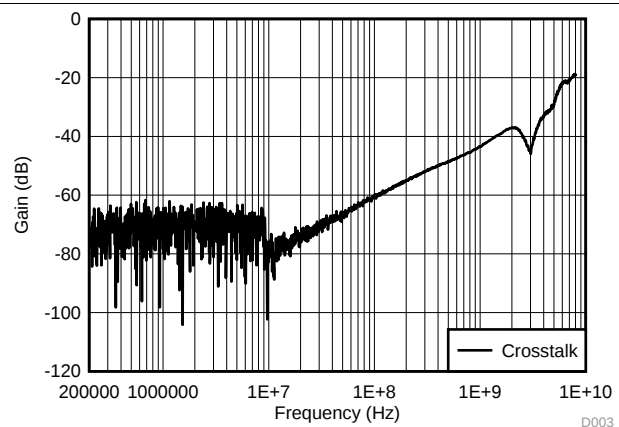


Figure 6. Differential Crosstalk

7 Parameter Measurement Information

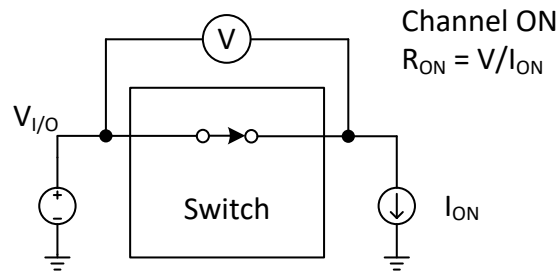

Copyright © 2018, Texas Instruments Incorporated

图 7. On Resistance




图 8. Off Leakage





图 9. On Leakage

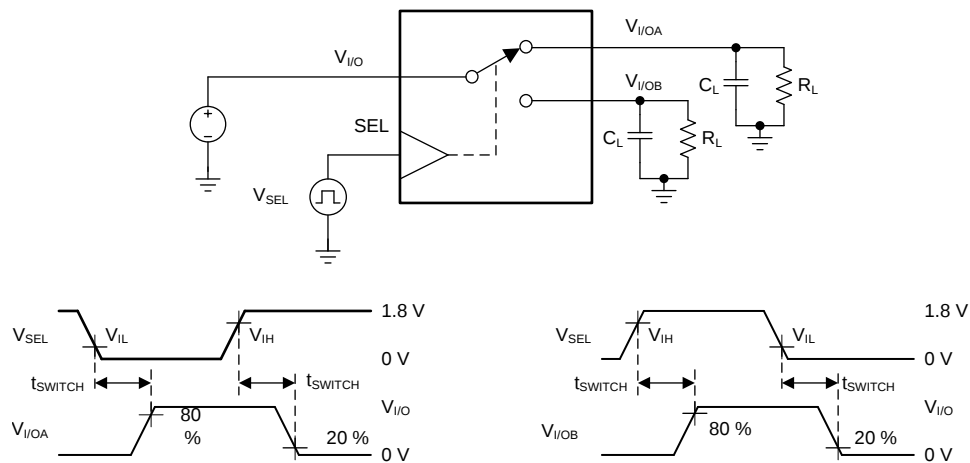


Copyright © 2018, Texas Instruments Incorporated

- (1) All input pulses are supplied by generators having the following characteristics: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r = 3 \text{ ns}$, $t_f = 3 \text{ ns}$.
- (2) C_L includes probe and jig capacitance.

图 10. t_{SWITCH} timing


Parameter Measurement Information (continued)

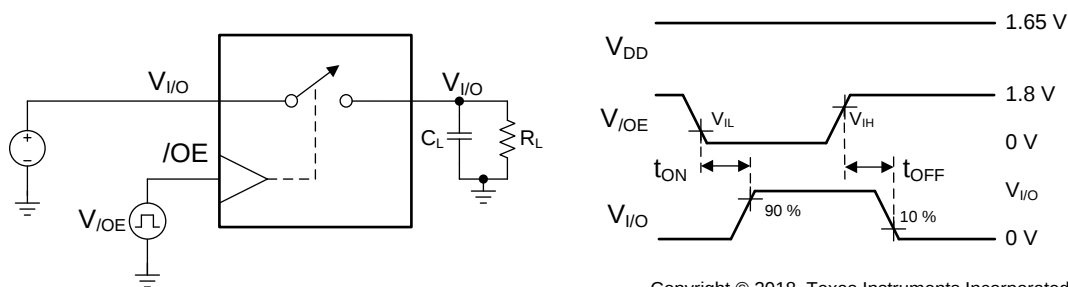

Copyright © 2018, Texas Instruments Incorporated

- (1) All input pulses are supplied by generators having the following characteristics: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r = 3 \text{ ns}$, $t_f = 3 \text{ ns}$.
- (2) C_L includes probe and jig capacitance.


FIG 11. t_{ON} and t_{OFF} Timing for $\overline{OE}$

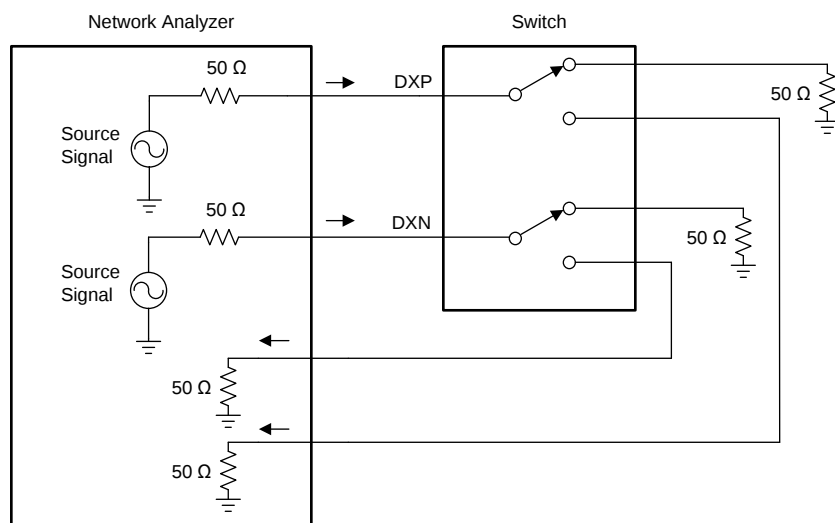

Copyright © 2018, Texas Instruments Incorporated


FIG 12. Off Isolation

Parameter Measurement Information (continued)

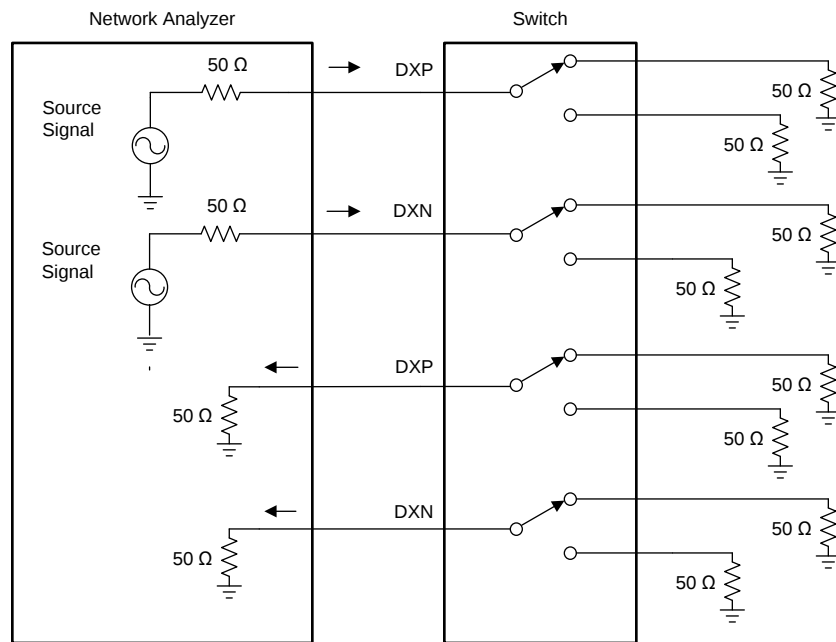

Copyright © 2018, Texas Instruments Incorporated


FIG 13. Crosstalk

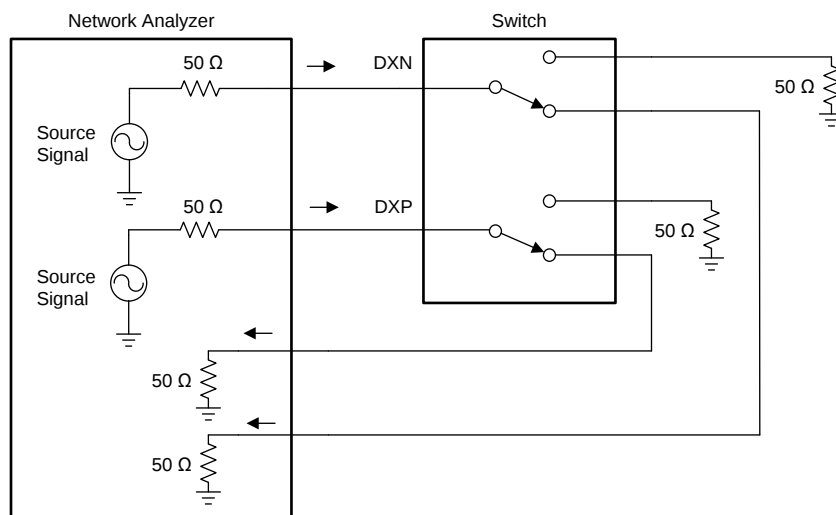

Copyright © 2017, Texas Instruments Incorporated

FIG 14. BW and Insertion Loss


Parameter Measurement Information (continued)

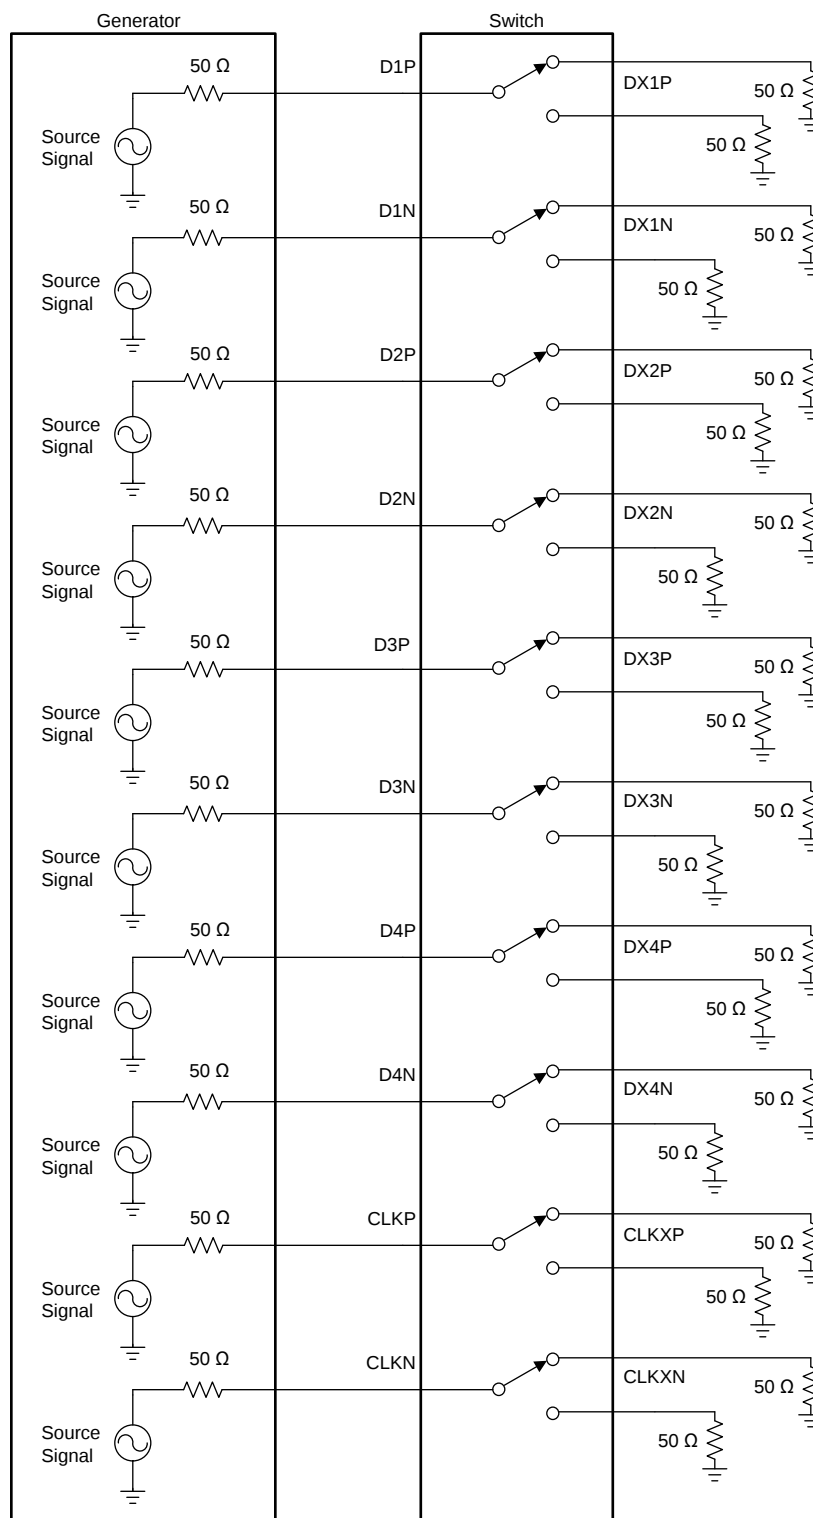

Copyright © 2017, Texas Instruments Incorporated


FIG 15. t_{PD} , $t_{SKEW(INTRA)}$ and t_{SKEW} Setup

Parameter Measurement Information (continued)

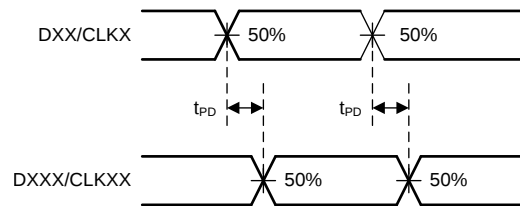

- (1) All input pulses are supplied by generators having the following characteristics: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r = 100 \text{ ps}$, $t_f = 100 \text{ ps}$.
- (2) C_L includes probe and jig capacitance.


FIG 16. t_{PD}

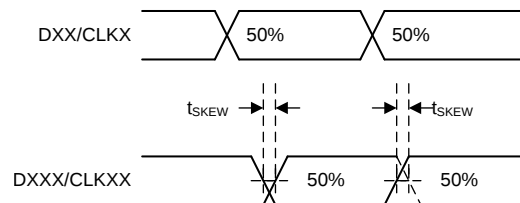

- (1) All input pulses are supplied by generators having the following characteristics: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r = 100 \text{ ps}$, $t_f = 100 \text{ ps}$.
- (2) C_L includes probe and jig capacitance.


FIG 17. t_{SKEW}

Parameter Measurement Information (continued)

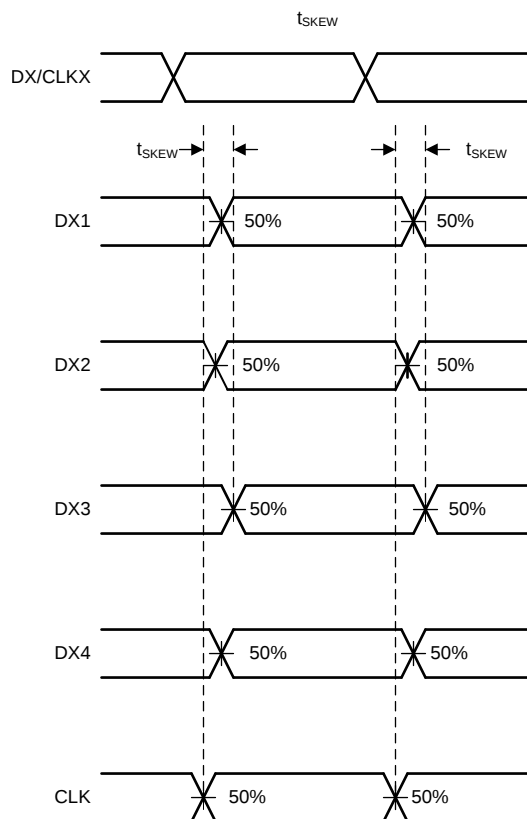

- (1) All input pulses are supplied by generators having the following characteristics: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r = 100 \text{ ps}$, $t_f = 100 \text{ ps}$.
- (2) C_L includes probe and jig capacitance.
- (3) $t_{SK(INTER)}$ is the max skew between all channels. Diagram exaggerates $t_{SK(INTER)}$ to show measurement technique

FIG 18. t_{SKEW}

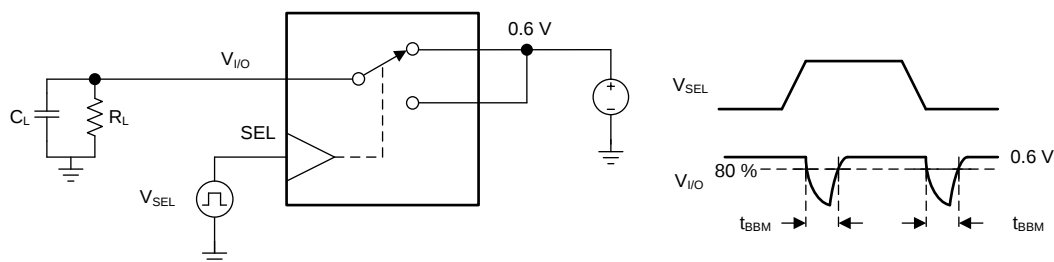

Copyright © 2017, Texas Instruments Incorporated

- (1) All input pulses are supplied by generators having the following characteristics: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r = 3 \text{ ns}$, $t_f = 3 \text{ ns}$.
- (2) C_L includes probe and jig capacitance.


FIG 19. t_{BBM}

8 Detailed Description

8.1 Overview

The TS5MP645 is a high-speed 4 Data lane 2:1 MIPI Switch. The device includes 10 channels (5 differential) with 4 differential data lanes and 1 differential clock lane for D-PHY, CSI or DSI. The switch allows a single MIPI port to interface between two MIPI modules, expanding the number of potential MIPI devices that can be used within a system that is MIPI port limited.

8.2 Functional Block Diagram

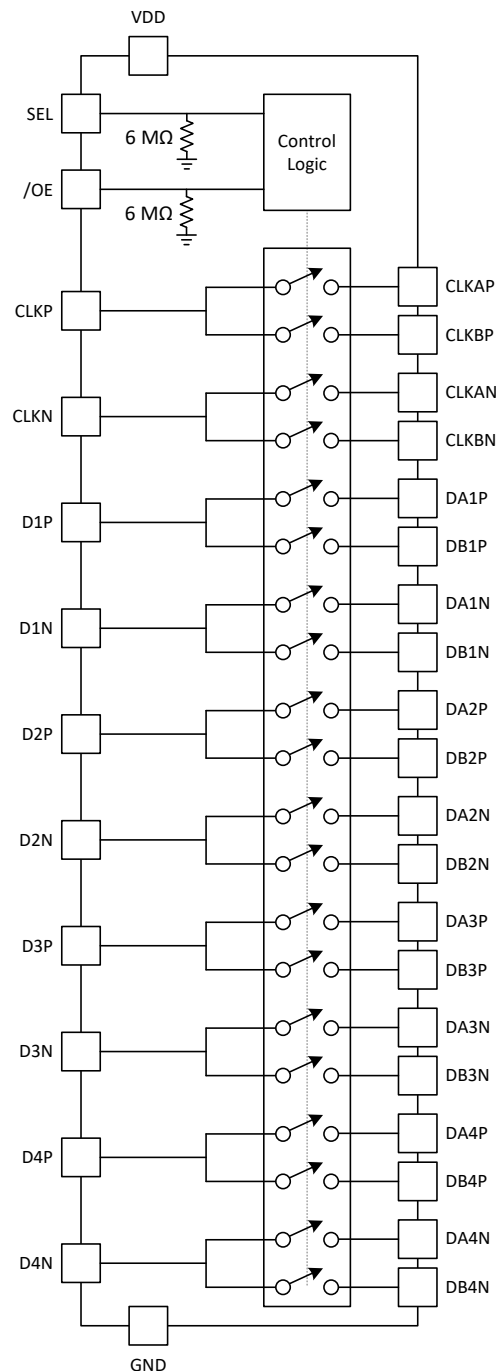

Copyright © 2018, Texas Instruments Incorporated

8.3 Feature Description

8.3.1 Powered-Off Protection

When the TS5MP645 is powered off ($V_{DD} = 0\text{ V}$) the I/Os and digital logic pins of the device will remain in a high impedance state. The crosstalk, off-isolation, and leakage remains within the electrical specifications. This prevents errant voltages from reaching the rest of the system and maintains isolation when the system is powering up.

Figure 20 shows an example system containing a switch without powered-off protection with the following system level scenario

1. Subsystem A powers up and starts sending information to Subsystem B that remains unpowered.
2. The I/O voltage back powers the supply rail in Subsystem B.
3. The digital logic is back powered and turns on the switch. The signal is transmitted to Subsystem B before it is powered and damages it.

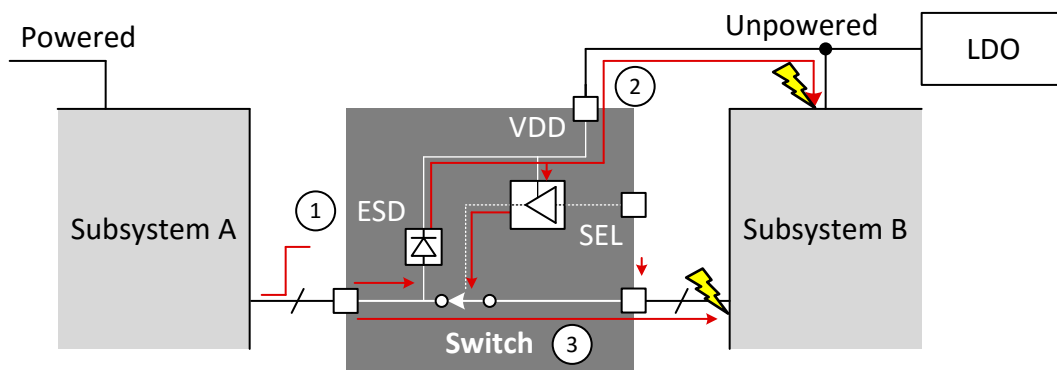


Figure 20. System Without Powered-Off Protection

With powered-off protection, the switch prevents back powering the supply and the switch remains high-impedance. Subsystem B remains protected.

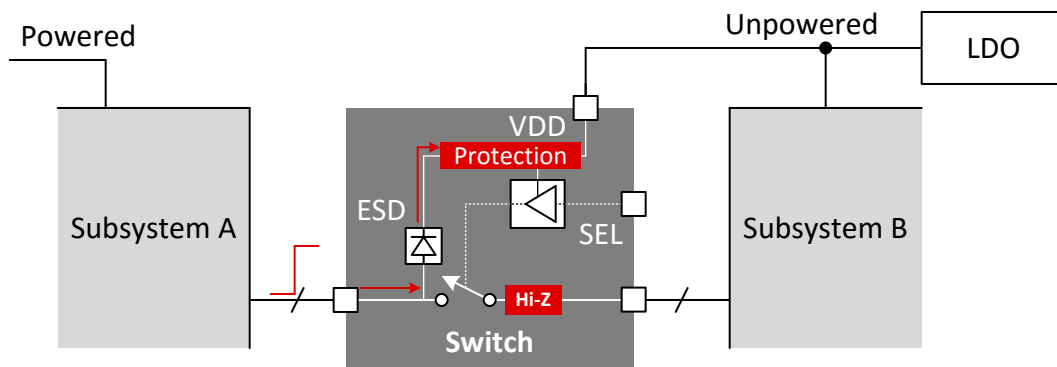


Figure 21. System With Powered-Off Protection

This feature has the following system level benefits.

- Protects the system from damage.
- Prevents data from being transmitted unintentionally
- Eliminates the need for power sequencing solutions reducing BOM count and cost, simplifying system design and improving reliability.

Feature Description (continued)

8.3.2 1.8 V Logic Compatible Inputs

The TS5MP645 has 1.8 V logic compatible digital inputs for switch control. Regardless of the V_{DD} voltage the digital input thresholds remained fixed, allowing a 1.8 V processor GPIO to control the TS5MP645 without the need for an external translator. This saves both space and BOM cost.

An example setup for a system without a 1.8 V logic compatible input is shown in [Figure 22](#). Here the supply mismatch between the processor and its GPIO output and the supply to the switch require a translator.

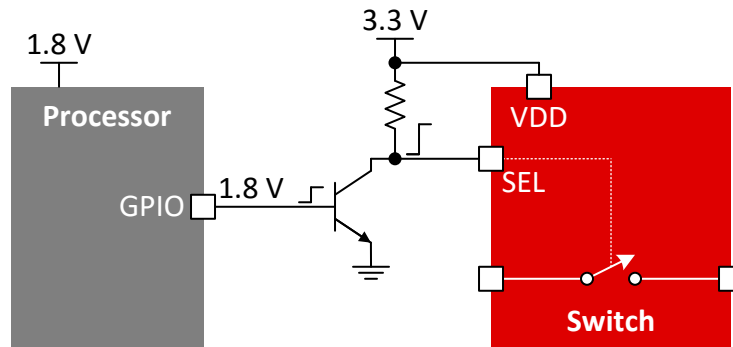


Figure 22. System Without 1.8 V Logic Compatible Inputs

With the 1.8 V logic compatibility in the TS5MP645, the translator is built in to the device so that the external components are no longer needed, simplifying the system design and overall cost.

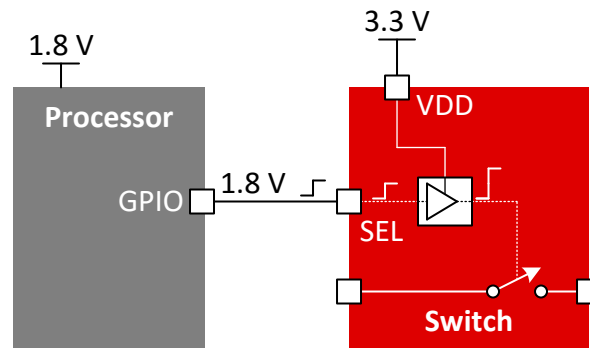


Figure 23. System With 1.8 V Logic Compatible Inputs

8.3.3 Low Power Disable Mode

The TS5MP645 has a low power mode that places all the signal paths in a high impedance state and lowers the current consumption while the device is not in use. To put the device in low power mode and disable the switch, the output enable pin $\overline{OE}$ must be supplied with a logic high signal.

8.4 Device Functional Modes

8.4.1 Pin Functions

SEL and $\overline{OE}$ have weak 6-M Ω pulldown resistors to prevent floating input logic.

表 1. Function Table

$\overline{OE}$	SEL	Function
H	X	I/O pins High-Impedance
L	L	CLK(P/N) = CLKA(P/N)
		Dn(P/N) = DAn(P/N)
L	H	CLK(P/N) = CLKB(P/N)
		Dn(P/N) = DBn(P/N)

8.4.2 Low Power Mode

While the output enable pin $\overline{OE}$ is supplied with a logic high the device remains in low power state. This reduces the current consumption substantially and the switches are be high impedance. The SEL pin is ignored while the $\overline{OE}$ remains high. Upon exiting low power mode, the switch status reflects the SEL pin as seen in [表 1](#).

8.4.3 Switch Enabled Mode

While the output enable pin $\overline{OE}$ is supplied with a logic low the device will remain in switch enabled mode.

9 Application and Implementation

注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

9.2 Typical Application

Figure 24 represents a typical application of the TS5MP645 MIPI switch. The TS5MP645 is used to switch signals between multiple MIPI modules and a single MIPI port on a processor. This expands the capabilities of a single port to handle multiple MIPI modules.

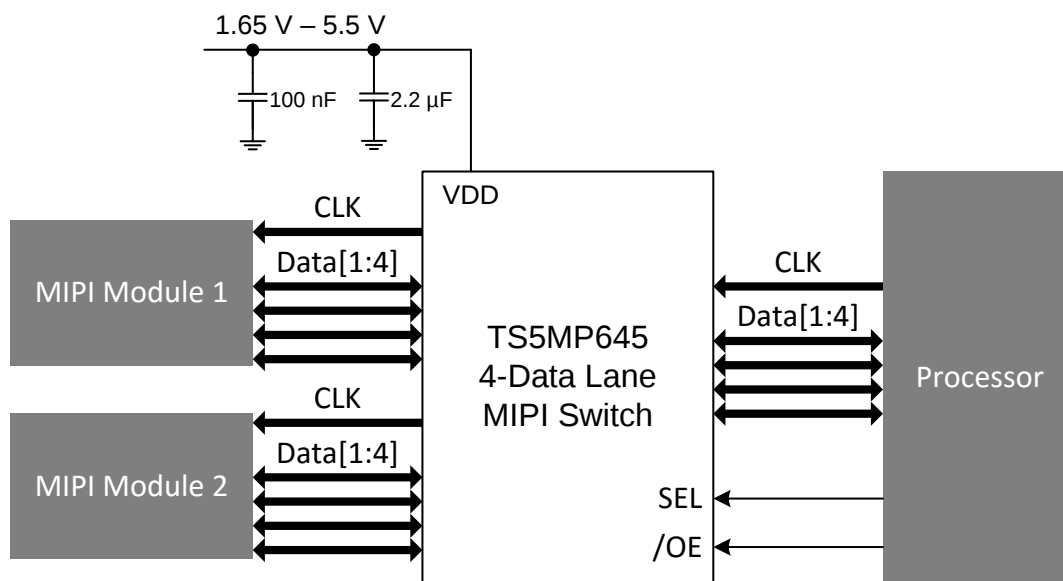


Figure 24. Typical TS5MP645 Application

9.2.1 Design Requirements

Design requirements of the MIPI standard being used must be followed. Supply pin decoupling capacitors of 2.2 μ F and 100 nF are recommended for best performance. The TS5MP645 has internal 6-M Ω pulldown resistors on SEL and OE. The pulldown on these pins ensure that the digital remains in a non-floating state during system power-up to prevent shoot through current spikes and an unknown switch status. By default the switch will power up enabled and with the A path selected until driven externally by the processor.


9.2.2 Detailed Design Procedure

The TS5MP645 can be properly operated without any external components. However, TI recommends that unused I/O signal pins be connected to ground through a 50 Ω resistor to prevent signal reflections and maintain device performance. The NC pins of the device do not require any external connections or terminations and have no connection to the rest of the device internally.

The clock and data lanes can be interchanged as necessary to facilitate the best layout possible for the application. For example the clock can be placed on the D1 channel and a data lane can be used on the CLK channel if this improves the layout. In addition the signal lines of the TS5MP645 are routed single ended on the chip die. This makes the device suitable for both differential and single-ended high-speed systems.

Typical Application (continued)

9.2.3 Application Curves

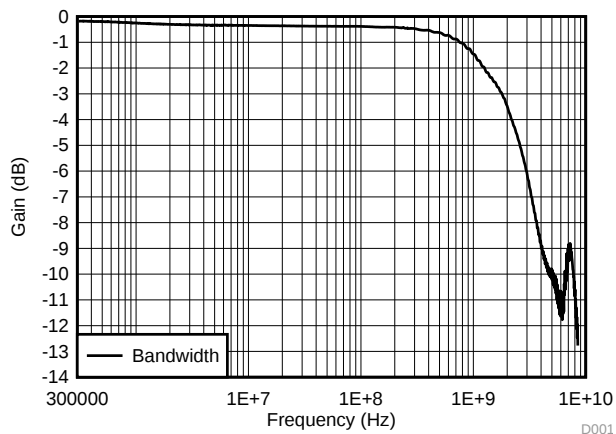

⊠ 25. Differential Bandwidth

10 Power Supply Recommendations

When the TS5MP645 is powered off ($V_{DD} = 0$ V), the I/Os of the device remains in a high-Z state. The crosstalk, off-isolation, and leakage remain within the electrical [Specifications](#). Power to the device is supplied through the VDD pin. Decoupling capacitors of 100 nF and 2.2 μ F are recommended on the supply.

11 Layout

11.1 Layout Guidelines

Place the supply de-coupling capacitors as close to the VDD and GND pin as possible. The spacing between the power traces, supply and ground, and the signal I/O lines, clock and data, should be a minimum of three times the trace width of the signal I/O lines to maintain signal integrity.

The characteristic impedance of the trace(s) must match that of the receiver and transmitter to maintain signal integrity. Route the high-speed traces using a minimum amount of vias and corners. This will reduce the amount of impedance changes.

When it becomes necessary to make the traces turn 90°, use two 45° turns or an arc instead of making a single 90° turn.


Do not route high-speed traces near crystals, oscillators, external clock signals, switching regulators, mounting holes or magnetic devices.

Avoid stubs on the signal lines.

All I/O signal traces should be routed over a continuous ground plane with no interruptions. The minimum width from the edge of the trace to any break in the ground plane must be 3 times the trace width. When routing on PCB inner signal layers, the high speed traces should be between two ground planes and maintain characteristic impedance.

High speed signal traces must be length matched as much as possible to minimize skew between data and clock lines.

11.2 Layout Example

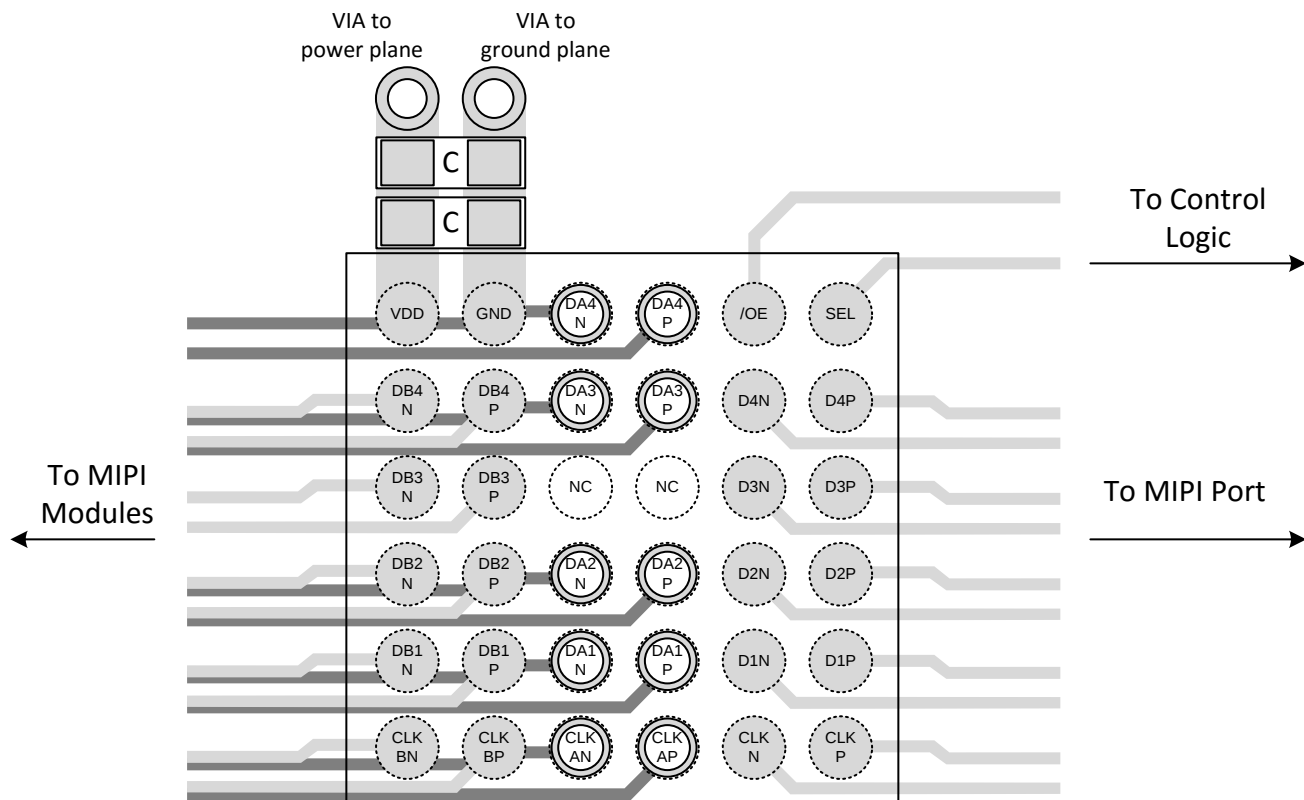

✎ 26. Layout Example

12 デバイスおよびドキュメントのサポート

12.1 ドキュメントのサポート

12.2 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、ti.comのデバイス製品フォルダを開いてください。右上の隅にある「通知を受け取る」をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取れます。変更の詳細については、修正されたドキュメントに含まれている改訂履歴をご覧ください。

12.3 コミュニティ・リソース

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ オンライン・コミュニティ *TIのE2E (Engineer-to-Engineer)* コミュニティ。エンジニア間の共同作業を促進するために開設されたものです。e2e.ti.comでは、他のエンジニアに質問し、知識を共有し、アイデアを検討して、問題解決に役立てることができます。

設計サポート *TIの設計サポート* 役に立つE2Eフォーラムや、設計サポート・ツールをすばやく見つけることができます。技術サポート用の連絡先情報も参照できます。

12.4 商標

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

12.5 静電気放電に関する注意事項



すべての集積回路は、適切なESD保護方法を用いて、取扱いと保存を行うようにして下さい。

静電気放電はわずかな性能の低下から完全なデバイスの故障に至るまで、様々な損傷を与えます。高精度の集積回路は、損傷に対して敏感であり、極めてわずかなパラメータの変化により、デバイスに規定された仕様に適合しなくなる場合があります。


12.6 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

13 メカニカル、パッケージ、および注文情報

以降のページには、メカニカル、パッケージ、および注文に関する情報が記載されています。この情報は、そのデバイスについて利用可能な最新のデータです。このデータは予告なく変更されることがあり、ドキュメントが改訂される場合もあります。本データシートのブラウザ版を使用されている場合は、画面左側の説明をご覧ください。




PACKAGE OUTLINE

YFP0036

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

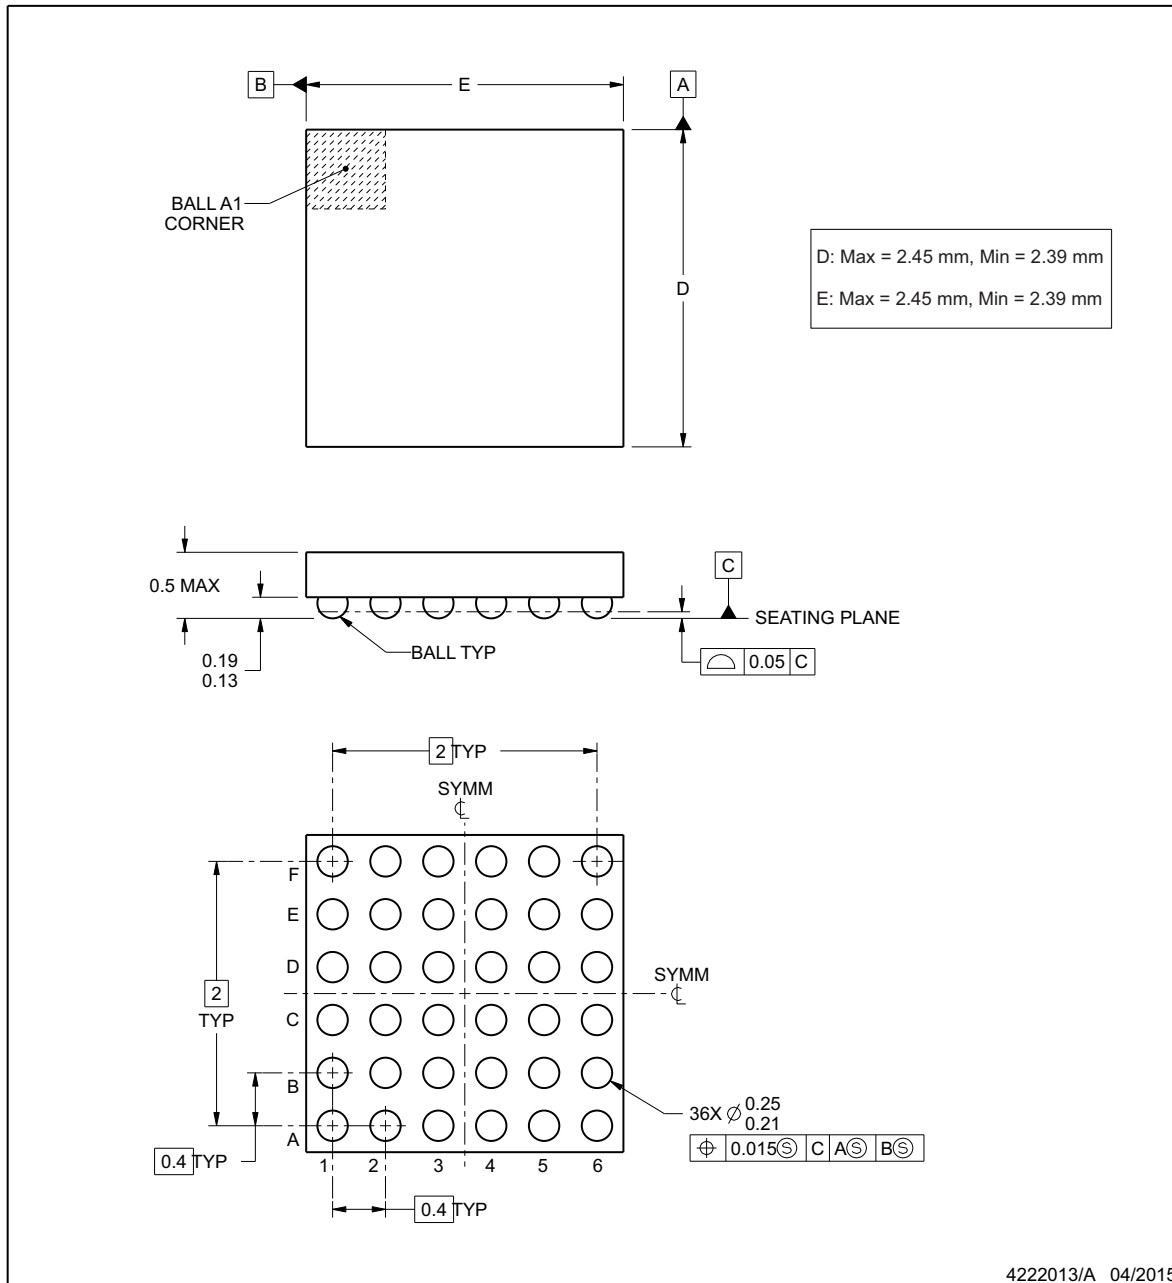

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

EXAMPLE BOARD LAYOUT


YFP0036

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

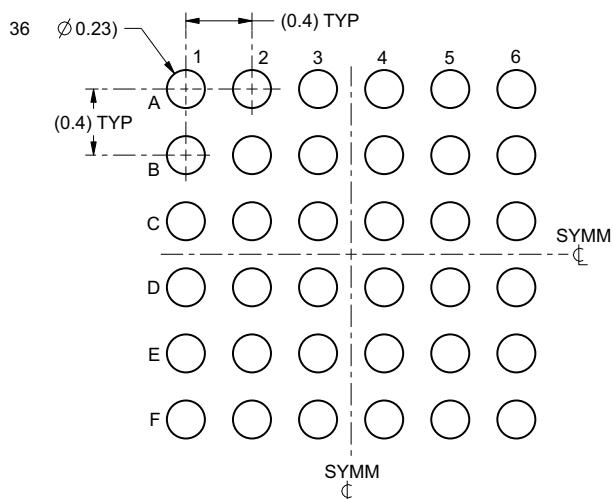

LAND PATTERN EXAMPLE
SCALE:25X

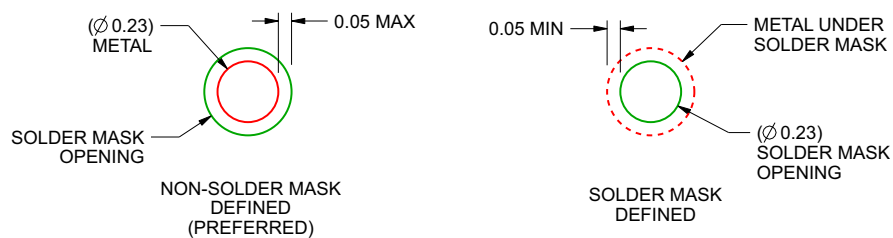

SOLDER MASK DETAILS
NOT TO SCALE

4222013/A 04/2015

NOTES: (continued)


- Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SNVA009 (www.ti.com/lit/snva009).

EXAMPLE STENCIL DESIGN

YFP0036

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

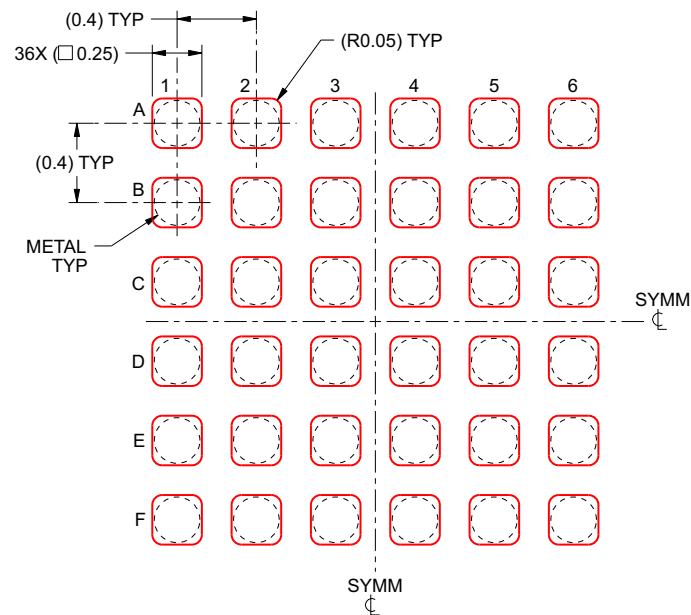

SOLDER PASTE EXAMPLE
 BASED ON 0.1 mm THICK STENCIL
 SCALE:30X

4222013/A 04/2015

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TS5MP645NYFPR	NRND	Production	DSBGA (YFP) 36	3000 LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	TS5MP645
TS5MP645NYFPR.A	NRND	Production	DSBGA (YFP) 36	3000 LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	TS5MP645
TS5MP645YFPR	NRND	Production	DSBGA (YFP) 36	3000 LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	TS5MP645
TS5MP645YFPR.A	NRND	Production	DSBGA (YFP) 36	3000 LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	TS5MP645

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal



Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TS5MP645NYFPR	DSBGA	YFP	36	3000	180.0	8.4	2.58	2.58	0.62	4.0	8.0	Q1
TS5MP645YFPR	DSBGA	YFP	36	3000	330.0	12.4	2.58	2.58	0.62	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TS5MP645NYFPR	DSBGA	YFP	36	3000	182.0	182.0	20.0
TS5MP645YFPR	DSBGA	YFP	36	3000	335.0	335.0	25.0

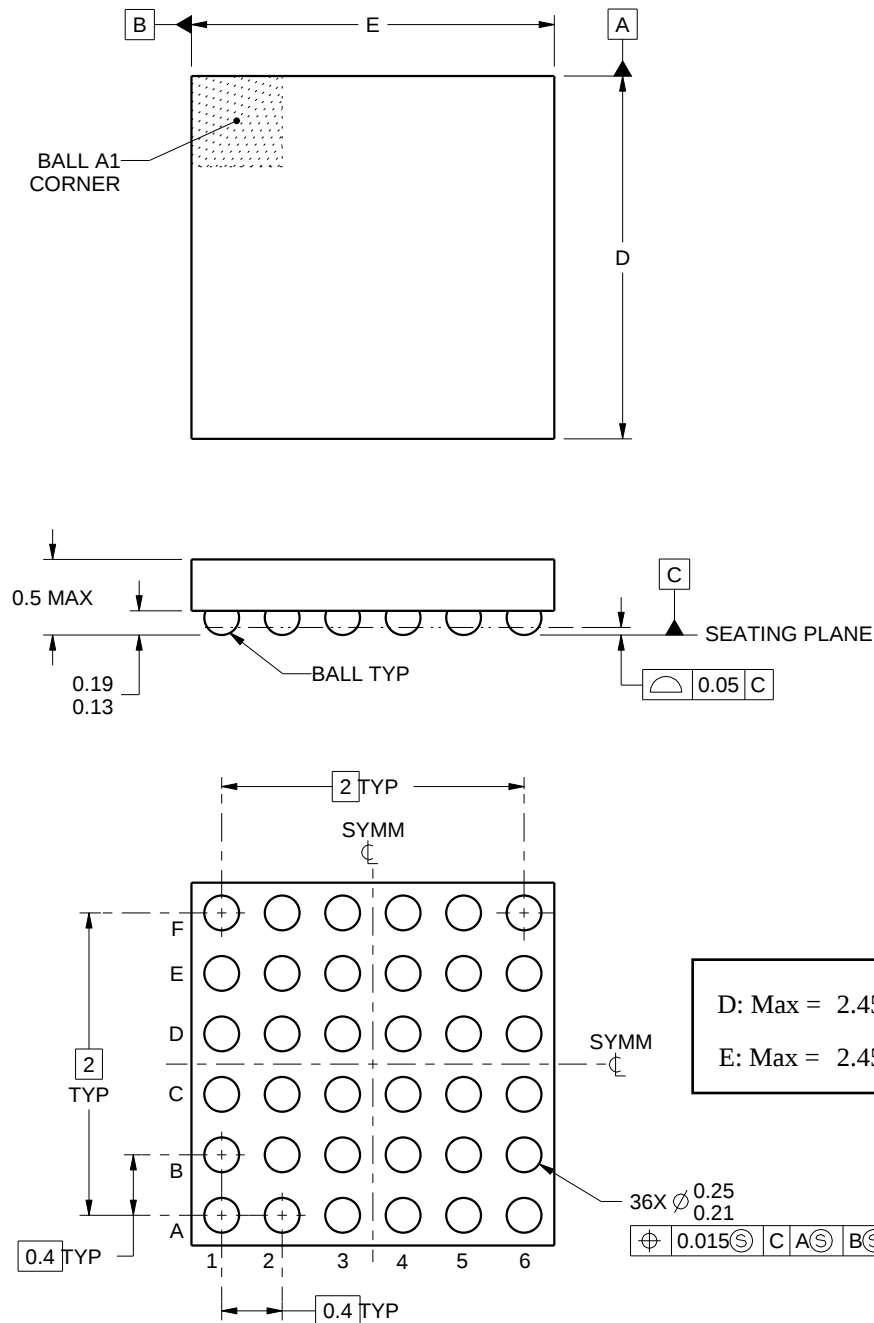

4222013/A 04/2015

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

EXAMPLE BOARD LAYOUT


YFP0036

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

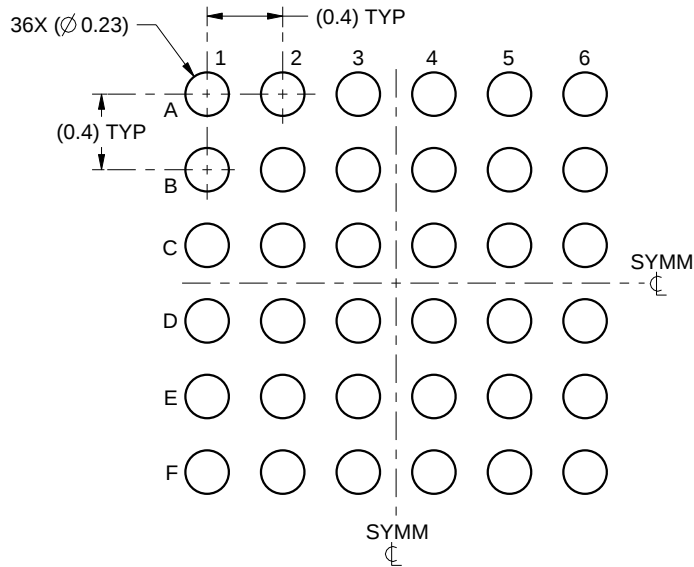

LAND PATTERN EXAMPLE
SCALE:25X

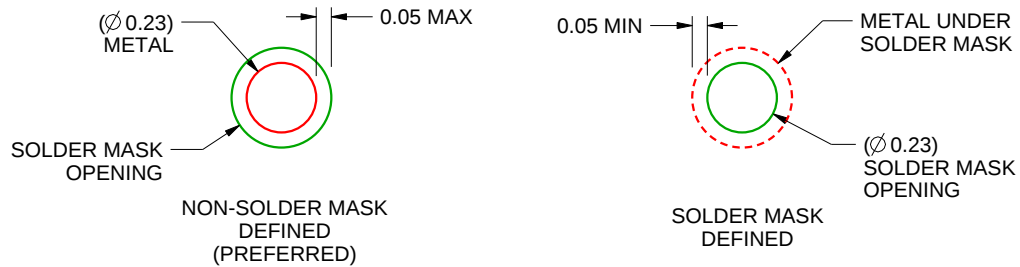

SOLDER MASK DETAILS
NOT TO SCALE

4222013/A 04/2015

NOTES: (continued)


- Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SNVA009 (www.ti.com/lit/snva009).

EXAMPLE STENCIL DESIGN

YFP0036

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

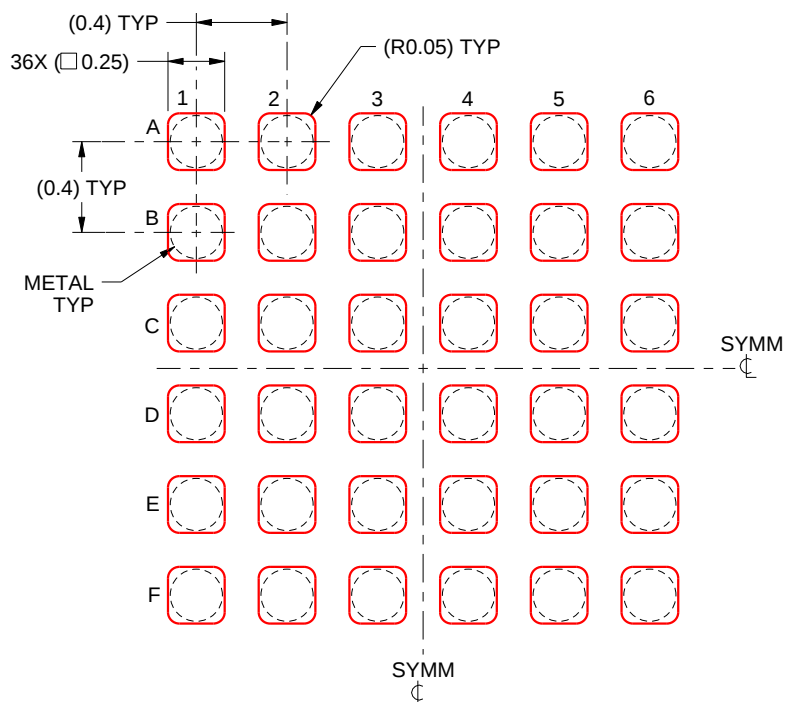

SOLDER PASTE EXAMPLE
BASED ON 0.1 mm THICK STENCIL
SCALE:30X

4222013/A 04/2015

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した テキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている テキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、[テキサス・インスツルメンツの販売条件](#)、または [ti.com](https://www.ti.com) やかかる テキサス・インスツルメンツ製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用される テキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated