



## 1 Photo

The photographs below show the top and bottom views of the PMP9126 Rev B demo board. The circuit is built on a PMP9126 Rev A PCB.

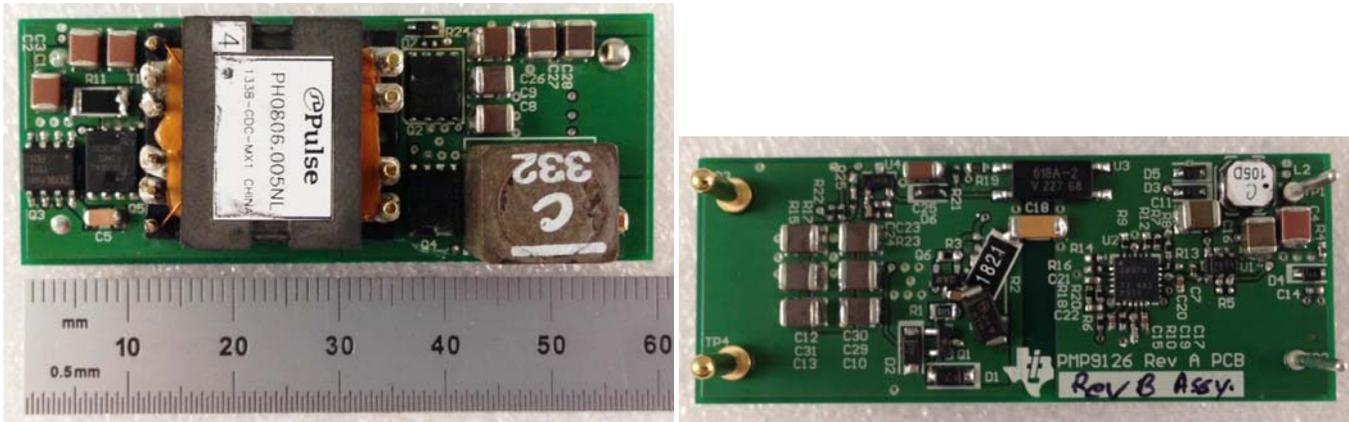

## 2 Efficiency

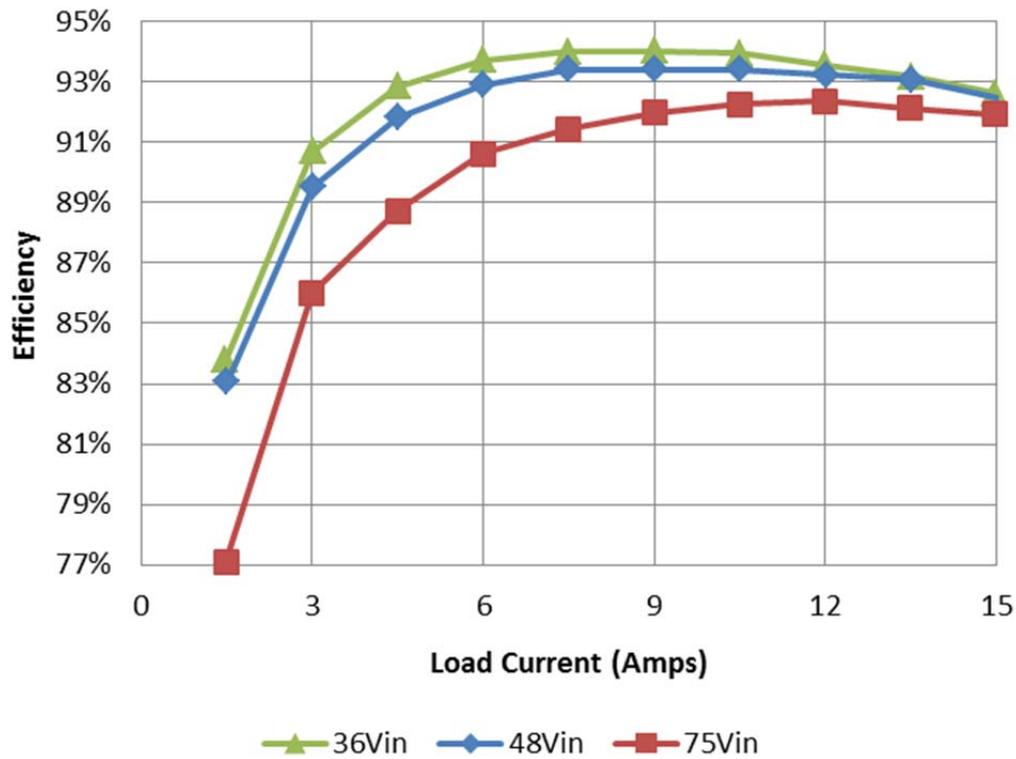

lout	Vout	Vin	lin	Pout	Losses	Efficiency
0.000	5.13	36.0	0.040	0.00	1.440	0.0%
1.483	5.13	36.0	0.252	7.61	1.472	83.8%
3.010	5.13	36.0	0.473	15.44	1.587	90.7%
4.502	5.13	36.0	0.691	23.10	1.781	92.8%
5.997	5.13	36.0	0.912	30.76	2.067	93.7%
7.50	5.13	36.0	1.137	38.48	2.457	94.0%
9.00	5.13	36.0	1.364	46.17	2.934	94.0%
10.49	5.13	36.0	1.591	53.81	3.462	94.0%
12.00	5.12	36.0	1.824	61.44	4.224	93.6%
13.51	5.12	36.0	2.062	69.17	5.061	93.2%
14.99	5.12	36.0	2.302	76.75	6.123	92.6%



lout	Vout	Vin	lin	Pout	Losses	Efficiency
0.000	5.13	48.0	0.034	0.00	1.632	0.0%
1.500	5.13	48.0	0.193	7.70	1.569	83.1%
3.007	5.13	48.0	0.359	15.43	1.806	89.5%
4.502	5.13	48.0	0.524	23.10	2.057	91.8%
5.998	5.13	48.0	0.690	30.77	2.350	92.9%
7.49	5.13	48.0	0.857	38.42	2.712	93.4%
9.01	5.12	48.0	1.029	46.13	3.261	93.4%
10.50	5.12	48.0	1.199	53.76	3.792	93.4%
12.01	5.12	48.0	1.374	61.49	4.461	93.2%
13.50	5.12	48.0	1.547	69.12	5.136	93.1%
15.01	5.11	48.0	1.728	76.70	6.243	92.5%

lout	Vout	Vin	lin	Pout	Losses	Efficiency
0.000	5.13	75.0	0.029	0.00	2.175	0.0%
1.488	5.13	75.0	0.132	7.63	2.267	77.1%
3.005	5.13	75.0	0.239	15.42	2.509	86.0%
4.501	5.13	75.0	0.347	23.09	2.935	88.7%
6.001	5.13	75.0	0.453	30.79	3.190	90.6%
7.50	5.12	75.0	0.560	38.40	3.600	91.4%
9.00	5.12	75.0	0.668	46.08	4.020	92.0%
10.50	5.12	75.0	0.777	53.76	4.515	92.3%
12.00	5.12	75.0	0.887	61.44	5.085	92.4%
13.48	5.11	75.0	0.997	68.88	5.892	92.1%
14.99	5.11	75.0	1.111	76.60	6.726	91.9%



## 3 Thermal Images

The ambient temperature was 25C. The input voltage was set to 48V.


### 3.1 10A Load – No Forced Air

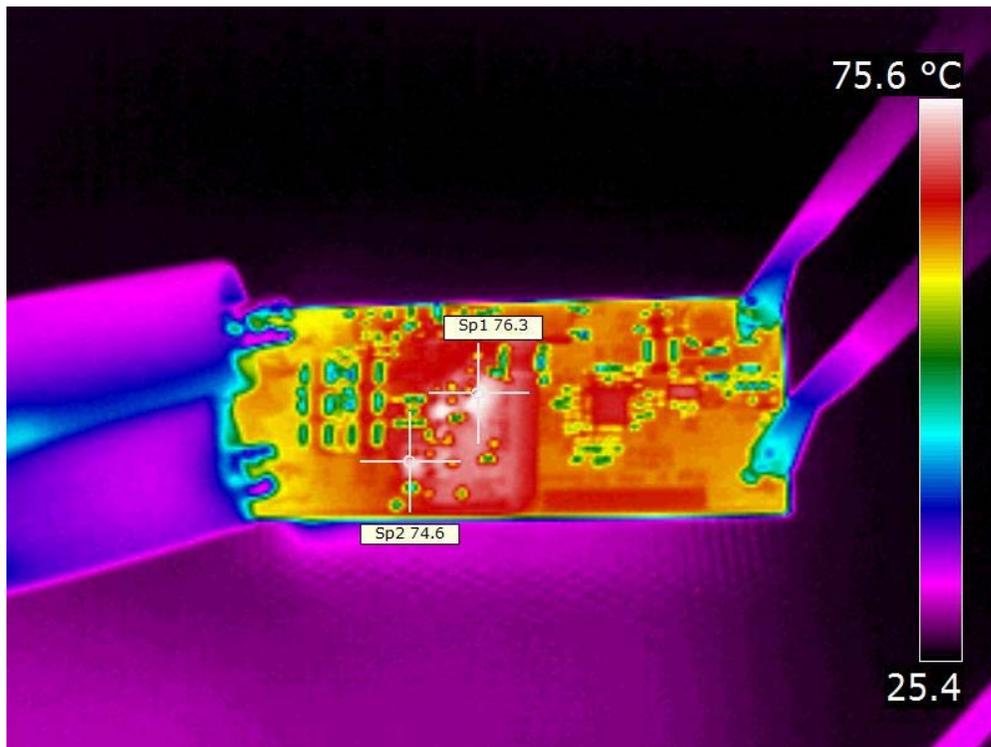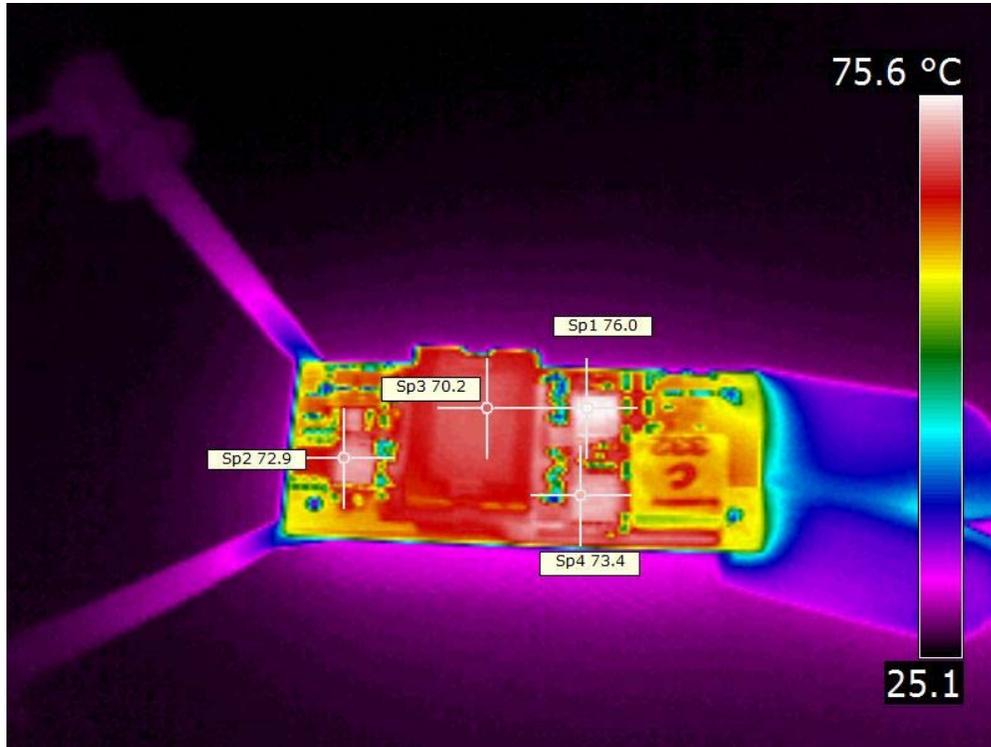


3.2 15A Load – 300 LFM

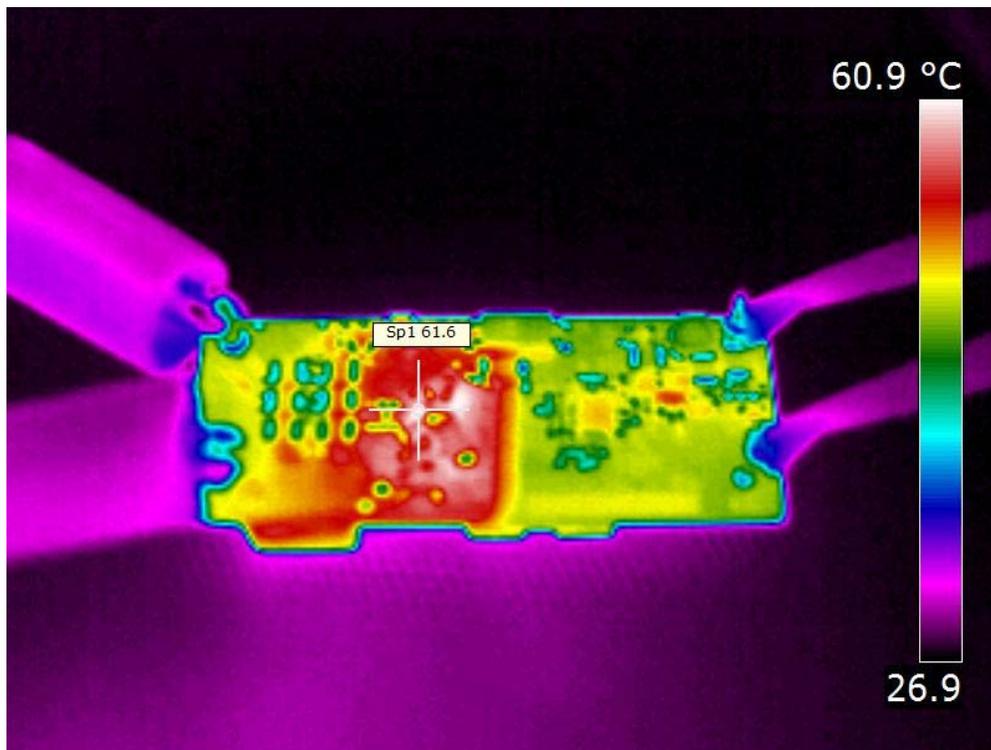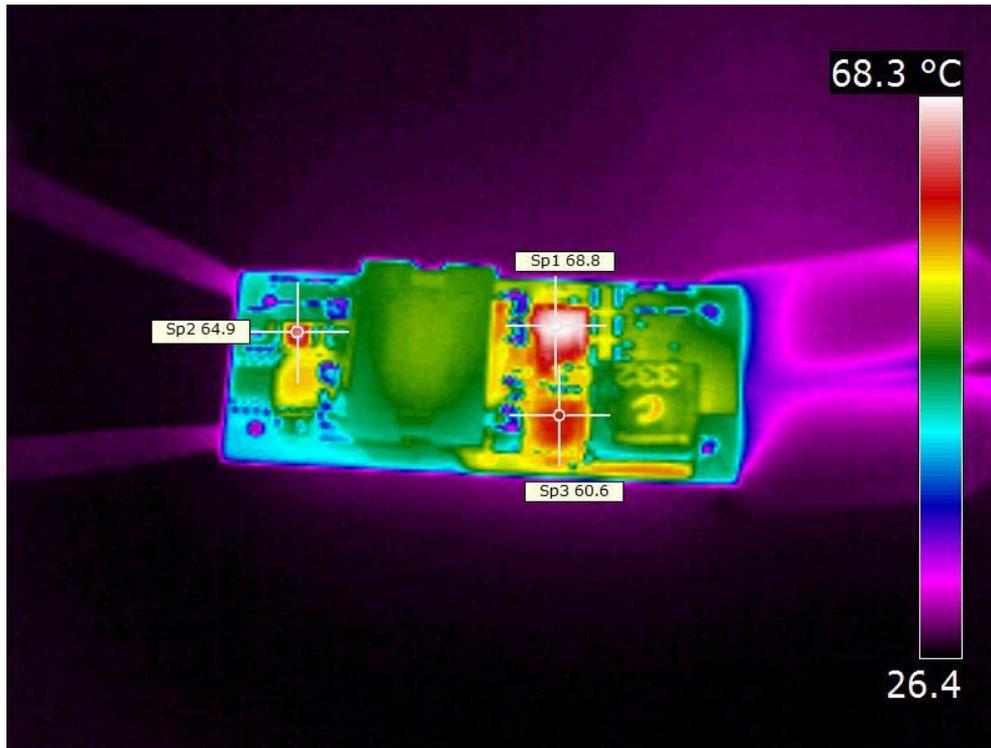


## 4 Startup – 36V Input, No Load

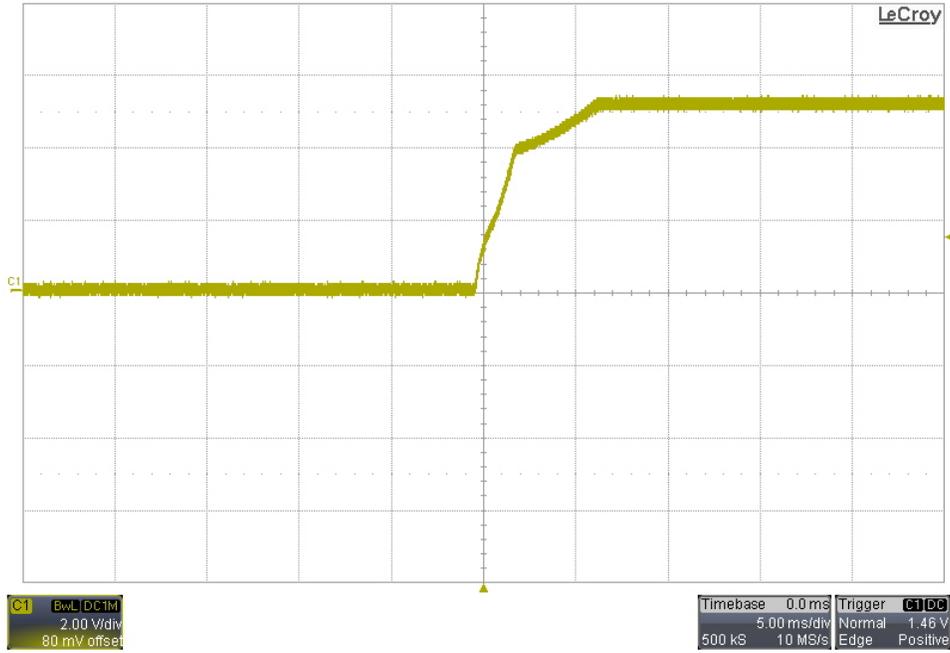


## 5 Startup – 75V Input, No Load

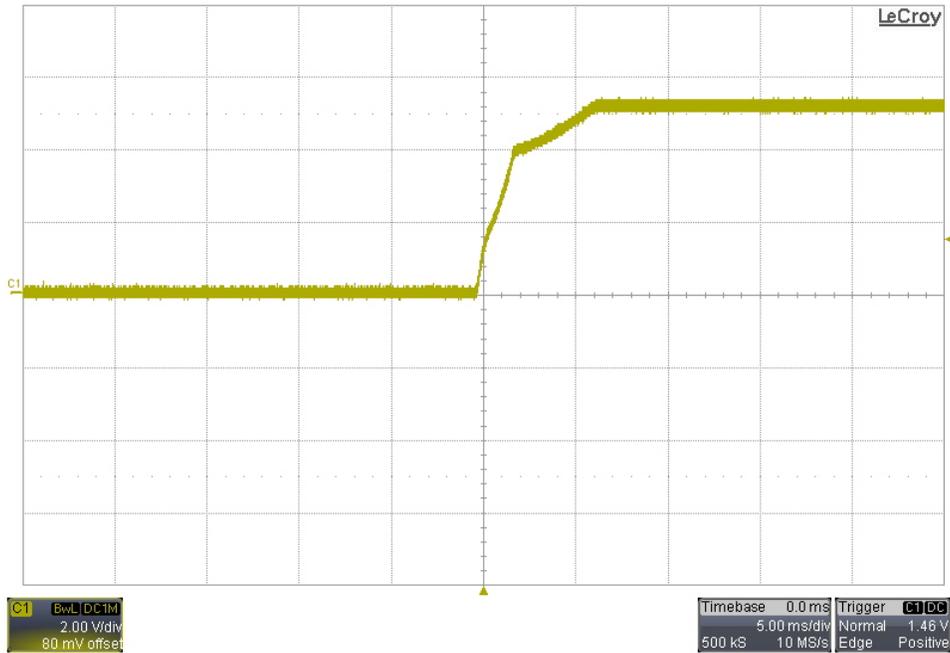

### 6 Startup – 36V Input, 0.33Ω Load

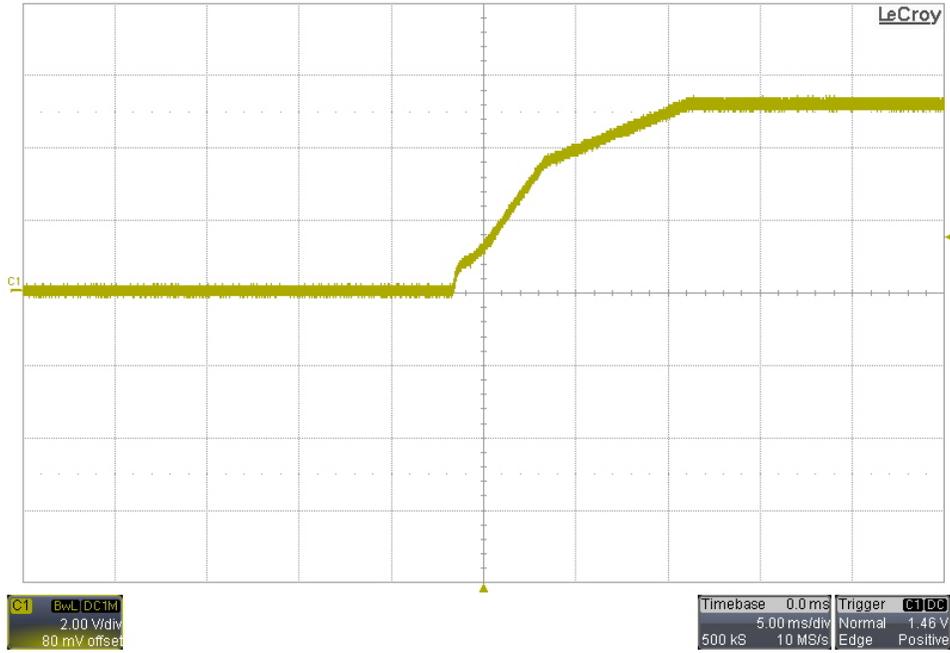


### 7 Startup – 75V Input, 0.33Ω Load

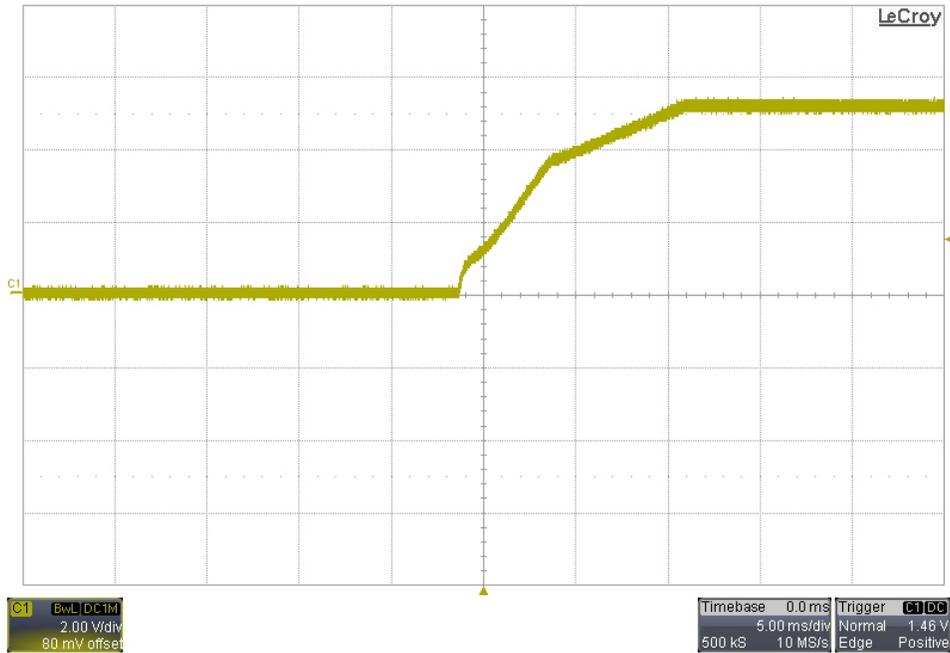


## 8 Output Ripple Voltage

The output ripple voltage is shown in the plots below. The output was loaded with 15A.

### 8.1 36V Input

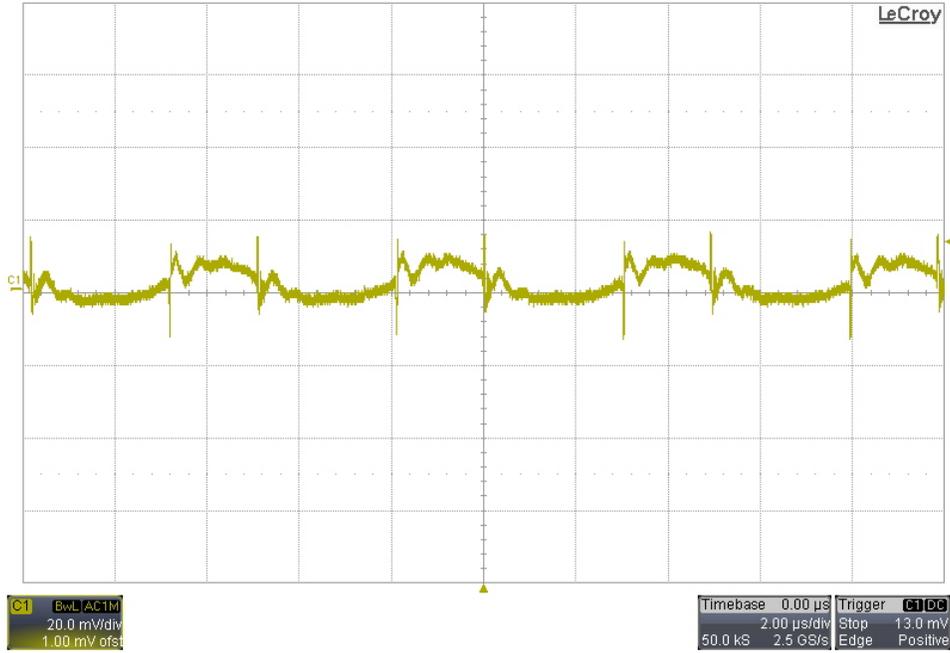


### 8.2 75V Input

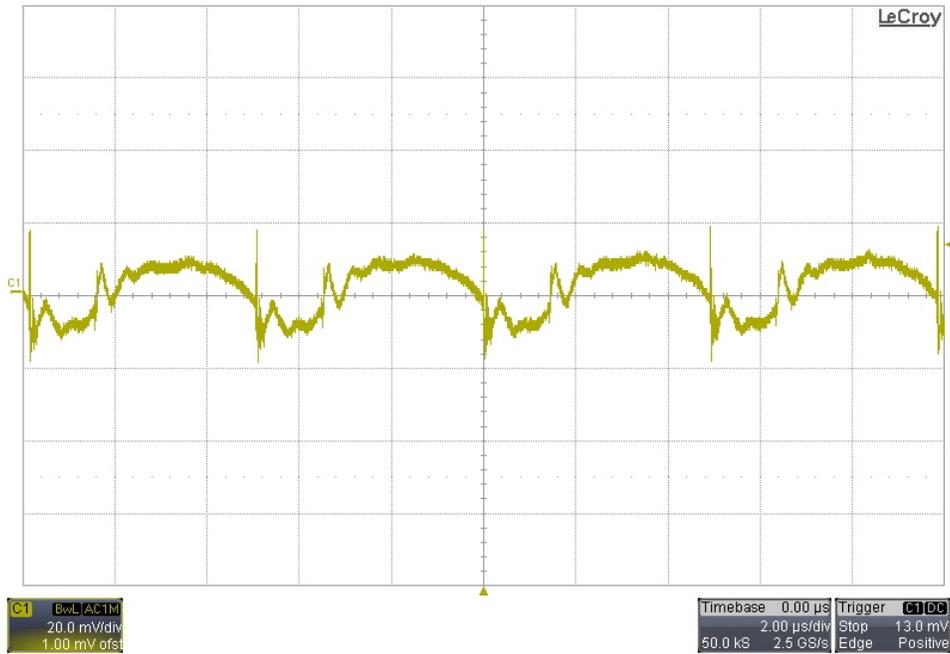


## 9 Frequency Response

The frequency response of the feedback loop is shown below. For the gain/phase plot #1, the input was set to 36V. For the gain/phase plot #2, the input was set to 75V. The output was loaded with 15A.

### 9.1 Measured Across R15

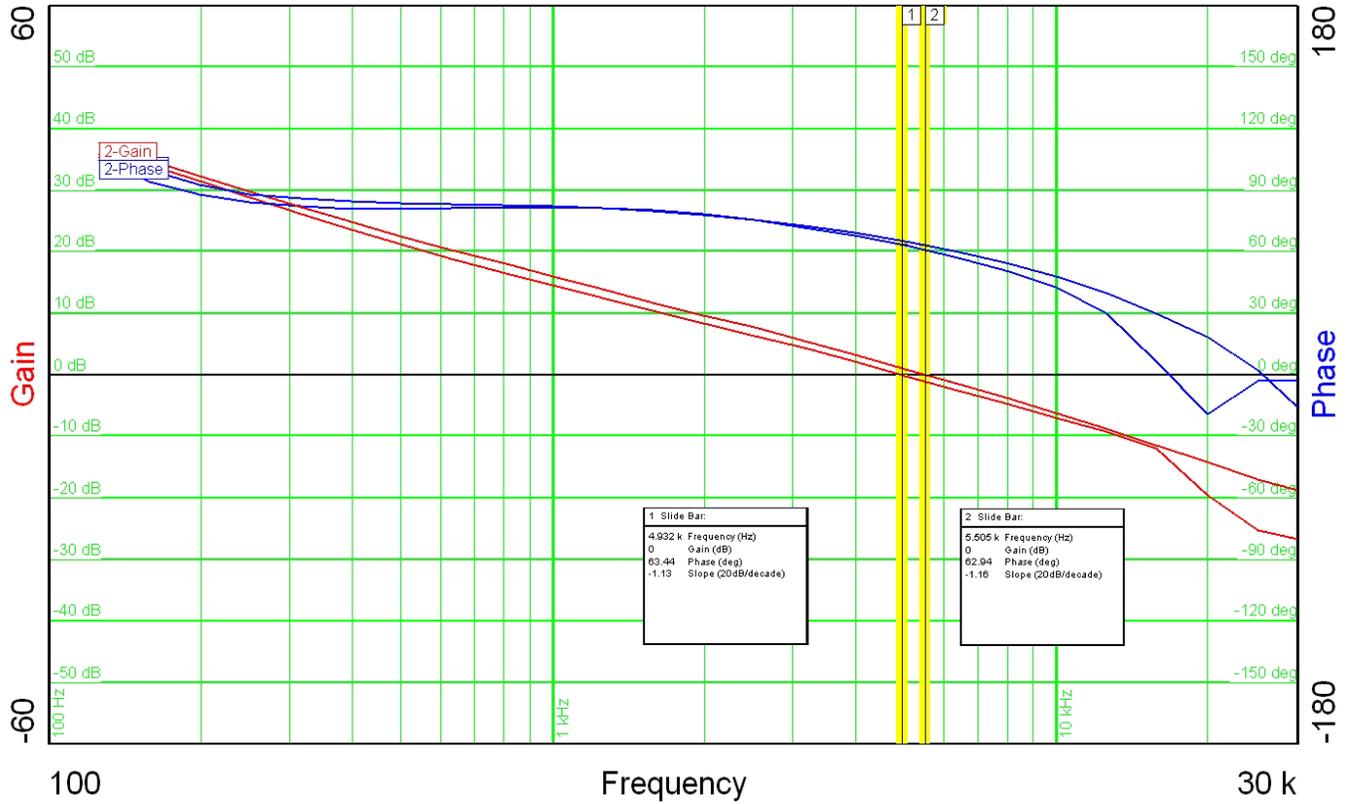


## 9.2 Measured Across R17

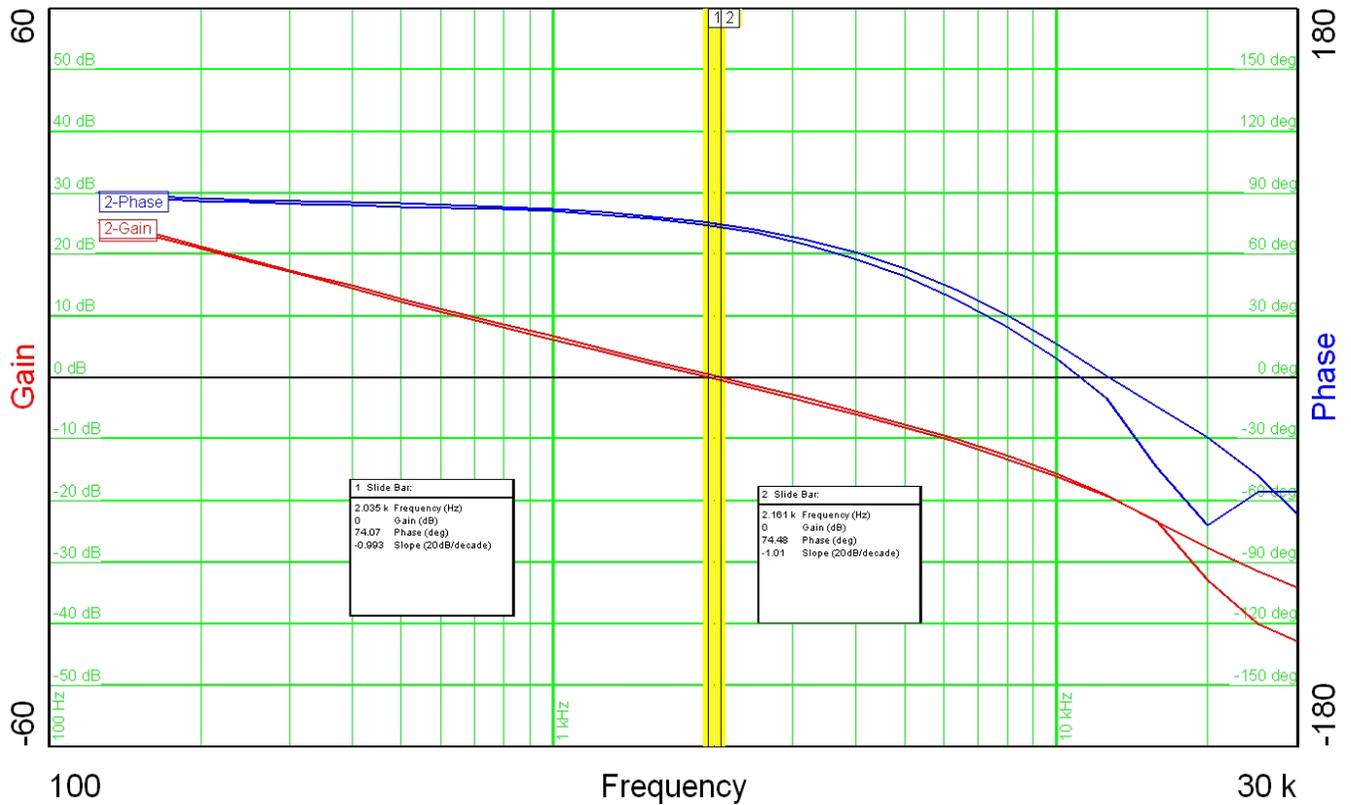


## 10 Load Transients

The response to a load step from 5A to 10A is shown in the images below. Channel 1: Vout (ac coupled); Channel 4: Iout

### 10.1 36V Input

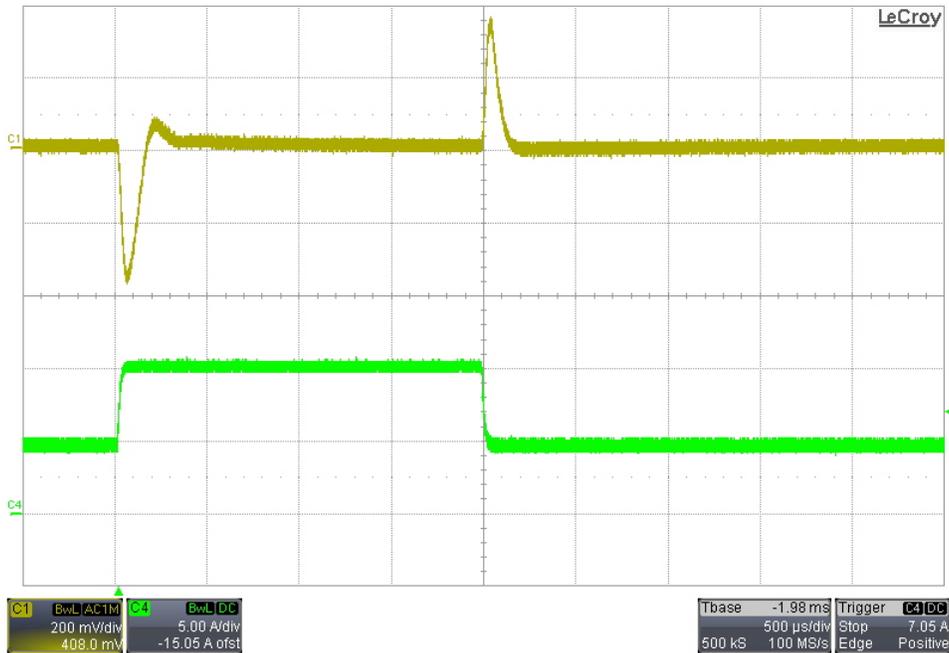

**10.2 75V Input**

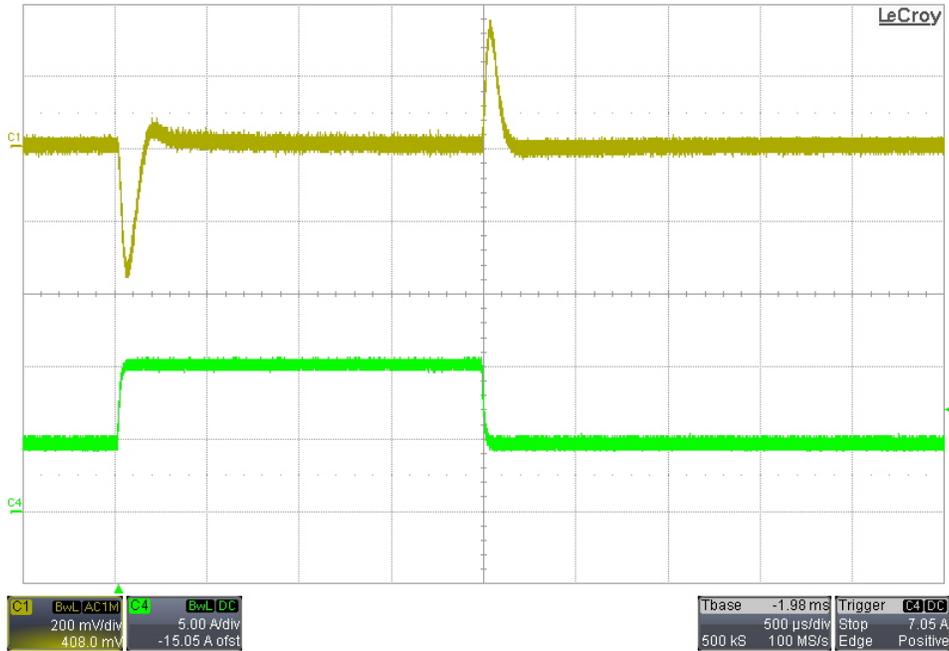

**11 Input Under-Voltage Lock-Out**


The turn-on and turn-off input voltages were measured and recorded below.

Turn-On	35.1 V
Turn-Off	34.6 V


**12 Switching Waveforms**

For the images below show the output was loaded with 15A.


**12.1 Primary FET (Q5) Vds – 36V Input**

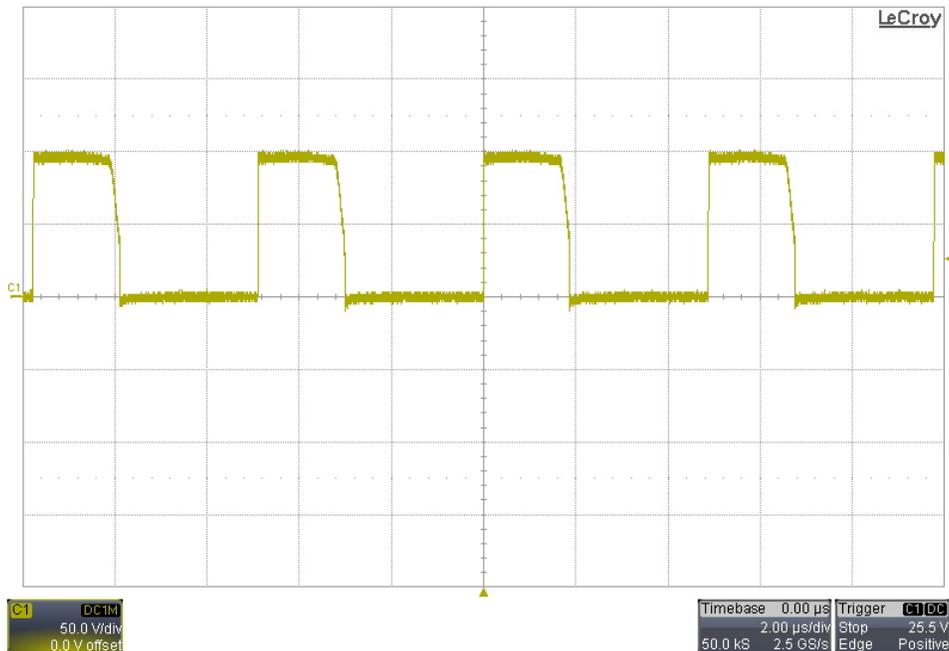


**12.2 Primary FET (Q5) Vds – 75V Input**

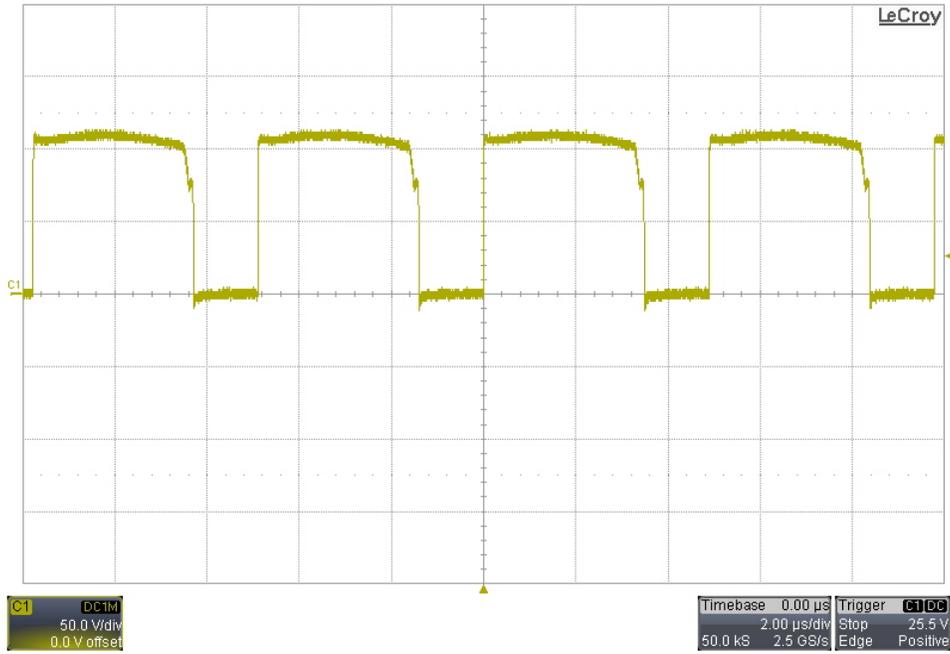


**12.3 Q4 Synchronous FET Vds – 36V Input**

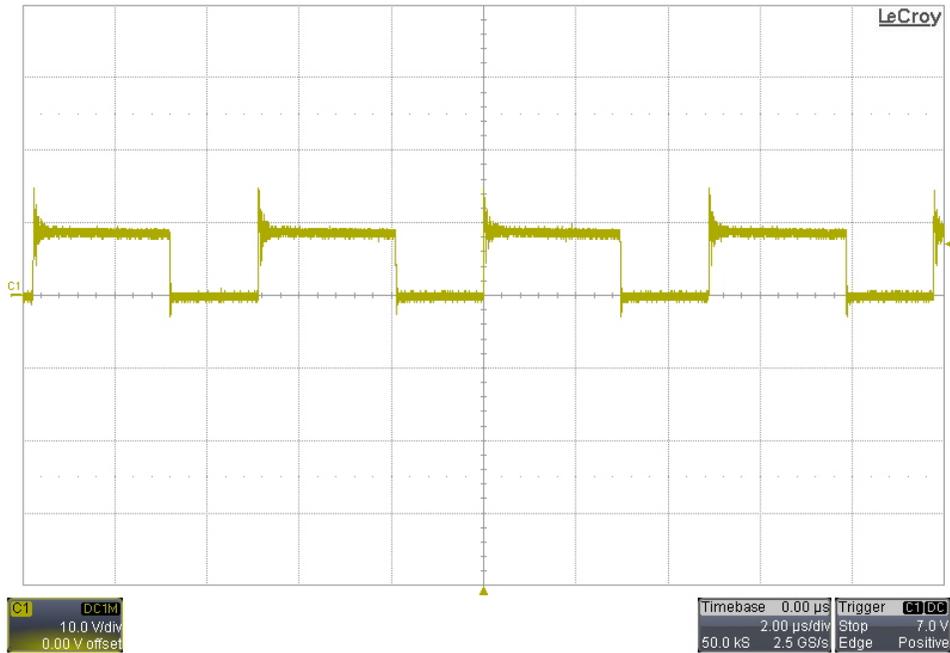


## 12.4 Q4 Synchronous FET – 75V Input

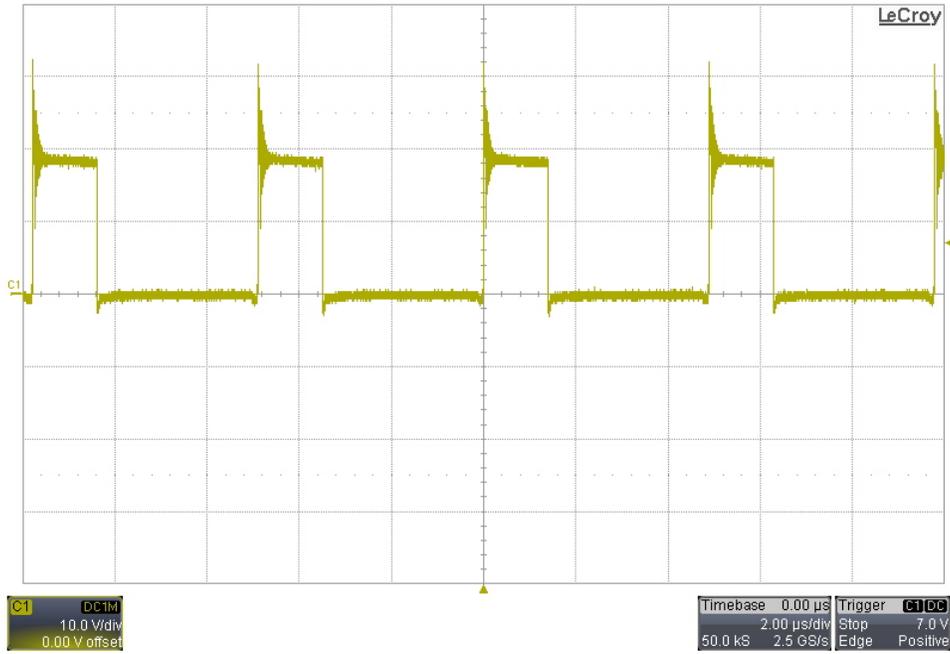

## 12.5 Q2 Synchronous FET – 36V Input

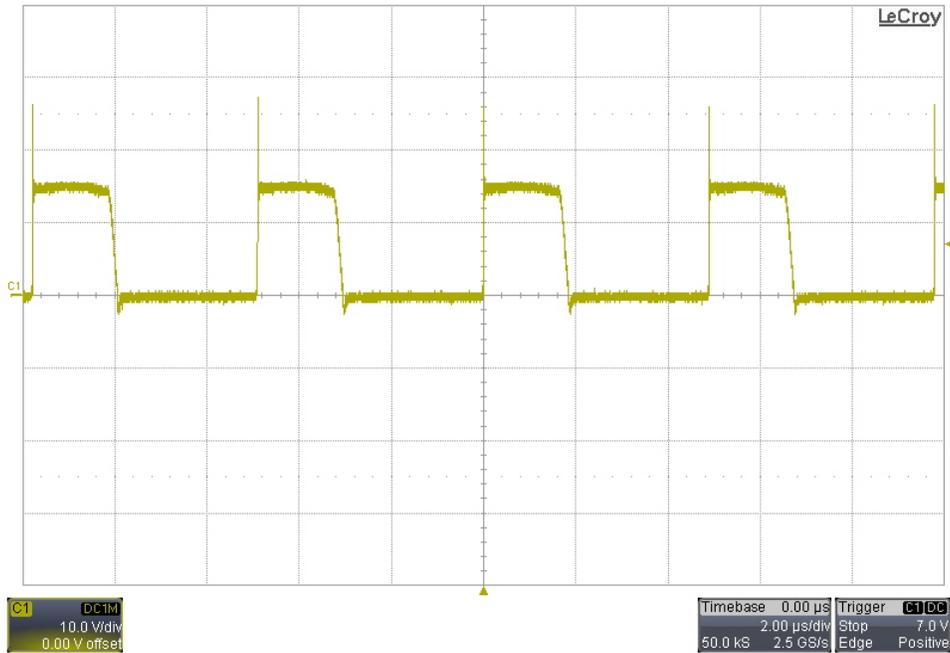

## 12.6 Q2 Synchronous FET – 75V Input

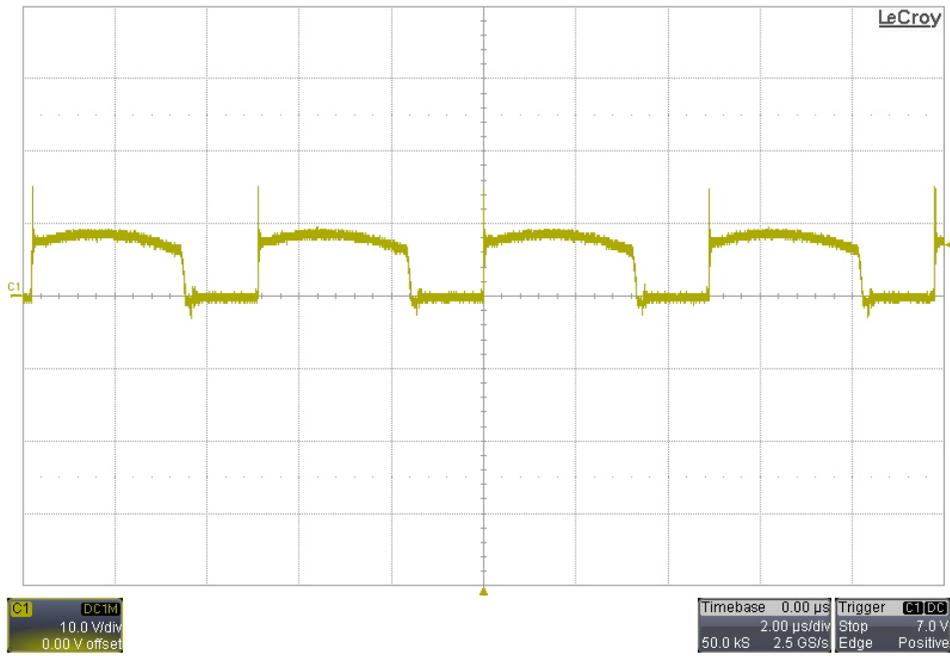

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2021, Texas Instruments Incorporated