

TMP1827

Functional Safety FIT Rate, FMD and Pin FMA



Table of Contents

1 Overview.....2

2 Functional Safety Failure In Time (FIT) Rates.....3

3 Failure Mode Distribution (FMD).....4

4 Pin Failure Mode Analysis (Pin FMA).....5

 4.1 WSON-8 Package.....6

5 Revision History.....8

Trademarks

1-Wire® is a registered trademark of Maxim Integrated Products, Inc..
All trademarks are the property of their respective owners.

1 Overview

This document contains information for the TMP1827 (WSON-8 package) to aid in a functional safety system design. Information provided are:

- Functional safety failure in time (FIT) rates of the semiconductor component estimated by the application of industry reliability standards
- Component failure modes and distribution (FMD) based on the primary function of the device
- Pin failure mode analysis (pin FMA)

Figure 1-1 shows the device functional block diagram for reference.

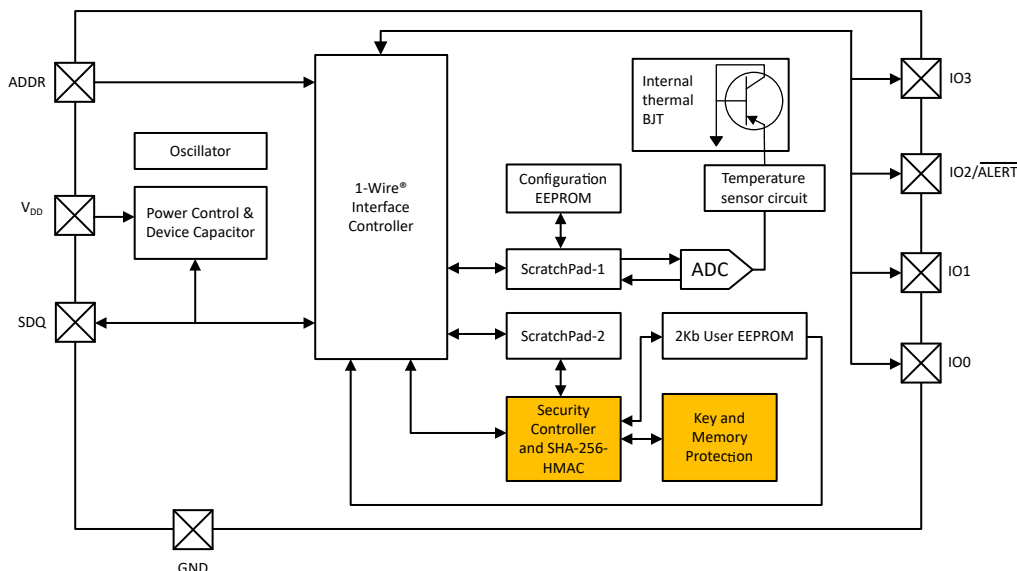


Figure 1-1. Functional Block Diagram with 1-Wire® controller

The TMP1827 was developed using a quality-managed development process, but was not developed in accordance with the IEC 61508 or ISO 26262 standards.

2 Functional Safety Failure In Time (FIT) Rates

This section provides functional safety failure in time (FIT) rates for the TMP1827 based on two different industry-wide used reliability standards:

- [Table 2-1](#) provides FIT rates based on IEC TR 62380 / ISO 26262 part 11
- [Table 2-2](#) provides FIT rates based on the Siemens Norm SN 29500-2

Table 2-1. Component Failure Rates per IEC TR 62380 / ISO 26262 Part 11

FIT IEC TR 62380 / ISO 26262	FIT (Failures Per 10 ⁹ Hours)
Total component FIT rate	6
Die FIT rate	2
Package FIT rate	4

The failure rate and mission profile information in [Table 2-1](#) comes from the reliability data handbook IEC TR 62380 / ISO 26262 part 11:

- Mission profile: Motor control from table 11 or figure 16
- Power dissipation: 1.0mW
- Climate type: World-wide table 8 or figure 13
- Package factor (λ_3): Table 17b or figure 15
- Substrate material: FR4
- EOS FIT rate assumed: 0 FIT

Table 2-2. Component Failure Rates per Siemens Norm SN 29500-2

Table	Category	Reference FIT Rate	Reference Virtual T _J
5	CMOS, BICMOS Digital, analog, or mixed	60 FIT	70°C

The reference FIT rate and reference virtual T_J (junction temperature) in [Table 2-2](#) come from the Siemens Norm SN 29500-2 tables 1 through 5. Failure rates under operating conditions are calculated from the reference failure rate and virtual junction temperature using conversion information in SN 29500-2 section 4.

3 Failure Mode Distribution (FMD)

The failure mode distribution estimation for the TMP1827 in [Table 3-1](#) comes from the combination of common failure modes listed in standards such as IEC 61508 and ISO 26262, the ratio of sub-circuit function size and complexity, and from best engineering judgment.

The failure modes listed in this section reflect random failure events and do not include failures resulting from misuse or overstress.

Table 3-1. Die Failure Modes and Distribution

Die Failure Modes	Failure Mode Distribution (%)
Serial communication error	15
ADC offset out of specification	10
ADC gain out of specification	15
ADC conversion output code bit error	20
Scratchpad data bit error	20
Internal capacitor fail to charge	20

4 Pin Failure Mode Analysis (Pin FMA)

This section provides a failure mode analysis (FMA) for the pins of the TMP1827 (WSON-8 package). The failure modes covered in this document include the typical pin-by-pin failure scenarios:

- Pin short-circuited to ground (see [Table 4-2](#))
- Pin open-circuited (see [Table 4-3](#))
- Pin short-circuited to an adjacent pin (see [Table 4-4](#))
- Pin short-circuited to supply (see [Table 4-5](#))

[Table 4-2](#) through [Table 4-5](#) also indicate how these pin conditions can affect the device as per the failure effects classification in [Table 4-1](#).

Table 4-1. TI Classification of Failure Effects

Class	Failure Effects
A	Potential device damage that affects functionality.
B	No device damage, but loss of functionality.
C	No device damage, but performance degradation.
D	No device damage, no impact to functionality or performance.

Following are the assumptions of use and the device configuration assumed for the pin FMA in this section:

- External pullup resistor on SDQ
- External resistor to GND connected to ADDR pin
- External pullup resistor to I/Os connected to VDD
- Multi-device environment, more than one device on a single wire bus

4.1 WSON-8 Package

Figure 4-1 shows the TMP1827 pin diagram for the WSON-8 package. For a detailed description of the device pins, see the *Pin Configuration and Functions* section in the TMP1827 data sheet.

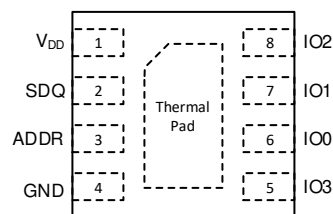


Figure 4-1. Pin Diagram (WSON-8 Package)

Table 4-2. Pin FMA for Device Pins Short-Circuited to Ground

Pin Name	Pin No.	Description of Potential Failure Effects	Failure Effect Class
ADDR	3	Limited address selection. Application must revert to 64 bit addressing mode.	C
		If ADDR selection is not being used, then no effect.	D
GND	4	No effect. Normal operation.	D
IO0	6	If I/O is used for controlling an external component, functionality is lost.	B
		If I/O is not being used, then no effect.	D
IO1	7	If I/O is used for controlling an external component, functionality is lost.	B
		If I/O is not being used, then no effect.	D
IO2	8	If I/O is used for controlling an external component, functionality is lost.	B
		If I/O is not being used, then no effect.	D
IO3	5	If I/O is used for controlling an external component, functionality is lost.	B
		If I/O is not being used, then no effect.	D
SDQ	2	No communication.	B
VDD	1	Device is in bus powered mode.	C

Table 4-3. Pin FMA for Device Pins Open-Circuited

Pin Name	Pin No.	Description of Potential Failure Effects	Failure Effect Class
ADDR	3	Limited address selection. Application must revert to 64 bit addressing mode.	C
GND	4	When floating, possible latch-up.	B
IO0	6	If I/O is used for controlling an external component, functionality is lost.	B
		If I/O is not being used, then no effect.	D
IO1	7	If I/O is used for controlling an external component, functionality is lost.	B
		If I/O is not being used, then no effect.	D
IO2	8	If I/O is used for controlling an external component, functionality is lost.	B
		If I/O is not being used, then no effect.	D
IO3	5	If I/O is used for controlling an external component, functionality is lost.	B
		If I/O is not being used, then no effect.	D
SDQ	2	No communication.	B
VDD	1	Device is in bus powered mode.	C

Table 4-4. Pin FMA for Device Pins Short-Circuited to Adjacent Pin

Pin Name	Pin No.	Shorted to	Description of Potential Failure Effects	Failure Effect Class
ADDR	3	SDQ	The absolute maximum for the ADDR pin is 1.65V. If shorted to SDQ, and SDQ is pulled to 5.5V, can cause leakage currents to increase and damage the device during ADDR detection.	A
GND	4	ADDR	If ADDR is shorted to GND, then address selection is limited. Application must revert to 64 bit addressing mode.	C
			GND is shorted to ADDR pin, has no affect during normal operation.	D
IO0	6	IO1	If I/O is used for controlling an external component, functionality is lost.	B
			If I/O is not being used, then no effect.	D
IO0	6	IO3	If I/O is used for controlling an external component, functionality is lost.	B
			If I/O is not being used, then no effect.	D
IO1	7	IO2	If I/O is used for controlling an external component, functionality is lost.	B
			If I/O is not being used, then no effect.	D
IO1	7	IO0	If I/O is used for controlling an external component, functionality is lost.	B
			If I/O is not being used, then no effect.	D
IO2	8	IO1	If I/O is used for controlling an external component, functionality is lost.	B
			If I/O is not being used, then no effect.	D
IO3	5	IO0	If I/O is used for controlling an external component, functionality is lost.	B
			If I/O is not being used, then no effect.	D
SDQ	2	VDD	Loss of functionality. Communication is lost.	B
VDD	1	SDQ	Loss of functionality. Communication is lost.	B

Table 4-5. Pin FMA for Device Pins Short-Circuited to Supply

Pin Name	Pin No.	Description of Potential Failure Effects	Failure Effect Class
ADDR	3	There can be an absolute maximum exceedance if the ADDR pin is used for address decoding.	A
		In other cases, no device damage.	D
GND	4	Device not powered. Device not functional. Verify that the absolute maximum ratings for all device pins are met, otherwise device damage is plausible.	B
IO0	6	If I/O is used for controlling an external component, functionality is lost.	B
		If I/O is not being used, then no effect.	D
IO1	7	If I/O is used for controlling an external component, functionality is lost.	B
		If I/O is not being used, then no effect.	D
IO2	8	If I/O is used for controlling an external component, functionality is lost.	B
		If I/O is not being used, then no effect.	D
IO3	5	If I/O is used for controlling an external component, functionality is lost.	B
		If I/O is not being used, then no effect.	D
SDQ	3	Loss of functionality. Communication is lost.	B
VDD	1	No effect. Normal operation.	D

5 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision A (May 2023) to Revision B (July 2025) Page

- Added 1-Wire® registered trademark and trademark owner.....2

Changes from Revision * (September 2022) to Revision A (May 2023) Page

- Removed the VSSOP-8 package.....2
- Changed the *Functional Block Diagram*2

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated