

# TPS54160EVM-535 User's Guide

## Contents

1	Introduction .....	1
1.1	Background .....	2
2	Schematic Diagram and Bill of Materials .....	2
2.1	Schematic Diagram .....	2
2.2	Bill of Materials .....	2
3	Board Layout .....	3
3.1	Layout .....	3
4	Connector Description .....	5
4.1	Input/Output Connector Descriptions .....	5
5	Performance Specifications .....	6
5.1	Converter Specifications .....	6
5.2	Modifications to the Converter .....	6
5.3	PWM Dimming .....	7
5.4	Analog Dimming .....	7
6	Test Results .....	7

## List of Figures

1	TPS54160EVM-535 Schematic Diagram .....	2
2	Top Assembly Layer .....	4
3	Bottom Assembly Layer .....	5
4	Top Layer Routing .....	5
5	Efficiency, Vin=24V .....	8
6	Output Ripple, Vin=24.0V, Iout=675mA, AC Coupled .....	8
7	Input Voltage Ripple, Vin=24.0V, Iout=675mA, AC Coupled.....	9
8	Start-up relative to EN, Vin=24V, Iout=675mA.....	9
9	PWM Dimming, Vin=24V, Iout=675mA .....	10
10	Analog Dimming, LED Current vs. ADIM Voltage.....	10
11	Loop response, VIN = 24V, Iout = 675mA .....	11
12	Thermal Performance, Top.....	12

## List of Tables

1	Bill of Materials .....	2
2	Converter Specifications .....	6

## 1 Introduction

The TPS54160EVM-535 evaluation module (EVM) helps designers evaluate the operation and performance of the TPS54160 DC/DC converter as a high-brightness light emitting diode (LED) driver. The converter is a wide input voltage (3.5–60V), 2.5MHz, non-synchronous, externally compensated, step down converter capable of 1.5A of output current.

## 1.1 Background

The TPS54160EVM-535 provides a high-brightness LED driver based on the TPS54160. The converter is designed to operate from a nominal 24 VDC  $\pm 25\%$  input voltage source. This input voltage range is typical for input supplies derived from rectified 24VAC sources. The converter provides an output current of 700mA with an output voltage sufficient to drive the four on board LEDs.

## 2 Schematic Diagram and Bill of Materials

### 2.1 Schematic Diagram

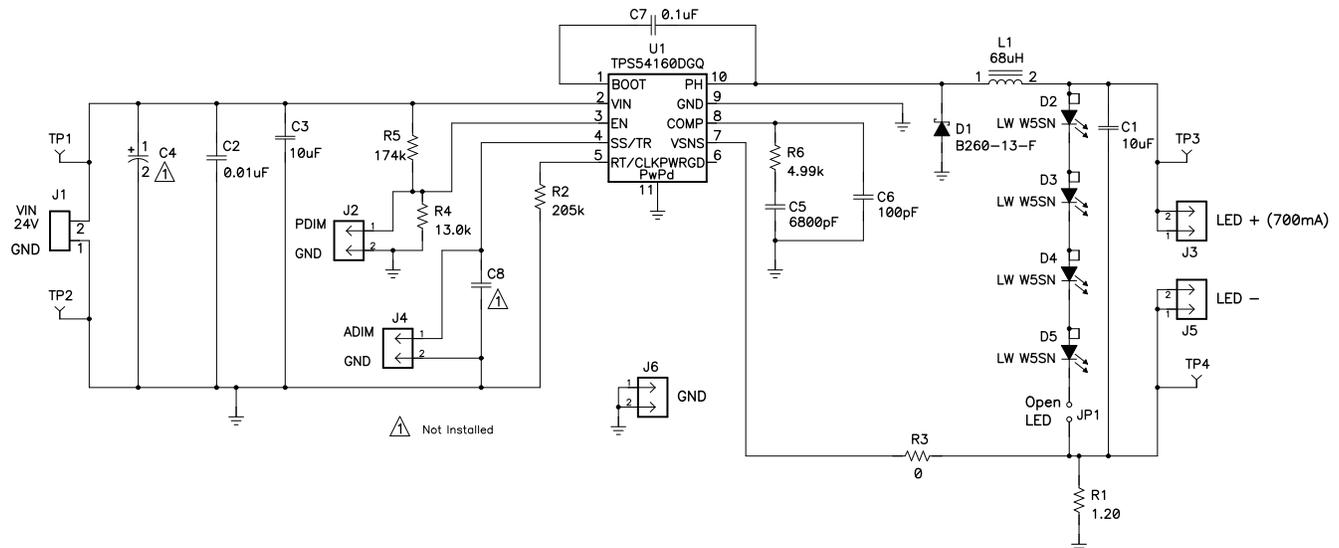


Figure 1. TPS54160EVM-535 Schematic Diagram

### 2.2 Bill of Materials

Table 1. Bill of Materials

Count	RefDes	Value	Description	Size	Part Number	MFR
2	C1, C3	10 $\mu$ F	Capacitor, Ceramic, 50V, X5R, 20%	1210	Std	Std
1	C2	0.01 $\mu$ F	Capacitor, Ceramic, 50V, X7R, 10%	0603	Std	Std
1	C5	6800pF	Capacitor, Ceramic, 50V, X7R, 10%	0603	Std	Std
1	C6	100pF	Capacitor, Ceramic, 50V, NPO, 5%	0603	Std	Std
1	C7	0.1 $\mu$ F	Capacitor, Ceramic, 25V, X5R, 10%	0603	Std	Std
1	D1	B260-13-F	Diode, Schottky, 60V, 2A	SMB	B260-13-F	Vishay
4	D2, D3, D4, D5	"LW W5SN-JYKZ-5K8L-Z (see Note 5 & 6)"	Diode, Platinum Dragon LED White, 700-mA	0.244 x 0.441 inch	"LW W5SN-JYKZ-5K8L-Z (see Note 5 & 6)"	Osram
1	L1	68 $\mu$ H	Inductor, SMT, 1.32A, 213 m $\Omega$	0.402 x 0.394 inch	MSS1038-683ML	Coilcraft
1	R1	1.20	Resistor, Chip, 1W, 1%	2512	Std	Std
1	R2	205k	Resistor, Chip, 1/16W, 1%	0603	Std	Std
1	R4	13.0k	Resistor, Chip, 1/16W, 1%	0603	Std	Std
1	R5	174k	Resistor, Chip, 1/16W, 1%	0603	Std	Std
1	R6	4.99k	Resistor, Chip, 1/16W, 1%	0603	Std	Std
1	U1	TPS54160DGQ	IC, DC-DC Converter	MSOP-10	TPS54160DGQ	TI

### 3 Board Layout

#### 3.1 Layout

The following figures show the layout for each layer of the TPS54160EVM-535. The top and bottom layers of the board are 2-oz. copper. The top layer is predominantly used to route the high current traces of the input and output voltages. Some noise sensitive traces, such as the feedback trace, have been routed on the bottom layer so that they are shielded by the large ground plane on the bottom layer. Board layout is critical for all high frequency switch mode power supplies. The nodes with high switching frequencies and currents are kept as short as possible to minimize trace inductance. Careful attention has been given to the routing of high frequency current loops and a single point grounding scheme is used. Refer to the datasheet for specific layout guidelines.

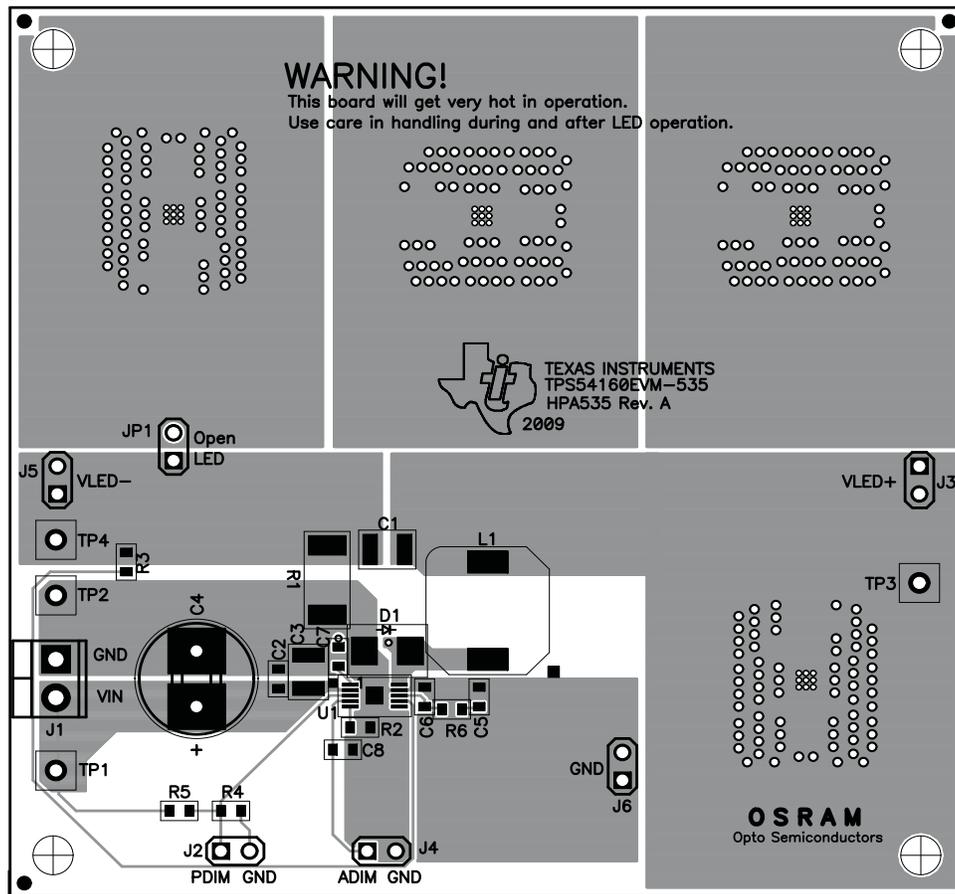


Figure 2. Top Assembly Layer

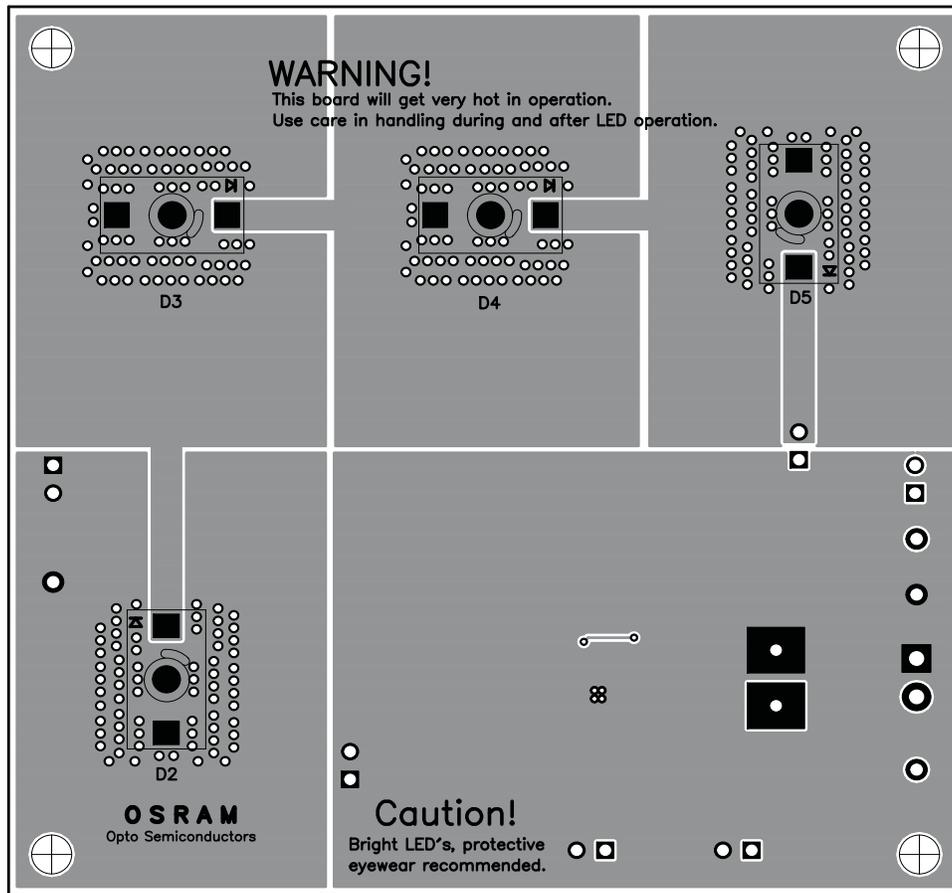
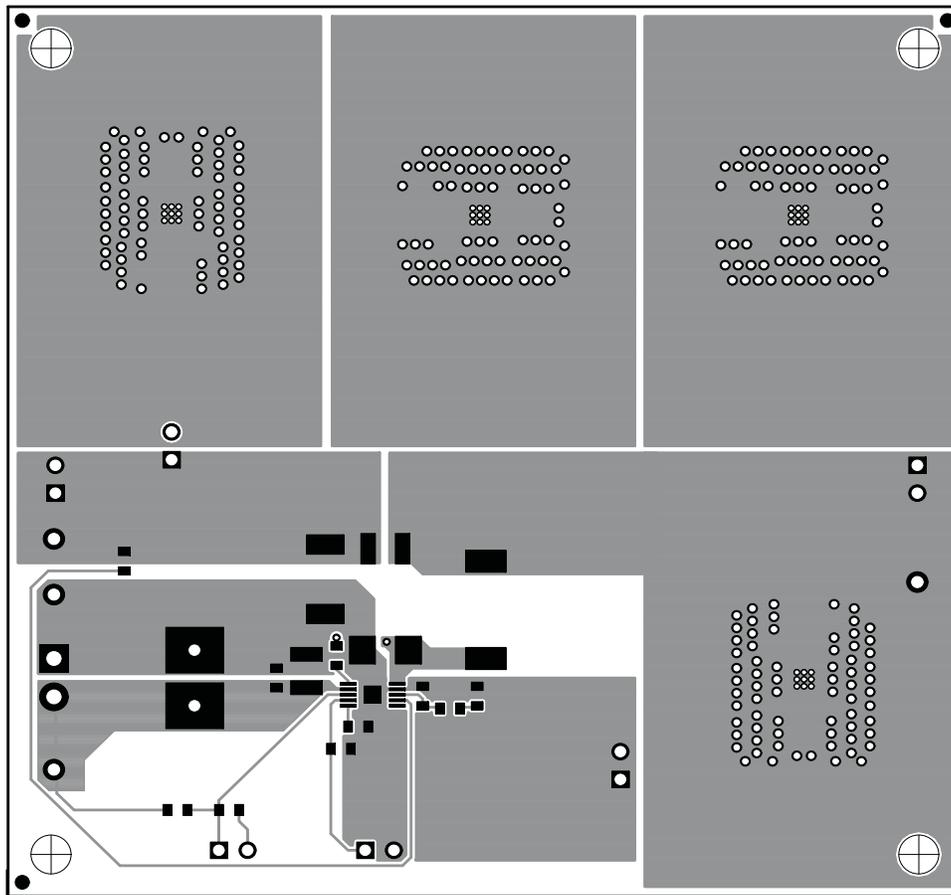


Figure 3. Bottom Assembly Layer



**Figure 4. Top Layer Routing**

## 4 Connector Description

This chapter describes the jumpers and connectors on the EVM as well as how to properly connect, setup and use the TPS54160EVM-535.

### 4.1 Input/Output Connector Descriptions

#### 4.1.1 J1 – GND, VIN

This header is the return and positive input voltage supply to the converter. The leads to the input supply should be twisted and kept as short as possible to minimize EMI transmission. Additional bulk capacitance should be added between J1 and J2 if the supply leads are greater than six inches. An additional 47 $\mu$ F or greater capacitor improves the transient response of the TPS54160 and helps to reduce ringing on the input when long supply wires are used.

#### 4.1.2 J2 – PDIM, GND

This header is for dimming using pulse width modulation. PDIM is connected to the EN pin of the TPS54160. Applying a PWM will adjust the average output current proportional to the duty cycle. GND is connected to the common ground plane.

#### 4.1.3 J3 – LED+

When using external LEDs, connect anode to LED+.

#### 4.1.4 J4 – ADIM, GND

This header is for analog dimming. ADIM is connected to the SS/TR pin on the TPS54160. The voltage applied to this pin is used as reference if below the TPS54610 internal voltage reference of 800mV. GND is connected to the common ground plane. [Figure 10](#) shows the LED current vs. ADIM voltage.

#### 4.1.5 J5 – LED–

When using external LEDs, connect cathode to LED–.

#### 4.1.6 J6 – GND

This header is connected to the common ground plane.

#### 4.1.7 JP1 – OPEN LED

Connect shorting jumper on JP1 to use the on-board LEDs. The user may monitor the LED current by connecting an ammeter between the two pins. Open JP1 to use external LEDs.

## 5 Performance Specifications

### 5.1 Converter Specifications

[Table 2](#) provides a summary of the converters specifications. The converter is designed and tested for  $V_{IN} = 24V \pm 25\%$ . Operation at other input voltages is possible but some performance specifications will vary compared to those shown. The ambient temperature is 25°C for all measurements, unless otherwise noted.

**Table 2. Converter Specifications**

Specification	Test Conditions	Min	Typ	Max	Unit
VIN input voltage range		18	24	30	V
Output current			675		mA
Output voltage			14.8		V
Loop bandwidth			50		kHz
Phase margin			100		°
Operating Frequency			570		kHz
Maximum Efficiency	$V_{in} = 24\text{ V}, I_{out} = 700\text{ mA}$		90%		
Converter enable voltage $V_{turn\ on}$	$V_{in}$ rising, $I_{out} = 700\text{ mA}$		17.8		V
Converter disable voltage $V_{turn\ off}$	$V_{in}$ falling, $I_{out} = 700\text{ mA}$		17.3		V
Output current rise time			0.4		ms

### 5.2 Modifications to the Converter

This converter is meant to show an application of the TPS54160 as an LED driver with the specification above. For applications with a different input voltage range or different numbers of LEDs, refer to the application note, *How to use the TPS54160 as a High-Brightness LED Driver* ([SLVA374](#)).

### 5.3 PWM Dimming

The brightness of the LEDs can be adjusted by applying a PWM signal to the PDIM pin. The average LED current is proportional to the PWM signal duty cycle. When PDIM is greater than  $V_{\text{turn on}} \times R4/(R4+R5)$  the TPS54160 drives current through the LEDs. When less than  $V_{\text{turn off}} \times R4/(R4+R5)$ , the TPS54160 turns off and stops driving current through the LEDs. Where  $V_{\text{turn on}}$  is the converter enable voltage and  $V_{\text{turn off}}$  is converter disable voltage as displayed [Table 2](#).

### 5.4 Analog Dimming

ADIM is connected to the SS/TR pin on the TPS54160. The voltage applied to this pin is used as reference if below the TPS54610 internal voltage reference of 800mV. See [Figure 10](#).

## 6 Test Results

This chapter provides typical performance waveforms for the TPS54160EVM-535

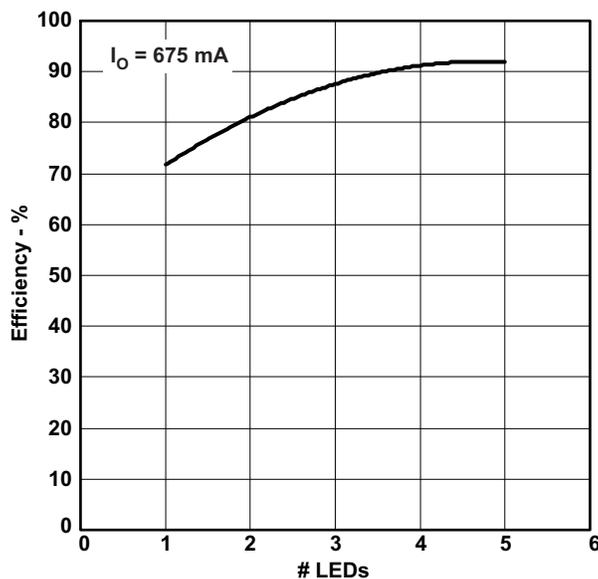


Figure 5. Efficiency, Vin=24V

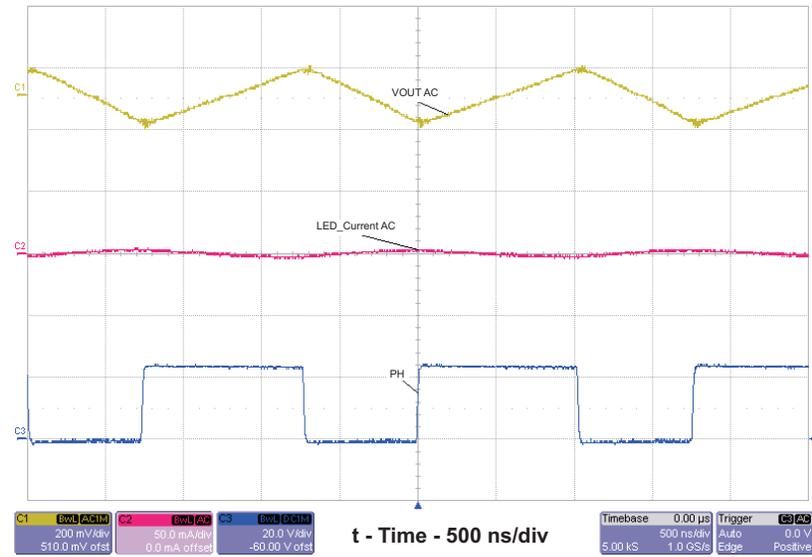


Figure 6. Output Ripple, Vin=24.0V, Iout=675mA, AC Coupled

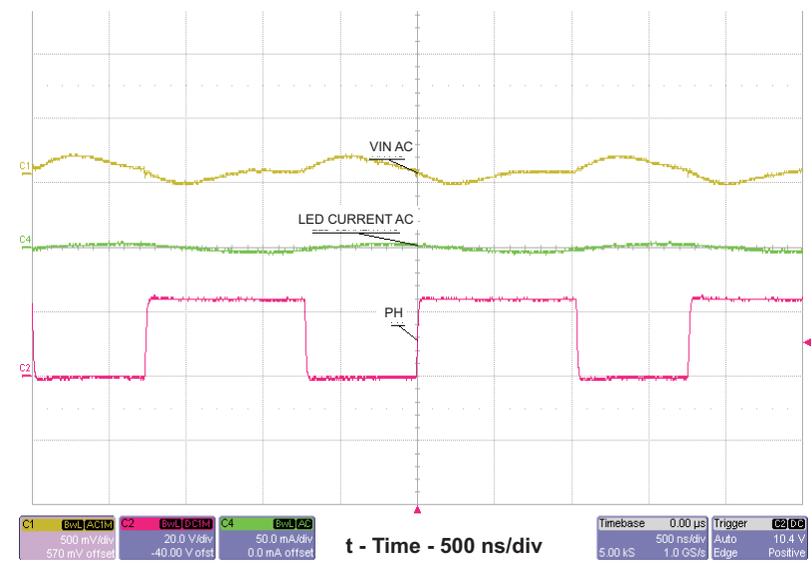


Figure 7. Input Voltage Ripple, Vin=24.0V, Iout=675mA, AC Coupled

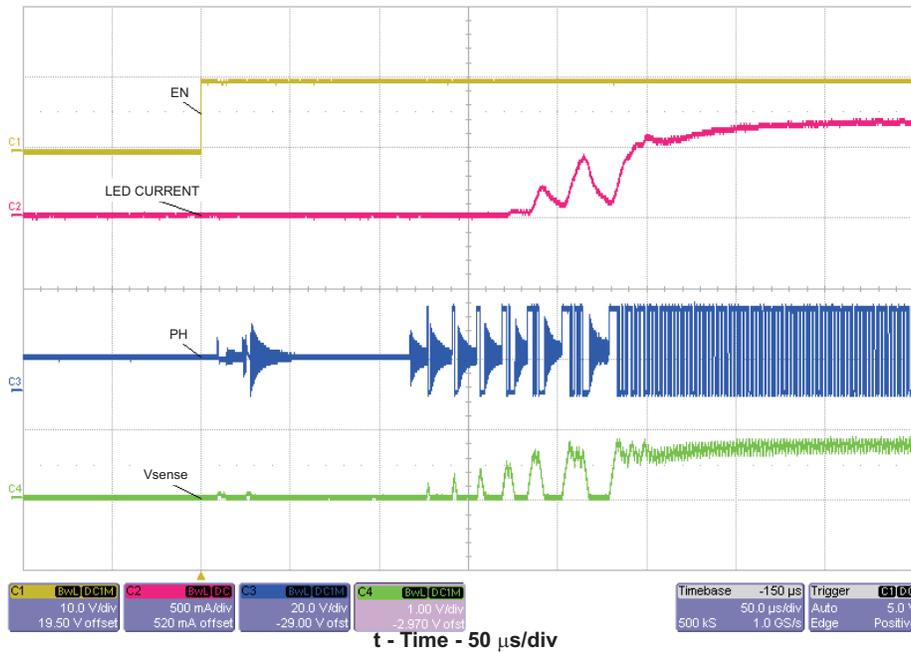


Figure 8. Start-up relative to EN, Vin=24V, Iout=675mA

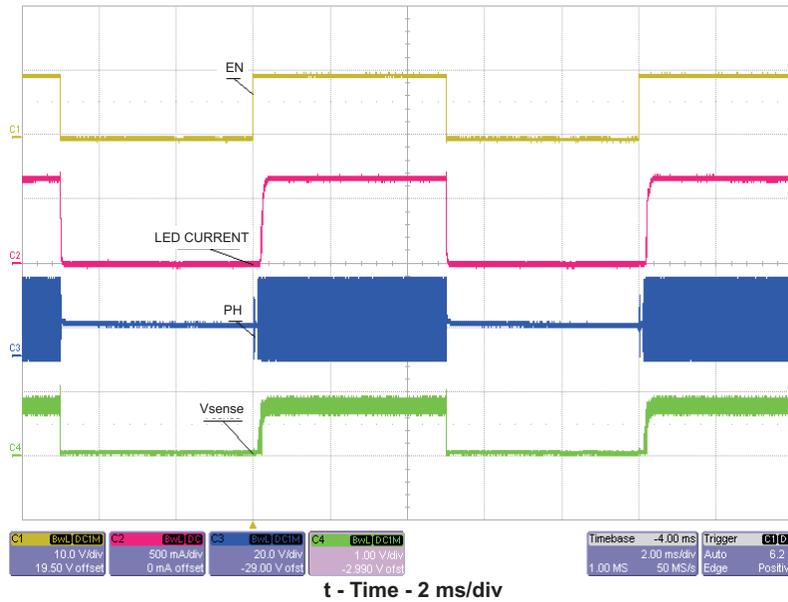


Figure 9. PWM Dimming, Vin=24V, Iout=675mA

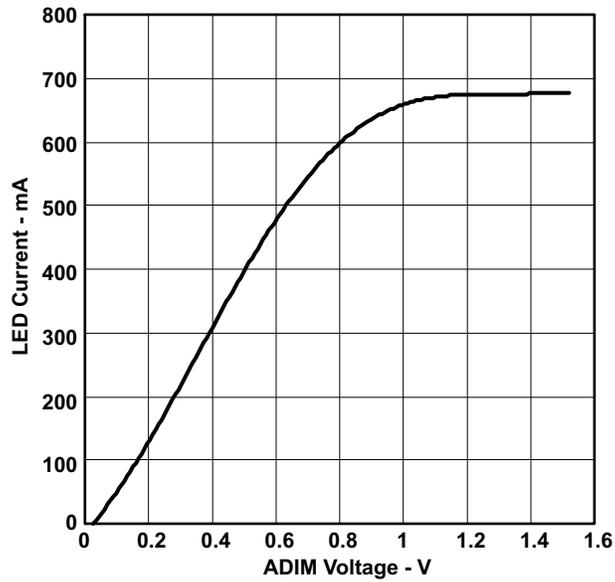


Figure 10. Analog Dimming, LED Current vs. ADIM Voltage

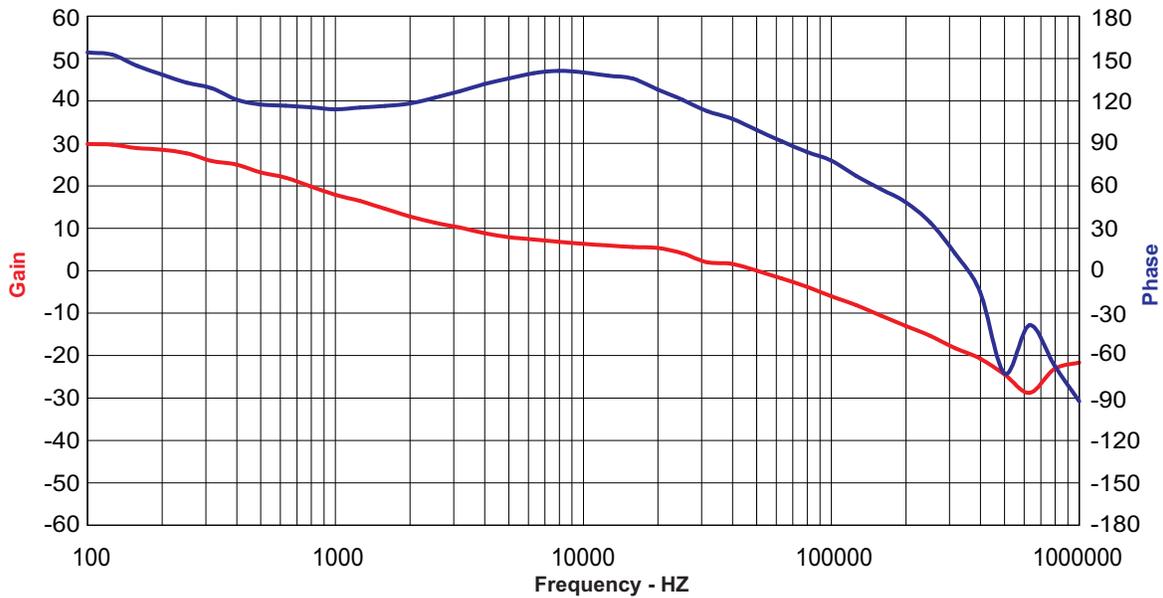


Figure 11. Loop response, VIN = 24V, Iout = 675mA

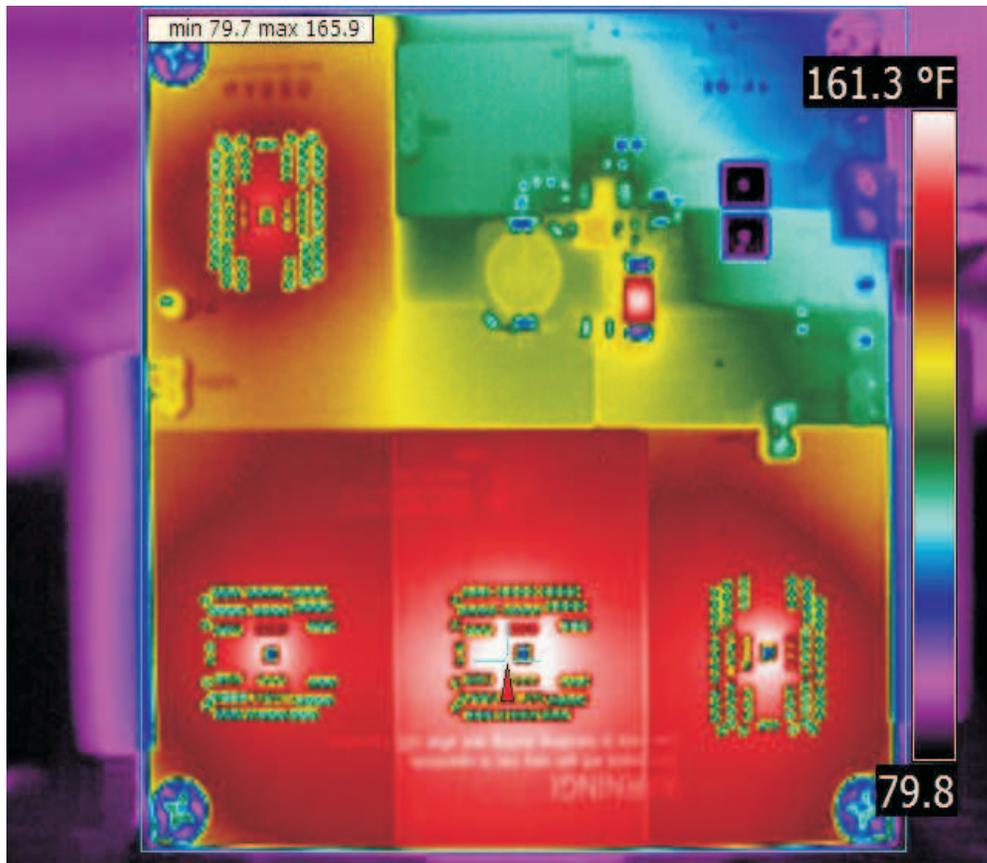


Figure 12. Thermal Performance, Top

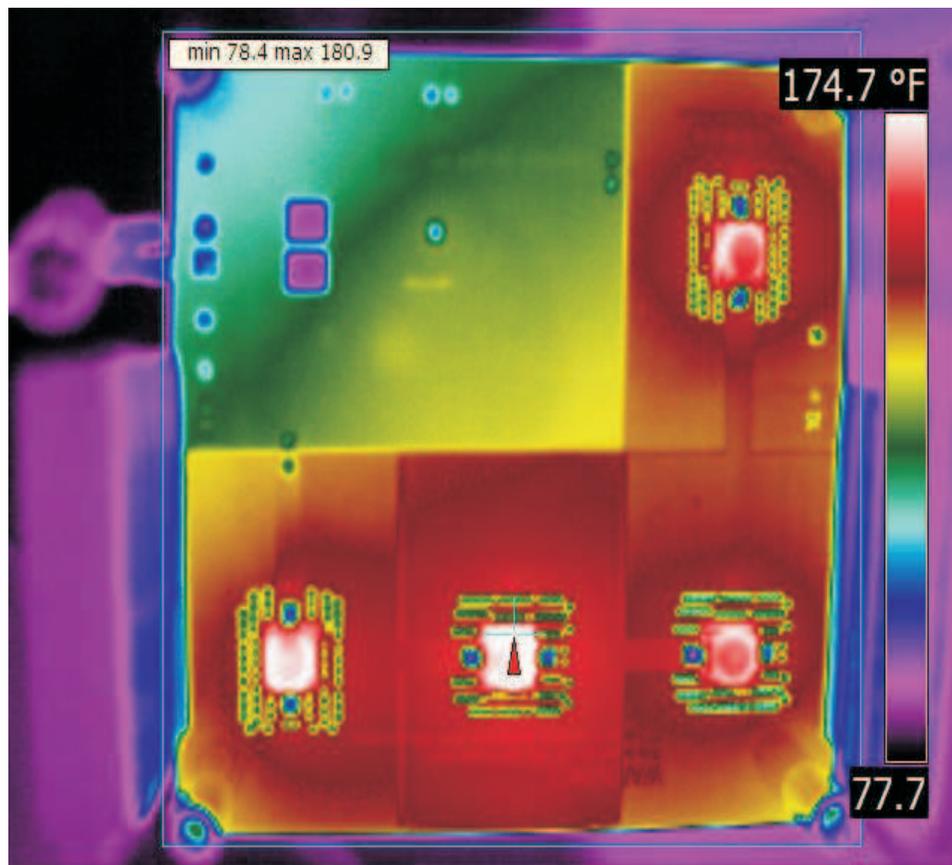


Figure 13. Thermal Performance, Bottom

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
RF/IF and ZigBee® Solutions	<a href="http://www.ti.com/lprf">www.ti.com/lprf</a>

### Applications

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Broadband	<a href="http://www.ti.com/broadband">www.ti.com/broadband</a>
Digital Control	<a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Military	<a href="http://www.ti.com/military">www.ti.com/military</a>
Optical Networking	<a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Telephony	<a href="http://www.ti.com/telephony">www.ti.com/telephony</a>
Video & Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>
Wireless	<a href="http://www.ti.com/wireless">www.ti.com/wireless</a>

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2009, Texas Instruments Incorporated