



14-BIT, 1.25-MSPS LOW POWER SAR ANALOG-TO-DIGITAL CONVERTER

FEATURES

- 1.25 MHz Sample Rate, 14-Bit Resolution
- Zero Latency
- Unipolar, Pseudo Differential Input, Range:
 - 0 V to 2.5 V
- SPI™ Compatible Serial Interface
- 77.5 dB SNR and -95 dB THD at 0.5 MHz I/P
- Power Dissipation 45 mW at 1.25 MSPS
- Nap Mode (10 mW Power Dissipation)
- Power Down (10 μW)
- Internal Reference
- Internal Reference Buffer
- 48-Pin TQFP Package


APPLICATIONS

- Optical Networking (DWDM, MEMS Based Switching)
- Spectrum Analyzers
- High Speed Data Acquisition Systems
- High Speed Close-Loop Systems
- Telecommunication

DESCRIPTION

The ADS7890 is a 14-bit 1.25-MSPS A-to-D converter with 2.5-V internal reference. The device includes a capacitor based SAR A/D converter with inherent sample and hold. The device offers a 14-bit serial SPI or DSP compatible interface. The device has a pseudo-differential input stage.

The -IN swing of ± 200 mV is useful to compensate for ground voltage mismatch between the ADC and sensor and also to cancel common-mode noise. The device operates at lower power when used at lower conversion rates because of the nap feature. The device is available in a 48-pin TQFP package.

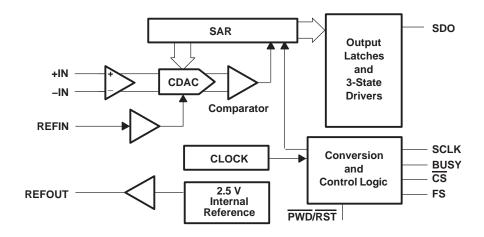



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

SPI is a trademark of Motorola, Inc.





This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

ORDERING INFORMATION

MODEL	MAXIMUM INTEGRAL LINEARITY (LSB)	MAXIMUM DIFFERENTIAL LINEARITY (LSB)	NO MISSING CODES AT RESOLUTION (BIT)	PACKAGE TYPE	PACKAGE DESIGNATOR	TEMPERATURE RANGE	ORDERING INFORMATION	TRANSPORT MEDIA QUANTITY
ADS7890 ±1	14.5	.45/4	4.4	48-Pin	DED	4000 1- 0500	ADS7890IPFBT	Tape and reel 250
	±1.5	±1.5 +1.5/–1	.5 +1.5/-1 14	TQFP	PFB	-40°C to 85°C	ADS7890IPFBR	Tape and reel 1000

NOTE: For most current specifications and package information, refer to the TI website at www.ti.com.

ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range(1)

		UNIT			
+IN to AGND	-0.3 V to +VA + 0.1 V				
-IN to AGND -0.3 V to 0.					
+VA to AGND -0.3 V to 7 V					
+VBD to BDGND		–0.3 V to 7 V			
Digital input voltage to GND		-0.3 V to (+VBD + 0.3 V)			
Digital output to GND	Digital output to GND -0.3 V to (+VBD +				
Operating temperature range	rating temperature range -40°C to 85°C				
Storage temperature range		−65°C to 150°C			
Junction temperature (Tjmax)		150°C			
TOED needsome	Power dissipation	(Τ _J Max–Τ _A)/ θ _{JA}			
TQFP package	θ _{JA} Thermal impedance	86°C/W			
I and to see a set up a neldow's a	Vapor phase (60 sec)	215°C			
Lead temperature, soldering	Infrared (15 sec)	220°C			

⁽¹⁾ Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.



SPECIFICATIONS

 $T_A = -40$ °C to 85°C, +VA = 5 V, +VBD = 5 V or 3.3 V, $V_{ref} = 2.5$ V, $f_{sample} = 1.25$ MHz (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
ANALOG INPUT						
Full-scale input span ⁽¹⁾	+IN - (-IN)	0		V _{ref}	V	
	+IN	-0.2		V _{ref} + 0.2		
Absolute input range	-IN	-0.2		+0.2	V	
Input capacitance			27		pF	
Input leakage current			500		рА	
SYSTEM PERFORMANCE						
Resolution			14		Bits	
No missing codes		14			Bits	
Integral linearity(2)		-1.5	±0.75	1.5	LSB(3)	
Differential linearity		-1	±0.75	1.5	LSB(3)	
Offset error ⁽⁴⁾	External reference	-1.5	±0.5	1.5	mV	
Gain error ⁽⁴⁾	External reference	-1	±0.25	1	mV	
Common-mode rejection ratio	With common mode input signal = 200 mVp-p at 0.5 MHz		60		dB	
Power supply rejection	At 3FF0 _H output code, +VA = 4.75 V to 5.25 V , Vref = 2.50 V		80		dB	
SAMPLING DYNAMICS	·					
	+VDB = 5 V			365	nsec	
Conversion time	+VDB = 3 V			365	nsec	
Acquisition time	+VDB = 5 V	187.5			nsec	
Acquisition time	+VDB = 3 V	187.5			nsec	
Maximum throughput rate				1.25	MHz	
Aperture delay			5		nsec	
Aperture jitter			20		psec	
Step response			50		nsec	
Over voltage recovery			50		nsec	
DYNAMIC CHARACTERISTICS						
Total harmonic distortion(5)	V _{IN} = 2.496 Vp–p at 100 kHz/2.5 Vref		-95		dB	
Total Harmonic distortion(*)	V _{IN} = 2.496 Vp-p at 0.5 MHz/2.5 Vref		-95	-88	aR	
SNR	V _{IN} = 2.496 Vp-p at 100 kHz/2.5 Vref		78		dB	
	V _{IN} = 2.496 Vp-p at 0.5 MHz/2.5 Vref		77.5		<u> </u>	
SINAD	V _{IN} = 2.496 Vp-p at 100 kHz/2.5 Vref		77		dB	
	V _{IN} = 2.496 Vp–p at 0.5 MHz/2.5 Vref		77			
SFDR	V _{IN} = 2.496 Vp–p at 0.5 MHz/2.5 Vref	89	97		dB	
-3 dB Small signal bandwidth			50		MHz	
EXTERNAL REFERENCE INPUT						
Input V _{REF} range		2.4	2.5	2.6	V	
Resistance(6)			500		kΩ	

⁽¹⁾ Ideal input span; does not include gain or offset error.
(2) This is endpoint INL, not best fit.
(3) LSB means least significant bit.

⁽⁴⁾ Measured relative to actual measured reference.

⁽⁵⁾ Calculated on the first nine harmonics of the input frequency.(6) Can vary ±20%.



SPECIFICATIONS Continued

 $T_A = -40$ °C to 85°C, +VA = 5 V, +VBD = 5 V or 3.3 V, $V_{ref} = 2.5$ V, $f_{sample} = 1.25$ MHz (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
INTERNAL REFEREN	ICE OUTPUT	·				
Start-up time		From 95% (+VA), with 1-μF storage capacitor on REFOUT to AGND			120	msec
V _{REF} Range		IOUT=0	2.48	2.5	2.52	V
Source current		Static load			10	μΑ
Line regulation		+VA = 4.75 V to 5.25 V		1		mV
Drift		IOUT = 0		25		PPM/C
DIGITAL INPUT/OUT	PUT	·				•
Logic family				CMOS		
Logic level	VIH	I _{IH} = 5 μA	+V _{BD} -1		+V _{BD} + 0.3	
	V _{IL}	I _{IL} = 5 μA	-0.3		0.8	V
	Voн	I _{OH} = 2 TTL loads	+V _{BD} – 0.6		+V _{BD}	V
	VOL	I _{OL} = 2 TTL loads	0		0.4	V
Data format				Straight Binary		
POWER SUPPLY REC	QUIREMENTS					
Davian avmah viakana	+VBD		2.7	3.3	5.25	V
Power supply voltage	+VA		4.75	5	5.25	V
Supply current, +VA, 1	.25 MHz sample rate			9	12	mA
Power dissipation, 1.25	5 MHz sample rate	+VA = 5 V		45	60	mW
NAP MODE						
Supply current, +VA				2	3	mA
POWER DOWN						
Supply current, +VA				2	2.5	μΑ
Power down time(1)				10		μsec
Power up time		1-μF Storage capacitor on REFOUT to AGND		25		msec
Invalid conversions aft	er power up or reset				4	Numbers
TEMPERATURE RAN	GE					
Operating free-air			-40		85	°C

⁽¹⁾ Time required to reach level of 2.5 μA.



TIMING REQUIREMENTS


All specifications typical at -40° C to 85° C, +VA = +5 V, +VBD = +5 V (see Notes 1, 2, and 3)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	REF FIG.
Conversion time	t(conv)			365	ns	1,2
Acquisition time	t(acq)	187.5			ns	1,2
Cycle time, SCLK	t(cyc)	25			ns	1,2
Pulse duration, SCLK low	t _{wL}	10			ns	
Pulse duration, SCLK high	t _w H	10			ns	
DSP INTERFACE						
Setup time CS low to FS high	t _{su1}	8			ns	2
Delay time FS high to MSB valid	t _{d1}			9	ns	2
FS pulse duration	t _{w1}	15			ns	2
Hold time, SCLK falling edge to FS falling edge (last SCLK falling edge when FS high)	^t h1	5			ns	2
Setup time, FS falling edge to first falling edge of SCLK after FS low	t _{su2}	5			ns	2
Hold time, internal conversion (indicated by $t_{\mbox{conv}}$) end to FS rising edge to avoid conversion abort	th3	10			ns	2
Delay time, 9th SCLK rising edge to FS rising edge for frame abort during sample	t _{d8}	5			ns	10
SPI INTERFACE		-				
Pulse duration, CS minimum	t _{w5}	15			ns	1
Hold time, SCLK falling edge (last SCLK falling edge when $\overline{\text{CS}}$ is high) to $\overline{\text{CS}}$ falling edge	th2	5			ns	1
Setup time, CS low to first SCLK falling edge after CS low	t _{su3}	5			ns	1
Delay time, CS low to MSB valid	t _{d3}			9	ns	1
Hold time, internal conversion (indicted by t_{CONV}) end to \overline{CS} falling edge to avoid conversion abort	th3	10			ns	1
DSP AND SPI INTERFACE		•				•
Delay time, SCLK rising edge to SDO valid	t _{d2}			9	ns	1, 2
Hold time, 16th SCLK falling edge to CS rising edge	t _{h4}	10			ns	1, 2
Delay time, 16th SCLK falling edge to BUSY rising edge	t _{d4}			40	ns	1, 2
Pulse duration, BUSY high	t _{w2}			365	ns	1, 2
Delay time, 9th SCLK rising edge to CS rising edge for frame abort during sample	^t d8	5			ns	6, 11
Delay time, CS high to SDO three-state	t _{d5}			10	ns	1, 2
POWER DOWN/RESET		•				•
Pulse width, low for PWD/RST to reset the device	t _{w3}	45	(6140	ns	4
Pulse width, low for PWD/RST to power down the device	t _{w4}	7200			ns	3
Delay time, power up after PWD/RST is high	t _{d6}			25	ms	3
Delay time, falling edge of PWD/RST to SDO three-state	t _{d7}			10	ns	3, 4

 ⁽¹⁾ All input signals are specified with t_r = t_f = 5 ns (10% to 90% of +VBD) and timed from a voltage level of (V_{IL} + V_{IH})/2.
 (2) See timing diagram.
 (3) All timings are measured with 20-pF equivalent loads at 5 V +VBD and 10-pF equivalent loads at 3 V +VBD on the SDO and BUSY pins.



PIN ASSIGNMENTS

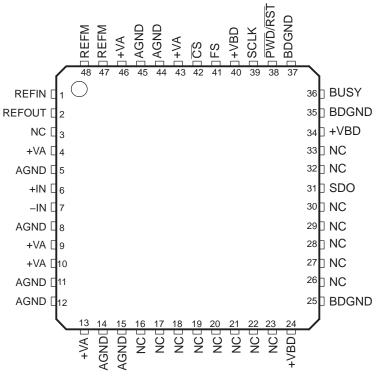

NC - No connection



Terminal Functions

PIN	NAME	I/O	DESCRIPTION
31	SDO	0	Serial data out. Data (excluding MSB) is latched out on the rising of SCLK with MSB first format. MSB is latched with the rising edge of FS or falling edge of CS depending on whether a DSP or SPI interface is used.
36	BUSY	0	Status output. This pin is high when a conversion is in progress.
39	SCLK	I	Serial clock. The device needs a minimum of 16 clocks per frame. As described in the timing diagrams, it controls serial data out (first 14 clocks), powerup (from nap) on the 8th rising edge of SCLK, start of sample (track) on the 9th rising edge and end of sample or start of conversion on the 16th falling edge of SCLK. The clock can be stopped after the 16th falling edge. It is important to have minimum jitter on SCLK as it decides the sampling instance and the jitter results in a loss of SNR performance.
41	FS	I	Frame sync. The rising edge of FS starts a new sample and convert frame. The MSB from the previous conversion is latched out on the rising edge of FS. The rising edge of FS during an internal convert (see Figure 12) aborts the conversion and starts a new frame.
42	CS	I	Chip Select. Active low signal. The falling edge of \overline{CS} starts a new sample and convert frame. The MSB from the previous conversion is latched out on the falling edge of \overline{CS} . This signal \underline{can} be pulled high after the 16th falling edge of SCLK during the frame. SDO goes to three-state with \overline{CS} high. The falling edge of \overline{CS} during internal convert (see Figure 7) aborts the conversion and starts a new frame.
24, 34, 40	+VBD		Digital power supply for all digital inputs and outputs. Refer to Table 2 for layout guidelines.
25, 35, 37	BDGND		Digital ground for all digital inputs and outputs. Needs to be shorted to analog ground plane below the device.
38	PWD/RST	I	Active low input, acts as device power down/device reset signal.
5, 8, 11, 12, 14, 15, 44, 45	AGND		Analog ground pins. Need to be shorted to analog ground plane below the device.
4, 9, 10, 13, 43, 46	+VA		Analog power supplies. Refer to Table 2 for layout guidelines.
6	+IN	I	Non inverting analog input channel
7	-IN	I	Inverting analog input channel
1	REFIN	I	Reference (positive) input. Needs to be decoupled with REFM pin using 0.1- μ F bypass capacitor and 1- μ F storage capacitor.
2	REFOUT	0	Internal reference output. To be shorted to REFIN pin when internal reference is used. Do not connect to REFIN pin when external reference is used. Always needs to be decoupled with AGND using 0.1 - μ F bypass capacitor.
47, 48	REFM	I	Reference ground. To be connected to analog ground plane.
3, 16 – 23, 26 – 30, 32, 33	NC		No connection pins.

DESCRIPTION AND TIMING DIAGRAMS

DEVICE OPERATION WITH SPI INTERFACE (See Figure 1)

Device operation is controlled with \overline{CS} and SCLK with FS always held high. The frame starts with the falling edge of \overline{CS} . The MSB is latched out first on the SDO pin. The clock cycle, with the first falling edge after the falling edge of \overline{CS} , is counted as first clock. Subsequent data bits are latched out on the SDO pin with every rising edge of further clocks (until the 14th rising edge of SCLK). The device has a built-in NAP mode. The device enters the NAP state with an end of conversion and continues to be in this state until the 8th SCLK rising edge. The sampling switch is closed on the 9th SCLK rising edge and the device samples the analog input [+IN- (-IN)] and enters the conversion phase on the 16th SCLK falling edge. The BUSY signal goes high to indicate the conversion is in progress and continues to be high until the end of conversion. A new frame can be started with the end of conversion.



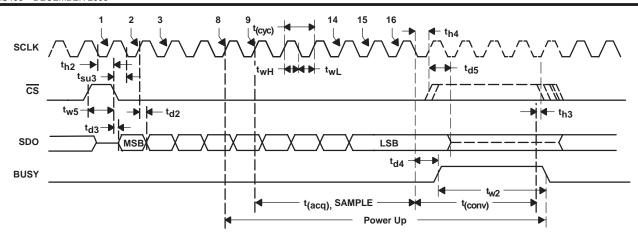


Figure 1. Device Operation With SPI Interface (FS Held High)

DEVICE OPERATION WITH DSP INTERFACE (See Figure 2)

Device operation is controlled with $\overline{\text{CS}}$, SCLK, and FS. The frame starts with the rising edge of FS with $\overline{\text{CS}}$ already low. The MSB is latched out first on the SDO pin. The clock cycle, with the first falling edge after the falling edge of FS is counted as first clock. Subsequent data bits are latched out on the SDO pin with every rising edge of further clocks (until the 14th rising edge of SCLK). The device has a built-in NAP mode. The device enters the NAP state with an end of conversion and continues to be in this state until the 8th SCLK rising edge. The sampling switch is closed on the 9th rising edge and the device samples the analog input [+IN- (-IN)] and enters the conversion phase on the 16th SCLK falling edge.

CS can be pulled high at any time after this. The BUSY signal goes high to indicate the conversion is in progress and continues to be high until the end of conversion. A new frame can be started with the end of conversion.

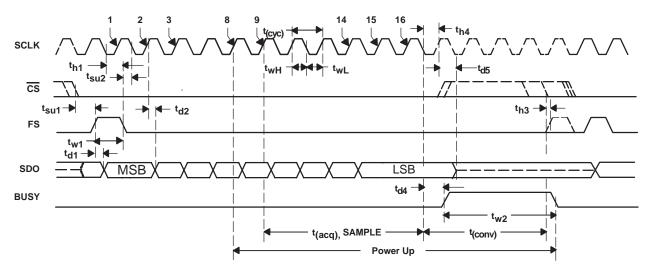


Figure 2. Device Operation With DSP Interface

POWERDOWN/RESET

A low level on the $\overline{PWD/RST}$ pin puts the device in the powerdown phase. This is an asynchronous signal. As shown in Figure 4, the device is in the reset phase for the first t_{W3} period after the falling edge of $\overline{PWD/RST}$. SDO goes to three-state for a period of t_{d7} after the falling edge of $\overline{PWD/RST}$. The device powers down if the $\overline{PWD/RST}$ pin continues to be low for a time period of more than t_{W4} . Data is not valid for the first four conversions after powerup (see Figure 3) or the end of reset (see Figure 4). The device is initialized during the first four conversions.



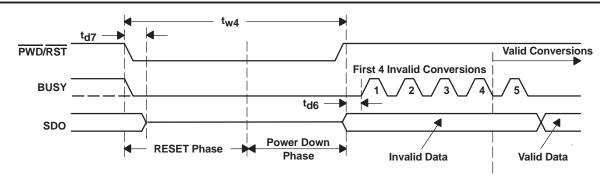


Figure 3. Device Power Down

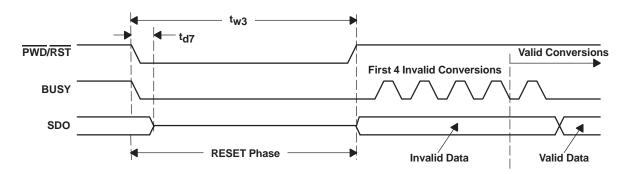


Figure 4. Device Reset

FRAME ABORT

A frame can be aborted at any time. There are three phases in the frame, data frame before sample start (first 8 clocks), sample phase (9th rising edge to the 16th falling edge of SCLK), and the conversion phase. The following sections describe a frame abort during each of these phases, for both SPI and DSP interfaces.

FRAME ABORT IN SPI INTERFACE MODE (FS Held High)

The rising edge of \overline{CS} after a frame start (falling edge of \overline{CS}) before the 9th rising edge of SCLK aborts a frame (see Figure 5). SDO goes to three-state with \overline{CS} high. A new frame is started with the falling edge of \overline{CS} . Previous conversion results are available on SDO during the new frame.

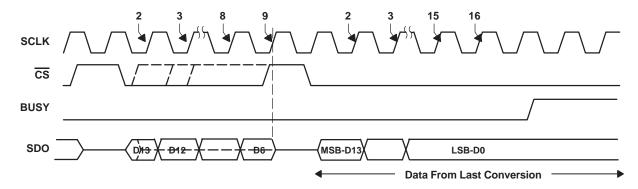


Figure 5. Frame Abort Before Sample Start

A $\overline{\text{CS}}$ rising edge during the sample period (t_{d8} after the 9th rising edge of SCLK to the 16th falling edge of SCLK) aborts the sample and the device enters the conversion phase. As expected, SDO goes to three-state with $\overline{\text{CS}}$ high. The conversion results can be latched in the next frame, however reliability of the data depends on the sampling time available before the frame abort.



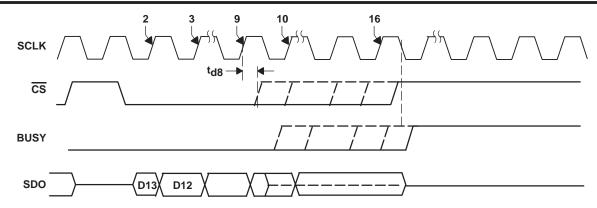


Figure 6. Frame Abort During Sample

The falling edge of $\overline{\text{CS}}$ during a conversion (from BUSY high until the end of $t_{(\text{CONV})}$ as shown in Figure 7) aborts the ongoing conversion. This starts the next frame. The device outputs 3F80 (hex) on SDO during the first frame after the conversion abort.

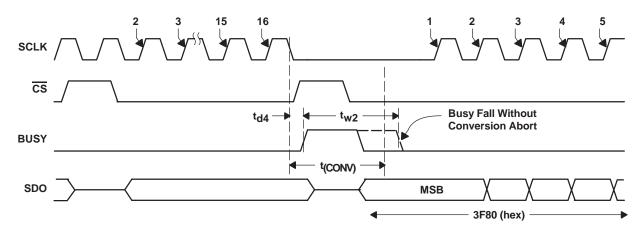


Figure 7. Frame Abort During Conversion

FRAME ABORT IN DSP INTERFACE MODE

The rising edge of FS (see Figure 8) or the rising edge of \overline{CS} (see Figure 9) after the falling edge of FS and before the 9th rising edge of SCLK aborts the frame. SDO goes to three-state with \overline{CS} high and a new frame is started with the rising edge of FS (see Figure 8 and Figure 9). Previous conversion results are available on SDO during the new frame.

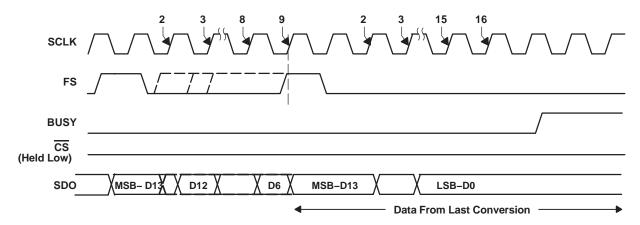


Figure 8. Frame Abort Using FS Before Sample Start



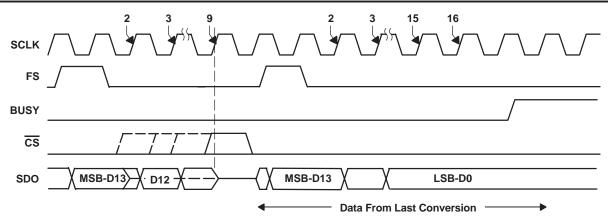


Figure 9. Frame Abort Using CS Before Sample Start

The rising edge of FS (see Figure 10) or rising edge of $\overline{\text{CS}}$ (see Figure 11) during a sample period (t_{d8} after the 9th rising edge of SCLK) to the 16th falling edge of SCLK aborts the sample and the device enters the conversion phase, this also aborts the current data out operation on SDO (if aborted before 14th clock). As expected, SDO goes to three-state with $\overline{\text{CS}}$ high. The conversion results can be latched in the next frame, however reliability of the data depends on the sampling time available before the frame abort.

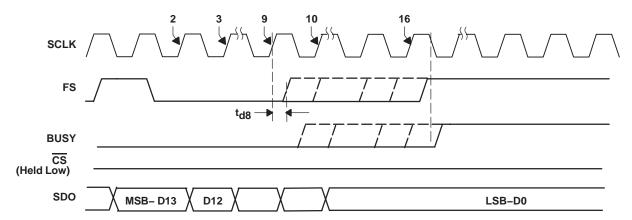


Figure 10. Frame Abort Using FS During Sample

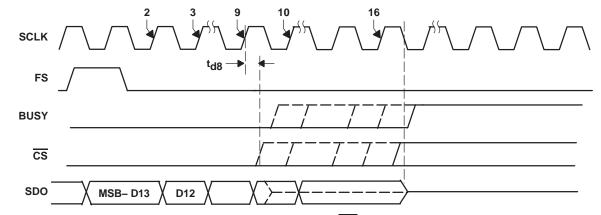


Figure 11. Frame Abort Using CS During Sample

The rising edge of FS during a conversion (from BUSY high until the end of $t_{(CONV)}$) as shown in Figure 12) aborts the ongoing conversion. This starts the next frame. The device outputs 3F80 (hex) on SDO during the first frame after the conversion abort. Toggling \overline{CS} during a conversion (with FS low) does not have any effect on the conversion.



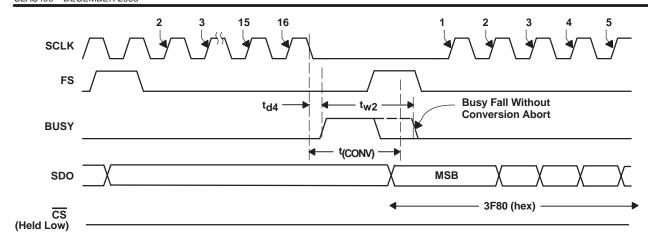


Figure 12. Frame Abort During Conversion



TYPICAL CHARACTERISTICS(1)







Figure 13



EFFECTIVE NUMBER OF BITS

SIGNAL-TO-NOISE RATIO

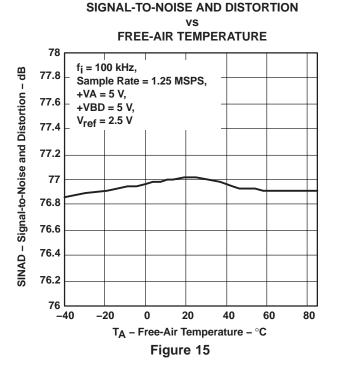


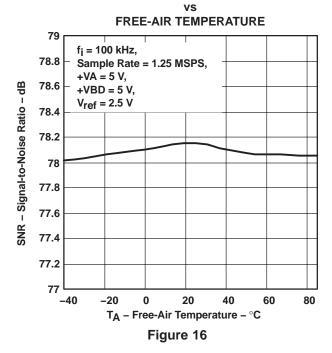

⁽¹⁾ $V_{ref} = 2.5 \text{ V}$ external, unless otherwise specified.




SPURIOUS FREE DYNAMIC RANGE FREE-AIR TEMPERATURE 105 SFDR - Spurious Free Dynamic Range - dB 100 95 $f_i = 100 \text{ kHz},$ 90 Sample Rate = 1.25 MSPS, +VA = 5 V+VBD = 5 V, V_{ref} = 2.5 V 85 _40 -20 20 80 60

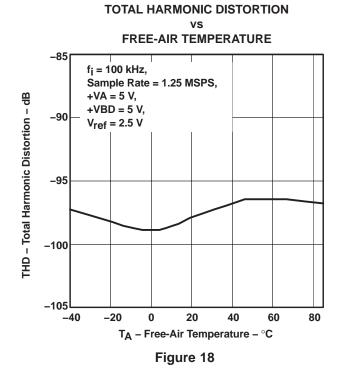


EFFECTIVE NUMBER OF BITS vs INPUT FREQUENCY

T_A – Free-Air Temperature – °C Figure 17



SIGNAL-TO-NOISE AND DISTORTION VS



SINAD - Signal-to-Nois and Distortion - dB



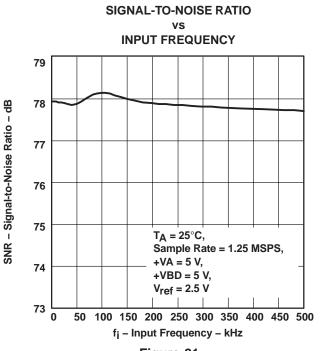


Figure 21


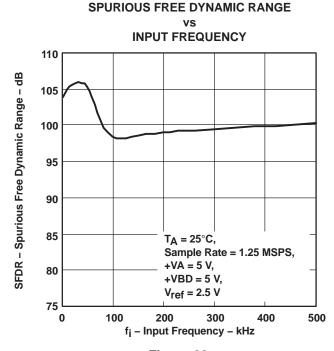


Figure 22

GAIN ERROR


vs

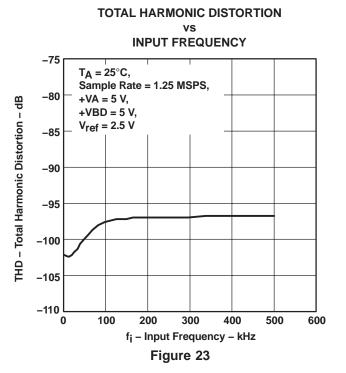


SUPPLY VOLTAGE $T_A = 25^{\circ}C$ Sample Rate = 1.25 MSPS, 0.8 +VBD = 5 V, 0.6 $V_{ref} = 2.5 V$ E_G-Gain Error - mV 0.4 0.2 0 -0.2 -0.4-0.6 -0.8 4.75 4.85 4.95 5.05 5.15 5.25 +VA - Supply Voltage - V


Figure 24




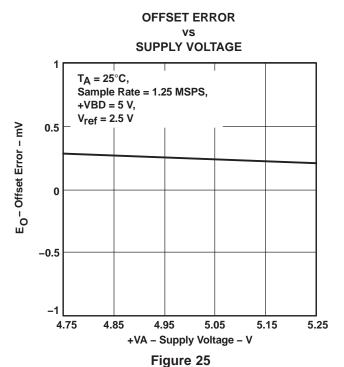





GAIN ERROR

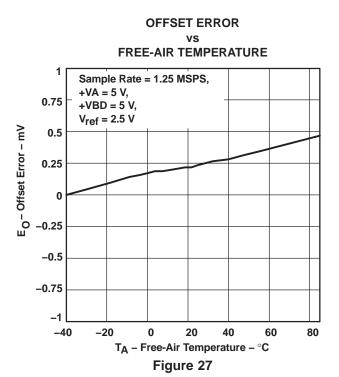


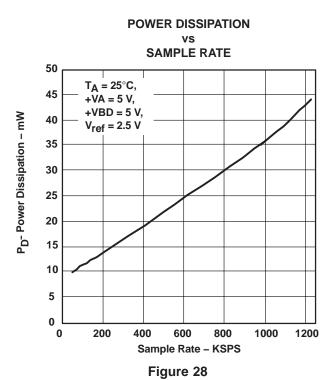




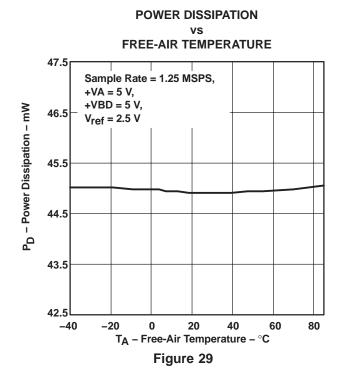

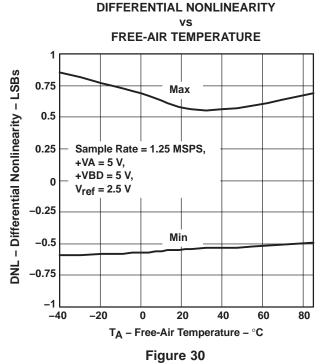


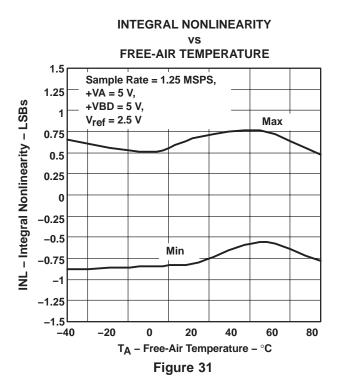

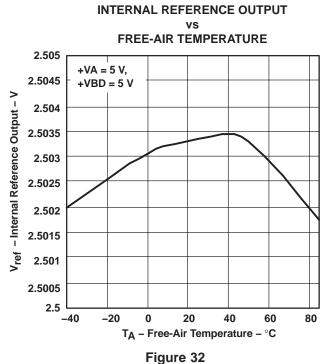



INTERNAL REFERENCE OUTPUT



DIFFERENTIAL NONLINEARITY

Figure 33

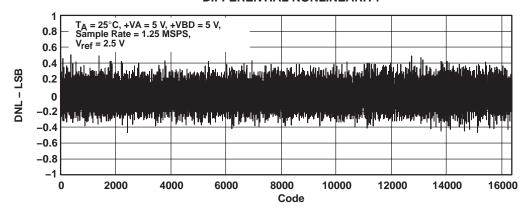


Figure 34

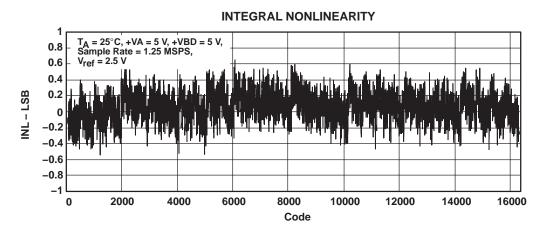


Figure 35



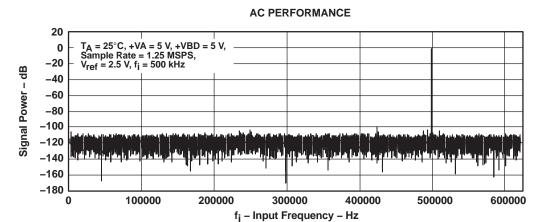


Figure 36



PRINCIPLES OF OPERATION

The ADS7890 is a member of a family of high-speed successive approximation register (SAR) analog-to-digital converters (ADC). The architecture is based on charge redistribution, which inherently includes a sample/hold function.

The conversion clock is generated internally. The conversion time is 365 ns max (at 5 V +VBD).

The analog input is provided to two input pins: +IN and –IN. (Note that this is pseudo differential input and there are restrictions on –IN voltage range.) When a conversion is initiated, the difference voltage between these pins is sampled on the internal capacitor array. While a conversion is in progress, both inputs are disconnected from any internal function.

REFERENCE

The ADS7890 has a built-in 2.5-V (nominal value) reference but can operate with an external reference. When an internal reference is used, pin 2 (REFOUT) should be connected to pin 1 (REFIN) with an 0.1- μ F decoupling capacitor and a 1- μ F storage capacitor between pin 2 (REFOUT) and pins 47 and 48 (REFM). The internal reference of the converter is buffered . There is also a buffer from REFIN to CDAC. This buffer provides isolation between the external reference and the CDAC and also recharges the CDAC during conversion. It is essential to decouple REFOUT to AGND with a 0.1- μ F capacitor while the device operates with an external reference.

ANALOG INPUT

When the converter enters hold mode, the voltage difference between the +IN and -IN inputs is captured on the internal capacitor array. The voltage on the -IN input is limited to between -0.2 V and 0.2 V, thus allowing the input to reject a small signal which is common to both the +IN and -IN inputs. The +IN input has a range of -0.2 V to (+V_{ref} +0.2 V). The input span (+IN - (-IN)) is limited from 0 V to VREF.

The input current on the analog inputs depends upon a number of factors: sample rate, input voltage, signal frequency, and source impedance. Essentially, the current into the ADS7890 charges the internal capacitor array during the sample period. After this capacitance has been fully charged, there is no further input current (this may not happen when a signal is moving continuously). The source of the analog input voltage must be able to charge the input capacitance (27 pF) to better than a 14-bit settling level with a step input within the acquisition time of the device. The step size can be selected equal to the maximum voltage difference between two consecutive samples at the maximum signal frequency. (Refer to Figure 39 for the suggested input circuit.) When the converter goes into hold mode, the input impedance is greater than 1 $G\Omega$.

Care must be taken regarding the absolute analog input voltage. To maintain the linearity of the converter, both –IN and +IN inputs should be within the limits specified. Outside of these ranges, the converter's linearity may not meet specifications.

Care should be taken to ensure that +IN and -IN see the same impedance to the respective sources. (For example, both +IN and -IN are connected to a decoupling capacitor through a $21-\Omega$ resistor as shown in Figure 39.) If this is not observed, the two inputs could have different settling times. This may result in an offset error, gain error, or linearity error which changes with temperature and input voltage.

RECOMMENDED OPERATIONAL AMPLIFIERS

It is recommended to use the THS4031 or THS4211 for the analog input. All of the performance figures in this data sheet are measured using the THS4031. Refer to Figure 39 for more information.

DIGITAL INTERFACE

The device can operate in SPI or DSP interface mode. A busy signal is available to indicate a conversion is in progress apart from \overline{CS} , SCLK in SPI and \overline{CS} , SCLK, and FS in DSP mode.



TIMING AND CONTROL

Refer to the DEVICE OPERATION IN SPI INTERFACE, DEVICE OPERATION IN DSP INTERFACE and FRAME ABORT in the DESCRIPTION AND TIMING sections.

READING DATA

The ADS7890 outputs serial data in straight binary format as listed in Table 1. Also refer to Figure 1 and Figure 2 for more details.

Table 1. Ideal Input Voltages and Output Codes⁽¹⁾

DESCRIPTION	ANALOG VALUE	BINARY CODE	HEX CODE
Full scale	V _{ref} – 1 LSB	11 1111 1111 1111	3FFF
Midscale	V _{ref} /2	10 0000 0000 0000	2000
Midscale – 1 LSB	V _{ref} /2 – 1 LSB	01 1111 1111 1111	1FFF
Zero	0 V	00 0000 0000 0000	000

⁽¹⁾ Full-scale range = V_{ref} and least significant bit (LSB) = $V_{ref}/16384$

Reset

Refer to the POWERDOWN/RESET section for the device reset sequence.

It is recommended to reset the device after power on. A reset can be issued once the power has reached 95% of its final value.

PWD/RST is an asynchronous active low input signal. A current conversion is aborted no later than 45 ns after the converter is in the reset mode. In addition, the device output SDO goes to three-state. The converter returns back to normal operation mode immediately after the PWD/RST input is brought high.

Data is not valid for the first four conversions after a device reset.

Powerdown

Refer to the POWERDOWN/RESET section for the device powerdown sequence.

The device enters powerdown mode if a $\overline{PWD}/\overline{RST}$ low duration is extended for more than a period of t_{w4} .

The converter goes back to normal operation mode no later than a period of t_{d6} after the $\overline{PWD}/\overline{RST}$ input is brought high.

After this period, normal conversion and sampling operation can be started as discussed in previous sections. Data is not valid for the first four conversions after a device reset.

Nap Mode

The device enters nap mode at the end of every conversion (with BUSY falling edge). The device powers up again on the 8th SDO rising edge in the next frame. Refer to Figure 1 and Figure 2 for more information. The power dissipation during nap mode is 10 mW. This offers power savings when the device is operated at lower throughput. Refer to Figure 28 for more information on power saving.



APPLICATION INFORMATION

LAYOUT

For optimum performance, care should be taken with the physical layout of the ADS7890 circuitry.

As the ADS7890 offers single-supply operation, it is often used in close proximity with digital logic, micro-controllers, microprocessors, and digital signal processors. The more digital logic present in the design and the higher the switching speed, the more difficult it is to achieve acceptable performance from the converter.

The basic SAR architecture is sensitive to glitches or sudden changes on the power supply, reference, ground connections, and digital inputs that occur just prior to the end of sampling (close to the 16th SCLK falling edge) and just prior to latching the output of the analog comparator during the conversion phase. Thus, driving any single conversion for an n-bit SAR converter, there are n+1 windows in which large external transient voltages can affect the conversion result. Such glitches might originate from switching power supplies, nearby digital logic, or high power devices.

The degree of error in the digital output depends on the reference voltage, layout, and the exact timing of the external event.

On average, the ADS7890 draws very little current from an external reference as the reference voltage is internally buffered. If the reference voltage is external and originates from an op amp, make sure that it can drive the bypass capacitor or capacitors without oscillation. A 0.1- μ F bypass capacitor and 1- μ F storage capacitor are recommended from REFIN (pin 1) directly to REFM (pin 48).

The AGND and BDGND pins should be connected to a clean ground point. In all cases, this should be the analog ground. Avoid connections which are too close to the grounding point of a micro-controller or digital signal processor. If required, run a ground trace directly from the converter to the power supply entry point. The ideal layout consists of an analog ground plane dedicated to the converter and associated analog circuitry.

As with the AGND connections, +VA should be connected to a 5-V power supply plane that is separate from the connection for +VBD and digital logic until they are connected at the power entry point onto the PCB. Power to the ADS7890 should be clean and well bypassed. A 0.1- μ F ceramic bypass capacitor should be placed as close to the device as possible. See Table 2 for the placement of capacitor. In addition to a 0.1- μ F capacitor, a 1- μ F capacitor is recommended. In some situations, additional bypassing may be required, such as a 100- μ F electrolytic capacitor or even a Pi filter made up of inductors and capacitors, all designed to essentially low-pass filter the 5-V supply, removing the high frequency noise.

Table 2. Power Supply Decoupling Capacitor Placement

POWER SUPPLY PLANE	CONVERTED ANALOG SIDE	CONVERTED DIGITAL CIDE	
SUPPLY PINS	CONVERTER ANALOG SIDE	CONVERTER DIGITAL SIDE	
Pairs of pins that require a shortest path to decoupling capacitors	(4,5), (9,8), (10,11), (13, 15), (43, 44) (46, 45)	(24, 25), (34, 35)	
Pins that require no decoupling	14, 12		

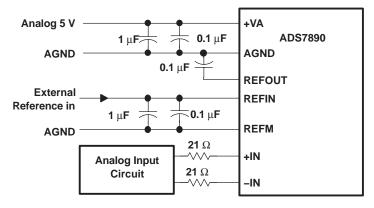


Figure 37. Using External Reference



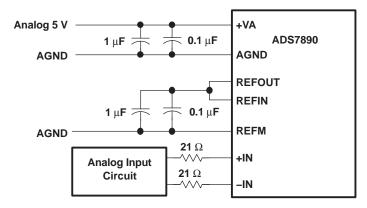


Figure 38. Using Internal Reference

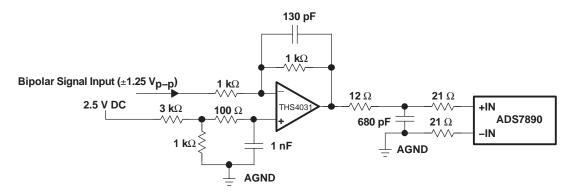


Figure 39. Typical Analog Input Circuit

www.ti.com 11-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
ADS7890IPFBT	Active	Production	TQFP (PFB) 48	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	ADS7890I
ADS7890IPFBT.B	Active	Production	TQFP (PFB) 48	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	ADS7890I
ADS7890IPFBTG4	Active	Production	TQFP (PFB) 48	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	ADS7890I

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



PLASTIC QUAD FLATPACK



NOTES:

- All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
 This drawing is subject to change without notice.
 Reference JEDEC registration MS-026.



PLASTIC QUAD FLATPACK



NOTES: (continued)

- 4. Publication IPC-7351 may have alternate designs.
- 5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



PLASTIC QUAD FLATPACK



NOTES: (continued)



^{6.} Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

^{7.} Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025