





DLP780NE DLPS188B - SEPTEMBER 2021 - REVISED MARCH 2024

DLP780NE 0.78-Inch 1080P Digital Micromirror Device

1 Features

- 0.78-inch diagonal micromirror array
 - Full HD (1920 × 1080) display resolution
 - 9.0-µm micromirror pitch
 - ±14.5° micromirror tilt
 - Corner illumination
- 2xLVDS input data bus
- Supports Full HD up to 120Hz
- LED, laser-phosphor, and RGB laser supported by DLPC4430 display controller, DLPA100 power management and motor driver IC

2 Applications

- Laser TV
- Smart projector
- Enterprise projector
- Digital signage

3 Description

The DLP780NE digital micromirror device (DMD) is a digitally controlled micro-electromechanical system (MEMS) spatial light modulator (SLM) that enables bright Full HD solid-state illuminated display systems. The TI DLP® 0.78-inch Full HD chipset comprises the DMD, DLPC4430 display controller, DLPA300 micromirror driver, and DLPA100 power and motor driver. The compact physical size of the chipset provides a complete system that enables small form factor Full HD displays with solid-state illumination.


To help accelerate the design cycle, the DMD ecosystem includes established resources, which include production ready optical modules, optical module manufacturers, and design houses.

To learn more about how to start designing with the DMD, visit the Getting Started with TI DLP display technology page.

Device Information

PART NUMBER ⁽¹⁾	PACKAGE	BODY SIZE (NOM)
DLP780NE	FYU (350)	35.0mm × 32.2mm

For more information, see the Mechanical, Packaging, and Orderable addendum.

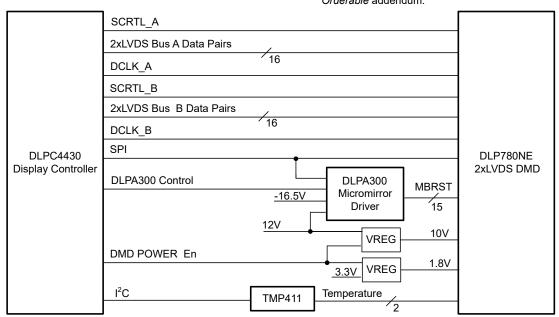

Simplified Application



Table of Contents

1 Features	1	6.8 W
2 Applications	1	6.9 M
3 Description	1	7 Appli
4 Pin Configuration and Functions	3	7.1 A
5 Specifications	8	7.2 T
5.1 Absolute Maximum Ratings	8	7.3 Te
5.2 Storage Conditions		8 Powe
5.3 ESD Ratings		8.1 D
5.4 Recommended Operating Conditions	9	8.2 D
5.5 Thermal Information		8.3 D
5.6 Electrical Characteristics	11	9 Layo
5.7 Timing Requirements	12	9.1 La
5.8 System Mounting Interface Loads	16	9.2 La
5.9 Micromirror Array Physical Characteristics	18	10 Devi
5.10 Micromirror Array Optical Characteristics	19	10.1
5.11 Window Characteristics		10.2
5.12 Chipset Component Usage Specification	20	10.3
6 Detailed Description		10.4
6.1 Overview		10.5 ا
6.2 Functional Block Diagram	22	10.6
6.3 Feature Description		10.7
6.4 Device Functional Modes		10.8
6.5 Optical Interface and System Image Quality		10.9
Considerations	23	11 Revi
6.6 Micromirror Array Temperature Calculation	24	12 Mec
6.7 Micromirror Power Density Calculation		Infor

6.8 Window Aperture Illumination Overfill Calculation	27
6.9 Micromirror Landed-On/Landed-Off Duty Cycle	. 28
7 Application and Implementation	. 31
7.1 Application Information	. 31
7.2 Typical Application	
7.3 Temperature Sensor Diode	
8 Power Supply Recommendations	35
8.1 DMD Power Supply Requirements	. 35
8.2 DMD Power Supply Power-Up Procedure	35
8.3 DMD Power Supply Power-Down Procedure	
9 Layout	37
9.1 Layout Guidelines	. 37
9.2 Layout Example	. 37
10 Device and Documentation Support	39
10.1 Third-Party Products Disclaimer	. 39
10.2 Device Support	. 39
10.3 Device Markings	. 39
10.4 Documentation Support	. 40
10.5 Receiving Notification of Documentation Updates	40
10.6 Support Resources	. 40
10.7 Trademarks	40
10.8 Electrostatic Discharge Caution	40
10.9 Glossary	40
11 Revision History	. 40
12 Mechanical, Packaging, and Orderable	
Information	41



4 Pin Configuration and Functions

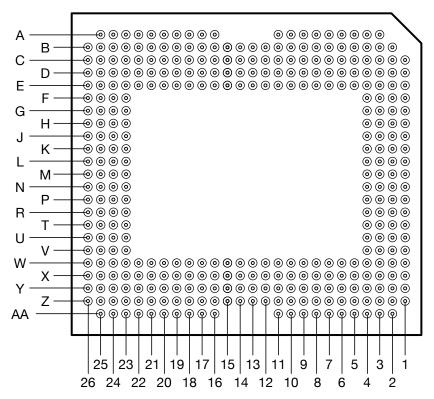


Figure 4-1. FYU Package (350-Pin) Bottom View



Table 4-1. Pin Functions

F	PIN		Table 4-1. Pin Functions	SIGNAL		
SIGNAL	PGA_PAD	TYPE ⁽¹⁾	PIN DESCRIPTION	TYPE	TERMINATION	
LVDS BUS C						
D_CN(0)	B18	I				
D_CP(0)	B19	I	High-speed differential pair		Differential 100Ω	
D_CN(1)	H24	I				
D_CP(1)	G24	I	High-speed differential pair		Differential 100Ω	
D_CN(2)	L23	I	1111		D: "	
D_CP(2)	K23	I	High-speed differential pair		Differential 100Ω	
D_CN(3)	C18	I	Library and differential main		D:#	
D_CP(3)	C19	I	High-speed differential pair		Differential 100Ω	
D_CN(4)	A19	I	I limb and differential main		Differential 4000	
D_CP(4)	A20	I	High-speed differential pair		Differential 100Ω	
D_CN(5)	E24	I	Lligh and differential radia		Differential 1000	
D_CP(5)	D24	I	High-speed differential pair		Differential 100Ω	
D_CN(6)	K25	I	Library and different Abelian in		Differential 4000	
D_CP(6)	J25	I	High-speed differential pair		Differential 100Ω	
D_CN(7)	C26	I	I limb and differential main		Differential 4000	
D_CP(7)	D26	I	High-speed differential pair		Differential 100Ω	
D_CN(8)	C21	I	I limb and differential main		Differential 100Ω	
D_CP(8)	B21	I	High-speed differential pair	I)/De	Dillerential 10022	
D_CN(9)	G25	I	Lligh and differential nair	LVDS	Differential 1000	
D_CP(9)	F25	I	High-speed differential pair		Differential 100Ω	
D_CN(10)	A24	I	High-speed differential pair		Differential 100Ω	
D_CP(10)	B24	I	- Tright-speed differential pail		Dillerential 10012	
D_CN(11)	J26	I	High-speed differential pair		Differential 100Ω	
D_CP(11)	K26	I	Tright-speed differential pail		Dillerential 10012	
D_CN(12)	D25	I	High-speed differential pair		Differential 100Ω	
D_CP(12)	C25	I	Tright-speed differential pail		Dillerential 10012	
D_CN(13)	E23	I	High-speed differential pair		Differential 100Ω	
D_CP(13)	D23	I	i ngn-speed dinerential pail		Dingigitial 10077	
D_CN(14)	B23	l	High-speed differential pair		Differential 100Ω	
D_CP(14)	C23	I	i ngn-speed dinerential pail		Direction 10077	
D_CN(15)	K24	I	High-speed differential pair		Differential 100Ω	
D_CP(15)	L24	I	i ngn-speed dinerential pail		Dingletitial 10077	
DCLK_CN	H23	I	High-speed differential pair		Differential 100Ω	
DCLK_CP	G23	I	i ligir-specu ullieleliliai pali		Dingigitial 10077	
SCTRL_CN	F26	I	High-speed differential pair		Differential 100Ω	
SCTRL_CP	G26	I	i ngn-speed dinerential pail		Dingletitial 10077	
LVDS BUS D						

Table 4-1. Pin Functions (continued)

PII	N		4-1. Pin Functions (continue	SIGNAL	
SIGNAL	PGA_PAD	TYPE ⁽¹⁾	PIN DESCRIPTION	TYPE	TERMINATION
D_DN(0)	Z18	ı			
D_DP(0)	Z19	I	High-speed differential pair		Differential 100Ω
D_DN(1)	T24	I		-	
D_DP(1)	U24	I	High-speed differential pair		Differential 100Ω
D_DN(2)	N23	I		-	
D_DP(2)	P23	I	High-speed differential pair		Differential 100Ω
D_DN(3)	Y18	I			
D_DP(3)	Y19	I	High-speed differential pair		Differential 100Ω
D_DN(4)	AA19	I		-	
D_DP(4)	AA20	I	High-speed differential pair		Differential 100Ω
D_DN(5)	W24	I		-	
D_DP(5)	X24	I	High-speed differential pair		Differential 100Ω
D_DN(6)	P25	I			DIF
D_DP(6)	R25	I	High-speed differential pair		Differential 100Ω
D_DN(7)	Y26	I		-	
D_DP(7)	X26	I	High-speed differential pair		Differential 100Ω
D_DN(8)	Y21	I		-	
D DP(8)	Z21	I	High-speed differential pair		Differential 100Ω
D_DN(9)	U25	I		LVDS	
D_DP(9)	V25	I	High-speed differential pair		Differential 100Ω
D_DN(10)	AA24	I		-	
D_DP(10)	Z24	I	High-speed differential pair		Differential 100Ω
D_DN(11)	R26	I		-	
D_DP(11)	P26	I	High-speed differential pair		Differential 100Ω
D_DN(12)	X25	I		-	
D_DP(12)	Y25	I	High-speed differential pair		Differential 100Ω
D_DN(13)	W23	1			Diff. # 1 1000
D_DP(13)	X23	1	High-speed differential pair		Differential 100Ω
D_DN(14)	Z23	I		-	
D_DP(14)	Y23	I	High-speed differential pair		Differential 100Ω
D_DN(15)	P24	I		-	
D_DP(15)	N24	I	High-speed differential pair		Differential 100Ω
DCLK_DN	T23	I			DIF
DCLK_DP	U23	I	High-speed differential pair		Differential 100Ω
SCTRL_DN	V26	I			DIF # 1 1 100 5
SCTRL_DP	U26	I	High-speed differential pair		Differential 100Ω
SCP INTERFACE	1	l		I .	1
SCPCLK	U2	I	Serial Communications Port CLK	LVCMOS	Internal pulldown
SCPDI	Т3	I	Serial Communications Data In	LVCMOS	Internal pulldown
SCPENZ	U4	I	Serial Communications Port Enable	LVCMOS	Internal pulldown
SCPDO	U3	0	Serial Communications Port Output	LVCMOS	Internal pulldown
OTHER SIGNALS	1	l	<u>'</u>	1	1
DMD_PWRDNZ	G4	I	Chip-Level ResetZ	LVCMOS	Internal pulldown
_					-



Table 4-1. Pin Functions (continued)

PIN	ı		4-1. Pin Functions (continued	SIGNAL	
SIGNAL	PGA PAD	TYPE ⁽¹⁾	PIN DESCRIPTION	TYPE	TERMINATION
N/C	G1, H1, J1, J3, J4, K3, P3, R1, R3, R4, T1, U1, V3, D17, X17, K4, P4, F3, G2, H3, W18, G3, W6, W5, Y5, Y4, W15, X15, Z16, Z15, Y16, Y17, Z13, Z12, Y14, Y13, AA10, AA9, Z10, Y10, Z5, Z6, Z9, Z8, W3, X3, X6, Y6, X7, X8, Y8, Y7, X4, W4, Y3, Z3, W11, W10, D4, E4, C3, B3, E15, D15, B16, B15, C16, C17, B13, B12, C14, C13, A10, A9, B10, C10, B5, B6, B9, B8, C4, C5, E5, E6, D7, D8, C8, C7, D3, E3, C6, D6, E11, E10, X16	No Connect			
TEMP_N	W16	I/O			
TEMP_P	W17	I/O			
MICROMIRROR BI	IAS RESET INPU	тѕ			
MBRST(0)	E14	I	Mirror actuation signal		
MBRST(1)	D13	I	Mirror actuation signal		
MBRST(2)	E13	I	Mirror actuation signal		
MBRST(3)	C12	I	Mirror actuation signal		
MBRST(4)	E12	I	Mirror actuation signal		
MBRST(5)	C11	I	Mirror actuation signal		
MBRST(6)	D16	I	Mirror actuation signal		
MBRST(7)	C15	I	Mirror actuation signal		
MBRST(8)	W14	I	Mirror actuation signal		
MBRST(9)	X13	I	Mirror actuation signal		
MBRST(10)	W13	I	Mirror actuation signal		
MBRST(11)	Y12	I	Mirror actuation signal		
MBRST(12)	W12	I	Mirror actuation signal		
MBRST(13)	Y11	I	Mirror actuation signal		
MBRST(14)	Y15	I	Mirror actuation signal		
POWERS AND GR	OUNDS	•	. '		•

Table 4-1. Pin Functions (continued)

		Table 4	4-1. Pin Functions (continue	d)	
PI	IN .	TYPE ⁽¹⁾	PIN DESCRIPTION	SIGNAL	TERMINATION
SIGNAL	PGA_PAD		52531111 11511	TYPE	
VDD	A5, A6, B2, C1, D10, D12, D19, D22, E8, E19, E20, E21, E22, F1, F2, J2, K1, L1, L25, M3, M4, M25, P1, R2, V1, V2, W8, W19, W20, W21, W22, X10, X12, X19, X22, Y1, Z1, Z2, AA2, AA5, AA6	Р	Low-voltage CMOS core supply		
VDDI	A7, A8, A11, A16, A17, A18, A21, A22, A23, AA7, AA8, AA11, AA16, AA17, AA18, AA21, AA22, AA23	Р	I/O supply		
VCC2	A3, A4, A25, B26, L26, M26, N26, Z26, AA3, AA4, AA25	Р	Memory array stepped-up voltage		
VSS	B4, B7, B11, B14, B17, B20, B22, B25, C2, C9, C20, C22, C24, D1, D2, D5, D9, D11, D14, D18, D20, D21, E1, E2, E7, E9, E16, E17, E18, E25, E26, F4, F23, F24, H2, H4, H25, H26, J23, J24, K2, L2, L3, L4, M1, M2, M23, M24, N2, N3, N4, P2, R23, R24, T2, T4, T25, T26, V4, V23, V24, W1, W2, W7, W9, W25, W26, X1, X2, X5, X9, X11, X14, X18, X20, X21, Y2, Y9, Y20, Y22, Y24, Z4, Z7, Z11, Z14, Z17, Z20, Z22, Z25	G	Global ground		

⁽¹⁾ I = Input, O = Output, P = Power, G = Ground, NC = No Connect



5 Specifications

5.1 Absolute Maximum Ratings

Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

		MIN	MAX	UNIT
SUPPLY VOLTAG	BES			
V _{DD}	Supply voltage for LVCMOS core logic ⁽¹⁾	-0.5	2.3	V
V _{DDI}	Supply voltage for LVDS Interface ⁽¹⁾	-0.5	2.3	V
V _{CC2}	Micromirror Electrode and HVCMOS voltage ⁽¹⁾ (2)	-0.5	11	V
V _{MBRST}	Input voltage for MBRST pins ⁽¹⁾	-17.5	22.5	V
V _{DDI} – V _{DD}	Supply voltage delta (absolute value) ⁽³⁾		0.3	V
INPUT VOLTAGE	S			
V _{ID}	Input differential voltage for LVDS pins (absolute value)		500	mV
V_LVCMOS	Input voltage for all other input pins ⁽¹⁾	-0.3	V _{DDI} + 0.3	V
ENVIRONMENTA	ıL .			
т	Temperature, operating ⁽⁴⁾	0	90	°C
T _{ARRAY}	Temperature, nonoperating ⁽⁴⁾	-40	90	°C
T _{DP}	Dew point temperature, operating and non-operating (noncondensing)		81	°C

- (1) All voltages are referenced to common ground V_{SS}. V_{DD}, V_{DDI}, and V_{CC2} power supplies are all required for all DMD operating modes.
- (2) V_{CC2} supply transients must fall within specified voltages.
- (3) Exceeding the recommended allowable voltage difference between V_{DD} and V_{DDI} may result in excessive current draw.
- (4) The array temperature cannot be measured directly and must be computed analytically from the temperature measured at test point 1 (TP1), shown in Figure 6-1 using the *Micromirror Array Temperature Calculation*.

5.2 Storage Conditions

Applicable for the DMD as a component or non-operating in a system

		MIN	MAX	UNIT
T _{DMD}	DMD storage temperature	-40	80	°C
T _{DP-AVG}	Average dew point temperature (noncondensing) ⁽¹⁾		28	°C
T _{DP-ELR}	Elevated dew point temperature range (noncondensing) ⁽²⁾	28	36	°C
CT _{ELR}	Cumulative time in elevated dew point temperature range		24	months

- (1) This is the average over time (including storage and operating) that the device is not in the elevated dew point temperature range.
- (2) Exposure to dew point temperatures in the elevated range during storage and operation must be limited to less than a total cumulative time of CT_{ELR}.

5.3 ESD Ratings

SYMBOL	PARAMETER	DESCRIPTION	VALUE	UNIT
V	Electrostatic	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±2000	V
V _(ESD) discharge	discharge	Charged device model (CDM), per ANSI/ESDA/JEDEC JS-002 ⁽²⁾	±500	V
V _(ESD)	Electrostatic discharge (MBRST PINS)	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001	±150	V

- JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.

Product Folder Links: DLP780NE

5.4 Recommended Operating Conditions

Over operating free-air temperature range (unless otherwise noted). The functional performance of the device specified in this data sheet is achieved when operating the device within the limits defined by this table. No level of performance is implied when operating the device above or below these limits.

miphod Wilom op	erating the device above or below these limits.	MIN	NOM	MAX	UNIT
VOLTAGE SUPPI	LY				
V _{DD}	Supply voltage for LVCMOS core logic ⁽¹⁾	1.65	1.8	1.95	V
V _{DDI}	Supply voltage for LVDS Interface ⁽¹⁾	1.65	1.8	1.95	V
V _{CC2}	Micromirror Electrode and HVCMOS voltage ⁽¹⁾ (2)	9.5	10	10.5	V
V _{MBRST}	Micromirror Bias / Reset Voltage ⁽¹⁾	-17		21.5	V
V _{DD} – V _{DDI}	Supply voltage delta (absolute value) ⁽³⁾		0	0.3	V
LVCMOS	, , ,				
V _{IH(DC)}	Input High Voltage	0.7 × VDD		V _{DD} + 0.3	V
V _{IL(DC)}	Input Low Voltage	-0.3		0.3 × VDD	V
V _{IH(AC)}	Input High Voltage	0.8 × VDD		V _{DD} + 0.3	V
V _{IL(AC)}	Input Low Voltage	-0.3		0.2 × VDD	V
I _{OH}	High-level Output Current			2	mA
I _{OL}	Low-level Output Current	-2			mA
t _{PWRDNZ}	PWRDNZ pulse width ⁽⁴⁾	10			ns
SCP INTERFACE					
F _{SCPCLK}	SCP clock frequency	50		500	kHz
SCPCLK _{DCDIN}	SCP Clk Input duty cycle	40%		60%	
LVDS INTERFAC					
F _{CLOCK}	Clock frequency for LVDS interface (all channels), DCLK ⁽⁵⁾			400	MHz
DCD _{IN}	Input CLK Duty Cycle Distortion tolerance	44%		56%	
V _{ID}	Input differential voltage (absolute value) ⁽⁶⁾	150	300	440	mV
V _{CM}	Common mode voltage ⁽⁶⁾	1100	1200	1300	mV
V _{LVDS}	LVDS voltage ⁽⁶⁾	880		1520	mV
t _{LVDS_RSTZ}	Time required for LVDS receivers to recover from PWRDNZ	2			μs
Z _{IN}	Internal differential termination resistance	80	100	120	Ω
Z _{LINE}	Line differential impedance (PWB/trace)	90	100	110	Ω
ENVIRONMENTA	NL				
-	Array temperature, long-term operational ⁽⁷⁾ (8) (9)	10		40 to 70 ⁽¹⁰⁾	°C
T _{ARRAY}	Array temperature, short-term operational, 500 hour max ⁽⁸⁾ (11)	0		10	°C
T _{DP -AVG}	Average dew point average temperature (non–condensing) ⁽¹²⁾			28	°C
T _{DP-ELR}	Elevated dew point temperature range (non-condensing) ⁽¹³⁾	28		36	°C
CT _{ELR}	Cumulative time in elevated dew point temperature range			24	Months
Q _{AP-ILL}	Window aperture illumination overfill ⁽¹⁴⁾ (15) (16)			17	W/cm ²
SOLID STATE ILI	LUMINATION	•			
ILL _{UV}	Illumination power at wavelengths < 410nm ⁽⁷⁾ (18)			10	mW/cm ²
ILL _{VIS}	Illumination power at wavelengths ≥ 410nm and ≤ 800nm ⁽¹⁷⁾ (18)			22	W/cm ²
ILL _{IR}	Ilumination power at wavelengths > 800nm ⁽¹⁸⁾			10	mW/cm ²
ILL _{BLU}	Illumination power at wavelengths ≥ 410nm and ≤ 475nm ⁽¹⁷⁾ (18)			7.5	W/cm ²
ILL _{BLU1}	Illumination power at wavelengths ≥ 410nm and ≤ 440nm ⁽¹⁷⁾ (18)			1.1	W/cm ²

All voltages are referenced to common ground V_{SS}. V_{DD}, V_{DDI}, and V_{CC2} power supplies are all required for proper DMD operation.
 V_{SS} must also be connected.

⁽²⁾ V_{CC2} supply transients must fall within specified max voltages.

- (3) To prevent excess current, the supply voltage delta |V_{DDI} V_{DD}| must be less than the specified limit. See the DMD Power Supply Requirements.
- (4) PWRDNZ input pin resets the SCP and disables the LVDS receivers. The PWRDNZ input pin overrides the SCPENZ input pin and tristates the SCPDO output pin.
- (5) See LVDS clock timing requirements in *Timing Requirements*.
- (6) See Figure 5-5 for the LVDS waveform requirements.
- (7) Simultaneous exposure of the DMD to the maximum *Recommend Operating Conditions* for temperature and UV illumination reduces device lifetime.
- (8) The array temperature cannot be measured directly and must be computed analytically from the temperature measured at test point 1 (TP1), shown in Figure 6-1 using the *Micromirror Array Temperature Calculation*.
- (9) Long-term is defined as the usable life of the device.
- (10) Per Figure 5-1, the maximum operational array temperature is derated based on the micromirror landed duty cycle that the DMD experiences in the end application. See *Micromirror Landed-on/Landed-off Duty Cycle* for a definition of micromirror landed duty cycle.
- (11) Short-term is the total cumulative time over the useful life of the device.
- (12) The average over time (including storage and operating) that the device is not in the elevated dew point temperature range.
- (13) Exposure to dew point temperatures in the elevated range during storage and operation is limited to less than a total cumulative time of CT_{FI R}.
- (14) Applies to region defined in Figure 5-2
- (15) The active area of the DMD is surrounded by an aperture on the inside of the DMD window surface that masks structures of the DMD device assembly from normal view. The aperture is sized to anticipate several optical conditions. Overfill light illuminating the area outside the active array can scatter and create adverse effects to the performance of an end application using the DMD. Minimizing the light flux incident outside the active array is a design requirement of the illumination optical system. Depending on the particular optical architecture and assembly tolerances of the optical system, the amount of overfill light on the outside of the active array may cause system performance degradation.
- (16) To calculate see Window Aperture Illumination Overfill Calculation.
- (17) The maximum allowable optical power incident on the DMD is limited by the maximum optical power density for each wavelength range specified and the micromirror array temperature (T_{ARRAY}).
- (18) To calculate see Micromirror Power Density Calculation.

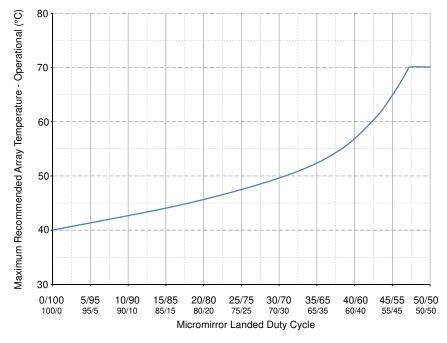


Figure 5-1. Maximum Recommended Array Temperature—Derating Curve

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated

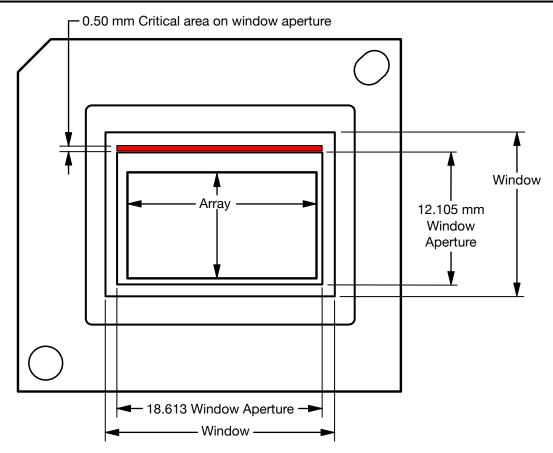


Figure 5-2. Illumination Overfill Diagram—Critical Area

5.5 Thermal Information

	DLP780NE	
THERMAL METRIC	FYU	UNIT
	350 PINS	
Thermal resistance, active area to test point 1 (TP1) ⁽¹⁾	0.55	°C/W

The DMD is designed to conduct absorbed and dissipated heat to the back of the package. The cooling system must be capable of maintaining the DMD within the temperature range specified in the Recommended operating conditions.
The total heat load on the DMD is largely driven by the incident light absorbed by the active area, although other contributions include light energy absorbed by the window aperture and electrical power dissipation of the array.
Minimizing the light energy falling outside the window clear aperture is a design requirement of the optical system because any additional thermal load in this area can significantly degrade the reliability of the device.

5.6 Electrical Characteristics

Over operating free-air temperature range (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power S	upply Information	·				
I _{DD}	Supply current V _{DD} ⁽¹⁾				800	mA
I _{DDI}	Supply current V _{DDI} ⁽¹⁾				170	mA
I _{CC2}	Supply current V _{CC2}				40	mA
P _{DD}	Supply power V _{DD} ⁽¹⁾				1560	mW
PDDI	Supply power V _{DDI} ⁽¹⁾				332	mW
PCC2	Supply power V _{CC2} ⁽¹⁾				420	mW
LVCMOS	· · · · · · · · · · · · · · · · · · ·					

Copyright © 2024 Texas Instruments Incorporated



5.6 Electrical Characteristics (continued)

Over operating free-air temperature range (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
V _{OH}	High-level output voltage	I _{OH} = 2mA	0.8			× V _{DD}
V _{OL}	Low-level output voltage	I _{OL} = 2mA			0.2	× V _{DD}
I _{OZ}	High impedance output current	V _{DD} = 1.95V			10	μA
I _{IL}	Low-level input current	VDD= 1.95V, Vin = 0V	-60			μA
I _{IH}	High-level input current ⁽²⁾	VDD = 1.95V, Vin = VDD			200	μA
Capacitances						
C _I	Input capacitance: LVDS pins	f = 1MHz			20	pF
C _I	Input capacitance ⁽²⁾	f = 1MHz			15	pF
Co	Output capacitance ⁽²⁾	f = 1MHz			15	pF
C _{IM}	Input capacitance for MBRST[0:14] pins	f = 75kHz	360	410	520	pF

⁽¹⁾ To prevent excess current, the supply voltage delta |VDDI - VDD| must be less than the specified limit in Absolute Maximum Ratings.

5.7 Timing Requirements

Over Recommended Operating Conditions (unless otherwise noted)

	PARAMETER DESCRIPTION	MIN	NOM MAX	UNIT
SCP				
t _{SCP_DS}	SCPDI clock setup time (before SCPCLK falling-edge) ⁽¹⁾	800		ns
t _{SCP_DH}	SCPDI hold time (after SCPCLK falling-edge) ⁽¹⁾	900		ns
t _{SCP_NEG_EN}	Time between falling edge of SCPENZ and the rising edge of SCPCLK ⁽¹⁾	1		μs
t _{SCP_POS_EN}	Time between falling edge of SCPCLK and the rising edge of SCPENZ ⁽¹⁾	1		μs
t _{SCP_OUT_EN}	Time required for SCP output buffer to recover after SCPENZ (from tri-state).(1)		960	ns
t _{SCP_PW_ENZ}	SCPENZ inactive pulse width (high-level)	1		1/F _{scpclk}
t _r	Rise time (20% to 80%). See ⁽²⁾		200	ns
t _f	Fall time (80% to 20%). See ⁽²⁾		200	ns
LVDS			,	
t _{R_LVDS}	Rise time (20% to 80%). See ⁽³⁾		500	ps
t _{F_LVDS}	Fall time (80% to 20%). See (3)		500	ps
t _C	Clock Cycle Duration for DCLK_C and DCLK_D ⁽⁴⁾	2.5		ns
t _W	Pulse Duration for DCLK_C/D ⁽⁴⁾	1.19		ns
t _{SU_data}	Setup Time for High-speed data(15:0) before DCLK ⁽⁴⁾	350		ps
t _{SU_sctrl}	Setup Time for SCTRL before DCLK ⁽⁴⁾	330		ps
t _{H_data}	Hold time for High-speed data(15:0) after DCLK ⁽⁴⁾	150		ps
t _{H_sctrl}	Hold Time for SCTRL after DCLK ⁽⁴⁾	170		ps
t _{SKEW_C2D}	Skew tolerance between Channel C and Channel D ⁽⁵⁾ (6) (7)	-1.25	1.25	ns

⁽¹⁾ See Figure 5-3.

Product Folder Links: DLP780NE

⁽²⁾ Applies to LVCMOS pins only. Excludes LVDS pins and test pad pins

⁽²⁾ See Figure 5-4.

⁽³⁾ See Figure 5-6.

⁽⁴⁾ See Figure 5-7.

⁽⁵⁾ See Figure 5-8.

⁽⁶⁾ Channel C (Bus C) includes the following LVDS pairs: DCLK_C, SCTRL_C, and D_C

⁷⁾ Channel D (Bus D) includes the following LVDS pairs: DCLK_D, SCTRL_D, and D_D.

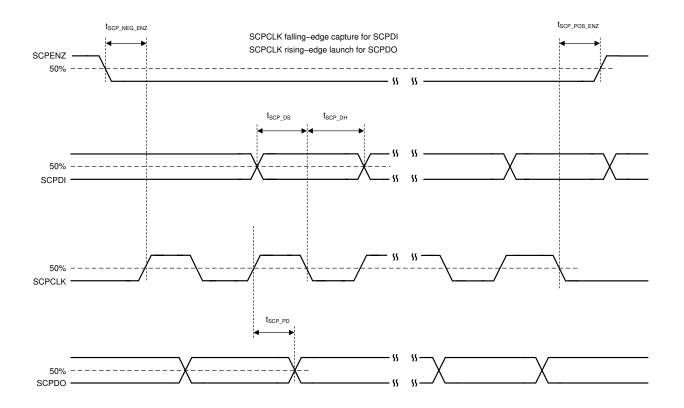


Figure 5-3. SCP Timing Parameters

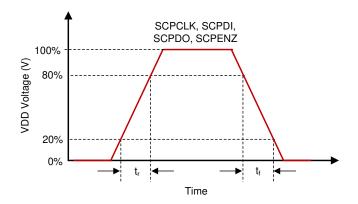


Figure 5-4. SCP Rise and Fall Times



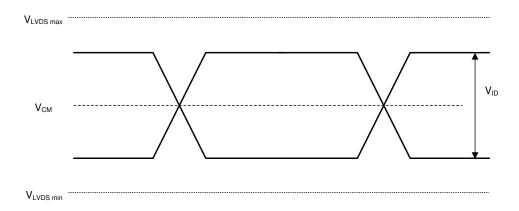


Figure 5-5. LVDS Waveform Parameters

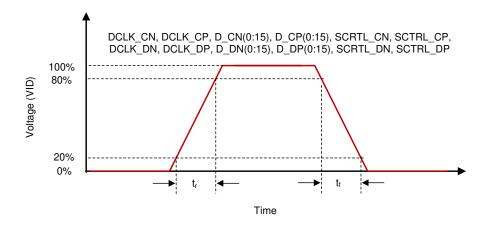


Figure 5-6. LVDS Rise and Fall Times

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated

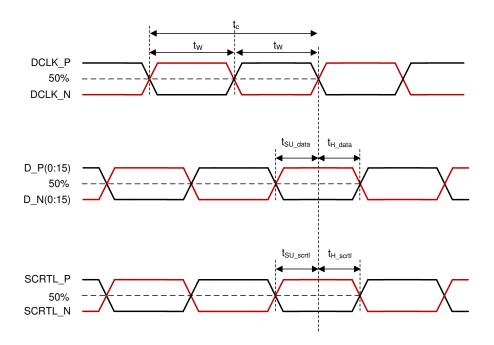


Figure 5-7. LVDS Timing Parameters



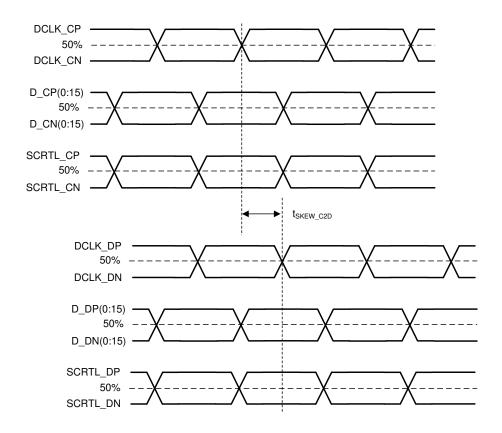


Figure 5-8. LVDS Skew Parameters

5.8 System Mounting Interface Loads

PARAMETER	MIN	NOM	MAX	UNIT
When loads are applied on both electrical and thermal interfa	ace areas			
Maximum load to be applied to the electrical interface area ⁽¹⁾			111	N
Maximum load to be applied to the thermal interface area ⁽¹⁾			111	N
When load is applied on the electrical interface area only				
Maximum load to be applied to the electrical interface area ⁽¹⁾			222	N
Maximum load to be applied to the thermal interface area ⁽¹⁾			0	N

(1) The load must be uniformly applied in the corresponding areas shown in Figure 5-9.



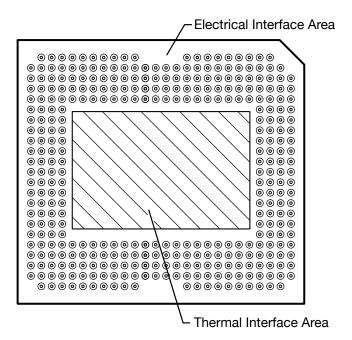


Figure 5-9. System Mounting Interface Loads



5.9 Micromirror Array Physical Characteristics

PARAMETER DESCRIPTION			UNIT
M	Number of active columns (1)	1920	micromirrors
N	Number of active rows (1)		micromirrors
P	Micromirror (pixel) pitch ⁽¹⁾		μm
Micromirror active array width ⁽¹⁾	Micromirror pitch x number of active columns	17.280	mm
Micromirror active array height ⁽¹⁾	Micromirror pitch x number of active rows	9.720	mm
Micromirror active border (top and bottom)(2)	Pond of micromirror (POM)	12	micromirrors/side
Micromirror active border (right and left) ⁽²⁾	Pond of micromirror (POM)	12	micromirrors/side

- (1) See Figure 5-10.
- (2) The structure and qualities of the border around the active array includes a band of partially functional micromirrors called the POM. These micromirrors are structurally and/or electrically prevented from tilting toward the bright or ON state, but still require an electrical bias to tilt toward OFF.

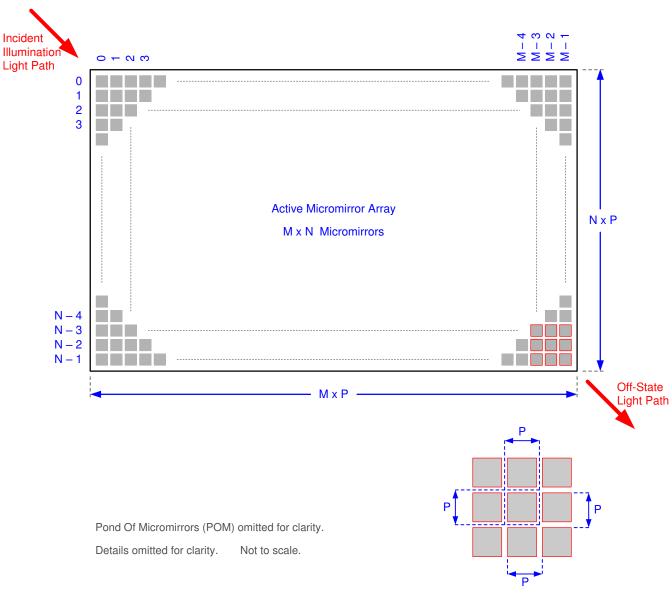


Figure 5-10. Micromirror Array Physical Characteristics

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated

5.10 Micromirror Array Optical Characteristics

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Micromirror tilt an	gle ^{(2) (3) (4) (5)}	Landed state ⁽¹⁾	13.5	14.5	15.5	degrees
Micromirror crossover time ⁽⁶⁾		typical performance		3		μs
Micromirror switch	ning time ⁽⁷⁾	typical performance	10			μs
	Bright pixel(s) in active area ⁽⁹⁾	Gray 10 screen ⁽¹²⁾			0	
	Bright pixel(s) in the POM ⁽⁹⁾ (11)	Gray 10 screen ⁽¹²⁾			1	
Image performance (8)	Dark pixel(s) in the active area ⁽¹⁰⁾	White screen ⁽¹³⁾			4	micromirrors
periormanoe	Adjacent pixel(s) ⁽¹⁶⁾	Any screen			0	
	Unstable pixel(s) in active area ⁽¹⁵⁾	Any screen			0	

- (1) Measured relative to the plane formed by the overall micromirror array.
- (2) Additional variation exists between the micromirror array and the package datums.
- (3) Represents the variation that can occur between any two individual micromirrors, located on the same device or located on different devices
- (4) For some applications, it is critical to account for the micromirror tilt angle variation in the overall system optical design. With some system optical designs, the micromirror tilt angle variation within a device may result in perceivable non-uniformities in the light field reflected from the micromirror array. With some system optical designs, the micromirror tilt angle variation between devices may result in colorimetry variations, system efficiency variations or system contrast variations.
- (5) Refer to Figure 5-11.
- (6) The time required for a micromirror to nominally transition from one landed state to the opposite landed state.
- (7) The minimum time between successive transitions of a micromirror.
- (8) Conditions of Acceptance: all DMD image performance returns are evaluated using the following projected image test conditions:

Test set degamma shall be linear.

Test set brightness and contrast shall be set to nominal.

The diagonal size of the projected image shall be a minimum of 60 inches.

The projections screen shall be 1× gain.

The projected image shall be inspected from an 8-foot minimum viewing distance.

The image shall be in focus during all image performance tests.

- (9) Bright pixel definition: a single pixel or mirror that is stuck in the ON position and is visibly brighter than the surrounding pixels
- (10) Dark pixel definition: a single pixel or mirror that is stuck in the OFF position and is visibly darker than the surrounding pixels
- (11) POM definition: rectangular border of off-state mirrors surrounding the active area
- (12) Gray 10 screen definition: a full screen with RGB values set to R = 10/255, G = 10/255, B = 10/255
- (13) White screen definition: a full screen with RGB values set to R=255/255, G = 255/255, B = 255/255
- (14) Adjacent pixel definition: Two or more stuck pixels sharing a common border or common point, also referred to as a cluster.
- (15) Unstable pixel definition: A single pixel or mirror that does not operate in sequence with parameters loaded into memory. The unstable pixel appears to be flickering asynchronously with the image.

Copyright © 2024 Texas Instruments Incorporated



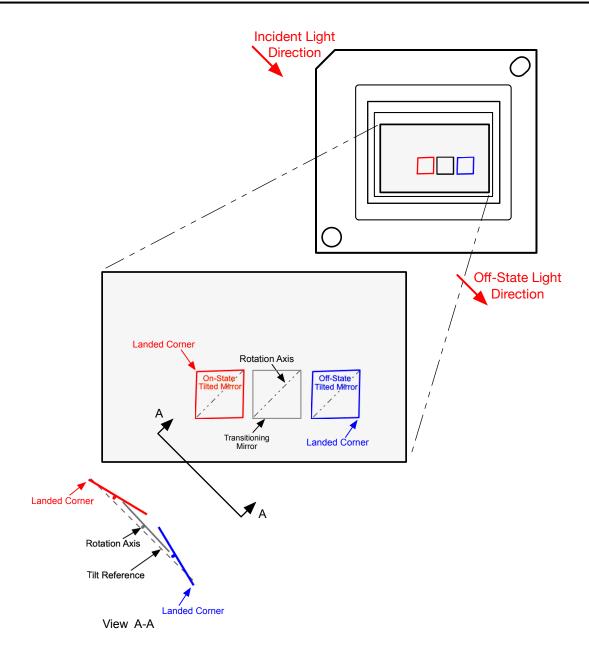


Figure 5-11. Micromirror Landed Orientation and Tilt

5.11 Window Characteristics

PARAMETER DESCRIPTION	Test Conditions	MIN NOM	MAX	UNIT
Window Material		Corning EagleXG		
Window Refractive Index	546.1nm	1.5119		

5.12 Chipset Component Usage Specification

Reliable function and operation of the DLP780NE DMD requires that it be used in conjunction with the other components of the applicable DLP chipset, including those components that contain or implement TI DMD

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated



control technology. TI DMD control technology consists of the TI technology and devices used for operating or controlling a DLP DMD.

Note

TI assumes no responsibility for image quality artifacts or DMD failures caused by optical system operating conditions exceeding limits described previously.

Copyright © 2024 Texas Instruments Incorporated


6 Detailed Description

6.1 Overview

The DMD is a 0.78-inch diagonal spatial light modulator which consists of an array of highly reflective aluminum micromirrors. The DMD is an electrical input, optical output micro-optical-electrical-mechanical system (MOEMS). The fast switching speed of the DMD micromirrors combined with advanced DLP image processing algorithms enables the micromirror array to display a full 1920 × 1080 pixel image at a 120Hz frame rate. The electrical interface is a low voltage differential signaling (LVDS) interface. The DMD consists of a twodimensional array of 1-bit CMOS memory cells. The array is organized in a grid of M memory cell columns by N memory cell rows. Refer to the Section 6.2. The positive or negative deflection angle of the micromirrors can be individually controlled by changing the address voltage of underlying CMOS addressing circuitry and micromirror reset signals (MBRST).

The DLP 0.78-inch Full HD chipset is comprised of the DLP780NE DMD, DLPC4430 display controller, the DLPA300 micromirror driver and the DLPA100 power management and motor driver. For reliable operation, the DLP780NE DMD must always be used with the DLP display controller and the power and motor driver specified in the chipset.

6.2 Functional Block Diagram

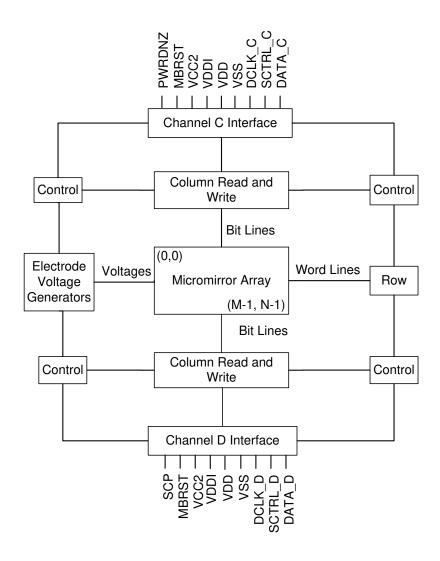

Product Folder Links: DLP780NE

6.3 Feature Description

6.3.1 Power Interface

The DMD requires two DC voltages: 1.8-V source for VDD and VDDI, and a 10-V supply for VCC2. In a typical configuration, 3.3V is created by the DLPA100 power management and motor driver and is used on the DMD board to create the 1.8V. The DLPA300 micromirror driver takes in 12V and creates the micromirror reset voltages.

6.3.2 Timing

The data sheet specifies timing at the device pin. For output timing analysis, the tester pin electronics and its transmission line effects must be considered. Timing reference loads are not intended to be precise representations of any particular system environment or depiction of the actual load presented by a production test. TI recommends that system designers use IBIS or other simulation tools to correlate the timing reference load to a system environment. Use the specified load capacitance value for characterization and measurement of AC timing signals only. This load capacitance value does not indicate the maximum load the device is capable of driving.

6.4 Device Functional Modes

DMD functional modes are controlled by the DLPC4430 display controller. See the DLPC4430 display controller data sheet or contact a TI applications engineer.

6.5 Optical Interface and System Image Quality Considerations

TI assumes no responsibility for end-equipment optical performance. Achieving the desired end-equipment optical performance involves making trade-offs between numerous component and system design parameters. Optimizing system optical performance and image quality strongly relate to optical system design parameter trades. Although it is not possible to anticipate every conceivable application, projector image quality and optical performance is contingent on compliance to the optical system operating conditions described in the following sections.

6.5.1 Numerical Aperture and Stray Light Control

TI recommends that the light cone angle defined by the numerical aperture of the illumination optics is the same as the light cone angle defined by the numerical aperture of the projection optics. This angle must not exceed the nominal device micromirror tilt angle unless appropriate apertures are added in the illumination and projection pupils to block out flat-state and stray light from the projection lens. The DLP780NE has a 14.5° tilt angle which corresponds to the f/2.0 numerical aperture. The micromirror tilt angle defines DMD capability to separate the "ON" optical path from any other light path, including undesirable flat-state specular reflections from the DMD window, DMD border structures, or other system surfaces near the DMD such as prism or lens surfaces. If the numerical aperture exceeds the micromirror tilt angle, or if the projection numerical aperture angle is more than 2° larger than the illumination numerical aperture angle (and vice versa), contrast degradation and objectionable artifacts in the display border or active area are possible.

6.5.2 Pupil Match

TI's optical and image quality specifications assume that the exit pupil of the illumination optics is nominally centered within 2° of the entrance pupil of the projection optics. Misalignment of pupils can create objectionable artifacts in the display border and active area, which may require additional system apertures to control, especially if the numerical aperture of the system exceeds the pixel tilt angle.

6.5.3 Illumination Overfill

The active area of the device is surrounded by an aperture on the inside DMD window surface that masks structures of the DMD chip assembly from normal view, and is sized to anticipate several optical operating conditions. Overfill light illuminating the window aperture can create artifacts from the edge of the window aperture opening and other surface anomalies that may be visible on the screen. Design the illumination optical system to limit light flux incident anywhere on the window aperture from exceeding approximately 10% of the



average flux level in the active area. Depending on the particular system optical architecture, overfill light may have to be further reduced below the suggested 10% level in order to be acceptable.

6.6 Micromirror Array Temperature Calculation

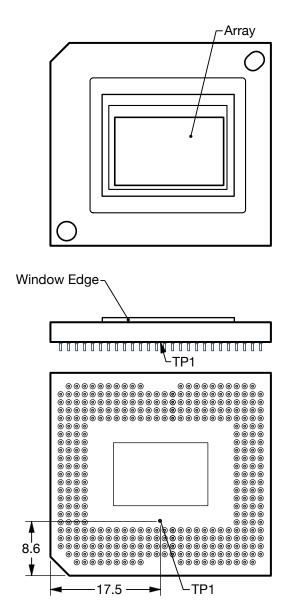


Figure 6-1. DMD Thermal Test Point

Micromirror array temperature cannot be measured directly, therefore it must be computed analytically from a measurement point on the outside of the package, the package thermal resistance, the electrical power, and the illumination heat load. The following equations show the relationship between array temperature and the reference ceramic temperature, thermal test TP1, shown above:

$$T_{ARRAY} = T_{CERAMIC} + (Q_{ARRAY} \times R_{ARRAY-TO-CERAMIC})$$
(1)

$$Q_{ARRAY} = Q_{ELECTRICAL} + Q_{ILLUMINATION}$$
 (2)

where

Copyright © 2024 Texas Instruments Incorporated Product Folder Links: *DLP780NE*

www.ti.com

- T_{ARRAY} = Computed array temperature (°C)
- T_{CERAMIC} = Measured ceramic temperature (°C) (TP1 location)
- R_{ARRAY-TO-CERAMIC} = Thermal resistance of package specified in Section 5.5 from array to ceramic TP1 (°C/Watt)
- Q_{ARRAY} = Total DMD power on the array (W) (electrical + absorbed)
- Q_{ELECTRICAL} = Nominal electrical power (W)
- Q_{INCIDENT} = Incident illumination optical power (W)
- Q_{ILLUMINATION} = (DMD average thermal absorptivity × Q_{INCIDENT}) (W)
- DMD average thermal absorptivity = 0.55

The electrical power dissipation of the DMD is variable and depends on the voltages, data rates, and operating frequencies. A nominal electrical power dissipation to use when calculating array temperature is 1.0W. The absorbed power from the illumination source is variable and depends on the operating state of the micromirrors and the intensity of the light source. The equations shown above are valid for a single chip or multichip DMD system. It assumes an illumination distribution of 83.7% on the active array, and 16.3% on the array border.

The sample calculation for a typical projection application is as follows:

$$Q_{INCIDENT} = 40W \text{ (measured)}$$
 (3)

$$T_{CERAMIC} = 55.0$$
°C (measured) (4)

$$Q_{ELECTRICAL} = 1.0W (5)$$

$$Q_{ARRAY} = 1.0W + (0.55 \times 40W) = 23.00W \tag{6}$$

$$T_{ARRAY} = 55.0^{\circ}C + (23.00W \times 0.55^{\circ}C/W) = 67.7^{\circ}C$$
 (7)

6.7 Micromirror Power Density Calculation

The calculation of the optical power density of the illumination on the DMD in the different wavelength bands uses the total measured optical power on the DMD, percent illumination overfill, area of the active array, and ratio of the spectrum in the wavelength band of interest to the total spectral optical power.

- ILL_{UV} = [OP_{UV-RATIO} × Q_{INCIDENT}] × 1000 ÷ A_{ILL} (mW/cm²)
- ILL_{VIS} = [OP_{VIS-RATIO} × Q_{INCIDENT}] ÷ A_{ILL} (W/cm²)
- ILL_{IR} = [OP_{IR-RATIO} × Q_{INCIDENT}] × 1000 ÷ A_{ILL} (mW/cm²)
- ILL_{BLU} = [OP_{BLU-RATIO} × Q_{INCIDENT}] ÷ A_{ILL} (W/cm²)
- ILL_{BLU1} = [OP_{BLU1-RATIO} × Q_{INCIDENT}] ÷ A_{ILL} (W/cm²)
- $A_{III} = A_{ARRAY} \div (1 OV_{III}) (cm^2)$

where:

- ILL_{UV} = UV illumination power density on the DMD (mW/cm²)
- ILL_{VIS} = VIS illumination power density on the DMD (W/cm²)
- ILL_{IR} = IR illumination power density on the DMD (mW/cm²)
- ILL_{BLU} = BLU illumination power density on the DMD (W/cm²)
- ILL_{BLU1} = BLU1 illumination power density on the DMD (W/cm²)
- A_{II I} = illumination area on the DMD (cm²)

Copyright © 2024 Texas Instruments Incorporated



- Q_{INCIDENT} = total incident optical power on DMD (W) (measured)
- A_{ARRAY} = area of the array (cm²) (data sheet)
- OV_{ILL} = percent of total illumination on the DMD outside the array (%) (optical model)
- OP_{UV-RATIO} = ratio of the optical power for wavelengths <410nm to the total optical power in the illumination spectrum (spectral measurement)
- OP_{VIS-RATIO} = ratio of the optical power for wavelengths ≥410 and ≤800nm to the total optical power in the illumination spectrum (spectral measurement)
- OP_{IR-RATIO} = ratio of the optical power for wavelengths >800nm to the total optical power in the illumination spectrum (spectral measurement)
- OP_{BLU-RATIO} = ratio of the optical power for wavelengths ≥410 and ≤475nm to the total optical power in the illumination spectrum (spectral measurement)
- OP_{BLU1-RATIO} = ratio of the optical power for wavelengths ≥410 and ≤440nm to the total optical power in the illumination spectrum (spectral measurement)

The illumination area varies and depends on the illumination overfill. The total illumination area on the DMD is the array area and overfill area around the array. The optical model is used to determine the percent of the total illumination on the DMD that is outside the array (OV_{ILL}) and the percent of the total illumination that is on the active array. From these values the illumination area (A_{ILL}) is calculated. The illumination is assumed to be uniform across the entire array.

From the measured illumination spectrum, the ratio of the optical power in the wavelength bands of interest to the total optical power is calculated.

Sample calculation:

Q _{INCIDENT} = 40W (measured)	(8)
A _{ARRAY} = (17.280mm × 9.72mm) ÷ 100 = 1.6796cm ² (data sheet)	(9)
OV _{ILL} = 16.3% (optical model)	(10)
OP _{UV-RATIO} = 0.00017 (spectral measurement)	(11)
OP _{VIS-RATIO} = 0.99977 (spectral measurement)	(12)
OP _{IR-RATIO} = 0.00006 (spectral measurement)	(13)
OP _{BLU-RATIO} = 0.28100 (spectral measurement)	(14)
OP _{BLU1-RATIO} = 0.03200 (spectral measurement)	(15)
$A_{ILL} = 1.6796 \text{cm}^2 \div (1 - 0.163) = 2.0067 \text{cm}^2$	(16)
$ILL_{UV} = [0.00017 \times 40W] \times 1000 \div 2.0067 \text{cm}^2 = 3.39 \text{mW/cm}^2$	(17)
$ILL_{VIS} = [0.99977 \times 40W] \div 2.0067 \text{cm}^2 = 19.93 \text{W/cm}^2$	(18)
$ILL_{IR} = [0.00006 \times 40W] \times 1000 \div 2.0067 \text{cm}^2 = 1.20 \text{mW/cm}^2$	(19)
$ILL_{BLU} = [0.28100 \times 40W] \div 2.0067 \text{cm}^2 = 5.60W/\text{cm}^2$	(20)

Submit Document Feedback

 $ILL_{BIJJ1} = [0.03200 \times 40W] \div 2.0067 \text{cm}^2 = 0.64W/\text{cm}^2$

Copyright © 2024 Texas Instruments Incorporated

(21)

6.8 Window Aperture Illumination Overfill Calculation

The amount of optical overfill on the critical area of the window aperture cannot be measured directly. For systems with uniform illumination on the array the amount is determined using the total measured incident optical power on the DMD, and the ratio of the total optical power on the DMD that is on the defined critical area. The optical model is used to determine the percent of optical power on the window aperture critical area and estimate the size of the area.

Q_{AP-ILL} = [Q_{INCIDENT} × OP_{AP ILL RATIO}] ÷ A_{AP ILL} (W/cm²)

where:

- Q_{AP-ILL} = window aperture illumination overfill (W/cm²)
- Q_{INCIDENT} = total incident optical power on the DMD (Watts) (measured)
- OP_{AP_ILL_RATIO} = ratio of the optical power on the critical area of the window aperture to the total optical power on the DMD (optical model)
- A_{AP-ILL} = size of the window aperture critical area (cm²) (datasheet)
- OP_{CA RATIO} = percent of the window aperture critical area with incident optical power (%) (optical model)

Sample calculation:

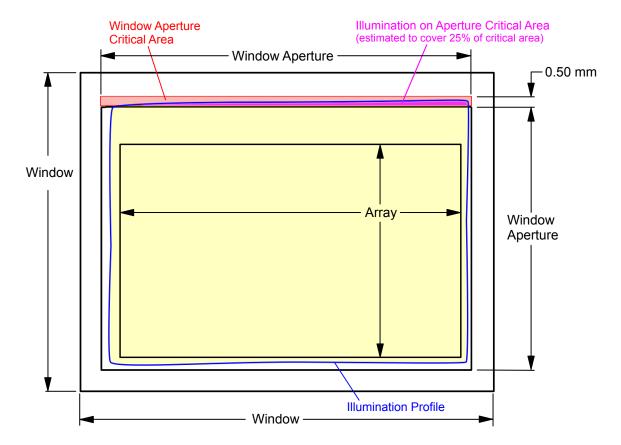


Figure 6-2. Window Aperture Overfill Example

See the figure for the length of the critical aperture.

$$Q_{\text{INCIDENT}} = 40W \text{ (measured)}$$
 (22)



OP _{AP_ILL_RATIO} = 0.312% (optical model)	(23)
OV _{CA_RATIO} = 25% (optical model)	(24)
Length of the window aperture for critical area = 1.8613cm (data sheet)	(25)
Width of critical area = 0.050cm (data sheet)	(26)
$A_{AP-ILL} = 1.8613 \text{cm} \times 0.050 \text{cm} = 0.093065 \text{ (cm}^2)$	(27)
$Q_{AP-ILL} = (40W \times 0.00312) \div (0.093065cm^2 \times 0.25) = 5.4 (W/cm^2)$	(28)

6.9 Micromirror Landed-On/Landed-Off Duty Cycle

6.9.1 Definition of Micromirror Landed-On/Landed-Off Duty Cycle

The micromirror landed-on/landed-off duty cycle (landed duty cycle) denotes the percentage of time that an individual micromirror is landed in the ON state versus the amount of time the same micromirror is landed in the OFF state.

For example, a landed duty cycle of 100/0 indicates that the referenced pixel is in the ON state 100% of the time (and in the OFF state 0% of the time); whereas 0/100 indicates that the pixel is in the OFF state 100% of the time. Likewise, 50/50 indicates that the pixel is ON for 50% of the time (and OFF for 50% of the time).

Note that when assessing landed duty cycle, the time spent switching from one state (ON or OFF) to the other state (OFF or ON) is considered negligible and is thus ignored.

Since a micromirror can only be landed in one state or the other (ON or OFF), the two numbers (percentages) always add to 100.

6.9.2 Landed Duty Cycle and Useful Life of the DMD

Knowing the long-term average landed duty cycle (of the end product or application) is important because subjecting all (or a portion) of the DMD micromirror array (also called the active array) to an asymmetric landed duty cycle for a prolonged period of time can reduce the DMD useful life.

Note that it is the symmetry/asymmetry of the landed duty cycle that is of relevance. The symmetry of the landed duty cycle is determined by how close the two numbers (percentages) are to being equal. For example, a landed duty cycle of 50/50 is perfectly symmetrical whereas a landed duty cycle of 100/0 or 0/100 is perfectly asymmetrical.

6.9.3 Landed Duty Cycle and Operational DMD Temperature

Operational DMD temperature and landed duty cycle interact to affect DMD useful life, and this interaction can be exploited to reduce the impact that an asymmetrical landed duty cycle has on the DMD useful life. This is quantified in the derating curve shown in Figure 5-1.

The importance of this curve is that:

- All points along this curve represent the same useful life.
- All points above this curve represent lower useful life (and the further away from the curve, the lower the useful life).
- All points below this curve represent higher useful life (and the further away from the curve, the higher the useful life).

In practice, this curve specifies the maximum operating DMD temperature for a given long-term average landed duty cycle.

Product Folder Links: DLP780NE

6.9.4 Estimating the Long-Term Average Landed Duty Cycle of a Product or Application

During a given period of time, the landed duty cycle of a given pixel follows from the image content being displayed by that pixel.

For example, in the simplest case, when displaying pure-white on a given pixel for a given time period, that pixel operates under a 100/0 landed duty cycle during that time period. Likewise, when displaying pure-black, the pixel operates under a 0/100 landed duty cycle.

Between the two extremes (ignoring for the moment color and any image processing that may be applied to an incoming image), the landed duty cycle tracks one-to-one with the gray scale value, as shown in Table 6-1.

GRAYSCALE VALUE LANDED DUTY CYCLE 0% 0/100 10% 10/90 20/80 20% 30% 30/70 40% 40/60 50% 50/50 60% 60/40 70% 70/30 80/20 80% 90/10 90%

Table 6-1. Grayscale Value and Landed Duty Cycle

Accounting for color rendition (but still ignoring image processing) requires knowing both the color intensity (from 0% to 100%) for each constituent primary color (red, green, and blue) for the given pixel as well as the color cycle time for each primary color, where "color cycle time" is the total percentage of the frame time that a given primary must be displayed in order to achieve the desired white point.

100/0

Use Equation 29 to calculate the landed duty cycle of a given pixel during a given time period.

100%

where

- Red_Cycle_% represents the percentage of the frame time that red is displayed to achieve the desired white point.
- Green_Cycle_% represents the percentage of the frame time that green is displayed to achieve the desired white point.
- Blue_Cycle_% represents the percentage of the frame time that blue is displayed to achieve the desired white point.

For example, assume that the red, green, and blue color cycle times are 30%, 50%, and 20% respectively (to achieve the desired white point), then the landed duty cycle for various combinations of red, green, blue color intensities are shown in Table 6-2 and Table 6-3.

Table 6-2. Example Landed Duty Cycle for Full-Color, Color Percentage

CYCLE PERCENTAGE				
RED	GREEN	BLUE		
30%	50%	20%		

Copyright © 2024 Texas Instruments Incorporated



Table 6-3. Example Landed Duty Cycle for Full-Color

S	SCALE VALUE				
RED	GREEN	BLUE	CYCLE		
0%	0%	0%	0/100		
100%	0%	0%	30/70		
0%	100%	0%	50/50		
0%	0%	100%	20/80		
0%	12%	0%	6/94		
0%	0%	35%	7/93		
60%	0%	0%	18/82		
0%	100%	100%	70/30		
100%	0%	100%	50/50		
100%	100%	0%	80/20		
0%	12%	35%	13/87		
60%	0%	35%	25/75		
60%	12%	0%	24/76		
100%	100%	100%	100/0		

The last factor to account for in estimating the landed duty cycle is any applied image processing. Within the DLPC4430 display controller, the gamma function affects the landed duty cycle.

Gamma is a power function of the form $Output_Level = A \times Input_Level^{Gamma}$, where A is a scaling factor that is typically set to 1.

In the DLPC4430 display controller, gamma is applied to the incoming image data on a pixel-by-pixel basis. A typical gamma factor is 2.2, which transforms the incoming data as shown in Figure 6-3.

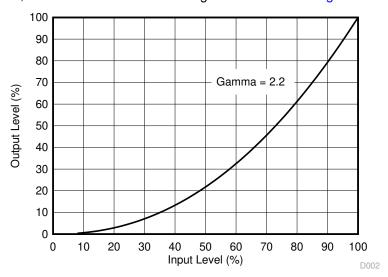


Figure 6-3. Example of Gamma = 2.2

From Figure 6-3, if the gray scale value of a given input pixel is 40% (before gamma is applied), then gray scale value is 13% after gamma is applied. Therefore, it can be seen that since gamma has a direct impact displayed gray scale level of a pixel, it also has a direct impact on the landed duty cycle of a pixel.

Consideration must also be given to any image processing that occurs before the DLPC4430 display controller.

7 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

7.1 Application Information

DMDs are spatial light modulators which reflect incoming light from an illumination source to one of two directions, with the primary direction being into a projection or collection optic. Each application is derived primarily from the optical architecture of the system and the format of the data coming into the DLPC4430 display controller. Typical applications using the DLP780NE DMD include laserTV, smart projectors, enterprise projectors and digital signage.

DMD power-up and power-down sequencing is strictly controlled by the DLPC4430 display controller through the DLPA300. Refer to Section 8.2 for power-up and power-down specifications. For reliable operation, the DLP780NE DMD must always be used with DLPC4430 display controller, a DLPA100 PMIC/Motor driver and a DLPA300 Micromirror Driver.

7.2 Typical Application

The DLP780NE DMD combined with DLPC4430 display controller and a power management device provides Full HD resolution for bright, colorful display applications. A typical display system using LED illumination combines the DLP780NE DMD, DLPC4430 display controller, DLPA300 micromirror driver and DLPA100 PMIC and motor driver. Figure 7-1 shows a system block diagram for this configuration of the DLP 0.78-inch Full HD chipset and additional system components needed. See Figure 7-2 for a block diagram showing the system components needed along with the laser phosphor of the DLP 0.78-inch Full HD chipset. The components include DLP780NE DMD, DLPC4430 display controller and DLPA100 PMIC and motor driver and a DLPA300 micromirror driver.

Copyright © 2024 Texas Instruments Incorporated



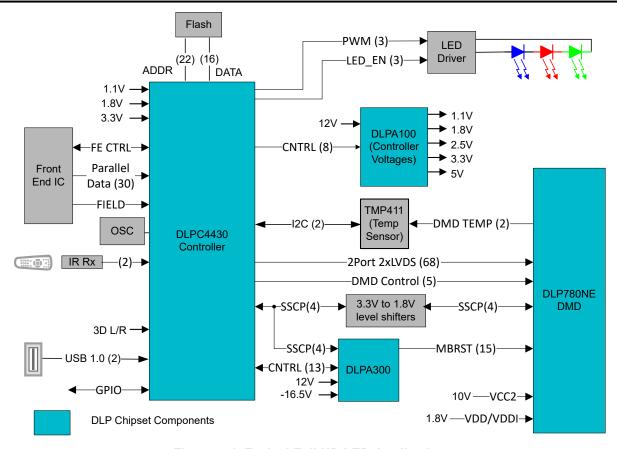


Figure 7-1. Typical Full HD LED Application

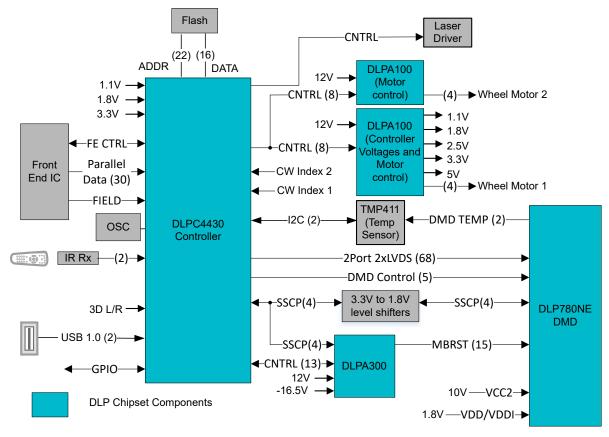


Figure 7-2. Typical Full HD Laser Phosphor Application

7.2.1 Design Requirements

Other core components of the display system include an illumination source, an optical engine for the illumination and projection optics, other electrical and mechanical components, and software. The type of illumination used and desired brightness has a major effect on the overall system design and size.

The display system uses the DLP780NE DMD as the core imaging device and contains a 0.78-inch array of micromirrors. The DLPC4430 display controller is the digital interface between the DMD and the rest of the system, taking digital input from front end receiver and driving the DMD over a high-speed LVDS interface. The DLPA100 PMIC serves as a voltage regulator for the controller, and color filter wheel and phosphor wheel motor control. The DLPA300 provides the DMD reset control.

7.2.2 Detailed Design Procedure

For a complete DLP system, an optical module or light engine is required that contains the DLP780NE DMD, associated illumination sources, optical elements, and necessary mechanical components.

For reliable operation, the DMD must always be used with DLPC4430 display controller, the DLPA300 micromirror driver and the DLPA100 PMIC and motor driver.

7.2.3 Application Curves

In a typical projector application, the luminous flux on the screen from the DMD depends on the optical design of the projector. The efficiency and total power of the illumination optical system and the projection optical system determines the overall light output of the projector. The DMD is inherently a linear spatial light modulator, so its efficiency just scales the light output. Figure 7-3 describes the relationship of laser input optical power to light output for a laser-phosphor illumination system, where the phosphor is not at its thermal guenching limit.




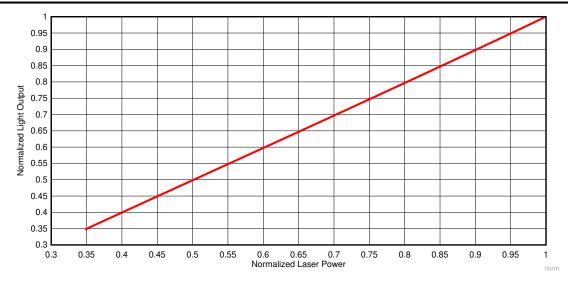


Figure 7-3. Normalized Light Output vs. Normalized Laser Power for Laser Phosphor Illumination

7.3 Temperature Sensor Diode

The DMD features a built-in thermal diode that measures the temperature at one corner of the die outside the micromirror array. The thermal diode can be interfaced with the TMP411 temperature sensor as shown in Figure 7-4. The software application contains functions to configure the TMP411 to read the DLP780NE DMD temperature sensor diode. This data can be leveraged by the customer to incorporate additional functionality in the overall system design such as adjusting illumination, fan speeds, etc. All communication between the TMP411 and the DLPC4430 display controller happens over the I²C interface. The TMP411 connects to the DMD through pins outlined in Section 4.

Leave TEMP_N and TEMP_P pins unconnected (NC) if the temp sensor is not used.

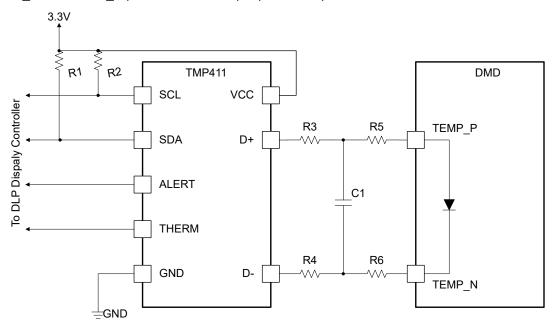

- A. Details omitted for clarity.
- B. See the TMP411 datasheet for system board layout recommendation.
- C. See the TMP411 datasheet and the TI reference design for suggested component values for R1, R2, R3, R4, and C1.
- D. R5 = 0Ω . R6 = 0Ω . Place $0-\Omega$ resistors close to the DMD package pins.

Figure 7-4. TMP411 Sample Schematic

8 Power Supply Recommendations

8.1 DMD Power Supply Requirements

The following power supplies are all required to operate the DMD: VDD, VDDI, and VCC2. VSS must also be connected. DMD power-up and power-down sequencing is strictly controlled by the DLPC4430 display controller.

CAUTION

For reliable operation of the DMD, the following power supply sequencing requirements must be followed. Failure to adhere to the prescribed power-up and power-down procedures may affect device reliability. VDD, VDDI and VCC2 power supplies have to be coordinated during power-up and power-down operations. VSS must also be connected. Failure to meet any of the below requirements results in a significant reduction in the reliability and lifetime of the DMD. Refer to Figure 8-1.

8.2 DMD Power Supply Power-Up Procedure

- During power-up, VDD and VDDI must always start and settle before VCC2 is are applied to the DMD.
- Power supply slew rates during power-up are flexible, provided that the transient voltage levels follow the requirements listed in Section 5.1 and in Section 5.4.
- During power-up, LVCMOS input pins must not be driven high until after VDD and VDDI have settled at operating voltages listed in Section 5.4 table.

8.3 DMD Power Supply Power-Down Procedure

- During power-down, VDD and VDDI must be supplied until after VCC2 is discharged to within the specified limit of ground. Refer to Section 5.4.
- Power supply slew rates during power-down are flexible, provided that the transient voltage levels follow the requirements listed in Section 5.1 and in Section 5.4.
- During power-down, LVCMOS input pins must be less than specified in Section 5.4.

Copyright © 2024 Texas Instruments Incorporated



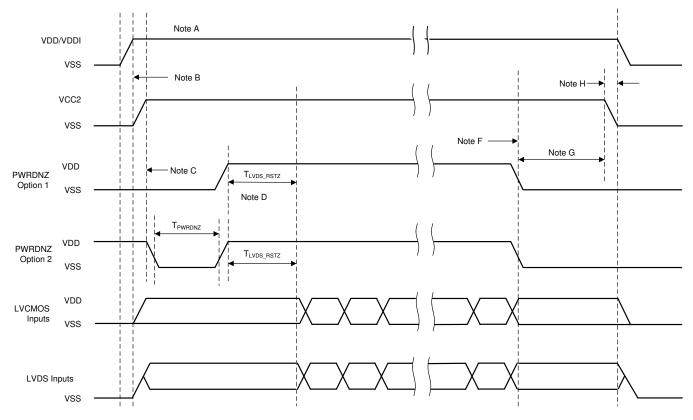


Figure 8-1. DMD Power Supply Sequencing Requirements

- A. See Pin Configuration and Functions for pin functions.
- B. VDD must be up and stable prior to VCC2 powering up.
- C. PWRDNZ has two turn on options. Option 1: PWRDNZ does not go high until VDD and VCC2 are up and stable, or Option 2: PWRDNZ must be pulsed low for a minimum of T_{PWRDNZ}, or 10ns after VDD and VCC2 are up and stable.
- D. There is a minimum of T_{LVDS ARSTZ}, or 2µs, wait time from PWRDNZ going high for the LVDS receiver to recover.
- E. After the DMD micromirror park sequence is complete, the DLP controller software initiates a hardware power-down that activates the PWRDNZ and disables VCC2.
- F. Under power-loss conditions, where emergency DMD micromirror park procedures are being enacted by the DLP controller hardware, PWRDNZ goes low.
- G. VDD must remain high until after VCC2 goes low.
- H. To prevent excess current, the supply voltage delta |VDDI VDD| must be less than specified limit in Section 5.4.

9 Layout

9.1 Layout Guidelines

The DLP780NE DMD is part of a chipset that is controlled by the DLPC4430 display controller in conjunction with the DLP300 micromirror driver and the DLPA100 power and motor driver. These guidelines are targeted at designing a PCB board with the DLP780NE DMD. The DLP780NE DMD board is a high-speed multi-layer PCB, with primarily high-speed digital logic utilizing dual edge clock rates up to 400MHz for DMD LVDS signals. The remaining traces are comprised of low speed digital LVTTL signals. Solid planes are required for DMD_P1P8V and Ground. The target impedance for the PCB is $50\Omega \pm 10\%$ with the LVDS traces being $100\Omega \pm 10\%$ differential. TI recommends using an 8-layer stack-up as described in Table 9-1.

9.2 Layout Example

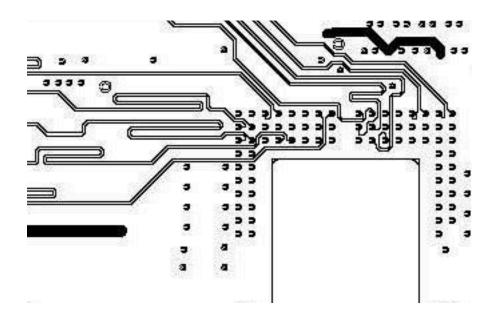


Figure 9-1. Typical example for matching LVDS signal lengths by serpentine sections

9.2.1 Layers

The layer stack-up and copper weight for each layer is shown in Table 9-1. Small subplanes are allowed on signal routing layers to connect components to major subplanes on top and bottom layers if necessary.

Table 9-1. Layer Stack-Up

LAYER NO.	LAYER NAME	COPPER WT. (oz.)	COMMENTS
1	Side A—DMD only	1.5	DMD, escapes, low frequency signals, power subplanes
2	Ground	1	Solid ground plane (net GND)
3	Signal	0.5	50Ω and 100Ω differential signals
4	Ground	1	Solid ground plane (net GND)
5	VDD and VDDI	1	+1.8V power plane
6	Signal	0.5	50Ω and 100Ω differential signals
7	Ground	1	Solid ground plane (net GND)
8	Side B—All other Components	1.5	Discrete components, low frequency signals, power subplanes

Copyright © 2024 Texas Instruments Incorporated



9.2.2 Impedance Requirements

TI recommends that the board has matched impedance of $50\Omega \pm 10\%$ for all signals. The exceptions are listed in Table 9-2.

Table 9-2. Special Impedance Requirements

SIGNAL TYPE	SIGNAL NAME	IMPEDANCE (Ω)	
	DDCP(0:15), DDCN(0:15)		
C channel LVDS differential pairs	DCLKC_P, DCLKC_N	100 ±10% differential across each pair	
	SCTRL_CP, SCTRL_CN		
	DDDP(0:15), DDDN(0:15)	100 100/ 115	
D channel LVDS differential pairs	DCLKD_P, DCLKD_N	100 ±10% differential across each pair	
	SCTRL_DP, SCTRL_DN	ps	

9.2.3 Trace Width, Spacing

Unless otherwise specified, TI recommends that all signals follow the 0.005"/0.005" design rule. Minimum trace clearance from the ground ring around the PWB has a 0.1" minimum. An analysis of impedance and stack-up requirements determine the actual trace widths and clearances.

9.2.3.1 Voltage Signals

Table 9-3. Special Trace Widths, Spacing Requirements

SIGNAL NAME	MINIMUM TRACE WIDTH TO PINS (MIL)	LAYOUT REQUIREMENT			
GND	15	Maximize trace width to connecting pin			
3.3-V Supply Rail	15	Maximize trace width to connecting pin			
VDD, VDDI	15	Maximize trace width to connecting pin			
MBRST(0,14)	15	Use 10mil etch to connect all signals/voltages from DLPA300 to DLP780NE			
VCC2	15	Create mini plane from Voltage regulator to DLP780NE			

Product Folder Links: DLP780NE

10 Device and Documentation Support

10.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

10.2 Device Support

10.2.1 Device Nomenclature

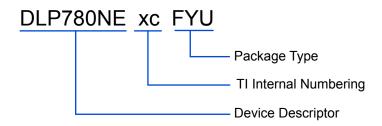


Figure 10-1. Part Number Description

10.3 Device Markings

The device marking includes both human-readable information and a 2-dimensional matrix code. The human-readable information is described in Figure 10-2. The 2-dimensional matrix code is an alpha-numeric string that contains the DMD part number, Part 1 and Part 2 of the serial number.

Example:

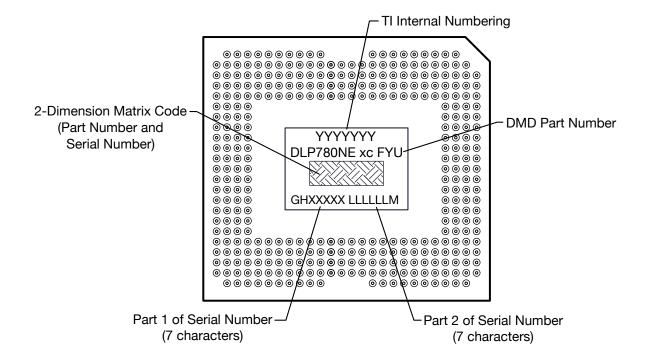


Figure 10-2. DMD Marking Locations



10.4 Documentation Support

10.4.1 Related Documentation

For related documentation, see the following:

- DLPC4430 DLP Display Controller Data Sheet
- DLPA100 Power and Motor Driver Data Sheet
- DLPA300 DMD Micromirror Driver Data Sheet

10.5 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

10.6 Support Resources

TI E2E[™] support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

10.7 Trademarks

TI E2E™ is a trademark of Texas Instruments.

DLP® is a registered trademark of Texas Instruments.

All trademarks are the property of their respective owners.

10.8 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

10.9 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

11 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision A (September 2022) to Revision B (March 2024)	Page		
Updated ILL _{VIS} , ILL _{BLU} and ILL _{BLU1} in Section 5.4	8		
Added Section 6.7 Micromirror Power Density Calculation	25		
Added Section 6.8 Window Aperture Illumination Overfill Calculation	27		
Changes from Revision * (September 2021) to Revision A (September 2022)	Page		
Corrected the body size in Device Information	1		

Updated ILL_{VIS}, added ILL_{BLU} and ILL_{BLU1} in Section 5.48

Product Folder Links: DLP780NE

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2024 Texas Instruments Incorporated

www.ti.com 8-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
	(1)	(2)			(0)	(4)	(5)		(0)
DLP780NEA0FYU	Active	Production	CPGA (FYU) 350	21 JEDEC TRAY (5+1)	Yes	Call TI	N/A for Pkg Type	0 to 70	
DLP780NEA0FYU.A	Active	Production	CPGA (FYU) 350	21 JEDEC TRAY (5+1)	Yes	Call TI	N/A for Pkg Type	0 to 70	
DLP780NEA0FYU.B	Active	Production	CPGA (FYU) 350	21 JEDEC TRAY (5+1)	-	Call TI	Call TI	0 to 70	

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.


⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.


⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.


⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

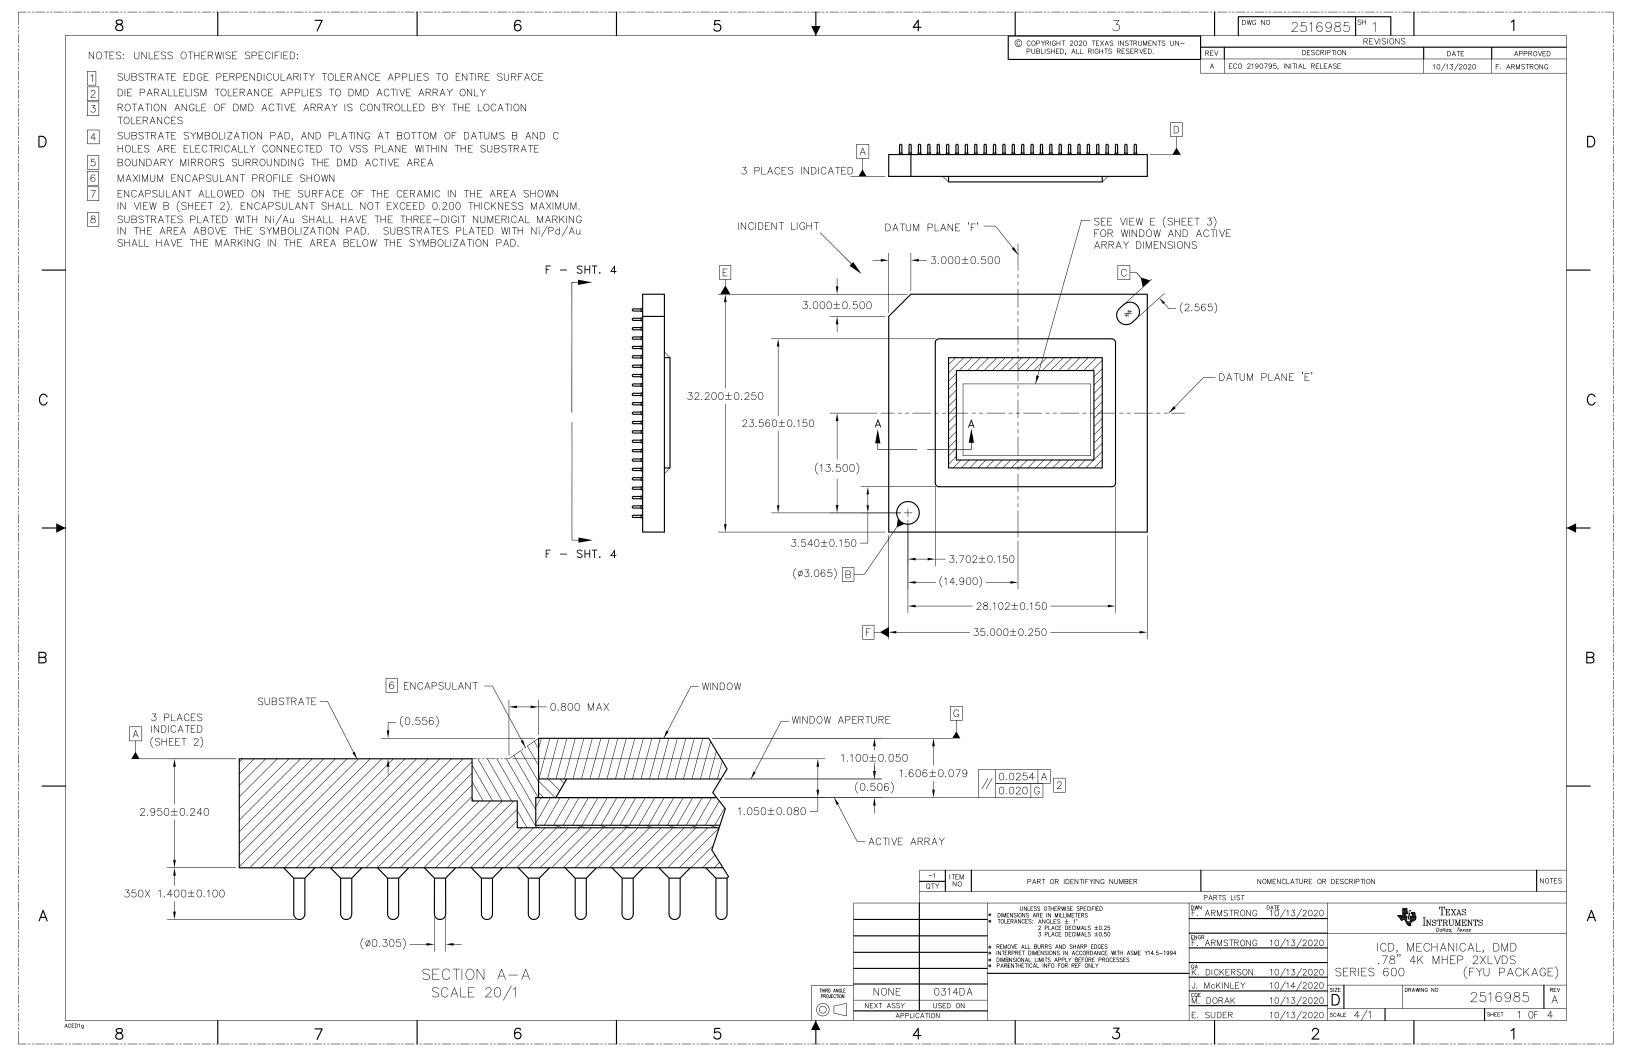

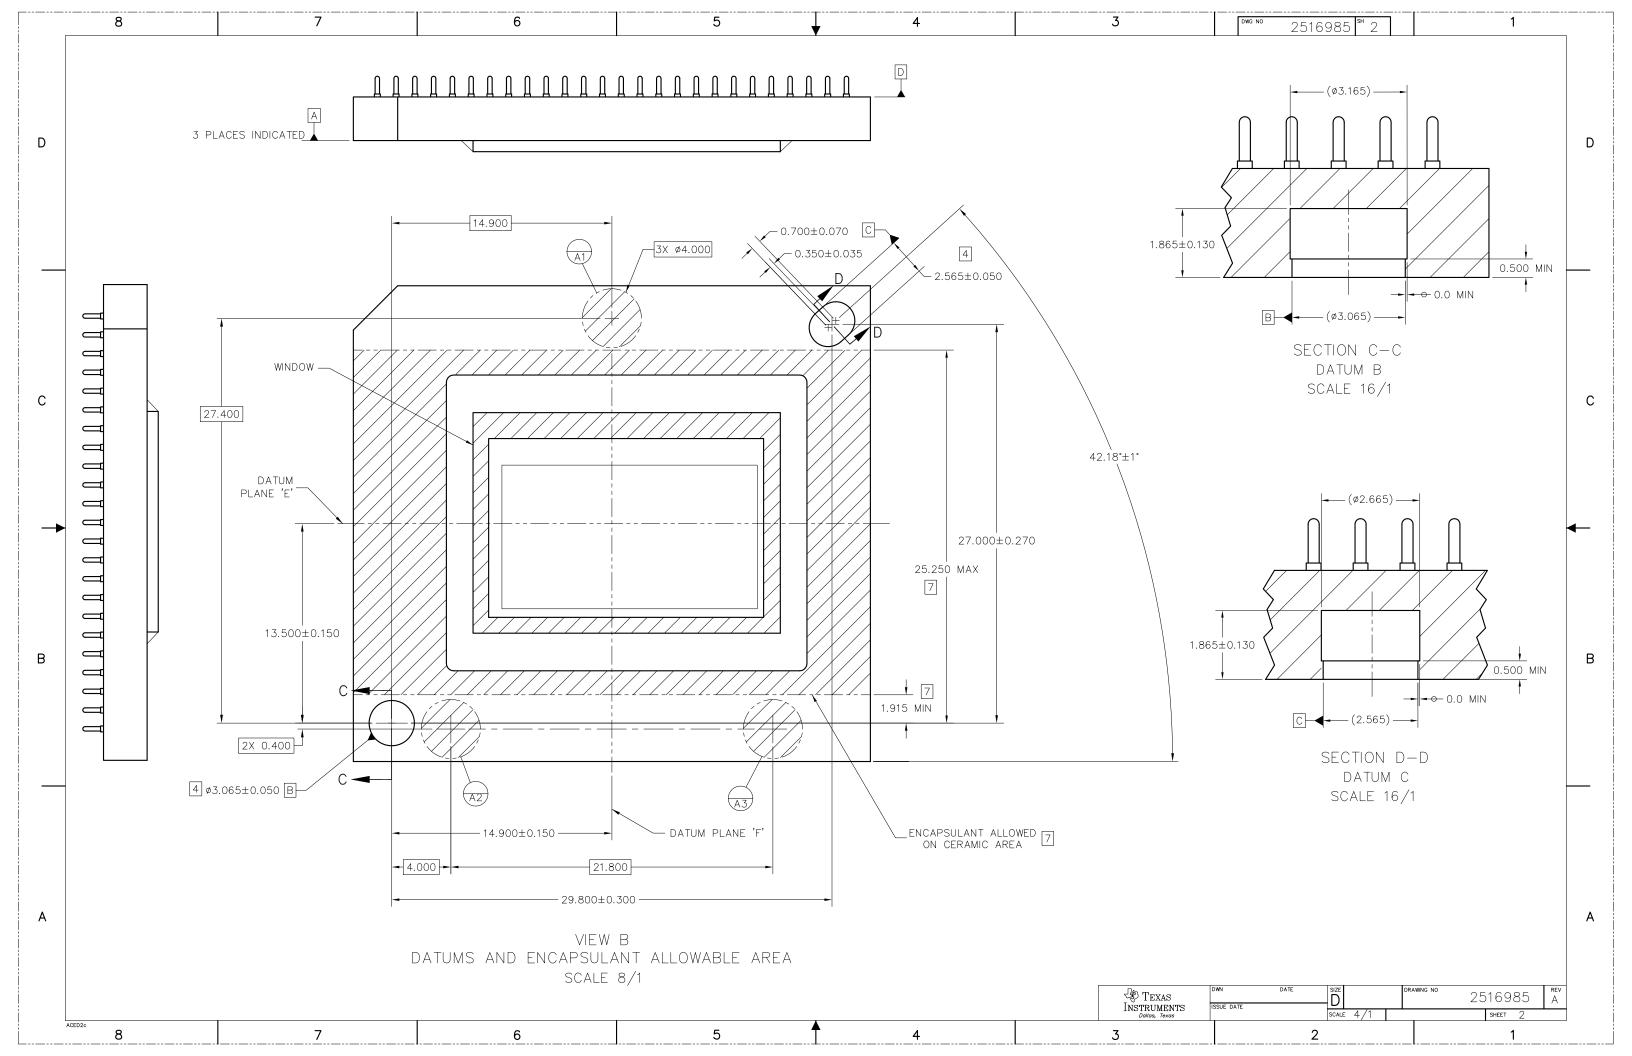

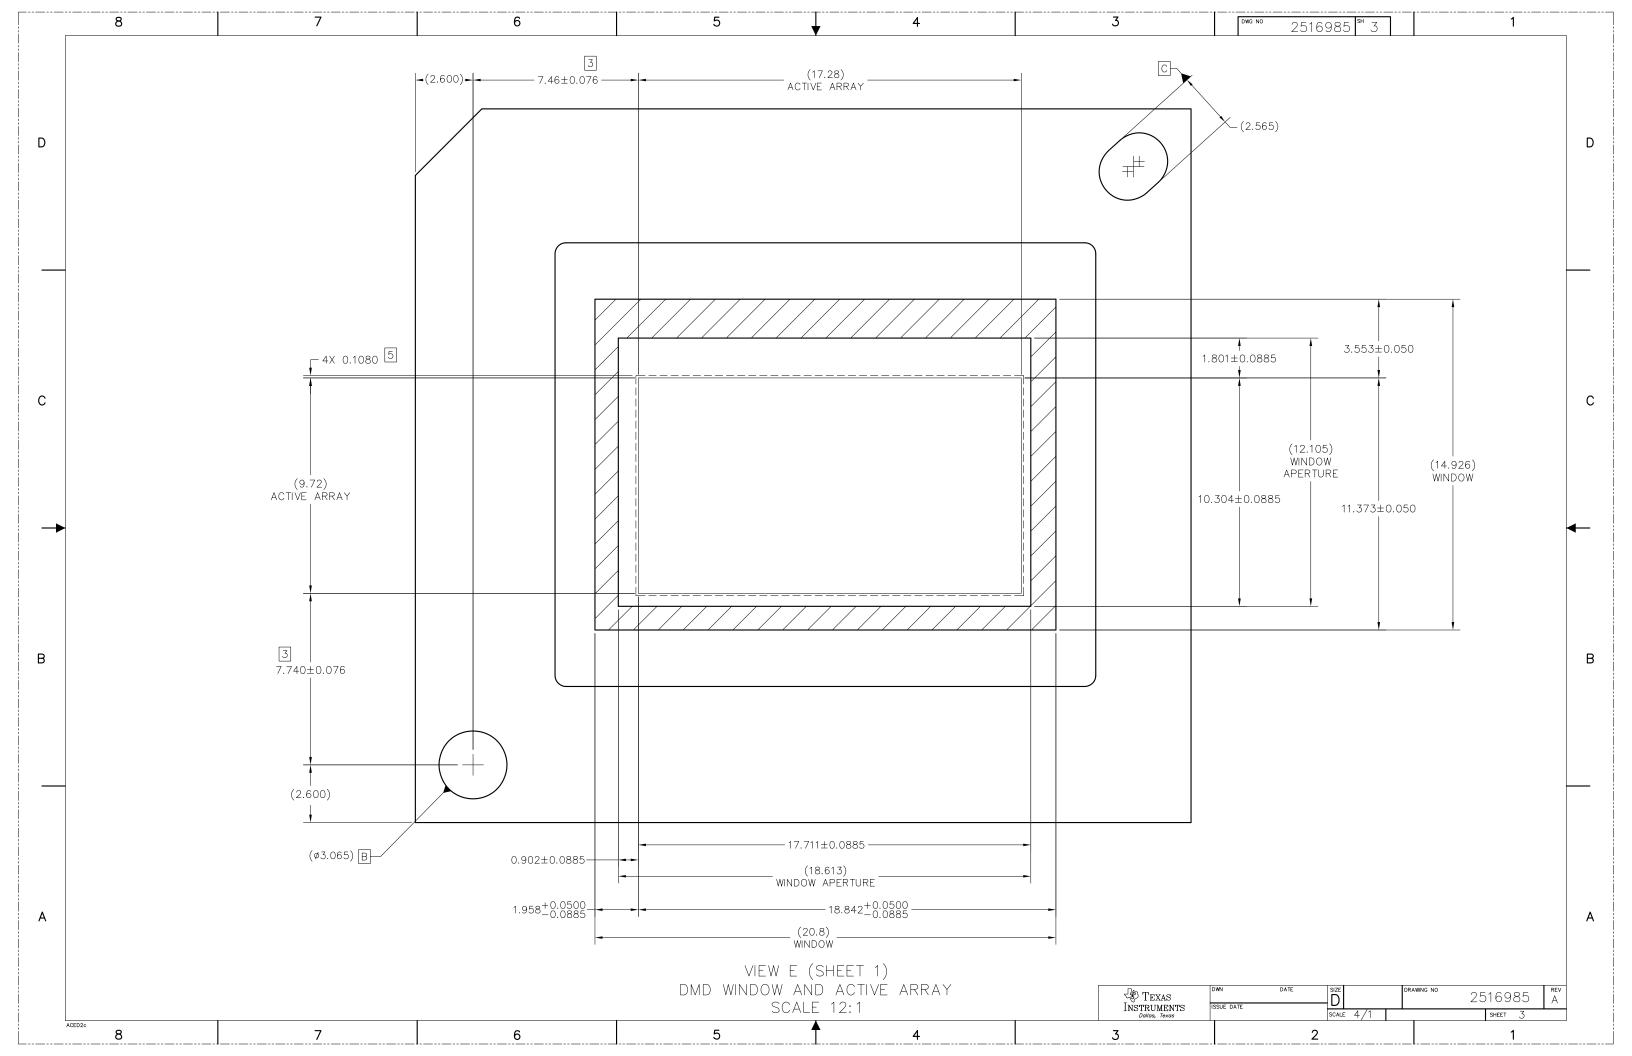

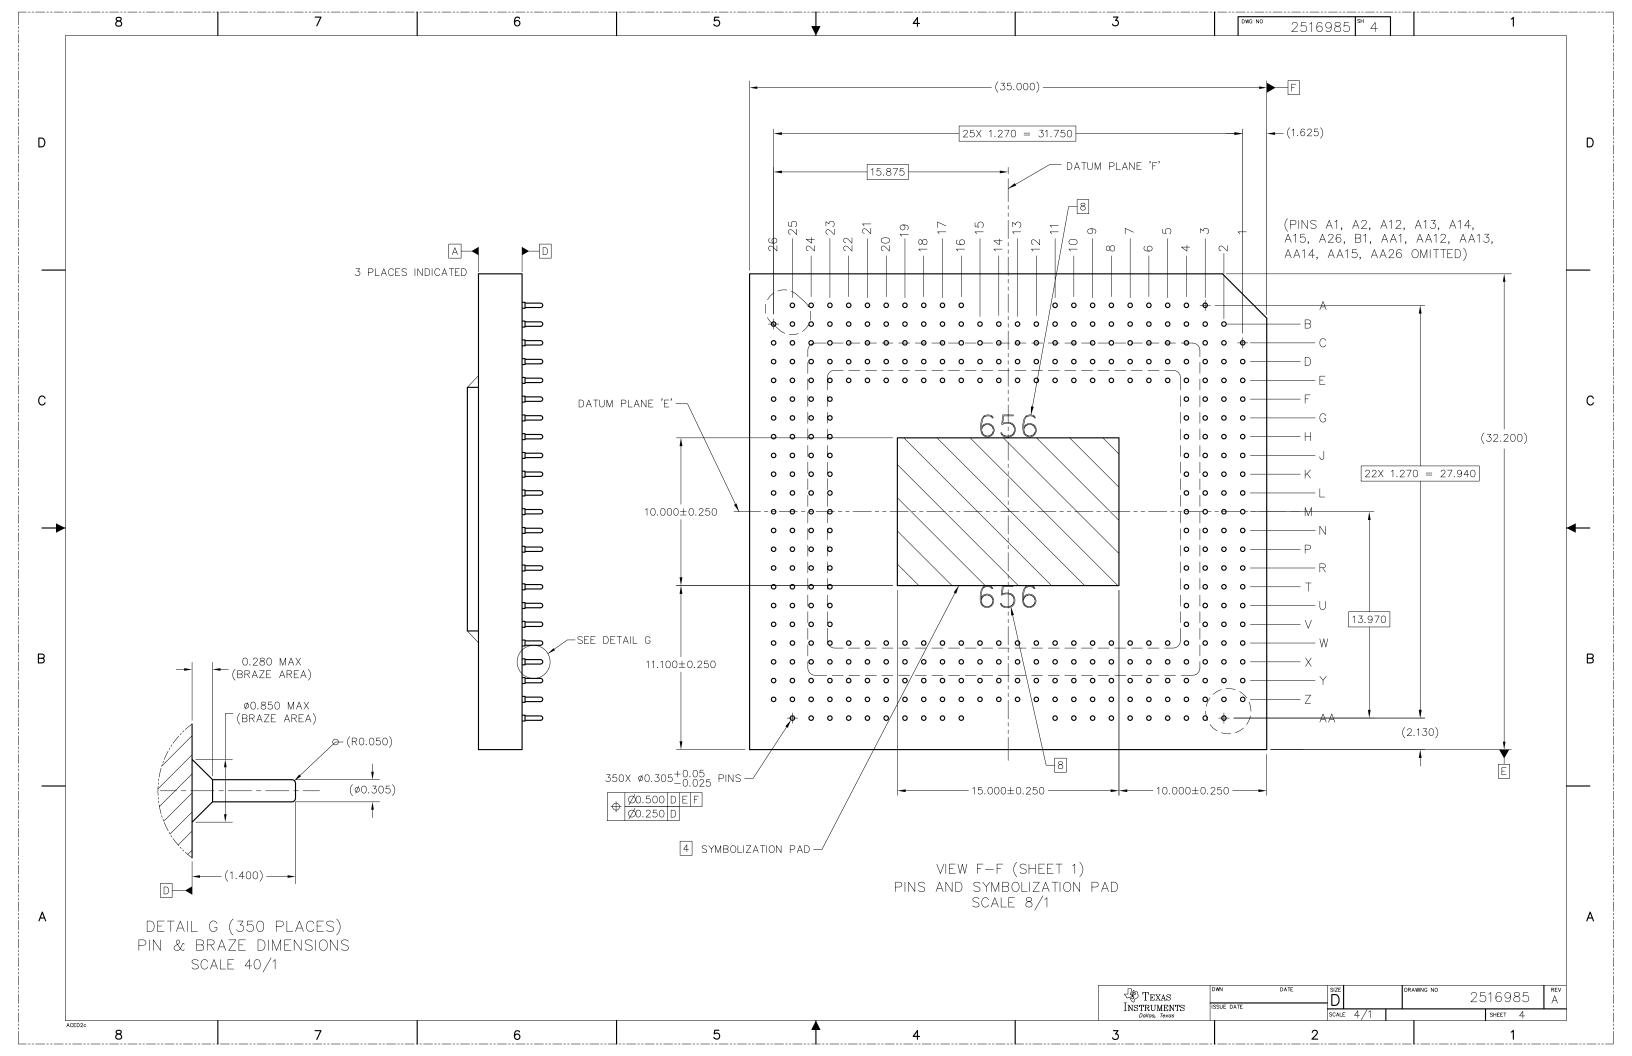

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025