

LMC603x 2.7V, Low-Power, Single-Supply, CMOS Operational Amplifiers

1 Features


- Typical unless otherwise noted
- LMC6035 in DSBGA package
- Specified 2.7V, 3V, 5V, and 15V performance
- Specified for $2k\Omega$ and 600Ω loads
- Wide operating range: 2.0V to 15.5V
- Ultra-low input current: 20fA
- Rail-to-rail output swing
 - At 600Ω : 200mV from either rail at 2.7V
 - At 100kΩ: 5mV from either rail at 2.7V
- High voltage gain: 126dB
- Wide input common-mode voltage range
 - -0.1V to +2.3V at $V_S = 2.7V$
- Low distortion: 0.01% at 10kHz
- LMC6035 dual LMC6036 quad
- See AN-1112 (literature number SNVA009) for **DSBGA** considerations
- AEC-Q100 Grade 3 qualified with LMC6035-Q1

2 Applications

- **Filters**
- High-impedance buffer or preamplifier
- Battery-powered electronics
- Medical instrumentation

3 Description

The LMC6035 and LMC6036 (LMC603x) are economical, low-voltage op amps capable of rail-torail output swing into loads of 600Ω . The LMC6035 is available in a chip-sized package (8-bump DSBGA)




Difference Amplifier Application With RES11

using micro SMD package technology. Both devices allow for single-supply operation and are specified for 2.7V, 3V, 5V, and 15V supply voltage. The 2.7V supply voltage corresponds to the end-of-life voltage (0.9V/cell) for three NiCd or NiMH batteries in series, making the LMC603x an excellent choice for portable and rechargeable systems. These devices also feature a well behaved decrease in specifications at supply voltages less than the specified 2.7V operation. This behavior provides a comfort zone for adequate operation at voltages significantly less than 2.7V. The ultra-low input current makes these devices an excellent choice for low-power, activefilter applications because a low input bias current allows the use of higher resistor values and lower capacitor values. In addition, the drive capability of the LMC603x makes these op amps an excellent choice in a broad range of applications for low-voltage systems.

Device Information

PART NUMBER	CHANNEL COUNT	PACKAGE ⁽¹⁾				
LMC6035		D (SOIC, 8)				
	Dual	DGK (VSSOP, 8)				
	Duai	YAF (DSBGA, 8)				
		YZR (DSBGA, 8)				
LMC6036	Quad	D (SOIC, 14)				
LIVICOUSO	Quau	PW (TSSOP, 14)				

For more information, see Section 10.



8-Bump DSBGA Package (Bump Side Down)—See Package Number YAF0008



Table of Contents

1 Features	1	6.2 Functional Block Diagram	16
2 Applications	1	7 Application and Implementation	
3 Description		7.1 Application Information	17
4 Pin Configuration and Functions		7.2 Typical Applications	
5 Specifications	5	7.3 Layout	
5.1 Absolute Maximum Ratings		8 Device and Documentation Support	
5.2 ESD Ratings		8.1 Receiving Notification of Documentation Updates	25
5.3 Recommended Operating Conditions	5	8.2 Support Resources	25
5.4 Thermal Information: LMC6035	6	8.3 Electrostatic Discharge Caution	
5.5 Thermal Information: LMC6036	6	8.4 Glossary	25
5.6 Electrical Characteristics	7	9 Revision History	
5.7 Typical Characteristics	9	10 Mechanical, Packaging, and Orderable	
6 Detailed Description		Information	26
6.1 Overview			



4 Pin Configuration and Functions




Figure 4-1. LMC6035 D Package, 8-Pin SOIC, and DGK Package, 8-Pin VSSOP (Top View)

Table 4-1. Pin Functions: LMC6035 D and DGK Packages

		- 1. 1 III I GIIC									
	PIN	TYPE	DESCRIPTION								
NAME	NO.		DESCRIPTION								
−IN A	2	Input	Inverting input channel A								
–IN B	6	Input	Inverting input channel B								
+IN A	3	Input	Noninverting input channel A								
+IN B	5	Input	Noninverting input channel B								
OUT A	1	Output	Output channel A								
OUT B	7	Output	Output channel B								
V-	4	Power	Negative supply								
V+	8	Power	Positive supply								




Figure 4-2. LMC6035 YZR Package, 8-Pin DSBGA and YAF Package, 8-Pin DSBGA (Top View)

Table 4-2. Pin Functions: LMC6035 YZR and YAF packages

PIN		TYPE	DESCRIPTION
NAME	NO.	ITPE	DESCRIPTION
−IN A	C2	Input	Inverting input channel A
–IN B	A2	Input	Inverting input channel B
+IN A	C3	Input	Noninverting input channel A
+IN B	A3	Input	Noninverting input channel B
OUT A	C1	Output	Output channel A
OUT B	A1	Output	Output channel B
V-	B3	Power	Negative supply
V+	B1	Power	Positive supply






Figure 4-3. LMC6036 D Package, 14-Pin SOIC, and PW Package, 14-Pin TSSOP (Top View)

Table 4-3. Pin Functions: LMC6036

	PIN		
NAME	NO.	TYPE	DESCRIPTION
−IN A	2	Input	Inverting input channel A
−IN B	6	Input	Inverting input channel B
–IN C	9	Input	Inverting input channel C
–IN D	13	Input	Inverting input channel D
+IN A	3	Input	Noninverting input channel A
+IN B	5	Input	Noninverting input channel B
+IN C	10	Input	Noninverting input channel C
+IN D	12	Input	Noninverting input channel D
OUT A	1	Output	Output channel A
OUT B	7	Output	Output channel B
OUT C	8	Output	Output channel C
OUT D	14	Output	Output channel D
V-	11	Power	Negative supply
V+	4	Power	Positive supply

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated

5 Specifications

5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1) (2)

				MIN	MAX	UNIT
	Differential input voltage				±Supply voltage	V
Vs	Supply voltage, V _S = (V+)	- (V-)		0	16	V
1	Output abort airquit	To V+			See ⁽³⁾	mΛ
I _{SC}	Output short circuit	To V-			See ⁽⁴⁾	mA
	Voltage at input pin			(V-) - 0.3	(V+) + 0.3	V
	Current at input pin			±	±5	mA
	Current at output pin				±18	mA
	Current at power supply pin				35	mA
TJ	Junction temperature ⁽⁵⁾				150	°C
T _{stg}	Storage temperature	Storage temperature		-65	150	°C
	Lead temperature (solder	Lead temperature (soldering, 10s)			260	°C

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) If Military/Aerospace specified devices are required, please contact the TI Sales Office/Distributors for availability and specifications.
- (3) Do not connect output to V+, when V+ is greater than 13V or reliability is adversely affected.
- (4) Applies to both single-supply and split-supply operation. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of 150°C. Output currents in excess of ±30mA over long term adversely affect reliability.
- (5) The maximum power dissipation is a function of $T_{J(max)}$, θ_{JA} , and T_A . The maximum allowable power dissipation at any ambient temperature is $P_D = (T_{J(max)} T_A) / \theta_{JA}$

5.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±3000	V

⁽¹⁾ JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.

5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM MAX	UNIT
V _S	Supply voltage, V _S = (V+) – (V–)	Single supply	2	15.5	\/
		Dual supply	±1	±7.75	, v
T _J	Junction temperature		-40	85	°C



5.4 Thermal Information: LMC6035

	THERMAL METRIC ⁽¹⁾	D (SOIC)	DGK (VSSOP)	YAF (DSBGA)	YZR (DSBGA)	UNIT
		8 PINS	8 PINS	8 PINS	8 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	122.3	149.2	103.1	93.8	°C/W
R _{0JC(top)}	Junction-to-case(top) thermal resistance	61.4	57.7	0.5	0.5	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	70.1	84.1	35.4	26.3	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	11.4	4.4	0.3	0.3	°C/W
ΨЈВ	Junction-to-board characterization parameter	69.1	82.9	35.2	26.2	°C/W
R _{0JC(bot)}	Junction-to-case(bottom) thermal resistance	N/A	N/A	N/A	N/A	°C/W

⁽¹⁾ For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

5.5 Thermal Information: LMC6036

		LMC	LMC6036			
	THERMAL METRIC(1)	D (SOIC)	PW (TSSOP)	UNIT		
		14 PINS	14 PINS			
$R_{\theta JA}$	Junction-to-ambient thermal resistance	83.0	99.5	°C/W		
R ₀ JC(top)	Junction-to-case(top) thermal resistance	42.7	31.3	°C/W		
$R_{\theta JB}$	Junction-to-board thermal resistance	42.4	56.4	°C/W		
ΨЈТ	Junction-to-top characterization parameter	7.0	1.0	°C/W		
ΨЈВ	Junction-to-board characterization parameter	42.0	55.7	°C/W		
R _{θJC(bot)}	Junction-to-case(bottom) thermal resistance	N/A	N/A	°C/W		

⁽¹⁾ For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated



5.6 Electrical Characteristics

at T_J = +25°C, V+ = 2.7V, V- = 0V, V_{CM} = 1V, V_{OUT} = V+ / 2, and R_L > 1M Ω (unless otherwise noted)

	PARAMETER	TEST CO	ONDITIONS	MIN	TYP	MAX	UNIT	
OFFSET	VOLTAGE							
V _{OS}	Input offset voltage				±0.5	±5	mV	
VOS	input onset voitage	$T_J = -40$ °C to +85°C				±6	IIIV	
dV _{OS} /dT	Input offset voltage drift	$T_J = -40^{\circ}\text{C to } +85^{\circ}\text{C}$			±2.3		μV/°C	
		Positive,		63	93			
	Power-supply rejection	5V ≤ V+ ≤ 15V	$T_J = -40^{\circ}\text{C to } +85^{\circ}\text{C}$	60				
PSRR	ratio	Negative,		74	97		dB	
		$0V \le V - \le -10V$, $V_0 = 2.5V$, $V + = 5V$	$T_J = -40$ °C to +85°C	70				
INPUT BI	AS CURRENT							
					±20		fA	
I _B	Input bias current ⁽¹⁾	T _J = -40°C to +85°C				±90	pА	
					±10		fA	
Ios	Input offset current ⁽¹⁾	T _J = -40°C to +85°C				±45	pА	
NOISE		1 - 7		1			-	
			V+ = 15V, V _{CM} = V+ / 2		27		_	
e _n	Input voltage noise density	f = 1kHz	oltage noise density f = 1kHz	V _{CM} = 1V		40		nV/√ Hz
i _n	Input current noise density	f = 1kHz			6		fA/√ Hz	
THD	Total harmonic distortion	$f = 10kHz, G = -10V/V, R_L = 2k\Omega$, V _{OUT} = 8V _{pp} , V+ = 10V		0.01		%	
INPUT VO	OLTAGE			1				
1111 01 10		To positive rail, For CMRR ≥ 40dB		2.0	2.3			
			$T_J = -40$ °C to +85°C	1.7				
		To negative rail For CMRR ≥ 40dB			-0.1	0.3		
			$T_J = -40$ °C to +85°C			0.5		
		To positive rail, For CMRR ≥ 40dB, V+ = 3V		2.3	2.6			
			$T_J = -40$ °C to +85°C	2.0				
		To negative rail			-0.3	0.1		
		For CMRR ≥ 40dB, V+ = 3V	$T_J = -40$ °C to +85°C			0.3		
V _{CM}	Common-mode voltage	To positive rail,		4.2	4.5		V	
		For CMRR ≥ 50dB, V+ = 5V	$T_J = -40^{\circ}\text{C to } +85^{\circ}\text{C}$	3.9				
		To negative rail			-0.5	-0.2		
		For CMRR ≥ 50dB, V+ = 5V	$T_J = -40$ °C to +85°C			0.0		
		To positive rail,		14.0	14.4			
		For CMRR ≥ 50dB, V+ = 15V	$T_J = -40^{\circ}\text{C to } +85^{\circ}\text{C}$	13.7				
		To negative rail			-0.5	-0.2		
		For CMRR ≥ 50dB, V+ = 15V	$T_J = -40^{\circ}\text{C to } +85^{\circ}\text{C}$			0.0		
OMES	Common-mode rejection	V+ = 15V,		63	96		25	
CMRR	ratio	0.7V ≤ V _{CM} ≤ 12.7V	$T_J = -40^{\circ}\text{C to } +85^{\circ}\text{C}$	60			dB	
INPUT IM	IPEDANCE	1	1	I.				
R _{IN}	Input resistance				>10		ΤΩ	
	- t	1		1				



5.6 Electrical Characteristics (continued)

at T_J = +25°C, V+ = 2.7V, V- = 0V, V_{CM} = 1V, V_{OUT} = V+ / 2, and R_L > 1M Ω (unless otherwise noted)

	PARAMETER	$= \frac{10, V_{CM} = 10, V_{OUT} = 0 + 72}{\text{TEST CON}}$		MIN	TYP	MAX	UNIT
OPEN-L	OOP GAIN						
			$R_L = 2k\Omega$ to 7.5V		2000		
		Sourcing, V+ = 15V, V_{CM} = 7.5V,	$R_L = 600\Omega$ to 7.5V	100	1000		
		$7.5V \le V_0 \le 11.5V$	$R_L = 600\Omega$ to to 7.5V, $T_J = -40^{\circ}$ C to +85°C	75			\(\lambda \)
A _{OL}	Open-loop voltage gain		$R_L = 2k\Omega$ to 7.5V		500		V/mV
		Sinking, V+ = 15V, $V_{CM} = 7.5V$,	$R_L = 600\Omega$ to 7.5V	25	250		
		$3.5V \le V_O \le 7.5V$	$R_L = 600\Omega \text{ to } 7.5V,$ $T_J = -40^{\circ}\text{C to } +85^{\circ}\text{C}$	20			
FREQUE	NCY RESPONSE						
GBW	Gain bandwidth product				1.4		MHz
SR	Slew rate ⁽²⁾	V _S = 15V, 10V step			1.5		V/µs
θ_{m}	Phase margin				48		٥
G _m	Gain margin				17		dB
	Crosstalk	Dual and quad channel, V+ = 15V V _{OUT} = 12V _{pp}	$R_L = 100k\Omega$ to 7.5V, $f = 1kHz$,		130		dB
OUTPUT	Ţ						
		To positive rail,		2.4	2.62		
		$R_L = 2k\Omega$ to 1.35V	$T_{J} = -40^{\circ}\text{C to } +85^{\circ}\text{C}$	2.2			
		To negative rail, R _L = 2kΩ to 1.35V			0.07	0.2	
			$T_J = -40$ °C to +85°C			0.4	
		To positive rail, R _L = 600Ω to $1.35V$		2.0	2.5		
			$T_J = -40^{\circ}\text{C to } +85^{\circ}\text{C}$	1.8			
		To negative rail, $R_L = 600\Omega$ to 1.35V			0.2	0.5	
Vo	Voltage output swing		$T_J = -40^{\circ}\text{C to } +85^{\circ}\text{C}$			0.7	V
•0	voltage output swiling	To positive rail, V+ = 15V, R_L = 2k Ω to 7.5V		14.2	14.8		v
			$T_J = -40^{\circ}\text{C to } +85^{\circ}\text{C}$	13.5			
		To negative rail,			0.12	0.4	
		V+ = 15V, R_L = 2kΩ to 7.5V	$T_J = -40$ °C to +85°C			0.5	
		To positive rail,		13.5	14.5		
		$V + = 15V$, $R_L = 600\Omega$ to 7.5V	$T_{J} = -40^{\circ}\text{C to } +85^{\circ}\text{C}$	13.0			
		To negative rail,			0.36	1.25	
		$V + = 15V$, $R_L = 600\Omega$ to 7.5V	$T_{\rm J} = -40^{\circ}{\rm C} \text{ to } +85^{\circ}{\rm C}$			1.50	
		Sourcing,		4	8		
I _{SC}	Short-circuit current	V _{OUT} = 0V	$T_{J} = -40^{\circ}\text{C to } +85^{\circ}\text{C}$	3			mA
50		Sinking,		3	5		
		V _{OUT} = 2.7V	$T_J = -40^{\circ}\text{C to } +85^{\circ}\text{C}$	2			
POWER	SUPPLY						
		LMC6035,			0.65	1.6	
IQ	Quiescent current	V _{OUT} = 1.5V	$T_{J} = -40^{\circ}\text{C to } +85^{\circ}\text{C}$			1.9	mA
~		LMC6036,			1.3	2.7	IIIA
		V _{OUT} = 1.5V	$T_J = -40$ °C to +85°C			3.0	

⁽¹⁾ Specified by design.

⁽²⁾ Number specified is the slower of the positive and negative slew rates.



5.7 Typical Characteristics




Figure 5-1. Supply Current vs Supply Voltage (Per Amplifier)





Figure 5-3. Input Bias Current vs Common-Mode Voltage






Figure 5-2. Input Bias Current vs Temperature




Figure 5-4. Input Current vs Common-Mode Voltage






Figure 5-6. Sourcing Current vs Output Voltage






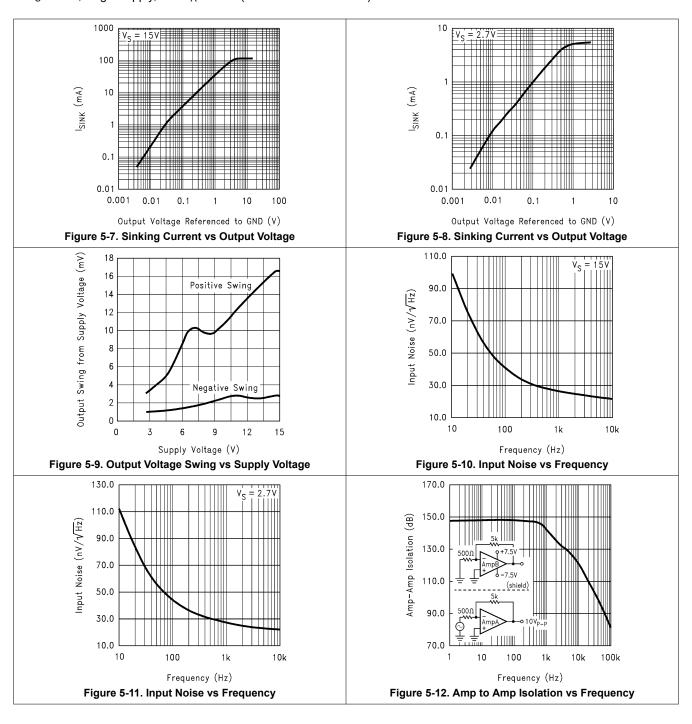


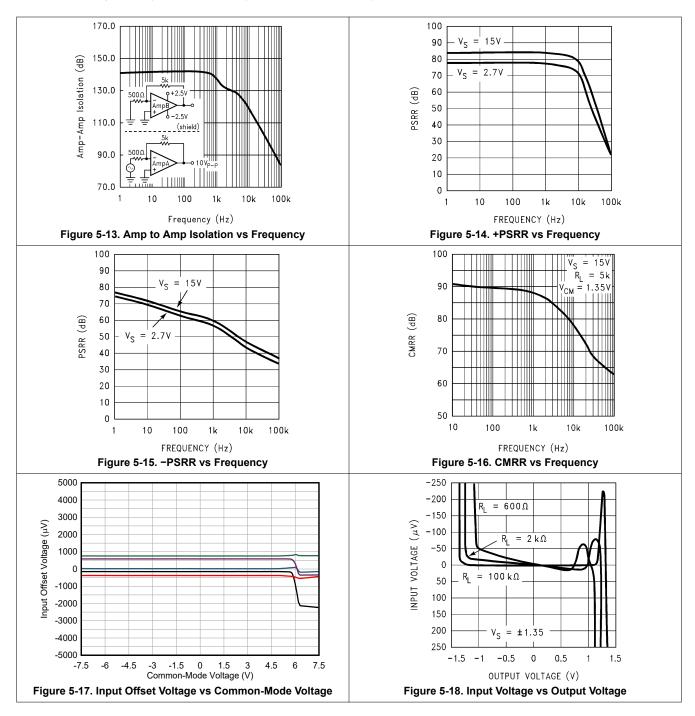




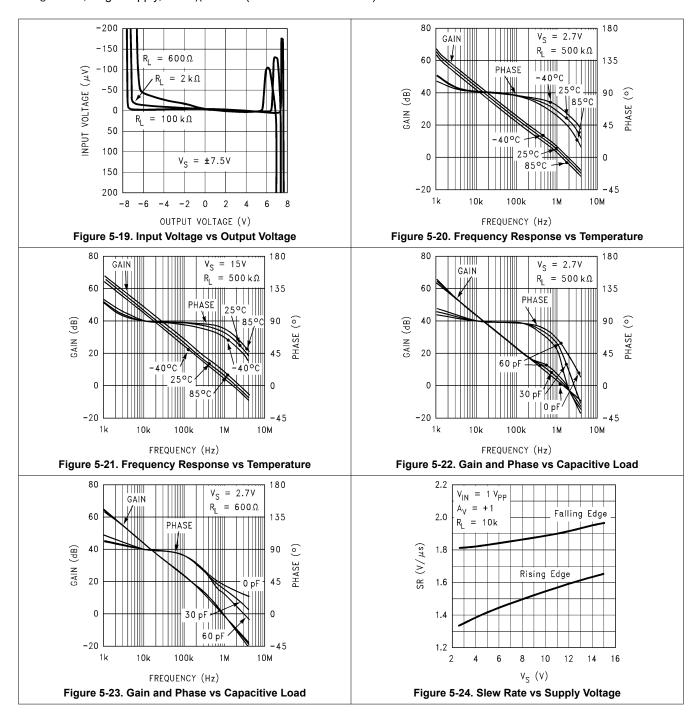




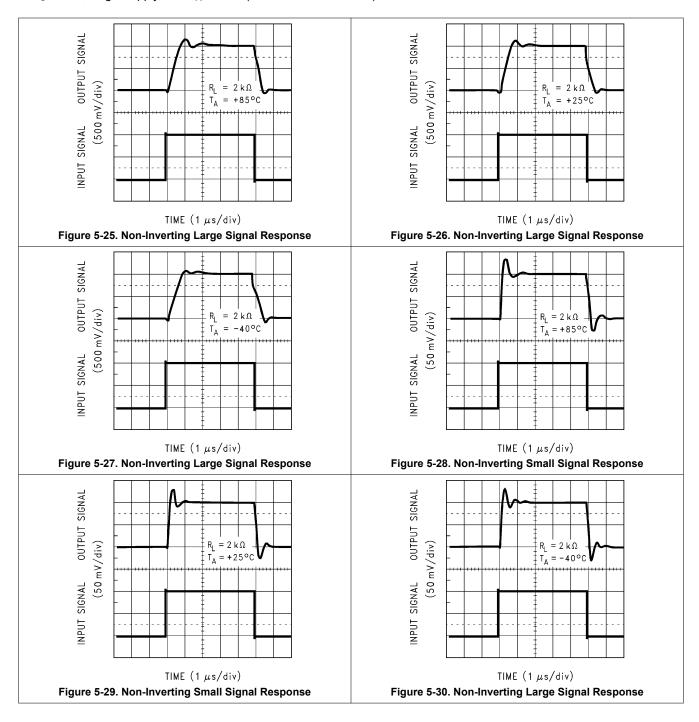



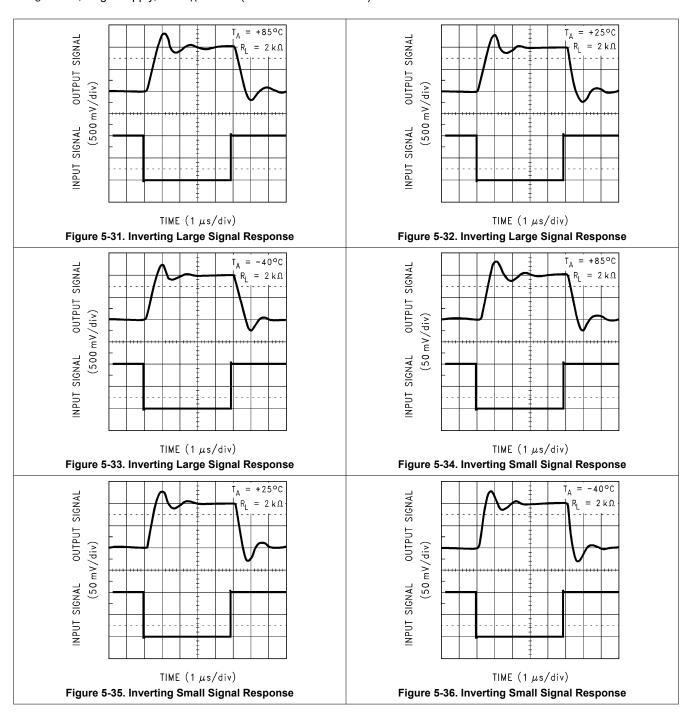



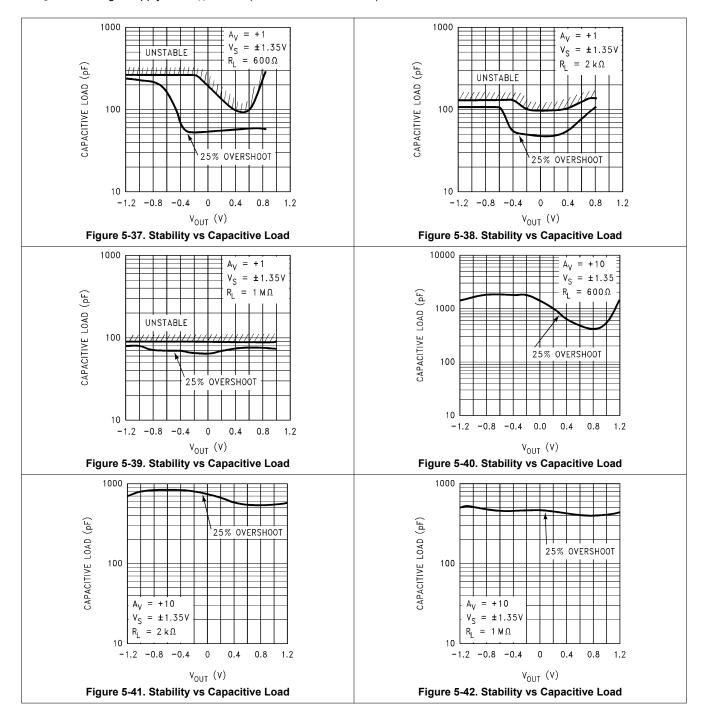


6 Detailed Description

6.1 Overview

The LMC603x operational amplifiers are designed to provide very low leakage current. The femtoampere leakage current level makes these op amps an excellent choice for buffering very high impedance sources. The LMC603x is capable of operating over a wide supply voltage range and as low as 2V. The low supply operation and tiny, die-size ball-grid-array (DSBGA) package make the LMC603x an excellent choice for portable, battery-operated systems.

6.2 Functional Block Diagram





7 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

7.1 Application Information

7.1.1 Capacitive Load Tolerance

Like many other op amps, the LMC603x can oscillate when the applied load appears capacitive. The threshold of oscillation varies both with load and circuit gain. The configuration most sensitive to oscillation is a unity-gain follower. See also Section 5.7.

The load capacitance interacts with the op amp output resistance to create an additional pole. If this pole frequency is sufficiently low, the pole degrades the op amp phase margin so that the amplifier is no longer stable at low gains. Figure 7-1 shows that the addition of a small resistor $(50\Omega$ to 100Ω) in series with the op amp output, and a capacitor (5pF to 10pF) from inverting input to output pins, returns the phase margin to a safe value without interfering with lower-frequency circuit operation. Thus, larger values of capacitance can be tolerated without oscillation. In all cases, the output rings heavily when the load capacitance is near the threshold for oscillation.




Figure 7-1. Rx, Cx Improve Capacitive Load Tolerance

Capacitive load driving capability is enhanced by using a pullup resistor to V+ (shown in Figure 7-2). Typically a pullup resistor conducting 500µA or greater significantly improves capacitive-load responses. The value of the pullup resistor is determined based on the current sinking capability of the amplifier with respect to the desired output swing. The open-loop gain of the amplifier can also be affected by the pullup resistor (see Section 5.6).




Figure 7-2. Compensating for Large Capacitive Loads With a Pullup Resistor

7.2 Typical Applications

7.2.1 Differential Driver

The LMC603x are an excellent choice for low-voltage applications. A desirable feature that the LMC603x bring to low-voltage applications is the output drive capability—a hallmark for Tl's CMOS amplifiers. The circuit of Figure 7-3 illustrates the drive capability of the LMC603x at 3V of supply. These devices are used as a differential output driver for a one-to-one audio transformer, like those used for isolating ground from the telephone lines. The transformer (T1) loads the op amps with about 600Ω of ac load, at 1kHz. Capacitor C1 functions to block dc from the low winding resistance of T1. Although the value of C1 is relatively high, the capacitive load reactance (X_C) is negligible compared to inductive reactance (X_I) of T1.

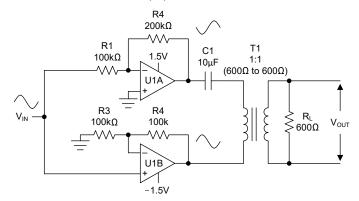


Figure 7-3. Differential Driver

The circuit in Figure 7-3 consists of one input signal and two output signals. U1A amplifies the input with an inverting gain of -2, while the U1B amplifies the input with a non-inverting gain of +2. The two outputs are 180° out of phase with each other; therefore, the gain across the differential output is 4. As the differential output swings between the supply rails, one of the op amps sources the current to the load, while the other op amp sinks the current.

How good a CMOS op amp can sink or source a current is an important factor in determining output swing capability. The output stage of the LMC603x—like many op amps—sources and sinks output current through two complementary transistors in series. This *totem pole* arrangement translates to a channel resistance (R_{dson}) at each supply rail that acts to limit the output swing. Most CMOS op amps are able to swing the outputs very close to the rails; except, however, under the difficult conditions of low supply voltage and heavy load. The LMC603x exhibit exceptional output swing capability under these conditions.

The scope photos of Figure 7-4 and Figure 7-5 represent measurements taken directly at the output (relative to GND) of U1A, in Figure 7-3. Figure 7-4 illustrates the output swing capability of the LMC6035, while Figure 7-5 provides a benchmark comparison. (The benchmark op amp is another low-voltage (3V) op amp manufactured by one of our reputable competitors.)

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated




Figure 7-4. Output Swing Performance of the LMC6035 per the Circuit of Figure 7-3




Figure 7-5. Output Swing Performance of Benchmark Op Amp per the Circuit of Figure 7-3

Notice the excellent drive capability of LMC6035 when compared with the benchmark measurement—even though the benchmark op amp uses twice the supply current.

Not only does the LMC603x provide excellent output swing capability at low supply voltages, but these devices also maintain high open-loop gain (A $_{OL}$) with heavy loads. To illustrate this, the LMC6035 and the benchmark op amp were compared for distortion performance in the circuit of Figure 7-3. Figure 7-6 shows this comparison. The y-axis represents percent total harmonic distortion (THD + noise) across the loaded secondary of T1. The x-axis represents the input amplitude of a 1kHz sine wave. (Notice that T1 loses about 20% of the voltage to the voltage divider of $R_{\rm I}$ (600 Ω) and T1 winding resistances—a performance deficiency of the transformer.)




Figure 7-6. THD+Noise Performance of LMC6035 and Benchmark per Circuit of Figure 7-3

Figure 7-6 shows the excellent distortion performance of the LMC603x over that of the benchmark op amp. The heavy loading of the circuit causes the A_{OL} of the benchmark part to drop significantly, which causes increased distortion.

7.2.2 Low-Pass Active Filter

A common application for low voltage systems is active filters, in cordless and cellular phones for example. The ultra low input bias currents (I_B) of the LMC603x makes these op amps an excellent for low power active filter applications, because the low input bias current allows the use of higher resistor values and lower capacitor values. This reduces power consumption and space.

Figure 7-7 shows a low pass, active filter with a Butterworth (maximally flat) frequency response. The topology is a Sallen and Key filter with unity gain. Note the normalized component values in parenthesis which are obtainable from standard filter design handbooks. These values provide a 1Hz cutoff frequency, but can be easily scaled for a desired cutoff frequency (f_c). The bold component values of Figure 7-7 provide a cutoff frequency of 3kHz. An example of the scaling procedure follows Figure 7-7.




Figure 7-7. 2-Pole, 3kHz, Active, Sallen and Key, Low-Pass Filter With Butterworth Response

7.2.2.1 Low-Pass Frequency Scaling Procedure

The actual component values represented in bold of Figure 7-7 were obtained with the following scaling procedure:

1. First determine the frequency scaling factor (FSF) for the desired cutoff frequency. Choosing f_c at 3kHz, provides the following FSF computation:

$$FSF = 2\pi \times 300 \text{kHz} = 18.84 \text{k} \tag{1}$$

2. Then divide all of the normalized capacitor values by the FSF as follows (C1' and C2': prior to impedance scaling):

$$C1' = \frac{C1_{\text{normalized}}}{FSF} = \frac{0.707}{18.84k} = 37.93 \times 10^{-6} F$$
 (2)

$$C2' = \frac{C1_{\text{normalized}}}{FSF} = \frac{1.414}{18.84k} = 75.05 \times 10^{-6} F$$
 (3)

3. Last, choose an impedance scaling factor (Z). This Z factor can be calculated from a standard value for C2. Then Z can be used to determine the remaining component values as follows:

$$Z = \frac{C2'}{C2_{\text{chosen}}} = \frac{75.05 \times 10^{-6} \text{F}}{6.8 \text{nF}} = 8.4 \text{k}$$
 (4)

$$C1 = \frac{C1'}{Z} = \frac{37.93 \times 10^{-6} \text{F}}{8.4 \text{k}} = 4.52 \text{nF}$$
 (5)

$$R1 = R1_{\text{normalized}} \times Z = 1\Omega \times 8.4k = 8.4k\Omega$$
 (6)

$$R2 = R2_{\text{normalized}} \times Z = 1\Omega \times 8.4k = 8.4k\Omega \tag{7}$$

4. A standard value of $8.45k\Omega$ is chosen for R1 and R2.



7.2.3 High-Pass Active Filter

The previous low-pass filter circuit of Figure 7-7 converts to a high-pass active filter per Figure 7-8.




Figure 7-8. 2-Pole, 300Hz, Sallen and Key, High-Pass Filter

7.2.3.1 High-Pass Frequency Scaling Procedure

Choose a standard capacitor value and scale the impedances in the circuit according to the desired cutoff frequency (300Hz) as follows:

$$C = C1 = C2 \tag{8}$$

$$Z = \frac{1}{2\pi f_c C} = \frac{1}{2\pi \times 300 \text{Hz} \times 6.8 \text{nF}} = 78.05 \text{k}\Omega$$
 (9)

$$R1 = Z \times R1_{\text{normalized}} = 78.05 \text{k}\Omega \times \frac{1}{0.707} = 110.4 \text{k}\Omega$$
 (10)

A standard value of $110k\Omega$ is chosen for R1.

$$R2 = Z \times R2_{\text{normalized}} = 78.05 \text{k}\Omega \times \frac{1}{1.414} = 55.2 \text{k}\Omega$$
 (11)

A standard value of $54.9k\Omega$ is chosen for R2.

7.2.4 Dual-Amplifier Bandpass Filter

The dual-amplifier bandpass (DABP) filter features the ability to independently adjust f_c and Q. In most other bandpass topologies, the f_c and Q adjustments interact with each other. The DABP filter also offers both low sensitivity to component values and a high Q. The following application of Figure 7-9, provides a 1kHz center frequency and a Q of 100.




Figure 7-9. Active 2-Pole Bandpass Filter (1kHz)

7.2.4.1 DABP Component Selection Procedure

Component selection for the DABP filter is performed as follows:

1. First choose a center frequency (f_c). Figure 7-9 represents component values that were obtained from the following computation for a center frequency of 1kHz.

$$R2 = R3 = \frac{1}{2\pi f_c C}$$
 (12)

Given that $f_c = 1 \text{kHz}$ and $C_{\text{(chosen)}} = 6.8 \text{nF}$:

$$R2 = R3 = \frac{1}{2\pi \times 1 \text{kHz} \times 6.8 \text{nF}} = 23.4 \text{k}\Omega$$
 (13)

A standard value resistor, $23.7k\Omega$ is chosen.

2. Then compute R1 for a desired Q (f_c / BW) as follows:

$$R1 = Q \times R2 \tag{14}$$

Choosing a Q of 100, the resistor R1 can be computed as follows: $R1 = 100 \times 23.7 \text{k}\Omega = 2.37 \text{M}\Omega$ (15)

7.3 Layout

7.3.1 Layout Guidelines

7.3.1.1 Printed Circuit Board (PCB) Layout for High-Impedance Work

Any circuit that must operate with < 1000pA of leakage current requires special layout of the PCB. To take advantage of the ultra-low bias current of the LMC603x (typically < 0.04pA), an excellent layout is essential. Fortunately, the techniques for obtaining low leakages are quite simple. First, do not ignore the surface leakage of the PCB, even though at times the surface leakage can appear acceptably low. Under conditions of high humidity, dust, or contamination, the surface leakage can be appreciable.

To minimize the effect of any surface leakage, lay out a ring of foil completely surrounding the LMC603x inputs and the terminals of capacitors, diodes, conductors, resistors, relay terminals, and so on, connected to the op-amp inputs. See also Figure 7-14. To have a significant effect, place guard rings on both the top and bottom of the PCB. This PCB foil must then be connected to a voltage that is at the same voltage as the amplifier inputs (because no leakage current can flow between two points at the same potential). For example, a PCB trace-to-pad resistance of $10^{12}\Omega$, which is normally considered a very large resistance, can leak 5pA if the trace is a 5V bus adjacent to the pad of an input. This configuration can cause a 100 times degradation from the actual performance of the amplifier. However, if a guard ring is held within 5mV of the inputs, then even a resistance of $10^{11}\Omega$ causes only 0.05pA of leakage current, or perhaps a minor (2:1) degradation of the amplifier performance. See Figure 7-10 through Figure 7-12 for typical connections of guard rings for standard op-amp configurations. If both inputs are active and at high impedance, the guard can be tied to ground and still provide some protection; see also Figure 7-13.




Figure 7-10. Guard Ring Connections: Inverting Amplifier




Figure 7-12. Guard Ring Connections: Follower




Figure 7-11. Guard Ring Connections:
Noninverting Amplifier




Figure 7-13. Howland Current Pump

A more comprehensive discussion on high impedance circuit design and considerations, see also *Measurement and Calibration Techniques for Ultra-low Current Measurement Systems* application note.

7.3.1.2 DSBGA Considerations

Unlike other small packages, the DSBGA package does not follow the trend of smaller packages having greater thermal resistance. The LMC6035 in DSBGA has a thermal resistance of 103.1°C/W compared to 149.2°C/W in VSSOP. Even when driving a 600Ω load and operating from ± 7.5 V supplies, the maximum temperature rise is less than 2°C. For application information specific to the DSBGA package, see the *AN-1112 DSBGA Wafer Level Chip Scale Package* application report.

7.3.2 Layout Example




Figure 7-14. Layout Example: Using the LMC603x Guard Ring in PCB Layout

8 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

8.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

8.2 Support Resources

TI E2E[™] support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

Trademarks

TI E2E[™] is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

8.3 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

8.4 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

9 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

С	hanges from Revision G (April 2013) to Revision H (December 2024)	Page
•	Updated the numbering format for tables, figures, and cross-references throughout the document	1
•	Moved LMC6035-Q1 to a new document	1
•	Updated <i>Description</i> text for clarity	1
•	Updated front-page image	
•	Added difference amplifier with RES11 application image	1
•	Added Pin Configuration and Functions	
•	Updated figures and tables in Pin Configuration and Functions	3
•	Added input pin voltage to Absolute Maximum Ratings	
•	Added ESD Ratings	
•	Deleted machine model in ESD Ratings	5
•	Added Thermal Information	
•	Updated junction-to-ambient thermal resistance values	6
•	Updated parameter names and symbols	<mark>7</mark>
•	Added input voltage noise density specification for V+ = 15V	<mark>7</mark>
•	Changed input current noise density TYP from 0.2fA/ $\sqrt{\text{Hz}}$ to 6fA/ $\sqrt{\text{Hz}}$	<mark>7</mark>
•	Deleted footnotes 1 and 2 from DC Electrical Characteristics	
•	Moved footnotes 4 into open-loop gain test conditions	<mark>7</mark>
•	Deleted footnote 1 from AC Electrical Characteristics	
•	Updated footnote 2 and moved conditions to slew rate test conditions	<mark>7</mark>
	•	



•	Moved footnote 3 from AC Electrical Characteristics conditions crosstalk test conditions	7
•	Added Figures 5-3, 5-4, 5-17	9
•	Deleted Figures 16 and 17	9
	Added Overview	
•	Added Functional Block Diagram	16
	Changed A _{VOL} to A _{OL}	
	Updated Figure 7-7	
•	Updated Figure 7-8	21
•	Updated Figure 7-9	22
•	Changed the value of f _c from 3kHz to 1kHz to fix error in equation	. 22
•	Added reference to Measurement and Calibration Techniques for Ultra-low Current Measurement Systems	s
	application note in Printed Circuit Board (PCB) Layout for High-Impedance Work	23
•	Updated thermal resistance information in DSBGA Considerations	. 24

10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated

www.ti.com

18-Oct-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
						(4)	(5)		
LMC6035IM/NOPB	Obsolete	Production	SOIC (D) 8	-	-	Call TI	Call TI	-40 to 85	LMC60 35IM
LMC6035IMM/NOPB	Active	Production	VSSOP (DGK) 8	1000 SMALL T&R	Yes	NIPDAU SN	Level-1-260C-UNLIM	-40 to 85	A06B
LMC6035IMM/NOPB.A	Active	Production	VSSOP (DGK) 8	1000 SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	A06B
LMC6035IMM/NOPB.B	Active	Production	VSSOP (DGK) 8	1000 SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	A06B
LMC6035IMMX/NOPB	Active	Production	VSSOP (DGK) 8	3500 LARGE T&R	Yes	NIPDAU SN	Level-1-260C-UNLIM	-40 to 85	A06B
LMC6035IMMX/NOPB.A	Active	Production	VSSOP (DGK) 8	3500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	A06B
LMC6035IMMX/NOPB.B	Active	Production	VSSOP (DGK) 8	3500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	A06B
LMC6035IMX/NOPB	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU SN	Level-1-260C-UNLIM	-40 to 85	LMC60 35IM
LMC6035IMX/NOPB.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LMC60 35IM
LMC6035IMX/NOPB.B	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LMC60 35IM
LMC6035ITL/NOPB	Active	Production	DSBGA (YZR) 8	250 SMALL T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	A 80
LMC6035ITL/NOPB.A	Active	Production	DSBGA (YZR) 8	250 SMALL T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	A 80
LMC6035ITL/NOPB.B	Active	Production	DSBGA (YZR) 8	250 SMALL T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	A 80
LMC6035ITLX/NOPB	Active	Production	DSBGA (YZR) 8	3000 LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	A 80
LMC6035ITLX/NOPB.A	Active	Production	DSBGA (YZR) 8	3000 LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	A 80
LMC6035ITLX/NOPB.B	Active	Production	DSBGA (YZR) 8	3000 LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	A 80
LMC6035YAFR	Active	Production	DSBGA (YAF) 8	3000 LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	316H
LMC6035YAFR.A	Active	Production	DSBGA (YAF) 8	3000 LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	316H
LMC6036IM/NOPB	Obsolete	Production	SOIC (D) 14	-	-	Call TI	Call TI	-40 to 85	LMC6036IM
LMC6036IMTX/NOPB	Active	Production	TSSOP (PW) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	(6036I, LMC603 6IMT

18-Oct-2025



www.ti.com

10 001 2020

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS	Lead finish/	MSL rating/	Op temp (°C)	Part marking
	(1)	(2)			(3)	Ball material	Peak reflow		(6)
						(4)	(5)		
LMC6036IMTX/NOPB.A	Active	Production	TSSOP (PW) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	(6036I, LMC603) 6IMT
LMC6036IMTX/NOPB.B	Active	Production	TSSOP (PW) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	(6036I, LMC603) 6IMT
LMC6036IMX/NOPB	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LMC6036IM
LMC6036IMX/NOPB.A	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LMC6036IM
LMC6036IMX/NOPB.B	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LMC6036IM

⁽¹⁾ Status: For more details on status, see our product life cycle.

- (3) RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.
- (4) Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- (5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- (6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF LMC6035:

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

PACKAGE OPTION ADDENDUM

www.ti.com 18-Oct-2025

• Automotive : LMC6035-Q1

NOTE: Qualified Version Definitions:

• Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects



www.ti.com 22-Oct-2025

TAPE AND REEL INFORMATION





_	Tanana and a same and a same and a same and a same a s
A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LMC6035IMM/NOPB	VSSOP	DGK	8	1000	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMC6035IMMX/NOPB	VSSOP	DGK	8	3500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMC6035IMX/NOPB	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
LMC6035ITL/NOPB	DSBGA	YZR	8	250	178.0	8.4	1.85	2.01	0.76	4.0	8.0	Q1
LMC6035ITLX/NOPB	DSBGA	YZR	8	3000	178.0	8.4	1.85	2.01	0.76	4.0	8.0	Q1
LMC6035YAFR	DSBGA	YAF	8	3000	180.0	8.4	1.89	2.05	0.7	4.0	8.0	Q2
LMC6036IMTX/NOPB	TSSOP	PW	14	2500	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
LMC6036IMX/NOPB	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1



www.ti.com 22-Oct-2025



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LMC6035IMM/NOPB	VSSOP	DGK	8	1000	353.0	353.0	32.0
LMC6035IMMX/NOPB	VSSOP	DGK	8	3500	353.0	353.0	32.0
LMC6035IMX/NOPB	SOIC	D	8	2500	353.0	353.0	32.0
LMC6035ITL/NOPB	DSBGA	YZR	8	250	208.0	191.0	35.0
LMC6035ITLX/NOPB	DSBGA	YZR	8	3000	208.0	191.0	35.0
LMC6035YAFR	DSBGA	YAF	8	3000	182.0	182.0	20.0
LMC6036IMTX/NOPB	TSSOP	PW	14	2500	353.0	353.0	32.0
LMC6036IMX/NOPB	SOIC	D	14	2500	353.0	353.0	32.0





NOTES:

- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm, per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
- 5. Reference JEDEC registration MS-012, variation AB.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.







NOTES:

- 1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
- 4. This dimension does not include interlead flash.
- 5. Reference JEDEC registration MS-012, variation AA.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.







NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.







NOTES:

PowerPAD is a trademark of Texas Instruments.

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-187.





NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
- 8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
- 9. Size of metal pad may vary due to creepage requirement.






NOTES: (continued)

- 11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 12. Board assembly site may have different recommendations for stencil design.



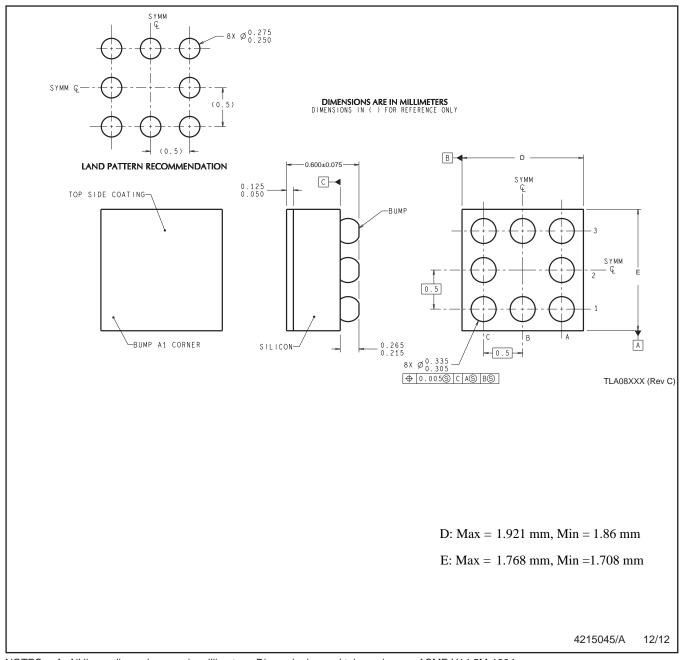

NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994. B. This drawing is subject to change without notice.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025