









LMP8601, LMP8601-Q1 LMP8602, LMP8602-Q1 LMP8603, LMP8603-Q1

SNOSAR2H - SEPTEMBER 2008 - REVISED APRIL 2016



LMP860x, LMP860x-Q1 60-V, Bidirectional, Low- or High-Side, Voltage-Output, Current-Sensing Amplifiers

1 Features

- Gain = 20x for LMP8601 and LMP8601-Q1
- Gain = 50x for LMP8602 and LMP8602-Q1
- Gain = 100x for LMP8603 and LMP8603-Q1
- TCV_{OS}: 10 μV/°C Maximum
- CMRR: 90-dB Minimum
- Input Offset Voltage: 1-mV Maximum
- CMVR at V_S = 3.3 V: -4 V to 27 V
- CMVR at $V_S = 5 \text{ V: } -22 \text{ V to } 60 \text{ V}$
- Single-Supply Bidirectional Operation
- All Minimum and Maximum Limits 100% Tested
- Q1 Devices Qualified for Automotive Applications
- Q1 Devices ACE-Q100 Qualified With the Following Results:
 - Device Temperature Grade 1: –40°C to 125°C
 Ambient Operating Temperature Range
 - Device Temperature Grade 0: -40°C to 150°C (LMP8601EDRQ1 Only)
 - Device HBM ESD Classification Level 2 (3A on inputs)
 - Device CDM ESD Classification Level C6
 - Device MM ESD Classification Level M2

2 Applications

- High-Side and Low-Side Driver Configuration Current Sensing
- · Bidirectional Current Measurement
- Current Loop to Voltage Conversion
- Automotive Fuel Injection Control
- Transmission Control
- Power Steering
- · Battery Management Systems

3 Description

The LMP8601, LMP8602, LMP8603 (LMP860x) and LMP8601-Q1, LMP8602-Q1, LMP8603-Q1 (LMP860x-Q1) devices are fixed-gain, precision current-sense amplifiers (also referred to as current-shunt monitors). The input common-mode voltage range is -22 V to +60 V when operating from a single 5-V supply, or -4 V to +27 V with a 3.3-V supply. The LMP860x and LMP860x-Q1 are ideal parts for unidirectional and bidirectional current sensing applications.

These devices have a precise gain of 20x (LPM8601, LPM8601-Q1), 50x (LPM8602, LPM8602-Q1), and 100x (LPM8603, LPM8603-Q1), and are adequate in most targeted applications to drive an ADC to full-scale value. The fixed gain is achieved in two separate stages: a preamplifier with a gain of 10x and an output stage buffer amplifier with a gain of 2x (LMP8601, LMP8601-Q1), 5x (LMP8602, LMP8602-Q1), or 10x (LMP8603, LMP8603-Q1). The path between the two stages is brought out on two pins to enable the option of an additional filter network or modifying the gain.

The offset input pin enables these devices for unidirectional or bidirectional single supply voltage current sensing.

The LMP860x-Q1 devices incorporate enhanced manufacturing and support processes for the automotive market and are compliant with the AEC-Q100 standard.

Device Information⁽¹⁾

PART NUMBER	PACKAGE	BODY SIZE (NOM)
LMP860x	SOIC (8)	4.90 mm x 3.91 mm
LMP860x-Q1	SOIC (8)	4.90 mm x 3.91 mm
LMP8602, LMP8603	\(CCOD (0)	2.00 mm 2.00 mm
LMP8602-Q1, LMP8603-Q1	VSSOP (8)	3.00 mm × 3.00 mm

(1) For all available packages, see the package option addendum at the end of the data sheet.

Typical Applications

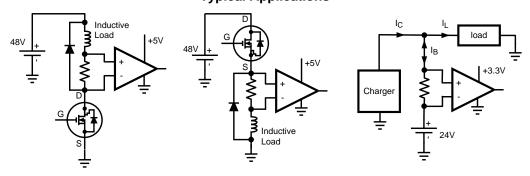




Table of Contents

4	Factures		7.3 Feature Description	10
1	Features 1			
2	Applications 1	_	7.4 Device Functional Modes	
3	Description 1	8	Application and Implementation	26
4	Revision History2		8.1 Application Information	26
5	Pin Configuration and Functions		8.2 Typical Applications	26
6	Specifications4	9	Power Supply Recommendations	<mark>3</mark> 1
•	6.1 Absolute Maximum Ratings 4	10	Layout	<mark>3</mark> 1
	6.2 ESD Ratings: LMP860x		10.1 Layout Guidelines	31
	6.3 ESD Ratings: LMP860x-Q1		10.2 Layout Example	31
	6.4 Recommended Operating Conditions	11	Device and Documentation Support	32
	6.5 Thermal Information5		11.1 Device Support	32
	6.6 Electrical Characteristics: V _S = 3.3 V		11.2 Related Links	
	6.7 Electrical Characteristics: V _S = 5 V		11.3 Community Resources	32
	6.8 Typical Characteristics9		11.4 Trademarks	32
7	Detailed Description 18		11.5 Electrostatic Discharge Caution	32
-	7.1 Overview		11.6 Glossary	32
	7.2 Functional Block Diagram	12	Mechanical, Packaging, and Orderable Information	32


4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Cł	nanges from Revision G (July 2015) to Revision H	Page
•	Added new temperature grade 0 version of LMP8601-Q1	1
•	Added LMP8602, LMP8602-Q1, LMP8603, and LMP8603-Q1 devices and related information to data sheet	1
•	Changed Features bullets	1
•	Changed text in Description section	1
•	Added new values to Thermal Information table	5
•	Changed R _{0JA} value in <i>Thermal Information</i> table	5
•	Deleted previous Note 1 from Electrical Characteristics tables	5
•	Changed all AV1 to K1 throughout data sheet for consistency	6
•	Changed all AV2 to K2 throughout data sheet for consistency	6
•	Deleted previous Note 1 from Electrical Characteristics tables	<mark>7</mark>
•	Deleted Related Documentation section; SNOSB36 data sheet content now combined with this data sheet	32
Cł	nanges from Revision F (January 2014) to Revision G	Page
•	Added ESD Ratings table, and Pin Configuration and Functions, Feature Description, Device Functional Modes, Application and Implementation, Power Supply Recommendations, Layout, Device and Documentation Support, an Mechanical, Packaging, and Orderable Information sections.	
Cł	nanges from Revision E (March 2013) to Revision F	Page
<u>•</u>	Added four typical curves	17
Cl	nanges from Revision D (October 2009) to Revision E	Page
•	Changed layout of National Data Sheet to TI format	30



5 Pin Configuration and Functions

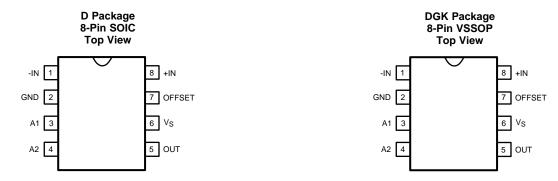

Pin Descriptions

	Pill Pesen pilene							
PIN		TYPE	DESCRIPTION					
NAME	NO.	1176	DESCRIPTION					
A1	3	0	Preamplifier output					
A2	4	I	Input from the external filter network and, or A1					
GND	2	Р	Power ground					
+IN	8	I	Positive input					
-IN	1	I	Negative input					
OFFSET	7	I	DC offset for bidirectional signals					
OUT	5	0	Single-ended output					
Vs	6	Р	Positive supply voltage					



6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

		MIN	MAX	UNIT
Supply voltage (V _S – GND)		-0.3	6	V
Continuous input voltage (-I	N and +IN)	-22	60	V
Transient (400 ms)		-25	65	V
Maximum voltage at A1, A2,	OFFSET and OUT pins	V _S + 0.3	GND - 0.3	V
	LMP8601EDRQ1 only	-40	150	°C
Operating temperature, T _A	All other devices	-40	125	٠.
Junction temperature (2)		-40	150	°C
Mounting town areture	Infrared or convection (20 sec)		235	°C
Mounting temperature	Wave soldering lead (10 sec)		260	
Storage temperature, T _{stg}		-65	150	°C

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

6.2 ESD Ratings: LMP860x

				VALUE	UNIT
		100000 hashara dal (HDM) mar ANOL/EDDA (HEDEO 10 004 (1)	All pins except 1 and 8	±2000	
.,	Electrostatic	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	Pins 1 and 8	±4000	\ /
V _(ESD)	discharge	Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾		±1000	V
		Machine model		±200	

⁽¹⁾ JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

6.3 ESD Ratings: LMP860x-Q1

				VALUE	UNIT
Electrostatic		Liverage hadrogradal (LIDM) and AEC 0400 000(1)	All pins except 1 and 8	±2000	
	Electrostatic	Human body model (HBM), per AEC Q100-002 ⁽¹⁾	Pins 1 and 8	±4000	
V _(ESD)	discharge	Charged-device model (CDM), per AEC Q100-011		±1000	V
		Machine model		±200	

⁽¹⁾ AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

6.4 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
Supply voltage (V _S – GND)	3	5.5	V	
OFFSET voltage (Pin 7)	0	Vs	V	
Operating temperature, T _A ⁽¹⁾	LMP8601EDRQ1 only	-40	150	00
	All other devices	-40	125	°C

(1) The maximum power dissipation must be derated at elevated temperatures and is dictated by T_{J(MAX)}, R_{θJA}, and the ambient temperature, T_A. The maximum allowable power dissipation P_{DMAX} = (T_{J(MAX)} - T_A) / R_{θJA} or the number given in *Absolute Maximum Ratings*, whichever is lower.

⁽²⁾ The maximum power dissipation must be derated at elevated temperatures and is dictated by $T_{J(MAX)}$, $R_{\theta JA}$, and the ambient temperature, T_A . The maximum allowable power dissipation $P_{DMAX} = (T_{J(MAX)} - T_A) / R_{\theta JA}$ or the number given in *Absolute Maximum Ratings*, whichever is lower.

⁽²⁾ JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.



6.5 Thermal Information

THERMAL METRIC ⁽¹⁾		LMP860x, LMP860x-Q1 D (SOIC) 8 PINS	LMP8602, LMP8602-Q1, LMP8603, LMP8603-Q1 DGK (VSSOP) 8 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance (2)	113.1	171.1	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	57.3	64.1	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	53.5	91.1	°C/W
ΨЈТ	Junction-to-top characterization parameter	11.1	9.4	°C/W
ΨЈВ	Junction-to-board characterization parameter	53.0	89.7	°C/W
R _{0JC(bot)}	Junction-to-case (bottom) thermal resistance	N/A	N/A	°C/W

For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report, SPRA953.

6.6 Electrical Characteristics: $V_s = 3.3 \text{ V}$

at $T_A = 25^{\circ}\text{C}$, $V_S = 3.3 \text{ V}$, GND = 0 V, $-4 \text{ V} \le V_{CM} \le 27 \text{ V}$, $R_L = \infty$, OFFSET (pin 7) is grounded, and 10 nF between V_S and GND (unless otherwise noted)

	PARAMETER	Т	EST CONDITIONS	MIN ⁽¹⁾	TYP ⁽²⁾	MAX ⁽¹⁾	UNIT
OVERALL	OVERALL PERFORMANCE (FROM -IN (PIN 1) AND +IN (PIN 8) TO OUT (PIN 5) WITH PINS A1 (PIN 3) AND A2 (PI						
	Committee and a second				1		0
I _S	Supply current	Over full temperature	range	0.6		1.3	mA
		LMP8601, LMP8601-	Q1	19.9	20	20.1	
A _V	Total gain	LMP8602, LMP8602-	Q1	49.75	50	50.25	V/V
		LMP8603, LMP8603-	Q1	99.5	100	100.5	
	Gain Drift ⁽³⁾	Over full temperature	range		-2.7	±20	ppm/°C
SR	Slew rate ⁽⁴⁾	V _{IN} = ±0.165 V		0.4	0.7		V/µs
BW	Bandwidth			50	60		kHz
Vos	Input offset voltage	V _{CM} = V _S / 2			0.15	±1	mV
TCV _{OS}	Input offset voltage drift ⁽⁵⁾	Over full temperature	range		2	±10	μV/°C
_	Input-referred voltage noise	0.1 Hz - 10 Hz, 6 sign	na		16.4		μV _{P-P}
e _n	input-referred voltage noise	Spectral density, 1 kHz			830		nV/√ Hz
PSRR	Power-supply rejection ratio	$3.0 \text{ V} \le \text{V}_{\text{S}} \le 3.6 \text{ V},$			86		dB
PSKK	Power-supply rejection ratio	DC, $V_{CM} = V_S/2$	Over full temperature range	70			αв
		LMP8601,			±0.15%	±0.5%	
		LMP8601-Q1	Input referred			±0.413	mV
	Midscale offset scaling accuracy	LMP8602,			±0.25%	±1%	
	wildscale offset scaling accuracy	LMP8602-Q1	Input referred			±0.33	mV
	LMP8603,	LMP8603,			±0.45%	±1.5%	
		LMP8603-Q1	Input referred			±0.248	mV

⁽¹⁾ Data sheet min and max limits are specified by test.

⁽²⁾ The maximum power dissipation must be derated at elevated temperatures and is dictated by $T_{J(MAX)}$, $R_{\theta JA}$, and the ambient temperature, T_A . The maximum allowable power dissipation $P_{DMAX} = (T_{J(MAX)} - T_A) / R_{\theta JA}$ or the number given in *Absolute Maximum Ratings*, whichever is lower.

⁽²⁾ Typical values represent the most likely parameter norms at T_A = 25°C, and at the *Recommended Operation Conditions* at the time of product characterization.

⁽³⁾ Both the gain of preamplifier K1 and the gain of buffer amplifier K2 are measured individually. The overall gain of both amplifiers (A_V) is also measured to assure the gain of all parts is always within the A_V limits.

⁽⁴⁾ Slew rate is the average of the rising and falling slew rates.

⁽⁵⁾ Offset voltage drift determined by dividing the change in V_{OS} at temperature extremes into the total temperature change.



Electrical Characteristics: $V_s = 3.3 \text{ V}$ (continued)

at $T_A = 25$ °C, $V_S = 3.3$ V, GND = 0 V, -4 V \leq $V_{CM} \leq$ 27 V, $R_L = \infty$, OFFSET (pin 7) is grounded, and 10 nF between V_S and GND (unless otherwise noted)

DC common-mode rejection ratio -2 \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	PARAMETER		TEST CONDITIONS		MIN ⁽¹⁾	TYP ⁽²⁾	MAX ⁽¹⁾	UNIT	
Input impedance common mode	PREAMPLI	FIER (FROM INPUT PINS -IN, (PIN 1) A	ND +IN (PIN 8) TO A1 ((PIN 3))					
Power full temperature range 250 350	D	lanut impadance common mode	41/21/27/1				295		1.0
Input impedance differential mode -4 \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	K _{CM}	input impedance common mode	$-4 \text{ V} \leq \text{V}_{CM} \leq 27 \text{ V}$	Over full temper	rature range	250		350	K12
Cover full temperature range S00 700	D	Input impedance differential mode	4 \ \ < \ \ < 27 \ \				590		kO
DC common-mode rejection ratio -2 V \$ V_{CM} \$ 24 V Over full temperature range 86	NDM	input impedance dinerential mode	-4 V 3 V _{CM} 3 27 V	Over full temper	rature range	500		700	K22
CCMRR DC common-mode rejection ratio CV ≤ V _{CM} ≤ 24 V Over full temperature range 86	V _{OS}	Input offset voltage	$V_{CM} = V_S / 2$				±0.15	±1	mV
AC CMRR AC common-mode rejection ratio 60 1	DC CMRR	DC common-mode rejection ratio	-2 V < V _{ou} < 24 V				96		dB
AC COMRN AC Common-mode rejection ratio F = 10 kHz F = 10 kHz S S S S S S S S S	DO OMITAIT	De commen mode rejection ratio	2 V = VCM = 2 : V	Over full temper	rature range	86			u.b
F = 10 kHz	AC CMRR	AC common-mode rejection ratio (6)				80	94		dB
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$			f = 10 kHz				85		
$R_{F,INT} \text{Output impedance filter resistor} \begin{array}{c ccccccccccccccccccccccccccccccccccc$	CMVR		for 80-dB CMRR	Over full temper	rature range	-4		27	
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	K1	Preamplifier gain ⁽³⁾				9.95	10.0	10.05	V/V
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$							100		
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	R _{F-INT}	Output impedance filter resistor	**						kΩ
$V_{\text{OL}}, R_{\text{L}} = \infty \\ V_{\text{OH}}, R_{\text{L}} = \infty \\ V_{\text{OVer full temperature range}} \\ V_{\text{OH}}, R_{\text{L}} = \infty \\ V_{\text{OVer full temperature range}} \\ V_{\text{OVer full temperature range}} \\ V_{\text{OUT}} \\ V_{\text{OS}} \\ V_{\text{Input offset voltage}} \\ V_{\text{OS}} \\ V_{\text{OVER}} \leq V_{\text{S}} \\ V_{\text{OVER}} \leq V_{\text{S}} \\ V_{\text{OVER}} \leq V_{\text{S}} \\ V_{\text{OVER}} \\ V_{\text{OVER}} \leq V_{\text{S}} \\ V_{\text{OVER}} \\ V_{\text$					only	97			
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	TCR _{F-INT}	Output impedance filter resistor drift	Over full temperature	range				±50	ppm/°C
A1 vout A1 output voltage swing VoH, RL = ∞ Over full temperature range 3.2 Vout full te			V _{OI} , R _I = ∞				2		mV
Voh, R _L = ∞ Over full temperature range 3.2 V	A1 Vout	A1 output voltage swing	OE, E	Over full temper	rature range			10	
Over full temperature range 3.2 Over full temperature range 2.5 2.5 Over full temperature range 3.28 Over full temperature range Over full temperatu	00.		V _{OH} , R _I = ∞				3.25		V
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$				Over full temper	rature range	3.2			
Nos Input offset voltage OV ≤ V _{CM} ≤ V _S Over full temperature range −2.5 2.5 MV	OUTPUT BU	JFFER (FROM A2 (PIN 4) TO OUT (PIN	l 5))	1					1
Cover full temperature range -2.5 2	Vos	Input offset voltage	$0V \le V_{CM} \le V_{S}$				±0.5		mV
LMP8602, LMP8603-Q1 4.975 5 5.025 V/V				-	rature range				
LMP8603, LMP8603-Q1 9.95 10 10.05 B	1/0	0	· · · · · · · · · · · · · · · · · · ·						
Input bias current of A2 (7), Over full temperature range ±20 nA	K2	Output buffer gain (9)	-						V/V
A2 V _{OUT} A2 output voltage swing (8) (9) A2 V _{OUT} A2 output voltage swing (8) (9) V _{OL} , R _L = 100 kΩ V _{OL} , R _L = 100			LMP8603, LMP8603-0	J1		9.95		10.05	
$A2 \text{ V}_{\text{OUT}} \text{A2 output voltage swing}^{(8)} \stackrel{(9)}{=} \\ V_{\text{OL}}, R_{\text{L}} = 100 \text{k}\Omega \\ \\ V_{\text{OH}}, R_{\text{L}} = 100 \text{k}\Omega \\ \\ V_{\text{OH}}, R_{\text{L}} = 100 \text{k}\Omega \\ \\ V_{\text{OH}}, R_{\text{L}} = 100 \text{k}\Omega \\ \\ \hline \\ V_{\text{OH}}, R_{\text{L}} = 100 \text{k}\Omega \\ \\ \hline \\ V_{\text{OH}}, R_{\text{L}} = 100 \text{k}\Omega \\ \\ \hline \\ V_{\text{OH}}, R_{\text{L}} = 100 \text{k}\Omega \\ \hline \\ V_{\text{OH}}, V_{\text{II}} = V_{\text{S}}, V_{\text{OUT}} = GND \\ \hline \\ V_{\text{OH}}, V_{\text{OUT}} = 000 \text{m} \\ \hline \\ V_{\text{OUT}}, V_{O$	I _B	Input bias current of A2 ⁽⁷⁾ ,	0 ()				-40		
$A2 \ V_{OUT} A2 \ output \ voltage \ swing^{(8)} \ (9) \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OH}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V_{OL}, \ R_L = 100 \ k\Omega \\ \hline \\ V$			Over full temperature	range			4	±20	nA
					Over full		4		
A2 V _{OUT} A2 output voltage swing ⁽⁸⁾ (9) $ \frac{V_{OL}, R_L = 100 \text{ k}\Omega}{V_{OH}, R_L = 100 \text{ k}\Omega} $				LMP8601-Q1,				20	
A2 V _{OUT} A2 output voltage swing ⁽⁸⁾ (9) A2 V _{OUT} A2 output voltage swing ⁽⁸⁾ (9) A2 V _{OUT} A2 output voltage swing ⁽⁸⁾ (9) A2 V _{OUT} A2 output voltage swing ⁽⁸⁾ (9) A2 V _{OUT} A2 output voltage swing ⁽⁸⁾ (9) A3 output voltage swing ⁽⁸⁾ (9) A4 output voltage swing ⁽⁸⁾ (9) A5 output voltage swing ⁽⁸⁾ (9) A6 output voltage swing ⁽⁸⁾ (9) A6 output voltage swing ⁽⁸⁾ (9) A7 output voltage swing ⁽⁸⁾ (9) A8 output voltage swing ⁽⁸⁾ (9) A8 output voltage swing ⁽⁸⁾ (9) A8 output voltage swing ⁽⁸⁾ (9) A9 output swing ⁽⁸⁾ (10		-
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	A2 Vour	A2 output voltage swing (8) (9)	V_{OL} , $R_L = 100 \text{ k}\Omega$					40	mV
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	· ·- • OUI	Surput voltage Swilly			. 3		10		
$V_{OH}, R_L = 100 \text{ k}\Omega$ $Over full temperature range$ $Output short-circuit current (10)$ $Sourcing, V_{IN} = V_S, V_{OUT} = GND$ $-25 -38 -60$ MA								80	
$V_{OH}, R_{L} = 100 \text{ k}\Omega$ Over full temperature range 3.28 V Over full temperature range 3.28 V Output short-circuit current (10) $V_{OH}, R_{L} = 100 \text{ k}\Omega$ V					, , , , , , , , ,		3.29		
Sourcing, V _{IN} = V _S , V _{OUT} = GND —25 —38 —60			V_{OH} , $R_L = 100 \text{ k}\Omega$	Over full temper	rature range	3.28			V
oo Output sport-circuit current (197		- (40)	Sourcing, V _{IN} = V _S , V _O				-38	-60	
	I _{SC}	Output short-circuit current(10)							mA

⁽⁶⁾ AC common-mode signal is a 5-V $_{\mbox{\footnotesize{PP}}}$ sine-wave (0 V to 5 V) at the given frequency.

⁽⁷⁾ Positive current corresponds to current flowing into the device.

For this test input is driven from A1 stage. For V_{OL} , R_L is connected to V_S and for V_{OH} , R_L is connected to GND.

⁽¹⁰⁾ Short-Circuit test is a momentary test. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of 150°C.



6.7 Electrical Characteristics: $V_s = 5 \text{ V}$

at $T_A = 25^{\circ}C$, $V_S = 5$ V, GND = 0 V, -22 V \leq $V_{CM} \leq$ 60 V, $R_L = \infty$, OFFSET (pin 7) is grounded, and 10 nF between V_S and GND (unless otherwise noted)

	PARAMETER	Т	EST CONDITIONS	MIN ⁽¹⁾	TYP(2)	MAX ⁽¹⁾	UNIT
OVERALL	VERALL PERFORMANCE (FROM -IN (PIN 1) AND +IN (PIN 8) TO OUT (PIN 5) WITH PINS A1 (PIN 3) AND A2 (PI						
	Complex compat				1.1		mA
I _S	Supply current Over full temperature range			0.7		1.5	mA
		LMP8601, LMP8601-	Q1	19.9	20	20.1	
A_V	Total gain (3)	LMP8602, LMP8602-	Q1	49.75	50	50.25	V/V
		LMP8603, LMP8603-	Q1	99.5	100	100.5	
	Gain drift	-40°C ≤ T _A ≤ 125°C			-2.8	±20	ppm/°C
SR	Slew rate ⁽⁴⁾	V _{IN} = ±0.25 V		0.6	0.83		V/µs
BW	Bandwidth			50	60		kHz
Vos	Input offset voltage				0.15	±1	mV
TCV _{OS}	Input offset voltage drift ⁽⁵⁾	-40°C ≤ T _A ≤ 125°C			2	±10	μV/°C
_	land and and analysis and an in-	0.1 Hz - 10 Hz, 6 sign	na		17.5		μV _{P-P}
e _N	Input-referred voltage noise	Spectral density, 1 kHz			890		nV/√ Hz
PSRR	Davis and the said of the said	$4.5 \text{ V} \le \text{V}_{\text{S}} \le 5.5 \text{ V},$			90		dB
PSKK	Power-supply rejection ratio	DC	Over full temperature range	70			ав
		LMP8601,			±0.15%	±0.5%	
		LMP8601-Q1	Input-referred			±0.625	mV
	Midagala offect applies appure	LMP8602.			±0.25%	±1%	
	Midscale offset scaling accuracy	LMP8602-Q1	Input-referred			±0.50	mV
		LMP8603,			±0.45%	±1.5%	
		LMP8603-Q1	Input-referred			±0.375	mV

⁽¹⁾ Data sheet min and max limits are specified by test.

⁽²⁾ Typical values represent the most likely parameter norms at T_A = 25°C, and at the Recommended Operation Conditions at the time of product characterization.

⁽³⁾ Both the gain of preamplifier K1 and the gain of buffer amplifier K2 are measured individually. The overall gain of both amplifiers (A_V) is also measured to assure the gain of all parts is always within the A_V limits.

⁽⁴⁾ Slew rate is the average of the rising and falling slew rates.

⁽⁵⁾ Offset voltage drift determined by dividing the change in V_{OS} at temperature extremes into the total temperature change.



Electrical Characteristics: $V_S = 5 \text{ V}$ (continued)

at $T_A = 25^{\circ}C$, $V_S = 5$ V, GND = 0 V, -22 V \leq $V_{CM} \leq$ 60 V, $R_L = \infty$, OFFSET (pin 7) is grounded, and 10 nF between V_S and GND (unless otherwise noted)

	PARAMETER	Т	EST CONDITION	S	MIN ⁽¹⁾	TYP ⁽²⁾	MAX ⁽¹⁾	UNIT	
PREAMPLIF	FIER (FROM INPUT PINS -IN (PIN 1) A	ND +IN (PIN 8) TO A1 (PIN 3))						
						295			
		$0 \text{ V} \le \text{V}_{\text{CM}} \le 60 \text{ V}$	Over full tempe	rature range	250		350	kΩ	
R _{CM}	Input impedance, common mode			Ü		193			
		-20 V ≤ V _{CM} ≤ 0 V	Over full tempe	erature range	165		250	kΩ	
						590			
		$0 \text{ V} \leq \text{V}_{\text{CM}} \leq 60 \text{ V}$	Over full tempe	erature range	500		700	kΩ	
R_{DM}	Input impedance, differential mode		O TOT TOTAL	rature range		386			
		$-20 \text{ V} \leq \text{V}_{\text{CM}} \leq 0 \text{ V}$	Over full tempe	erature range	300		500	kΩ	
V _{OS}	Input offset voltage	V _{CM} = V _S / 2	Over run tempe	raturo rango		±0.15	±1	mV	
*05	input oncet voltage	VCM - VS / 2				105		111.4	
DC CMRR	DC common-mode rejection ratio	$-20 \text{ V} \leq \text{V}_{\text{CM}} \leq 60 \text{ V}$	Over full tempe	rature range	90			dB	
		f = 1 kHz	Over full tempe	rature range	80	96			
AC CMRR	AC common-mode rejection ratio (6)	f = 10 kHz	00	83		dB			
CMVD	lanut common mode veltage rooms		Over full tempe	roturo rongo	22	03	60	V	
CMVR	Input common-mode voltage range	for 80-dB CMRR Over full temperature range			-22	40	60		
K1	Preamplifier gain ⁽³⁾				9.95	10	10.05	V/V	
_	Output impedance filter register					100			
R _{F-INT}	Output impedance filter resistor	-40 °C \leq T _A \leq 125°C,		_	99		101	kΩ	
		-40 °C \leq T _A \leq 150°C,	LMP8601EDRQ1	only	97		103		
TCR _{F-INT}	Output impedance filter resistor drift					±5	±50	ppm/°C	
		V _{OL} , R _L = ∞				2		mV	
A1 V _{OUT}	A1 output voltage swing	OL, E	Over full tempe	erature range			10		
	, ,	Vou R₁ = ∞	V _{OH} , R _L = ∞			4.985		V	
		· OH, · · ·L	Over full tempe	erature range	4.95				
OUTPUT BU	JFFER (FROM A2 (PIN 4) TO OUT (PIN	N 5))						1	
V _{OS}	Input offset voltage	0\/ < \/ < \/ .	0V ≤ V _{CM} ≤ V _S Over full temperature range			±0.5	2	mV	
VOS	input onset voltage	OV = VCM = VS					2.5	1111	
		LMP8601, LMP8601-	Q1		1.99	2	2.01		
K2	Output buffer gain ⁽³⁾	LMP8602, LMP8602-	Q1		4.975	5	5.025	V/V	
		LMP8603, LMP8603-	Q1		9.95	10	10.05		
	Input bias current of A2 ⁽⁷⁾					-40		fA	
I _B	input bias current of A2**/	Over full temperature	range				±20	nA	
			LMDocca			4			
			LMP8601, LMP8601-Q1,	Over full			20		
			,	temperature range			20		
			LMP8602,			10		mV	
	(0) (0)	V _{OL} , R _L = ∞	LMP8602-Q1	Over full			40		
A2 V _{OUT}	A2 output voltage swing (8) (9)			temperature range		40			
			LMP8602,	0		10			
			LMP8603-Q1	Over full temperature range			80		
				. 3		4.99			
		V _{OH} , R _L = ∞	Over full tempe	4.98			V		
		Sourcing, V _{IN} = V ₂ V	-25	-42	-60	<u> </u>			
I _{SC}	Output short-circuit current (10)		Sourcing, $V_{IN} = V_S$, $V_{OUT} = GND$ Sinking, $V_{IN} = GND$, $V_{OUT} = V_S$					mA	
		Sinking, VIN = GIVD, V	VOUT - VS	30	48	65	<u> </u>		

AC common-mode signal is a 5-V_{PP} sine-wave (0 V to 5 V) at the given frequency.

Positive current corresponds to current flowing into the device.

⁽⁸⁾ For this test input is driven from A1 stage.

 ⁽⁹⁾ For V_{OL}, R_L is connected to V_S and for V_{OH}, R_L is connected to GND.
 (10) Short-Circuit test is a momentary test. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of 150°C.



6.8 Typical Characteristics

at $T_A = 25^{\circ}\text{C}$, $V_S = 5$ V, GND = 0 V, $-22 \le V_{CM} \le 60$ V, $R_L = \infty$, OFFSET (pin 7) connected to V_S , and 10 nF between V_S and GND (unless otherwise noted)




Figure 1. V_{OS} vs V_{CM} at V_{S} = 3.3 V




Figure 2. V_{OS} vs V_{CM} at $V_S = 5$ V




Figure 3. Input Bias Current Over Temperature (+IN and -IN pins) at $V_S = 3.3 \text{ V}$




Figure 4. Input Bias Current Over Temperature (+IN and -IN pins) at $V_S = 5 \text{ V}$




Figure 5. Input Bias Current Over Temperature (A2 pin) at $\rm V_S = 5~\rm V$





Figure 6. Input Bias Current Over Temperature (A2 pin) at $V_S = 5 \text{ V}$




at $T_A = 25^{\circ}\text{C}$, $V_S = 5$ V, GND = 0 V, $-22 \le V_{CM} \le 60$ V, $R_L = \infty$, OFFSET (pin 7) connected to V_S , and 10 nF between V_S and GND (unless otherwise noted)



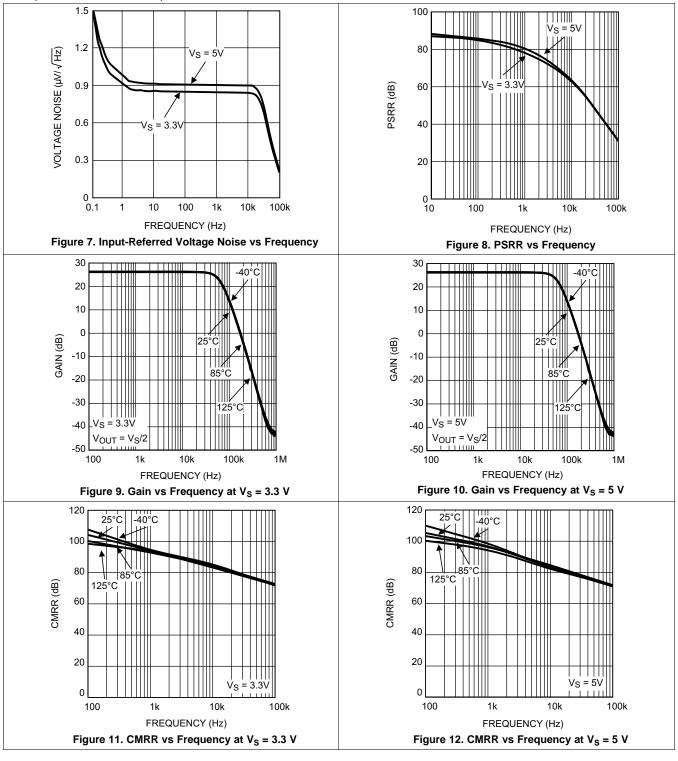

at $T_A = 25^{\circ}\text{C}$, $V_S = 5 \text{ V}$, GND = 0 V, $-22 \leq V_{CM} \leq 60 \text{ V}$, $R_L = \infty$, OFFSET (pin 7) connected to V_S , and 10 nF between V_S and GND (unless otherwise noted)

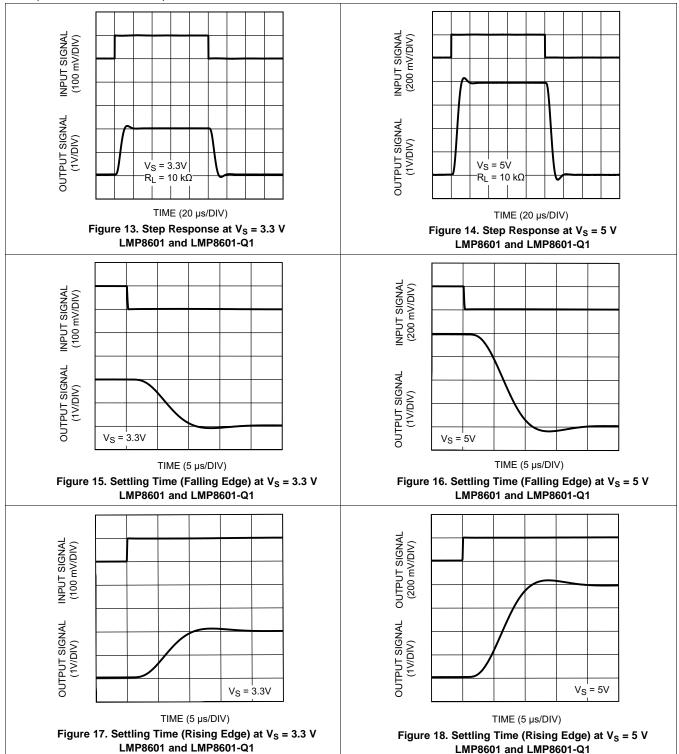



at $T_A = 25^{\circ}\text{C}$, $V_S = 5 \text{ V}$, GND = 0 V, $-22 \leq V_{CM} \leq 60 \text{ V}$, $R_L = \infty$, OFFSET (pin 7) connected to V_S , and 10 nF between V_S and GND (unless otherwise noted)




Figure 19. Step Response at V $_{S}$ = 3.3 V, R $_{L}$ = 10 k Ω LMP8602 and LMP8602-Q1




Figure 20. Step Response at $V_S = 5$ V, $R_L = 10$ k Ω LMP8602 and LMP8602-Q1




Figure 21. Settling Time (Falling Edge) at $V_S = 3.3 \text{ V}$ LMP8602 and LMP8602-Q1




Figure 22. Settling Time (Falling Edge) at V_S = 5 V LMP8602 and LMP8602-Q1




Figure 23. Settling Time (Rising Edge) at V_S = 3.3 V LMP8602 and LMP8602-Q1




Figure 24. Settling Time (Rising Edge) at V_S = 5 V LMP8602 and LMP8602-Q1



at $T_A = 25^{\circ}\text{C}$, $V_S = 5$ V, GND = 0 V, $-22 \le V_{CM} \le 60$ V, $R_L = \infty$, OFFSET (pin 7) connected to V_S , and 10 nF between V_S and GND (unless otherwise noted)

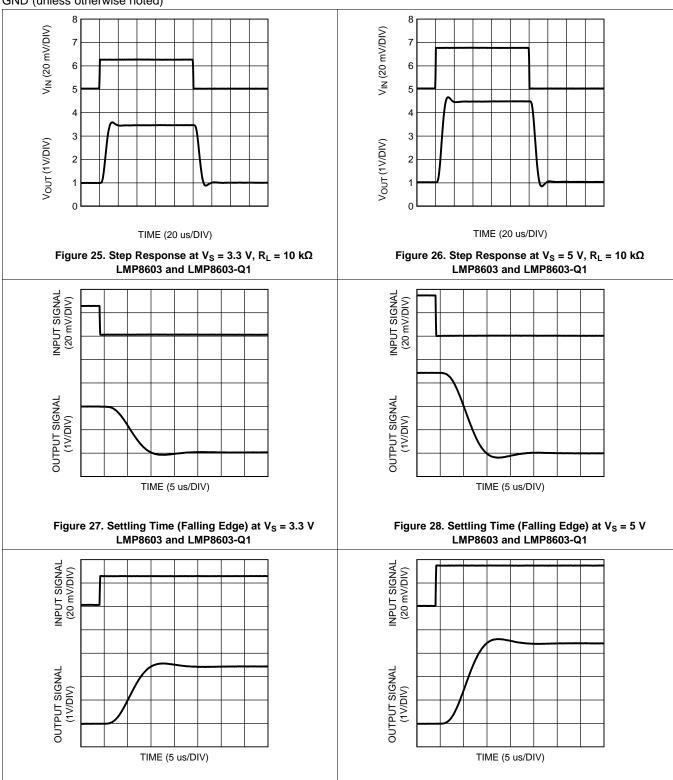


Figure 29. Settling Time (Rising Edge) at V_S = 3.3 V


LMP8603 and LMP8603-Q1

Figure 30. Settling Time (Rising Edge) at $V_S = 5 \text{ V}$

LMP8603 and LMP8603-Q1




at $T_A = 25^{\circ}\text{C}$, $V_S = 5$ V, GND = 0 V, $-22 \le V_{CM} \le 60$ V, $R_L = \infty$, OFFSET (pin 7) connected to V_S , and 10 nF between V_S and GND (unless otherwise noted)

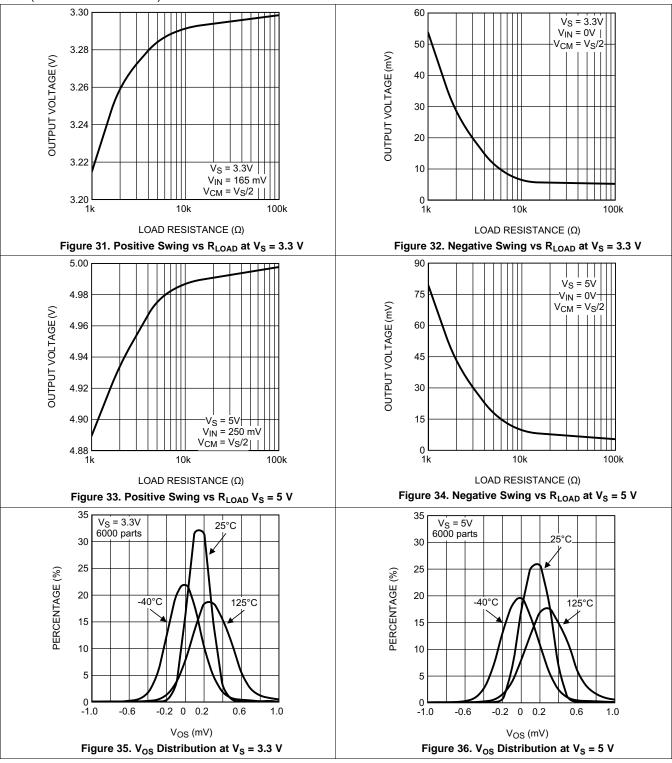



at $T_A = 25^{\circ}\text{C}$, $V_S = 5$ V, GND = 0 V, $-22 \le V_{CM} \le 60$ V, $R_L = \infty$, OFFSET (pin 7) connected to V_S , and 10 nF between V_S and GND (unless otherwise noted)

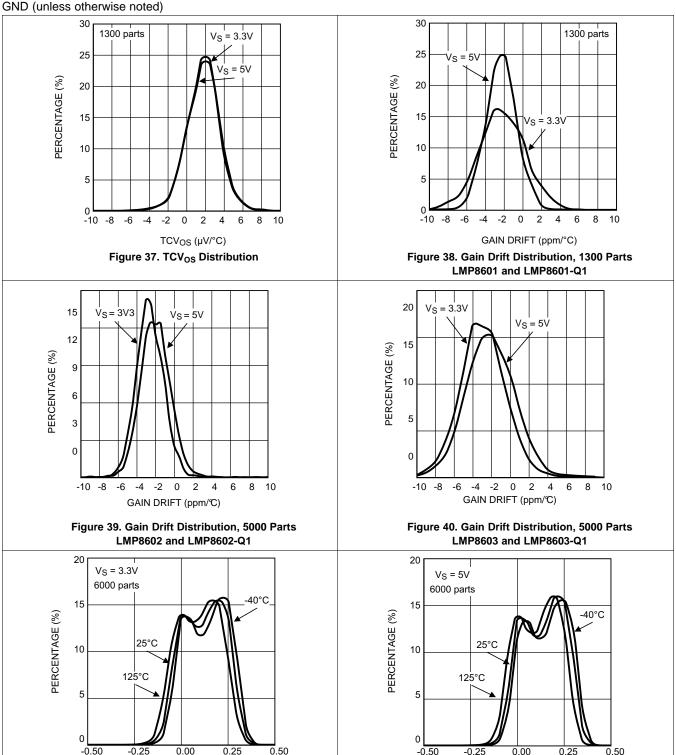

GAIN ERROR (%)

Figure 41. Gain Error Distribution at V_S = 3.3 V

LMP8601 and LMP8601-Q1

GAIN ERROR (%)

Figure 42. Gain Error Distribution at $V_S = 5 \text{ V}$

LMP8601 and LMP8601-Q1



at $T_A = 25$ °C, $V_S = 5$ V, GND = 0 V, $-22 \le V_{CM} \le 60$ V, $R_L = \infty$, OFFSET (pin 7) connected to V_S , and 10 nF between V_S and GND (unless otherwise noted)




Figure 43. Gain Error Distribution at $V_S = 3.3 \text{ V}$, 5000 Parts LMP8602 and LMP8602-Q1




Figure 44. Gain Error Distribution at $V_S = 5 \text{ V}$, 5000 Parts LMP8602 and LMP8602-Q1




Figure 45. Gain Error Distribution at $V_S = 3.3 \text{ V}$, 5000 Parts LMP8603 and LMP8603-Q1






Figure 46. Gain Error Distribution at V_S = 5 V LMP8603 and LMP8603-Q1







at $T_A = 25^{\circ}\text{C}$, $V_S = 5$ V, GND = 0 V, $-22 \le V_{CM} \le 60$ V, $R_L = \infty$, OFFSET (pin 7) connected to V_S , and 10 nF between V_S and GND (unless otherwise noted)




Figure 49. Output Voltage vs VIN




Figure 50. Output Voltage vs VIN (Enlarged Close to 0 V)




Figure 51. Output Voltage vs VIN




Figure 52. Output Voltage vs VIN (Enlarged Close to 0 V)



7 Detailed Description

7.1 Overview

The LMP860x and LMP860x-Q1 are fixed gain differential voltage precision amplifiers, with a -22-V to +60-V input common-mode voltage range when operating from a single 5-V supply, or a -4-V to +27-V input common-mode voltage range when operating from a single 3.3-V supply. The LMP8601 and LMP8601-Q1 have a gain of 20x, the LMP8602 and LMP8602-Q1 have a gain of 50x, and the LMP8603 and LMP8603-Q1 have a gain of 100x.

The LMP860x and LMP860x-Q1 are members of the LMP family and are ideal parts for unidirectional and bidirectional current sensing applications. Because of the proprietary chopping level-shift input stage, the LMP860x and LMP860x-Q1 achieve very low offset, very low thermal offset drift, and very high CMRR. The LMP860x and LMP860x-Q1 amplify and filter small differential signals in the presence of high common-mode voltages.

The LMP860x and LMP860x-Q1 use level shift resistors at the inputs. Because of these resistors, the LMP860x and LMP860x-Q1 can easily withstand very large differential input voltages that may exist in fault conditions where some other less protected high-performance current sense amplifiers might sustain permanent damage.


7.1.1 Theory of Operation

The schematic shown in the *Functional Block Diagram* gives a basic representation of the internal operation of the LMP860x and LMP860x-Q1.

The signal on the input pins is typically a small differential voltage developed across a current sensing shunt resistor. The input signal may also appear at a high common-mode voltage. The input signals are accessed through two input resistors that change the voltage into a current. The proprietary chopping level-shift current circuit pulls or pushes current through the input resistors to bring the common-mode voltage behind these resistors within the supply rails.

Subsequently, the signal is gained up by a factor of 10 and brought out on the A1 pin through a trimmed $100-k\Omega$ resistor. In the application, additional gain adjustment or filtering components can be added between the A1 and A2 pins as explained in subsequent sections. The signal on the A2 pin is further amplified by a factor of 2 (LMP8601 and LMP8601-Q1), 5 (LMP8602, LMP8602-Q1), or 10 (LMP8603, LMP8603-Q1), and brought out on the OUT pin.

7.2 Functional Block Diagram

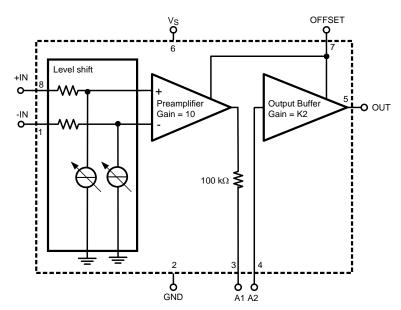

NOTE: K2 = 2 for LMP8601, LMP8601-Q1; 5 for LMP8602, LMP8602-Q1; or 10 for LMP8603, LMP8603-Q1.



7.3 Feature Description

7.3.1 Offset Input Pin

The OFFSET pin allows the output signal to be level-shifted to enable bidirectional current sensing. The output signal is bidirectional and mid-rail referenced when the offset pin is connected to the positive supply rail. With the offset pin connected to ground, the output signal is unidirectional and ground-referenced.

The signal on the A1 and OUT pins is ground-referenced when the offset pin is connected to ground. This means that the output signal can only represent positive values of the current through the shunt resistor, so only currents flowing in one direction can be measured.

When the offset pin is tied to the positive supply rail, the signal on the A1 and OUT pins is referenced to a midrail voltage which allows bidirectional current sensing. The operation of the amplifier will be fully bidirectional and symmetrical around 0 V differential at the input pins. The signal at the output will follow this voltage difference multiplied by the gain and at an offset voltage at the output of half V_S .

When the offset pin is connected to an external voltage source, the output signal will be level shifted to that voltage divided by two. In principle, the output signal can be shifted to any voltage between 0 and $V_{\rm S}$ / 2 by applying twice that voltage to the OFFSET pin.

NOTE

The OFFSET pin must be driven from a very low-impedance source (< 10Ω). This low source impedance is required because the OFFSET pin internally connects directly to the resistive feedback networks of the two gain stages. When the OFFSET pin is driven from a relatively large impedance (for example, a resistive divider between the supply rails), accuracy decreases.

Examples:


- **LMP8601**, **LMP8601-Q1**: A 5-V supply, a gain of 20x, OFFSET pin tied to V_S, and a differential input signal of 10 mV results in 2.7 V at the output pin. Similarly, –10 mV at the input results in 2.3 V at the output pin.
- LMP8602, LMP8602-Q1: A 5-V supply, a gain of 50x, and a differential input signal of 10 mV results in 3.0 V at the output pin. Similarly, -10 mV at the input results in 2.0 V at the output pin.
- LMP8603, LMP8603-Q1: A 5-V supply, a gain of 100x, and a differential input signal of 10 mV results in 3.5 V at the output pin. Similarly, -10 mV at the input results in 1.5 V at the output pin. (1) (1)
- (1) The OFFSET pin must be driven from a very low-impedance source (< 10 Ω) because the OFFSET pin internally connects directly to the resistive feedback networks of the two gain stages. When the OFFSET pin is driven from a relatively large impedance (for example, a resistive divider between the supply rails), accuracy decreases.</p>

Feature Description (continued)

7.3.2 Additional Second-Order Low-Pass Filter

The LMP86x1 and LMP86x1-Q1 have a third-order Butterworth lowpass characteristic with a typical bandwidth of 60 kHz integrated in the preamplifier stage. The bandwidth of the output buffer can be reduced by adding a capacitor on the A1 pin to create a first-order low-pass filter with a time constant determined by the $100-k\Omega$ internal resistor and the external filter capacitor.

It is also possible to create an additional second-order, Sallen-Key, low-pass filter by adding external components R_2 , C_1 and C_2 . Together with the internal 100-k Ω resistor R_1 as illustrated in Figure 53, this circuit creates a second-order, low-pass filter characteristic.

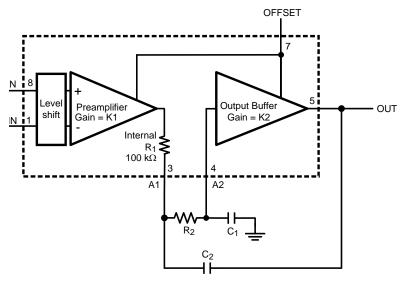

NOTE: K1 = 10; K2 = 2 for LMP8601, LMP8601-Q1; 5 for LMP8602, LMP8602-Q1; or 10 for LMP8603, LMP8603-Q1.

Figure 53. Second-Order Low-Pass Filter

When the corner frequency of the additional filter is much lower than 60 kHz, the transfer function of the described amplifier can be written as:

$$H(s) = \frac{K_1 * K_2 \frac{1}{R_1 R_2 C_1 C_2}}{s^2 + s * \left[\frac{1}{R_1 C_2} + \frac{1}{R_2 C_2} + \frac{(1 - K_2)}{R_2 C_1}\right] + \frac{1}{R_1 R_2 C_1 C_2}}$$

where

K₁ equals the gain of the preamplifier and K₂ that of the buffer amplifier.

Equation 1 can be written in the normalized frequency response for a second-order lowpass filter:

$$G(j\omega) = K_1 * \frac{K_2}{\frac{(j\omega)^2}{\omega_0^2} + \frac{j\omega}{Q\omega_0} + 1}$$
(2)

The cutoff frequency ω_0 in rad/sec (divide by 2π to get the cut-off frequency in Hz) is given by:

$$\omega_0 = \frac{1}{\sqrt{R_1 R_2 C_1 C_2}} \tag{3}$$



Feature Description (continued)

and the quality factor of the filter is given by:

$$Q = \frac{\sqrt{R_1 R_2 C_1 C_2}}{R_1 C_1 + R_2 C_1 + (1 - K_2) * R_1 C_2}$$
(4)

With $K_2 = 2x$, Equation 4 transforms results in:

$$Q = \frac{\sqrt{R_1 R_2 C_1 C_2}}{R_1 C_1 + R_2 C_1 - R_1 C_2}$$
(5)

For any filter gain K > 1x, the design procedure can be very simple if the two capacitors are chosen to in a certain ratio.

$$C_2 = \frac{C_1}{K_2 - 1} \tag{6}$$

Inserting this in Equation 4 for Q results in:

$$Q = \frac{\sqrt{R_1 R_2 \frac{C_1^2}{K_2 - 1}}}{R_1 C_1 + R_2 C_1 - \frac{(K_2 - 1)R_1 C_1}{K_2 - 1}}$$
(7)

Which results in:

$$Q = \frac{\sqrt{R_1 R_2 \frac{C_1^2}{K_2 - 1}}}{C_1 R_2} = \frac{\sqrt{\frac{R_1 R_2}{K_2 - 1}}}{R_2}$$
(8)

In this case, given the predetermined value of R1 = 100 k Ω (the internal resistor), the quality factor is set solely by the value of the resistor R₂.

 R_2 can be calculated based on the desired value of Q as the first step of the design procedure with the following equation:

$$R_2 = \frac{R_1}{(K-1)Q^2}$$
 (9)

For the gain of 2 for the LMP8601 and LMP8601-Q1, the result is:

$$R_2 = \frac{R_1}{Q^2} \tag{10}$$

For the gain of 5 for the LMP8602 and LMP8602-Q1, the result is:

$$R_2 = \frac{R_1}{4Q^2} \tag{11}$$

For the gain of 10 for the LMP8603 and LMP8603-Q1, the result is:

$$R_2 = \frac{R_1}{9Q^2} \tag{12}$$



Feature Description (continued)

For instance, the value of Q can be set to $0.5\sqrt{2}$ to create a Butterworth response, to $1/\sqrt{3}$ to create a Bessel response, or a 0.5 to create a critically damped response. After the value of R_2 has been found, the second and last step of the design procedure is to calculate the required value of C to give the desired low-pass cut-off frequency using:

$$C_1 = \frac{(K_2 - 1)Q}{R_1 \omega_0} \tag{13}$$

For the gain = 2, the result is:

$$C = \frac{Q}{R_1 \omega_0} \tag{14}$$

The gain = 5 results in:

$$C1 = \frac{4Q}{R_1 \omega_0} \tag{15}$$

The gain = 10 gives:

$$C_1 = \frac{9Q}{R_1 \omega_0} \tag{16}$$

For C₂ the value is calculated with:

$$C_2 = \frac{C_1}{K_2 - 1} \tag{17}$$

For a gain = 2:

$$C_2 = C_1 \tag{18}$$

Or for a gain = 5:

$$C_2 = \frac{C_1}{4} \tag{19}$$

And for a gain = 10:

$$C_2 = \frac{C_1}{9} \tag{20}$$

Note that the frequency response achieved using this procedure is only accurate if the cut-off frequency of the second-order filter is much smaller than the intrinsic 60-kHz, low-pass filter. In other words, choose the frequency response of the LMP860x or LMP860x-Q1 circuit so that the internal poles do not affect the external second-order filter.

7.4 Device Functional Modes

7.4.1 Gain Adjustment


The gain of the LMP860x and LMP860x-Q1 is fixed; however, the overall gain may be adjusted as the signal path between the two internal amplifiers is available on the A1 and A2 pins.



Device Functional Modes (continued)

7.4.1.1 Reducing Gain

Figure 54 shows the configuration that can be used to reduce the gain of the LMP8601 and LMP8601-Q1.



NOTE: K2 = 2 for LMP8601, LMP8601-Q1; 5 for LMP8602, LMP8602-Q1; or 10 for LMP8603, LMP8603-Q1.

Figure 54. Reduce Gain

 R_r creates a resistive divider together with the internal 100-k Ω resistor such that the reduced gain G_r becomes:

$$G_{r} = \frac{20 R_{r}}{R_{r} + 100 k\Omega}$$

$$(21)$$

For the LMP8602 and LMP8602-Q1:

$$G_{r} = \frac{50 R_{r}}{R_{r} + 100 k\Omega}$$

$$(22)$$

And for the LMP8603 and LMP8603-Q1:

$$G_{r} = \frac{100 R_{r}}{R_{r} + 100 k\Omega}$$

$$(23)$$

Given a desired value of the reduced gain G_r , using this equation, the LMP8601 and LMP8601-Q1 required value for the R_r is calculated with:

$$R_r = 100 \text{ k}\Omega \text{ X} \frac{G_r}{20 - G_r}$$
 (24)

For the LMP8602 and LMP8602-Q1:

$$R_r = 100 \text{ k}\Omega \text{ X} \frac{G_r}{50 - G_r}$$
 (25)

And for the LMP8603 and LMP8603-Q1:


$$R_r = 100 \text{ k}\Omega \times \frac{G_r}{100 - G_r}$$
 (26)

7.4.1.2 Increasing Gain

Figure 55 shows the configuration that can be used to increase the gain of the LMP8601 and LMP8601-Q1.



Device Functional Modes (continued)



NOTE: K2 = 2 for LMP8601, LMP8601-Q1; 5 for LMP8602, LMP8602-Q1; or 10 for LMP8603, LMP8603-Q1.

Figure 55. Increase Gain

 R_i creates positive feedback from the output pin to the input of the buffer amplifier. The positive feedback increases the gain. The increased gain G_i for the LMP8601 and LMP8601-Q1 becomes:

$$G_i = \frac{20 R_i}{R_i - 100 k\Omega}$$

$$(27)$$

For the LMP8602 and LMP8602-Q1:

$$G_{i} = \frac{50 R_{i}}{R_{i} - 400 k\Omega}$$
 (28)

And for the LMP8603 and LMP8603-Q1:

$$G_i = \frac{100 R_i}{R_i - 900 k\Omega}$$
 (29)

From this equation, for a desired value of the gain, the LMP8601 and LMP8601-Q1 required value of R_i is calculated with:

$$R_i = 100 \text{ k}\Omega \text{ X} \frac{G_i}{G_i - 20}$$
 (30)

For the LMP8602 and LMP8602-Q1:

$$R_i = 400 \text{ k}\Omega \text{ X} \frac{G_i}{G_i - 50}$$
 (31)

And for the LMP8603 with:

$$R_{i} = 900 \text{ k}\Omega \times \frac{G_{i}}{G_{i} - 100}$$
(32)

Note that from the equation for the gain G_i , for large gains, R_i approaches 100 k Ω . In this case, the denominator in the equation becomes close to zero. In practice, for large gains, the denominator is determined by tolerances in the value of the external resistor R_i and the internal 100-k Ω resistor. In this case, the gain becomes very inaccurate. If the denominator becomes equal to zero, the system becomes unstable. TI recommends to limit the application of this technique to gain values of 50 or smaller.



Device Functional Modes (continued)

7.4.2 Driving Switched Capacitive Loads

Some ADCs load their signal source with a sample and hold capacitor. The capacitor may be discharged prior to being connected to the signal source. If the LMP860x and LMP860x-Q1 are driving such ADCs, the sudden current that should be delivered when the sampling occurs may disturb the output signal. This effect was simulated with the circuit shown in Figure 56 where the output is to a capacitor that is driven by a rail-to-rail square wave.





Figure 56. Driving Switched Capacitive Load

This circuit simulates the switched connection of a discharged capacitor to the LMP860x and LMP860x-Q1 output. The resulting V_{OUT} disturbance signals are shown in Figure 57 and Figure 58.

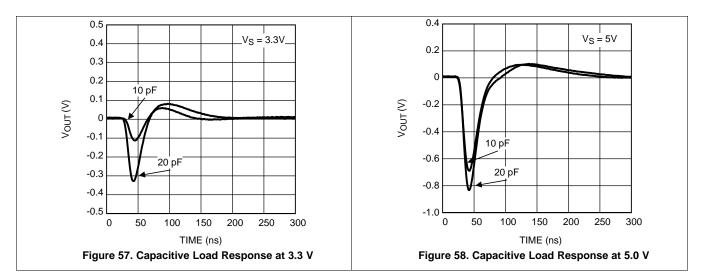

These figures can be used to estimate the disturbance that will be caused when driving a switched capacitive load. To minimize the error signal introduced by the sampling that occurs on the ADC input, place an additional RC filter between the LMP860x or LMP860x-Q1 and the ADC, as illustrated in Figure 59.




Figure 59. Reduce Error When Driving ADCs

The external capacitor absorbs the charge that flows when the ADC sampling capacitor is connected. The external capacitor should be much larger than the sample-and-hold capacitor at the input of the ADC, and the RC time constant of the external filter should be such that the speed of the system is not affected.



8 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

8.1 Application Information


8.1.1 Specifying Performance

To specify the high performance of the LMP860x and LMP860x-Q1, all minimum and maximum values shown in the parameter tables of this data sheet are 100% tested, and all over temperature limits are also 100% tested over temperature.

8.2 Typical Applications

8.2.1 High-Side, Current-Sensing Application

Figure 60 illustrates the application of the LMP860x and LMP860x-Q1 in a high-side sensing application. This application is similar to the low-side sensing discussed below, except in this application the common-mode voltage on the shunt drops below ground when the driver is switched off. Because the common-mode voltage range of the LMP860x and LMP860x-Q1 extends below the negative rail, the LMP860x and LMP860x-Q1 are also very well suited for this application.

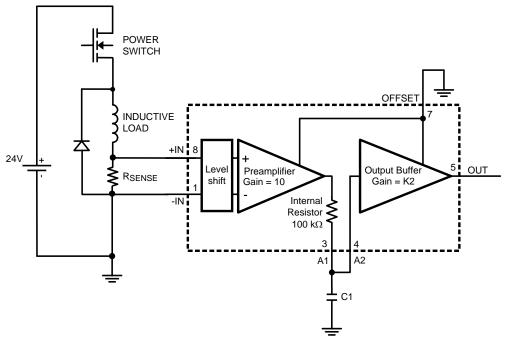

NOTE: For this application example, K2 = 2.

Figure 60. High-Side, Current-Sensing Application



8.2.1.1 Design Requirements

Using the circuit in Figure 60, the requirement is to measure coil current up to 10 A and drive the ADC input to a maximum of 3.3 V. The OFFSET pin is grounded, so zero current will result in a zero volt output.

8.2.1.2 Detailed Design Procedure

First, the value of R_{SENSE} must be determined. R_{SENSE} can be found by dividing the maximum desired output swing by the gain to determine the maximum input voltage. In this example, the LMP8601 is used, with a gain of 20 V/V, as shown in Equation 33:

$$V_{\text{INMAX}} = \frac{V_{\text{OUTMAX}}}{\text{Gain}} = \frac{3.3 \text{ V}}{20 \text{ V/V}} = 165 \text{ mV}$$
(33)

Knowing 165 mV must be generated, the ideal value of the sense resistor can be determined through simple ohms law:

$$R_{SENSE} = \frac{V_{INMAX}}{I_{LOADMAX}} = \frac{165 \text{ mV}}{10A} = 16.5 \text{ m}\Omega$$
(34)

The ideal sense resistor value is 16.5 m Ω . The closest standard value is 15 m Ω , but this value may cause the output to slightly overrange at 10 V. It is recommended to reduce the expected maximum output by a few percent to allow for overloads and component tolerances. The next most popular values would be 10 m Ω , 15 m Ω , and 20 m Ω . 10 m Ω allows for a maximum output of 2 V at 10 A, but may be too low and not use the full output range. 20 m Ω provides more sensitivity, but limits the maximum current to 8.25 A. 15 m Ω is a good compromise at 11 A maximum, and allows for some component tolerance variation.

If a suitable sense resistor value is not available, it is possible to adjust the gain as detailed in the *Gain Adjustment* section.

The sense resistor does dissipates power, so the maximum wattage rating and appropriate power deratings must be observed. In the example above, the sense resistor dissipates $0.165 \text{ V} \times 10 \text{ A} = 1.65 \text{ W}$, so a sense resistor of at least twice the maximum expected power should be used (greater than 4 W).

8.2.1.3 Application Curve

Below is the expected output value using a 15-m Ω sense resistor.





Figure 61. Expected Output Voltage vs Load Current Using 15-mΩ Sense Resistor

8.2.2 Low-Side, Current-Sensing Application

Figure 62 illustrates a low-side, current-sensing application with a low-side driver. The power transistor is pulse width modulated to control the average current flowing through the inductive load which is connected to a relatively high battery voltage. The current through the load is measured across a shunt resistor R_{SENSE} in series with the load. When the power transistor is on, current flows from the battery through the inductive load, the shunt resistor and the power transistor to ground. In this case, the common-mode voltage on the shunt is close to ground. When the power transistor is off, current flows through the inductive load, through the shunt resistor and through the freewheeling diode. In this case the common-mode voltage on the shunt is at least one diode voltage drop above the battery voltage. Therefore, in this application the common-mode voltage on the shunt is varying between a large positive voltage and a relatively low voltage. Because the large common-mode voltage range of the LMP860x and LMP860x-Q1 and because of the high ac common-mode rejection ratio, the LMP860x and LMP860x-Q1 are very well suited for this application.

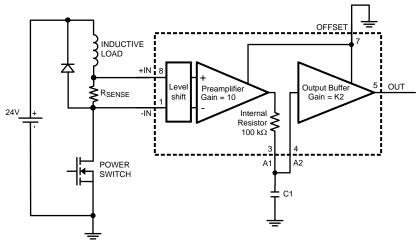

 $R_{SENSE} = 0.01 \Omega$, K2 = 2, $V_{OUT} = 0.2 V/A$

Figure 62. Low-Side Current-Sensing Application

For this application, the following example can be used for the calculation of the sense voltage (V_{SENSE}):

When using a sense resistor, R_{SENSE} , of 0.01 Ω and a current, I_{LOAD} , of 1 A, the sense voltage at the input pins of the LMP860x and LMP860x-Q1 is:

$$V_{SENSE} = R_{SENSE} \times I_{LOAD} = 0.01 \Omega \times 1 A = 0.01 V$$
(35)

With the gain of 20 for the LMP8601, the result is an output of 0.2 V. Or in other words, $V_{OUT} = 0.2 \text{ V/A}$. The result is the same for the LMP8601-Q1.


For the LMP8602 and LMP8602-Q1 with a gain of 50, the output is 0.5 V/A.

For the LMP8603 and LMP8603-Q1 with a gain of 100, the output is 1 V/A.



8.2.3 Battery Current Monitor Application

This application example shows how the LMP860x and LMP860x-Q1 can be used to monitor the current flowing in and out of a battery pack. The fact that the LMP860x and LMP860x-Q1 can measure small voltages at a high offset voltage outside the parts own supply range makes this part a very good choice for such applications. If the load current of the battery is higher then the charging current, the output voltage of the LMP860x and LMP860x-Q1 will be above the *half offset voltage* for a net current flowing out of the battery. When the charging current is higher then the load current the output will be below this half offset voltage.

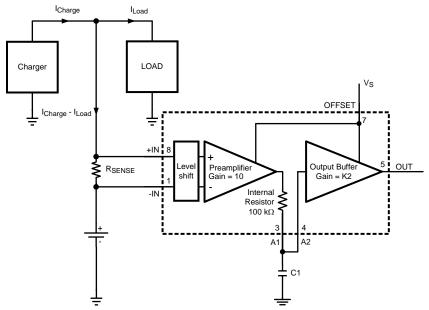


NOTE: K2 = 2 for LMP8601, LMP8601-Q1; 5 for LMP8602, LMP8602-Q1; or 10 for LMP8603, LMP8603-Q1.

Figure 63. Battery Current Monitor Application

8.2.4 Advanced Battery Charger Application

Figure 63 can be used to realize an advanced battery charger that has the capability to monitor the exact net current that flows in and out the battery as show in Figure 64. The output signal of the LMP860x and LMP860x-Q1 is digitized with the ADC and used as an input for the charge controller. The Charge controller can be used to regulate the charger circuit to deliver exactly the current that is required by the load, avoiding overcharging a fully loaded battery.

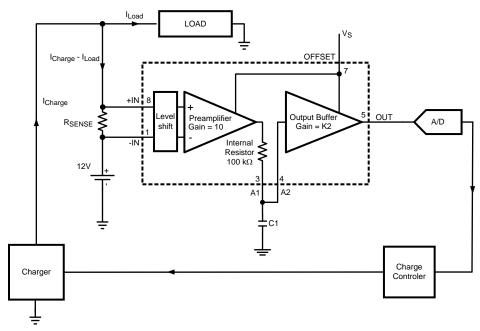


NOTE: K2 = 2 for LMP8601, LMP8601-Q1; 5 for LMP8602, LMP8602-Q1; or 10 for LMP8603, LMP8603-Q1.

Figure 64. Advanced Battery Charger Application

8.2.5 Current Loop Receiver Application

Many industrial applications use 4-mA to 20-mA transmitters to send an analog value of a sensor to a central control room. The LMP860x and LMP860x-Q1 can be used as a current loop receiver as shown in Figure 65.

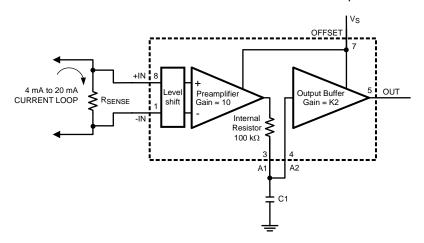

NOTE: K2 = 2 for LMP8601, LMP8601-Q1; 5 for LMP8602, LMP8602-Q1; or 10 for LMP8603, LMP8603-Q1.

Figure 65. Current-Loop Receiver Application



9 Power Supply Recommendations

In order to decouple the LMP860x and LMP860x-Q1 from AC noise on the power supply, place a 0.1- μ F bypass capacitor between the V_S and GND pins. Place this capacitor as close as possible to the supply pins. In some cases, an additional 10- μ F bypass capacitor may further reduce the supply noise.

10 Layout

10.1 Layout Guidelines

The traces leading to and from the sense resistor can be significant error sources. With small value sense resistors ($< 100 \text{ m}\Omega$), any trace resistance shared with the load current can cause significant errors.

The amplifier inputs should be directly connected to the sense resistor pads using Kelvin or 4-wire connection techniques. The traces should be one continuous piece of copper from the sense resistor pad to the amplifier input pin pad, and ideally on the same copper layer with minimal vias or connectors. This can be important around the sense resistor if it is generating any significant heat gradients.

To minimize noise pickup and thermal errors, the input traces should be treated as a differential signal pair and routed tightly together with a direct path to the input pins. The input traces should be run away from noise sources, such as digital lines, switching supplies or motor drive lines. Remember that these traces can contain high voltage, and should have the appropriate trace routing clearances.

Since the sense traces only carry the amplifier bias current, the connecting input traces can be thinner, signal level traces. Excessive Resistance in the trace should also be avoided.

The paths of the traces should be identical, including connectors and vias, so that any errors will be equal and cancel.

The sense resistor will heat up as the load increases. As the resistor heats up, the resistance generally goes up, which will cause a change in the readings. The sense resistor should have as much heatsinking as possible to remove this heat through the use of heatsinks or large copper areas coupled to the resistor pads. A reading drifting over time after turnon can usually be traced back to sense resistor heating.

10.2 Layout Example




Figure 66. Kelvin or 4-wire Connection to the Sense Resistor



Click here

11 Device and Documentation Support

11.1 Device Support

11.1.1 Development Support

LMP8601 TINA SPICE Model, SNOM084

TINA-TI SPICE-Based Analog Simulation Program, http://www.ti.com/tool/tina-ti

11.2 Related Links

Table 1 lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

SUPPORT & TOOLS & PRODUCT FOLDER **PARTS SAMPLE & BUY** COMMUNITY **DOCUMENTS SOFTWARE** LMP8601 Click here Click here Click here Click here Click here LMP8601-Q1 Click here Click here Click here Click here Click here LMP8602 Click here Click here Click here Click here Click here LMP8602-Q1 Click here Click here Click here Click here Click here LMP8603 Click here Click here Click here Click here Click here

Click here

Click here

Table 1. Related Links

11.3 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

Click here

TI E2E™ Online Community TI's Engineer-to-Engineer (E2E) Community. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

11.4 Trademarks

LMP8603-Q1

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

Click here

11.5 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

11.6 Glossary

SLYZ022 — TI Glossarv.

This glossary lists and explains terms, acronyms, and definitions.

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Submit Documentation Feedback

www.ti.com

10-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	(3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
LMP8601EDRQ1	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 150	LMP86 01EDQ1
LMP8601EDRQ1.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 150	LMP86 01EDQ1
LMP8601MA/NOPB	Last Time Buy	Production	SOIC (D) 8	95 TUBE	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMP86 01MA
LMP8601MAX/NOPB	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMP86 01MA
LMP8601MAX/NOPB.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMP86 01MA
LMP8601QMA/NOPB	Last Time Buy	Production	SOIC (D) 8	95 TUBE	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMP86 01QMA
LMP8601QMAX/NOPB	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMP86 01QMA
LMP8601QMAX/NOPB.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMP86 01QMA
LMP8601QMAX/NOPB.B	Active	Production	SOIC (D) 8	2500 LARGE T&R	-	Call TI	Call TI	-40 to 150	
LMP8602MA/NOPB	Last Time Buy	Production	SOIC (D) 8	95 TUBE	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMP86 02MA
LMP8602MAX/NOPB	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMP86 02MA
LMP8602MAX/NOPB.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMP86 02MA
LMP8602MM/NOPB	Last Time Buy	Production	VSSOP (DGK) 8	1000 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	AN3A
LMP8602MME/NOPB	Last Time Buy	Production	VSSOP (DGK) 8	250 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	AN3A
LMP8602MMX/NOPB	Active	Production	VSSOP (DGK) 8	3500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	AN3A
LMP8602MMX/NOPB.A	Active	Production	VSSOP (DGK) 8	3500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	AN3A
LMP8602QMA/NOPB	Last Time Buy	Production	SOIC (D) 8	95 TUBE	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMP86 02QMA
LMP8602QMAX/NOPB	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMP86 02QMA





www.ti.com 10-Nov-2025

Orderable part number	Status (1)	Material type	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
LMP8602QMAX/NOPB.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMP86 02QMA
LMP8602QMM/NOPB	Last Time Buy	Production	VSSOP (DGK) 8	1000 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	AF7A
LMP8602QMME/NOPB	Last Time Buy	Production	VSSOP (DGK) 8	250 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	AF7A
LMP8602QMMX/NOPB	Active	Production	VSSOP (DGK) 8	3500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	AF7A
LMP8602QMMX/NOPB.A	Active	Production	VSSOP (DGK) 8	3500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	AF7A
LMP8603MA/NOPB	Last Time Buy	Production	SOIC (D) 8	95 TUBE	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMP86 03MA
LMP8603MAX/NOPB	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMP86 03MA
LMP8603MAX/NOPB.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMP86 03MA
LMP8603MM/NOPB	Last Time Buy	Production	VSSOP (DGK) 8	1000 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	AP3A
LMP8603MME/NOPB	Last Time Buy	Production	VSSOP (DGK) 8	250 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	AP3A
LMP8603MMX/NOPB	Active	Production	VSSOP (DGK) 8	3500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	AP3A
LMP8603MMX/NOPB.A	Active	Production	VSSOP (DGK) 8	3500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	AP3A
LMP8603QMA/NOPB	Obsolete	Production	SOIC (D) 8	-	-	Call TI	Call TI	-40 to 125	LMP86 03QMA
LMP8603QMAX/NOPB	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMP86 03QMA
LMP8603QMAX/NOPB.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMP86 03QMA
LMP8603QMM/NOPB	Last Time Buy	Production	VSSOP (DGK) 8	1000 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	AH7A
LMP8603QMME/NOPB	Last Time Buy	Production	VSSOP (DGK) 8	250 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	AH7A
LMP8603QMMX/NOPB	Active	Production	VSSOP (DGK) 8	3500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	AH7A
LMP8603QMMX/NOPB.A	Active	Production	VSSOP (DGK) 8	3500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	AH7A

⁽¹⁾ Status: For more details on status, see our product life cycle.

www.ti.com 10-Nov-2025

- (2) Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.
- (3) RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.
- (4) Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- (5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- (6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF LMP8601, LMP8601-Q1, LMP8602, LMP8602-Q1, LMP8603, LMP8603-Q1:

- Catalog: LMP8601, LMP8602, LMP8603
- Automotive: LMP8601-Q1, LMP8602-Q1, LMP8603-Q1

NOTE: Qualified Version Definitions:


- Catalog TI's standard catalog product
- Automotive Q100 devices qualified for high-reliability automotive applications targeting zero defects



www.ti.com 1-Aug-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LMP8601EDRQ1	SOIC	D	8	2500	330.0	12.4	6.5	5.4	2.0	8.0	12.0	Q1
LMP8601MAX/NOPB	SOIC	D	8	2500	330.0	12.4	6.5	5.4	2.0	8.0	12.0	Q1
LMP8601QMAX/NOPB	SOIC	D	8	2500	330.0	12.4	6.5	5.4	2.0	8.0	12.0	Q1
LMP8602MAX/NOPB	SOIC	D	8	2500	330.0	12.4	6.5	5.4	2.0	8.0	12.0	Q1
LMP8602MM/NOPB	VSSOP	DGK	8	1000	177.8	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMP8602MME/NOPB	VSSOP	DGK	8	250	177.8	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMP8602MMX/NOPB	VSSOP	DGK	8	3500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMP8602QMAX/NOPB	SOIC	D	8	2500	330.0	12.4	6.5	5.4	2.0	8.0	12.0	Q1
LMP8602QMM/NOPB	VSSOP	DGK	8	1000	177.8	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMP8602QMME/NOPB	VSSOP	DGK	8	250	177.8	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMP8602QMMX/NOPB	VSSOP	DGK	8	3500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMP8603MAX/NOPB	SOIC	D	8	2500	330.0	12.4	6.5	5.4	2.0	8.0	12.0	Q1
LMP8603MM/NOPB	VSSOP	DGK	8	1000	177.8	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMP8603MME/NOPB	VSSOP	DGK	8	250	177.8	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMP8603MMX/NOPB	VSSOP	DGK	8	3500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMP8603QMAX/NOPB	SOIC	D	8	2500	330.0	12.4	6.5	5.4	2.0	8.0	12.0	Q1



PACKAGE MATERIALS INFORMATION

www.ti.com 1-Aug-2025

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LMP8603QMM/NOPB	VSSOP	DGK	8	1000	177.8	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMP8603QMME/NOPB	VSSOP	DGK	8	250	177.8	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMP8603QMMX/NOPB	VSSOP	DGK	8	3500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1



www.ti.com 1-Aug-2025



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LMP8601EDRQ1	SOIC	D	8	2500	356.0	356.0	35.0
LMP8601MAX/NOPB	SOIC	D	8	2500	356.0	356.0	35.0
LMP8601QMAX/NOPB	SOIC	D	8	2500	356.0	356.0	35.0
LMP8602MAX/NOPB	SOIC	D	8	2500	356.0	356.0	35.0
LMP8602MM/NOPB	VSSOP	DGK	8	1000	208.0	191.0	35.0
LMP8602MME/NOPB	VSSOP	DGK	8	250	208.0	191.0	35.0
LMP8602MMX/NOPB	VSSOP	DGK	8	3500	356.0	356.0	35.0
LMP8602QMAX/NOPB	SOIC	D	8	2500	356.0	356.0	35.0
LMP8602QMM/NOPB	VSSOP	DGK	8	1000	208.0	191.0	35.0
LMP8602QMME/NOPB	VSSOP	DGK	8	250	208.0	191.0	35.0
LMP8602QMMX/NOPB	VSSOP	DGK	8	3500	356.0	356.0	35.0
LMP8603MAX/NOPB	SOIC	D	8	2500	356.0	356.0	35.0
LMP8603MM/NOPB	VSSOP	DGK	8	1000	208.0	191.0	35.0
LMP8603MME/NOPB	VSSOP	DGK	8	250	208.0	191.0	35.0
LMP8603MMX/NOPB	VSSOP	DGK	8	3500	356.0	356.0	35.0
LMP8603QMAX/NOPB	SOIC	D	8	2500	356.0	356.0	35.0
LMP8603QMM/NOPB	VSSOP	DGK	8	1000	208.0	191.0	35.0
LMP8603QMME/NOPB	VSSOP	DGK	8	250	208.0	191.0	35.0



PACKAGE MATERIALS INFORMATION

www.ti.com 1-Aug-2025

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LMP8603QMMX/NOPB	VSSOP	DGK	8	3500	356.0	356.0	35.0

PACKAGE MATERIALS INFORMATION

www.ti.com 1-Aug-2025

TUBE



*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
LMP8601MA/NOPB	D	SOIC	8	95	495	8	4064	3.05
LMP8601QMA/NOPB	D	SOIC	8	95	495	8	4064	3.05
LMP8602MA/NOPB	D	SOIC	8	95	495	8	4064	3.05
LMP8602QMA/NOPB	D	SOIC	8	95	495	8	4064	3.05
LMP8603MA/NOPB	D	SOIC	8	95	495	8	4064	3.05



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES:

- 1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
- 4. This dimension does not include interlead flash.
- 5. Reference JEDEC registration MS-012, variation AA.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.





SMALL OUTLINE PACKAGE



NOTES:

PowerPAD is a trademark of Texas Instruments.

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-187.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
- 8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
- 9. Size of metal pad may vary due to creepage requirement.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 12. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025