

SN74AHC573-Q1 Automotive Octal Transparent D-Type Latch With 3-State Outputs

1 Features

- Qualified for automotive applications
- Operating range 2V to 5.5V V_{CC}
- 3-state outputs directly drive bus lines

2 Description

The SN74AHC573 is an octal transparent D-type latch designed for 2V to 5.5V V_{CC} operation.

Package Information

| PART NUMBER | PACKAGE ⁽¹⁾ | PACKAGE SIZE ⁽²⁾ | BODY SIZE ⁽³⁾ |
|---------------|------------------------|-----------------------------|--------------------------|
| SN74AHC573-Q1 | PW (TSSOP, 20) | 6.50mm × 6.4mm | 6.50mm × 4.40mm |

- (1) For more information, see [Mechanical, Packaging, and Orderable Information](#).
- (2) The package size (length × width) is a nominal value and includes pins, where applicable.
- (3) The body size (length × width) is a nominal value and does not include pins.

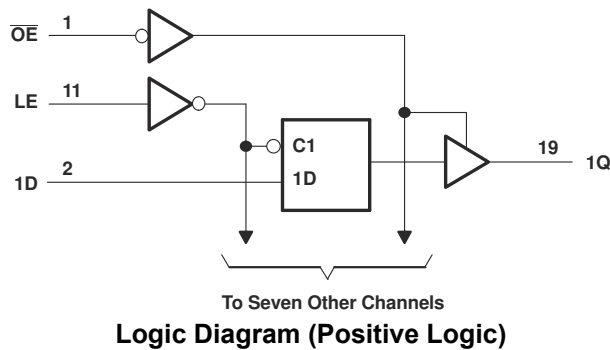


Table of Contents

| | | | |
|---|---|--|----|
| 1 Features | 1 | 6.1 Overview..... | 8 |
| 2 Description | 1 | 6.2 Functional Block Diagram..... | 8 |
| 3 Pin Configuration and Functions | 3 | 6.3 Device Functional Modes..... | 8 |
| 4 Specifications | 4 | 7 Application and Implementation | 9 |
| 4.1 Absolute Maximum Ratings..... | 4 | 7.1 Power Supply Recommendations..... | 9 |
| 4.2 ESD Ratings..... | 4 | 7.2 Layout..... | 9 |
| 4.3 Recommended Operating Conditions..... | 4 | 8 Device and Documentation Support | 11 |
| 4.4 Thermal Information..... | 5 | 8.1 Documentation Support..... | 11 |
| 4.5 Electrical Characteristics..... | 5 | 8.2 Receiving Notification of Documentation Updates.... | 11 |
| 4.6 Timing Requirements, $V_{CC} = 3.3V \pm 0.3V$ | 5 | 8.3 Support Resources..... | 11 |
| 4.7 Timing Requirements, $V_{CC} = 5V \pm 0.5V$ | 5 | 8.4 Trademarks..... | 11 |
| 4.8 Switching Characteristics, $V_{CC} = 3.3V \pm 0.3V$ | 6 | 8.5 Electrostatic Discharge Caution..... | 11 |
| 4.9 Switching Characteristics, $V_{CC} = 5V \pm 0.5V$ | 6 | 8.6 Glossary..... | 11 |
| 4.10 Operating Characteristics..... | 6 | 9 Revision History | 11 |
| 5 Parameter Measurement Information | 7 | 10 Mechanical, Packaging, and Orderable Information | 11 |
| 6 Detailed Description | 8 | | |

3 Pin Configuration and Functions

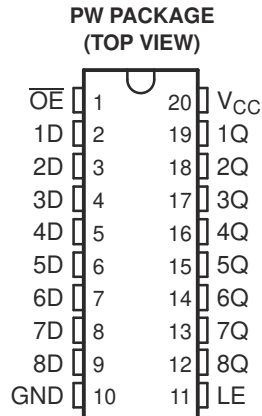


Figure 3-1. PW Package, 20-Pin TSSOP (Top View)

| PIN | | I/O ¹ | DESCRIPTION |
|-----|-----------------|------------------|---------------|
| NO. | NAME | | |
| 1 | OE | I | Output Enable |
| 2 | 1D | I | 1D Input |
| 3 | 2D | I | 2D Input |
| 4 | 3D | I | 3D Input |
| 5 | 4D | I | 4D Input |
| 6 | 5D | I | 5D Input |
| 7 | 6D | I | 6D Input |
| 8 | 7D | I | 7D Input |
| 9 | 8D | I | 8D Input |
| 10 | GND | — | Ground |
| 11 | LE | I | Latch Enable |
| 12 | 8Q | O | 8Q Output |
| 13 | 7Q | O | 7Q Output |
| 14 | 6Q | O | 6Q Output |
| 15 | 5Q | O | 5Q Output |
| 16 | 4Q | O | 4Q Output |
| 17 | 3Q | O | 3Q Output |
| 18 | 2Q | O | 2Q Output |
| 19 | 1Q | O | 1Q Output |
| 20 | V _{CC} | — | Power Pin |

1. I = input, O = output, P = power, FB = feedback, GND = ground, N/A = not applicable

4 Specifications

4.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)

| | | MIN | MAX | UNIT |
|-----------|--|-----------------------------|----------------|------|
| V_{CC} | Supply voltage range | -0.5 | 7 | V |
| V_I | Input voltage range ⁽¹⁾ | -0.5 | 7 | V |
| V_O | Output voltage range ⁽¹⁾ | -0.5 | $V_{CC} + 0.5$ | V |
| I_{IK} | Input clamp current | $V_I < 0$ | -20 | mA |
| I_{OK} | Output clamp current | $V_O < 0$ or $V_O > V_{CC}$ | ±20 | mA |
| I_O | Continuous output current | $V_O = 0$ to V_{CC} | ±25 | mA |
| | Continuous current through V_{CC} or GND | | ±75 | mA |
| T_{stg} | Storage temperature range | -65 | 150 | °C |

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

4.2 ESD Ratings

| | | Value | UNIT |
|-------------|-------------------------|---|-------|
| $V_{(ESD)}$ | Electrostatic discharge | Human body model (HBM), per AEC Q100-002 ⁽¹⁾ | ±1000 |
| | | Charged device model (CDM), per AEC Q100-011 | ±1000 |

- (1) AEC Q100-002 indicates that HBM stressing must be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

4.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

| | | -40°C to 125°C | | -40°C to 85°C | | UNIT |
|---------------------|------------------------------------|--------------------------|----------|---------------|----------|------|
| | | MIN | MAX | MIN | MAX | |
| V_{CC} | Supply voltage | 2 | 5.5 | 2 | 5.5 | V |
| V_{IH} | High-level input voltage | $V_{CC} = 2V$ | 1.5 | 1.5 | | V |
| | | $V_{CC} = 3V$ | 2.1 | 2.1 | | |
| | | $V_{CC} = 5.5V$ | 3.85 | 3.85 | | |
| V_{IL} | Low-level input voltage | $V_{CC} = 2V$ | | 0.5 | 0.5 | V |
| | | $V_{CC} = 3V$ | | 0.9 | 0.9 | |
| | | $V_{CC} = 5.5V$ | | 1.65 | 1.65 | |
| V_I | Input voltage | 0 | 5.5 | 0 | 5.5 | V |
| V_O | Output voltage | 0 | V_{CC} | 0 | V_{CC} | V |
| I_{OH} | High-level output current | $V_{CC} = 2V$ | | -50 | -50 | µA |
| | | $V_{CC} = 3.3V \pm 0.3V$ | | -4 | -4 | mA |
| | | $V_{CC} = 5V \pm 0.5V$ | | -8 | -8 | mA |
| I_{OL} | Low-level output current | $V_{CC} = 2V$ | | 50 | 50 | µA |
| | | $V_{CC} = 3.3V \pm 0.3V$ | | 4 | 4 | mA |
| | | $V_{CC} = 5V \pm 0.5V$ | | 8 | 8 | mA |
| $\Delta t/\Delta v$ | Input transition rise or fall rate | $V_{CC} = 3.3V \pm 0.3V$ | | 100 | 100 | ns/V |
| | | $V_{CC} = 5V \pm 0.5V$ | | 20 | 20 | ns/V |
| T_A | Operating free-air temperature | -40 | 125 | -40 | 85 | °C |

- (1) All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

4.4 Thermal Information

| THERMAL METRIC ⁽¹⁾ | | SN74AHC573-Q1 | UNIT |
|-------------------------------|--|---------------|------|
| | | PW (TSSOP) | |
| | | 20 PINS | |
| R _{θJA} | Junction-to-ambient thermal resistance | 83 | °C/W |

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report (SPRA953).

4.5 Electrical Characteristics

over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | TEST CONDITIONS | V _{CC} | T _A = 25°C | | | –40°C to 125°C | | –40°C to 85°C | | UNIT |
|-----------------|---|-----------------|-----------------------|-----|-------|----------------|------|---------------|-----|------|
| | | | MIN | TYP | MAX | MIN | MAX | MIN | MAX | |
| V _{OH} | I _{OH} = –50μA | 2V | 1.9 | 2 | | 1.9 | | 1.9 | V | |
| | | 3V | 2.9 | 3 | | 2.9 | | 2.9 | | |
| | | 4.5V | 4.4 | 4.5 | | 4.4 | | 4.4 | | |
| | I _{OH} = –4mA | 3V | 2.58 | | | 2.48 | | 2.48 | | |
| | | 4.5V | 3.94 | | | 3.8 | | 3.8 | | |
| V _{OL} | I _{OL} = 50μA | 2V | | | 0.1 | | 0.1 | 0.1 | V | |
| | | 3V | | | 0.1 | | 0.1 | 0.1 | | |
| | | 4.5V | | | 0.1 | | 0.1 | 0.1 | | |
| | I _{OL} = 4mA | 3V | | | 0.36 | | 0.5 | 0.44 | | |
| | | 4.5V | | | 0.36 | | 0.5 | 0.44 | | |
| I _I | V _I = 5.5V or GND | 0V to 5.5V | | | ±0.1 | | ±1 | ±1 | μA | |
| I _{OZ} | V _I = V _{IL} or V _{IH} , V _O = V _{CC} or GND | 5.5V | | | ±0.25 | | ±2.5 | ±2.5 | μA | |
| I _{CC} | V _I = V _{CC} or GND, I _O = 0 | 5.5V | | | 4 | | 40 | 40 | μA | |
| C _i | V _I = V _{CC} or GND | 5V | | 2.5 | 10 | | | 10 | pF | |
| C _o | V _O = V _{CC} or GND | 5V | | 3.5 | | | | | pF | |

4.6 Timing Requirements, V_{CC} = 3.3V ± 0.3V

over recommended operating free-air temperature range, V_{CC} = 3.3V ± 0.3V (unless otherwise noted) (see [Load Circuits and Voltage Waveforms](#))

| | | T _A = 25°C | | –40°C to 125°C | | –40°C to 85°C | | UNIT |
|-----------------|-----------------------------|-----------------------|-----|----------------|-----|---------------|-----|------|
| | | MIN | MAX | MIN | MAX | MIN | MAX | |
| t _w | Pulse duration, LE high | 5 | | 5 | | 5 | | ns |
| t _{su} | Setup time, data before LE↓ | 3.5 | | 3.5 | | 3.5 | | ns |
| t _h | Hold time, data after LE↓ | 1.5 | | 1.5 | | 1.5 | | ns |

4.7 Timing Requirements, V_{CC} = 5V ± 0.5V

over recommended operating free-air temperature range, V_{CC} = 5V ± 0.5V (unless otherwise noted) (see [Load Circuits and Voltage Waveforms](#))

| | | T _A = 25°C | | –40°C to 125°C | | –40°C to 85°C | | UNIT |
|-----------------|-----------------------------|-----------------------|-----|----------------|-----|---------------|-----|------|
| | | MIN | MAX | MIN | MAX | MIN | MAX | |
| t _w | Pulse duration, LE high | 5 | | 5 | | 5 | | ns |
| t _{su} | Setup time, data before LE↓ | 3.5 | | 3.5 | | 3.5 | | ns |
| t _h | Hold time, data after LE↓ | 1.5 | | 1.5 | | 1.5 | | ns |

4.8 Switching Characteristics, $V_{CC} = 3.3V \pm 0.3V$

over recommended operating free-air temperature range, $V_{CC} = 3.3V \pm 0.3V$ (unless otherwise noted) (see [Load Circuits and Voltage Waveforms](#))

| PARAMETER | FROM (INPUT) | TO (OUTPUT) | LOAD CAPACITANCE | $T_A = 25^\circ\text{C}$ | | | $-40^\circ\text{C to } 125^\circ\text{C}$ | | $-40^\circ\text{C to } 85^\circ\text{C}$ | | UNIT |
|-----------|-----------------|-------------|---------------------|--------------------------|------|-----|---|------|--|------|------|
| | | | | MIN | TYP | MAX | MIN | MAX | MIN | MAX | |
| t_{PLH} | D | Q | $C_L = 50\text{pF}$ | 9.5 | 14.5 | | 1 | 16.5 | 1 | 16.5 | ns |
| t_{PHL} | | | | 9.5 | 14.5 | 1 | 16.5 | 1 | 16.5 | | |
| t_{PLH} | LE | Q | $C_L = 50\text{pF}$ | 10.1 | 15.4 | | 1 | 17.5 | 1 | 17.5 | ns |
| t_{PHL} | | | | 10.1 | 15.4 | 1 | 17.5 | 1 | 17.5 | | |
| t_{PZH} | \overline{OE} | Q | $C_L = 50\text{pF}$ | 9.8 | 15 | | 1 | 17 | 1 | 17 | ns |
| t_{PZL} | | | | 9.8 | 15 | 1 | 17 | 1 | 17 | | |
| t_{PHZ} | \overline{OE} | Q | $C_L = 50\text{pF}$ | 10.7 | 14.5 | | 1 | 16.5 | 1 | 16.5 | ns |
| t_{PLZ} | | | | 10.7 | 14.5 | 1 | 16.5 | 1 | 16.5 | | |

4.9 Switching Characteristics, $V_{CC} = 5V \pm 0.5V$

over recommended operating free-air temperature range, $V_{CC} = 5V \pm 0.5V$ (unless otherwise noted) (see [Load Circuits and Voltage Waveforms](#))






| PARAMETER | FROM (INPUT) | TO (OUTPUT) | LOAD CAPACITANCE | $T_A = 25^\circ\text{C}$ | | | $-40^\circ\text{C to } 125^\circ\text{C}$ | | $-40^\circ\text{C to } 85^\circ\text{C}$ | | UNIT |
|-----------|-----------------|-------------|---------------------|--------------------------|-----|-----|---|-----|--|-----|------|
| | | | | MIN | TYP | MAX | MIN | MAX | MIN | MAX | |
| t_{PLH} | D | Q | $C_L = 50\text{pF}$ | 6 | 8.8 | | 1 | 10 | 1 | 10 | ns |
| t_{PHL} | | | | 6 | 8.8 | 1 | 10 | 1 | 10 | | |
| t_{PLH} | LE | Q | $C_L = 50\text{pF}$ | 6.5 | 9.7 | | 1 | 11 | 1 | 11 | ns |
| t_{PHL} | | | | 6.5 | 9.7 | 1 | 11 | 1 | 11 | | |
| t_{PZH} | \overline{OE} | Q | $C_L = 50\text{pF}$ | 6.7 | 9.7 | | 1 | 11 | 1 | 11 | ns |
| t_{PZL} | | | | 6.7 | 9.7 | 1 | 11 | 1 | 11 | | |
| t_{PHZ} | \overline{OE} | Q | $C_L = 50\text{pF}$ | 6.7 | 9.7 | | 1 | 11 | 1 | 11 | ns |
| t_{PLZ} | | | | 6.7 | 9.7 | 1 | 11 | 1 | 11 | | |

4.10 Operating Characteristics

$V_{CC} = 5V$, $T_A = 25^\circ\text{C}$

| PARAMETER | | TEST CONDITIONS | TYP | UNIT |
|-----------|-------------------------------|-----------------------------|-----|------|
| C_{pd} | Power dissipation capacitance | No load, $f = 1\text{ MHz}$ | 16 | pF |

5 Parameter Measurement Information

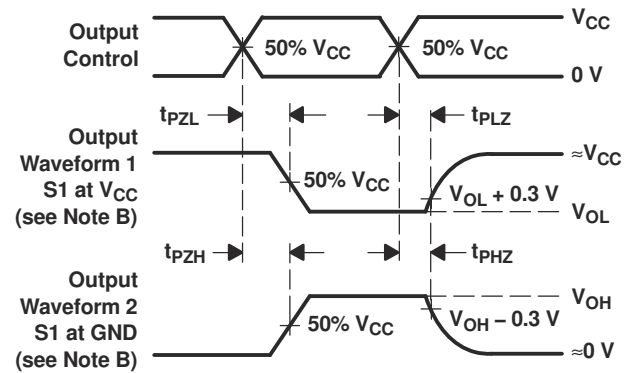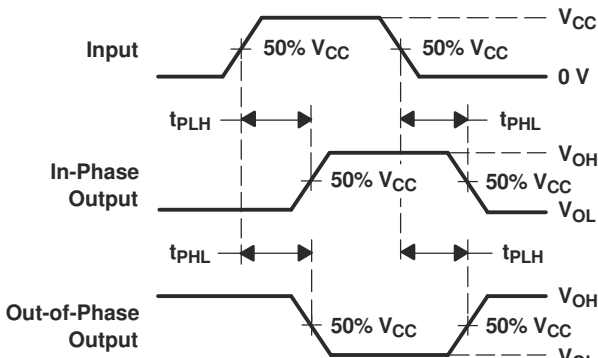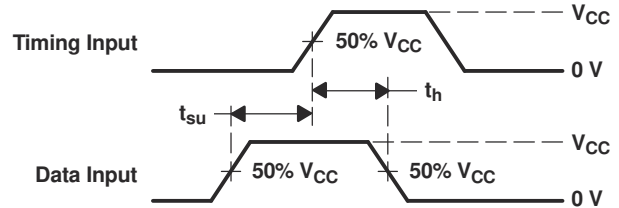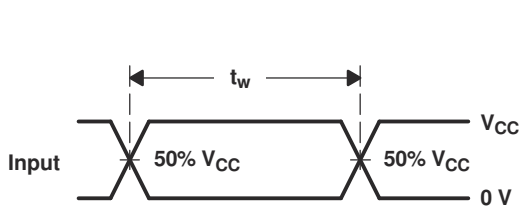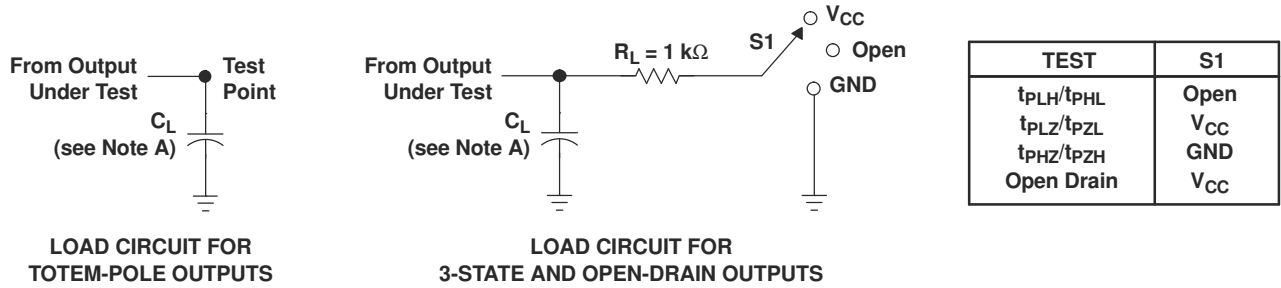

- NOTES: A. C_L includes probe and jig capacitance.
 B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
 C. All input pulses are supplied by generators having the following characteristics: $PRR \leq 1$ MHz, $Z_O = 50 \Omega$, $t_r \leq 3$ ns, $t_f \leq 3$ ns.
 D. The outputs are measured one at a time, with one input transition per measurement.
 E. All parameters and waveforms are not applicable to all devices.

Figure 5-1. Load Circuits and Voltage Waveforms

6 Detailed Description

6.1 Overview

When the latch-enable (LE) input is high, the Q outputs follow the data (D) inputs. When LE is low, the Q outputs are latched at the logic levels of the D inputs.

A buffered output-enable (\overline{OE}) input can be used to place the eight outputs in either a normal logic state (high or low) or the high-impedance state. In the high-impedance state, the outputs neither load nor drive the bus lines significantly. The high-impedance state and increased drive provide the capability to drive bus lines without interface or pullup components.

\overline{OE} does not affect the internal operations of the latches. Old data can be retained or new data can be entered while the outputs are in the high-impedance state.

To ensure the high-impedance state during power up or power down, \overline{OE} should be tied to V_{CC} through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

6.2 Functional Block Diagram

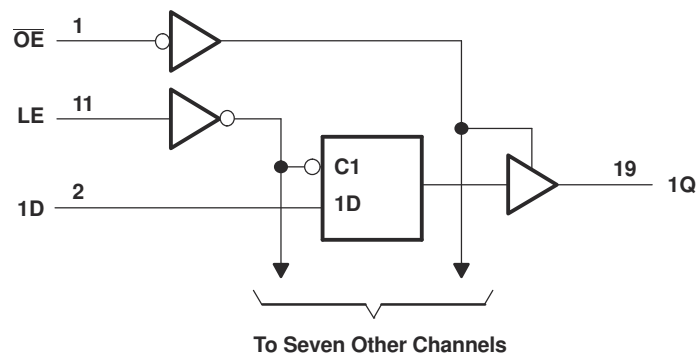


Figure 6-1. Logic Diagram (Positive Logic)

6.3 Device Functional Modes

Table 6-1. Function Table
(Each Latch)

| INPUTS | | | OUTPUT |
|-----------------|----|---|--------|
| \overline{OE} | LE | D | Q |
| L | H | H | H |
| L | H | L | L |
| L | L | X | Q_0 |
| H | X | X | Z |

7 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

7.1 Power Supply Recommendations

The power supply can be any voltage between the minimum and maximum supply voltage rating located in the *Recommended Operating Conditions*. Each V_{CC} terminal should have a good bypass capacitor to prevent power disturbance. A $0.1\mu\text{F}$ capacitor is recommended for this device. It is acceptable to parallel multiple bypass capacitors to reject different frequencies of noise. The $0.1\mu\text{F}$ and $1\mu\text{F}$ capacitors are commonly used in parallel. The bypass capacitor should be installed as close to the power terminal as possible for best results.

7.2 Layout

7.2.1 Layout Guidelines

- Bypass capacitor placement
 - Place near the positive supply terminal of the device
 - Provide an electrically short ground return path
 - Use wide traces to minimize impedance
 - Keep the device, capacitors, and traces on the same side of the board whenever possible
- Signal trace geometry
 - 8mil to 12mil trace width
 - Lengths less than 12cm to minimize transmission line effects
 - Avoid 90° corners for signal traces
 - Use an unbroken ground plane below signal traces
 - Flood fill areas around signal traces with ground
 - For traces longer than 12cm
 - Use impedance controlled traces
 - Source-terminate using a series damping resistor near the output
 - Avoid branches; buffer signals that must branch separately

7.2.2 Layout Example

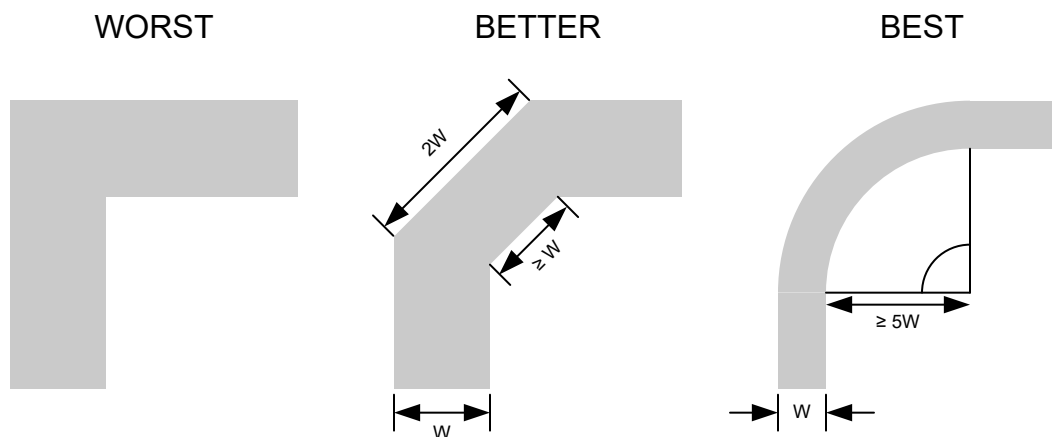


Figure 7-1. Example Trace Corners for Improved Signal Integrity

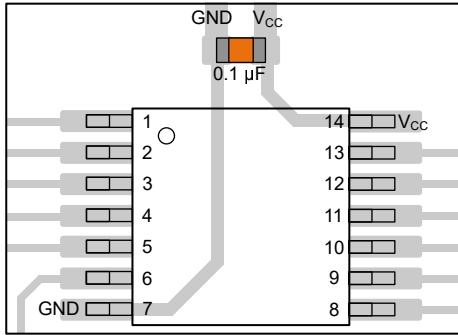


Figure 7-2. Example Bypass Capacitor Placement for TSSOP and Similar Packages

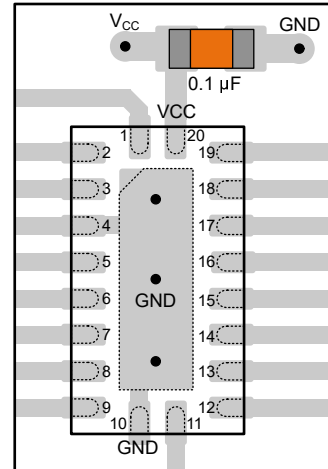


Figure 7-3. Example Bypass Capacitor Placement for WQFN and Similar Packages




Figure 7-4. Example Bypass Capacitor Placement for SOT, SC70 and Similar Packages

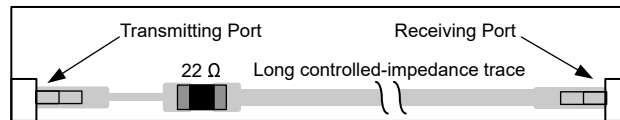


Figure 7-5. Example Damping Resistor Placement for Improved Signal Integrity

8 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

8.1 Documentation Support

8.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, [CMOS Power Consumption and \$C_{pd}\$ Calculation application report](#)
- Texas Instruments, [Designing With Logic application report](#)
- Texas Instruments, [Thermal Characteristics of Standard Linear and Logic \(SLL\) Packages and Devices application report](#)

8.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

8.3 Support Resources

TI E2E™ [support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

8.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.
All trademarks are the property of their respective owners.

8.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

8.6 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

9 Revision History

| Changes from Revision A (April 2008) to Revision B (January 2025) | Page |
|---|------|
| • Added <i>Package Information</i> table, <i>Pin Functions</i> table, <i>ESD Ratings</i> table, <i>Thermal Information</i> table, <i>Device Functional Modes</i> , Application and Implementation section, <i>Device and Documentation Support</i> section, and <i>Mechanical, Packaging, and Orderable Information</i> section | 1 |

10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|------------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| SN74AHC573QDGSRQ1 | Active | Production | VSSOP (DGS) 20 | 5000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | HA573Q |
| SN74AHC573QPWRG4Q1 | Active | Production | TSSOP (PW) 20 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | HA573Q |
| SN74AHC573QPWRG4Q1.A | Active | Production | TSSOP (PW) 20 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | HA573Q |
| SN74AHC573QPWRQ1 | NRND | Production | TSSOP (PW) 20 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | HA573Q |
| SN74AHC573QPWRQ1.A | NRND | Production | TSSOP (PW) 20 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | HA573Q |
| SN74AHC573QWRKSRQ1 | Active | Production | VQFN (RKS) 20 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | AHC573Q |

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF SN74AHC573-Q1 :

- Catalog : [SN74AHC573](#)
- Military : [SN54AHC573](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Military - QML certified for Military and Defense Applications

TAPE AND REEL INFORMATION

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74AHC573QDGSRQ1 | VSSOP | DGS | 20 | 5000 | 330.0 | 16.4 | 5.4 | 5.4 | 1.45 | 8.0 | 16.0 | Q1 |
| SN74AHC573QPWRG4Q1 | TSSOP | PW | 20 | 2000 | 330.0 | 16.4 | 6.95 | 7.0 | 1.4 | 8.0 | 16.0 | Q1 |
| SN74AHC573QPWRQ1 | TSSOP | PW | 20 | 2000 | 330.0 | 16.4 | 6.95 | 7.0 | 1.4 | 8.0 | 16.0 | Q1 |
| SN74AHC573QWRKSRQ1 | VQFN | RKS | 20 | 3000 | 180.0 | 12.4 | 2.8 | 4.8 | 1.2 | 4.0 | 12.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|--------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74AHC573QDGSRQ1 | VSSOP | DGS | 20 | 5000 | 353.0 | 353.0 | 32.0 |
| SN74AHC573QPWRG4Q1 | TSSOP | PW | 20 | 2000 | 353.0 | 353.0 | 32.0 |
| SN74AHC573QPWRQ1 | TSSOP | PW | 20 | 2000 | 353.0 | 353.0 | 32.0 |
| SN74AHC573QWRKSRQ1 | VQFN | RKS | 20 | 3000 | 210.0 | 185.0 | 35.0 |

EXAMPLE BOARD LAYOUT

PW0020A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X



SOLDER MASK DETAILS

4220206/A 02/2017

NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

PW0020A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4220206/A 02/2017

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.


DGS0020A



PACKAGE OUTLINE

VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

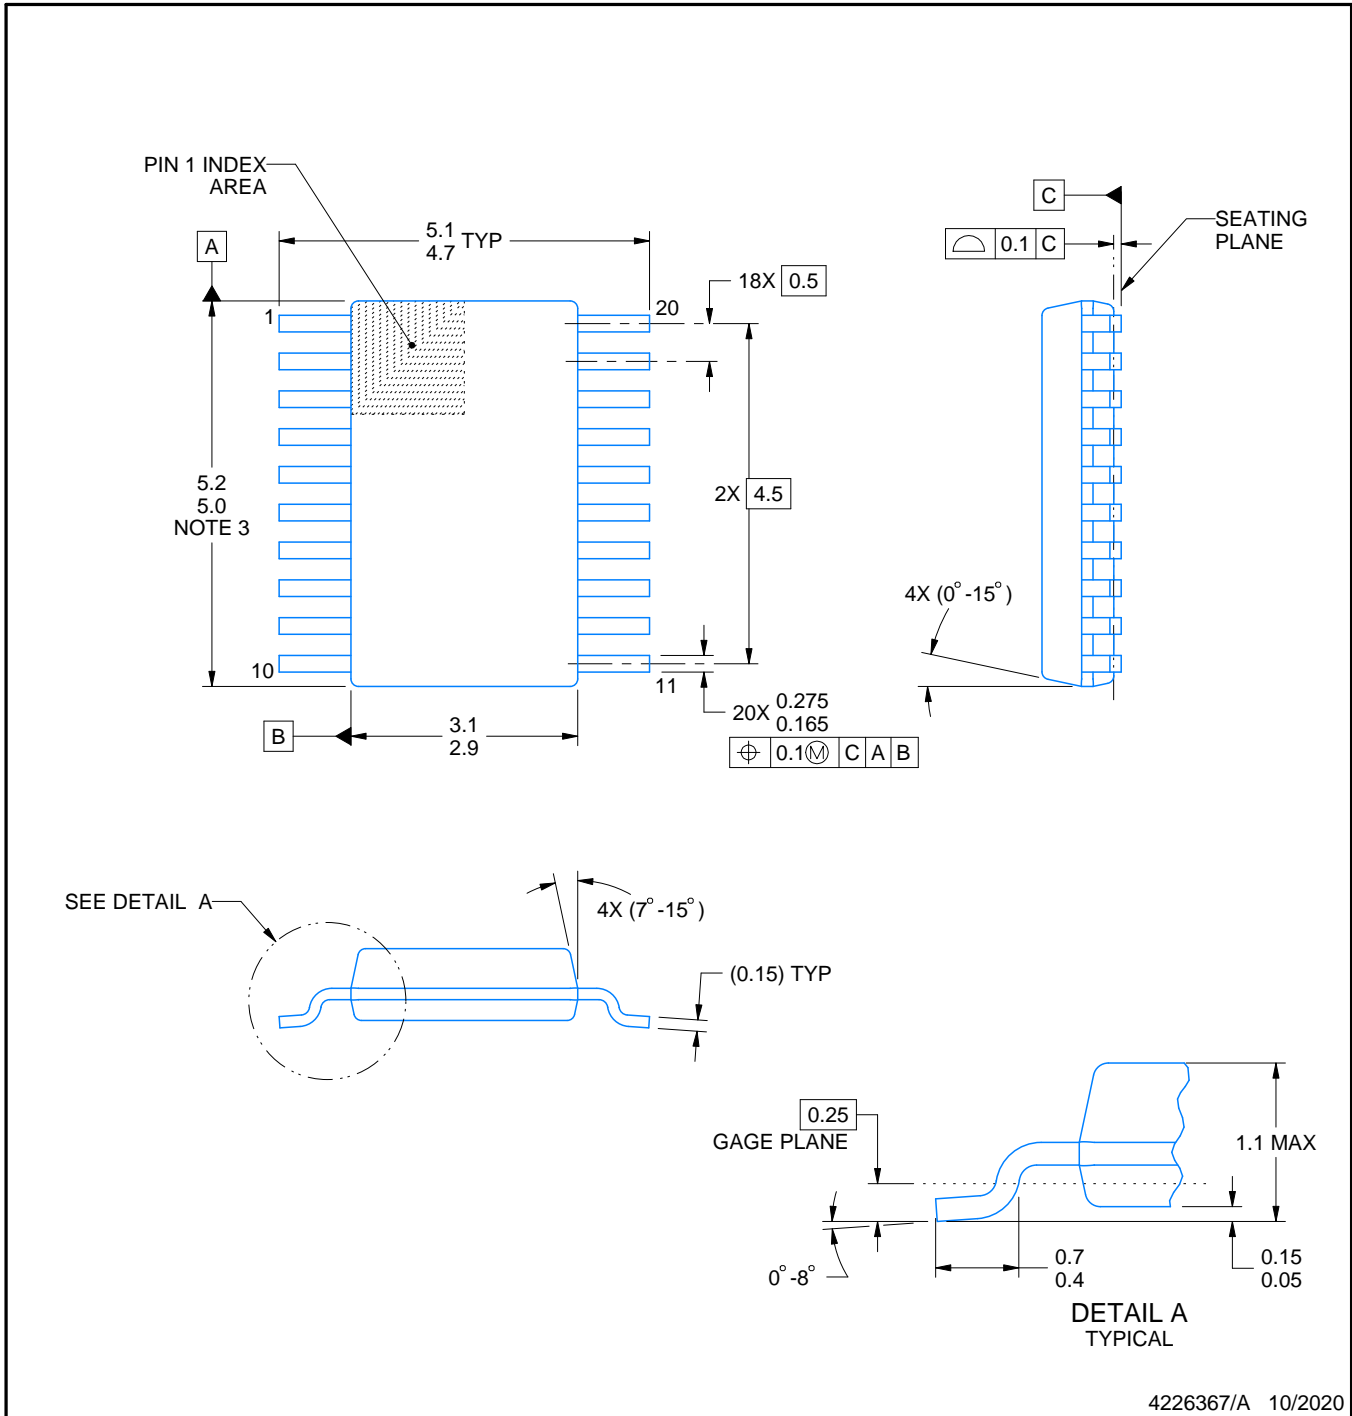

4226367/A 10/2020

NOTES:

PowerPAD is a trademark of Texas Instruments.



1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. No JEDEC registration as of September 2020.
5. Features may differ or may not be present.

EXAMPLE BOARD LAYOUT

DGS0020A

VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

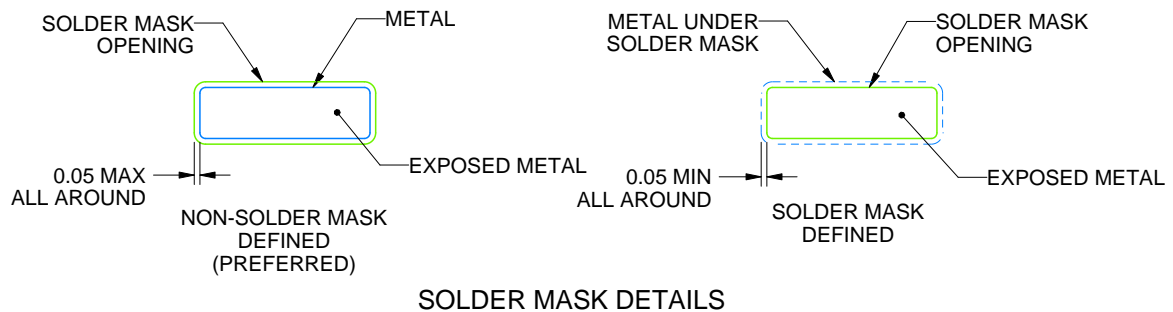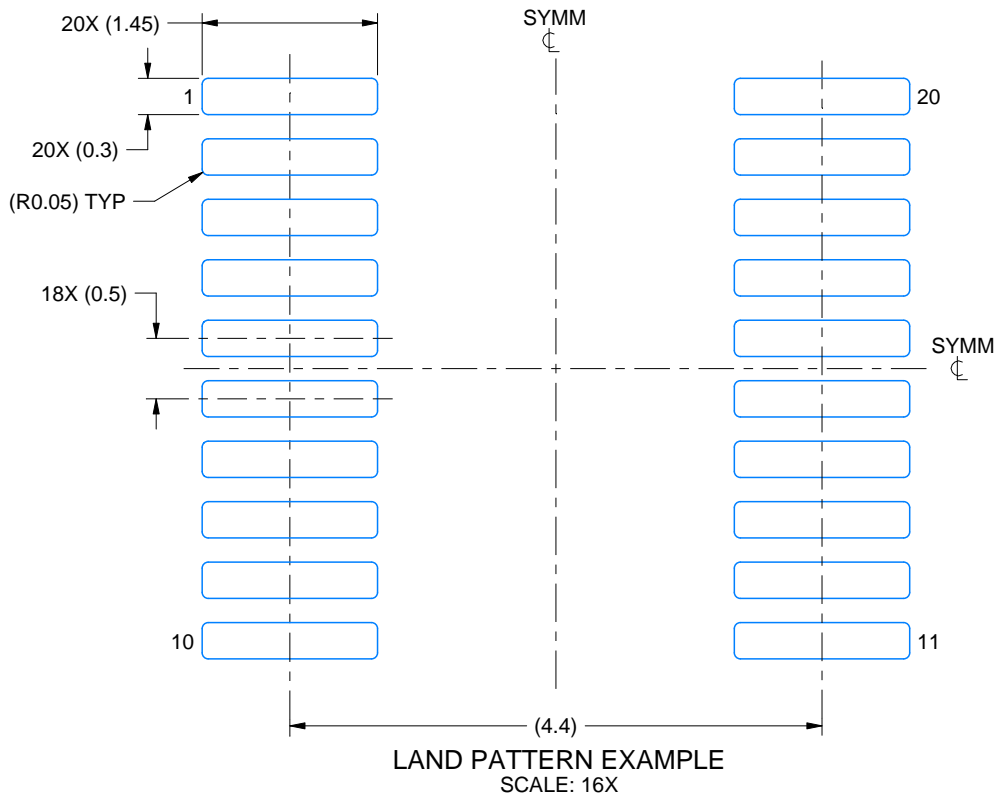

4226367/A 10/2020

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature numbers SLMA002 (www.ti.com/lit/slma002) and SLMA004 (www.ti.com/lit/slma004).
9. Size of metal pad may vary due to creepage requirement.
10. Vias are optional depending on application, refer to device data sheet. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

DGS0020A

VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

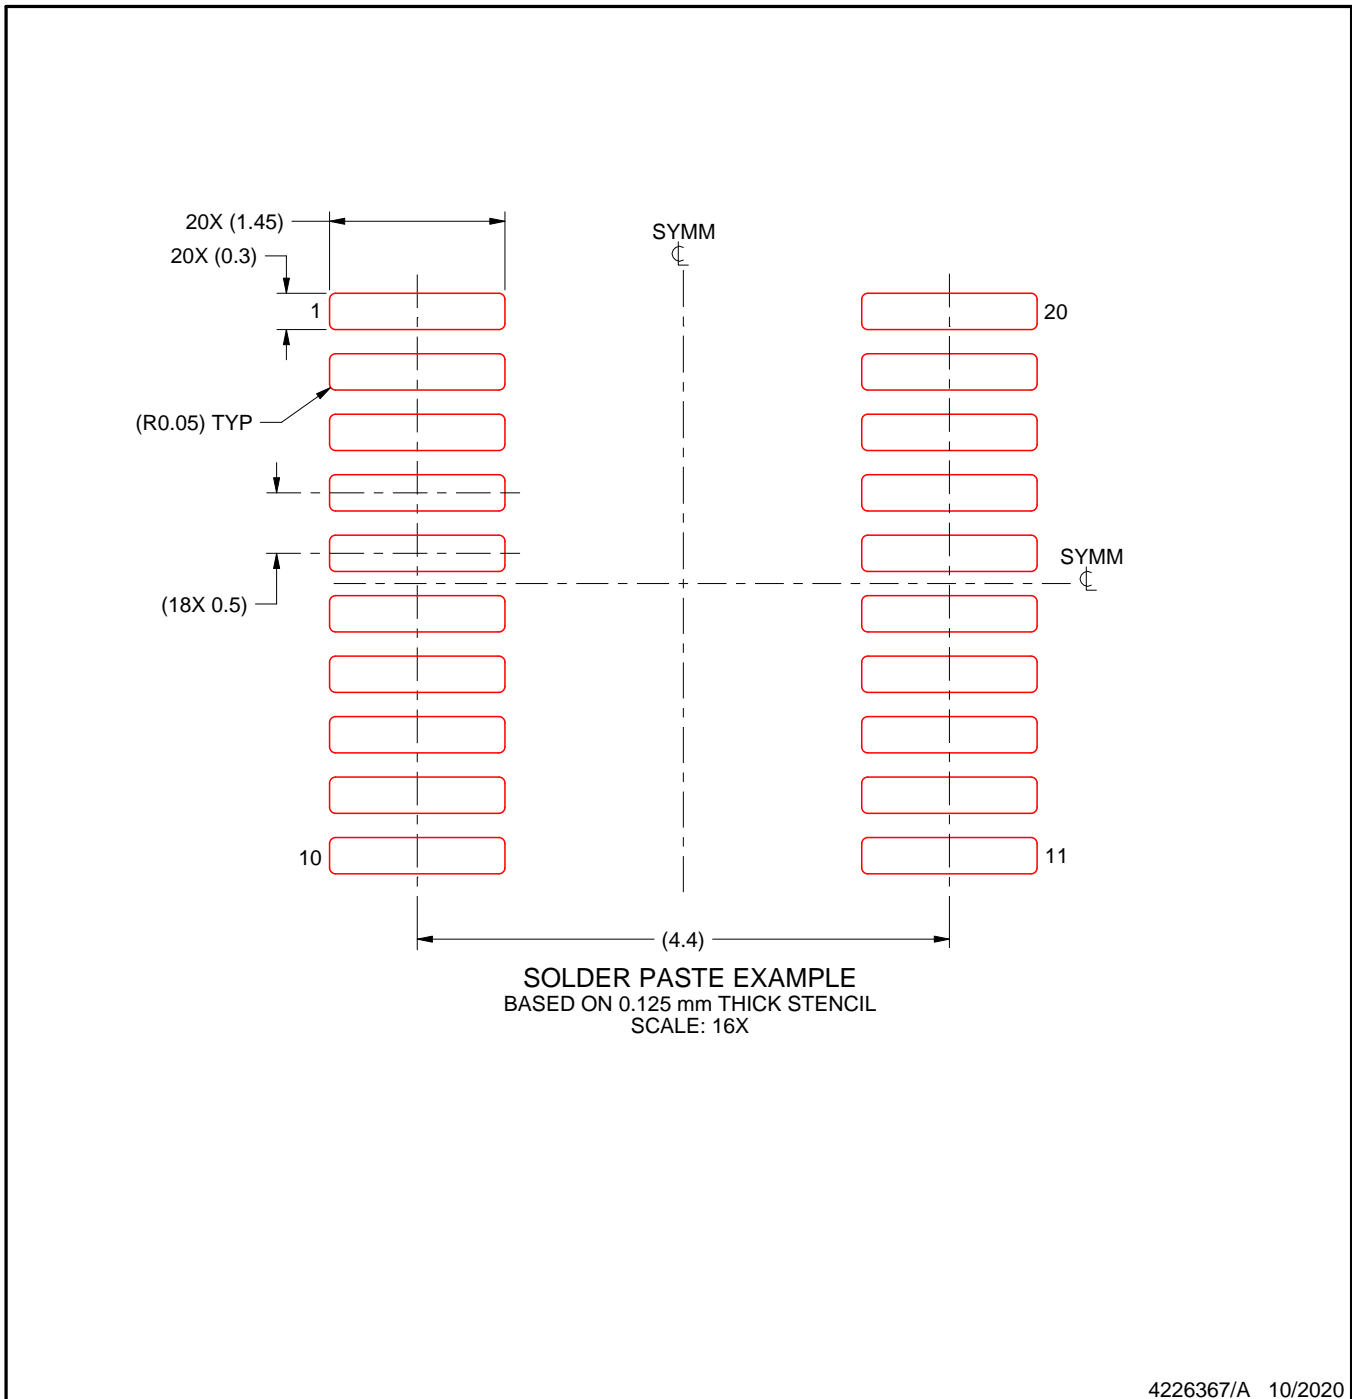

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.

GENERIC PACKAGE VIEW


RKS 20

VQFN - 1 mm max height

2.5 x 4.5, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

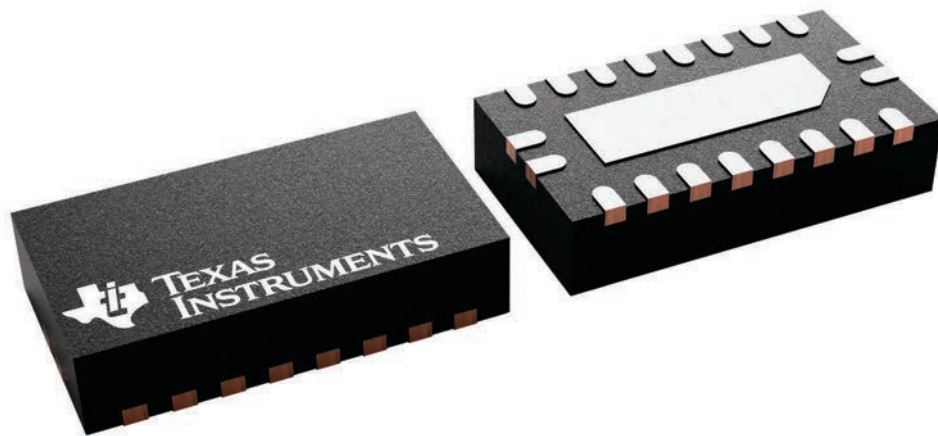

4226872/A

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025