











SN74LVC1G79-Q1

SCES874 - MARCH 2017

## SN74LVC1G79-Q1 Single Positive-Edge-Triggered D-Type Flip-Flop

#### **Features**

- **Qualified for Automotive Applications**
- AEC-Q100 Qualified With the Following Results:
  - ±4000-V Human-Body Model (HBM) ESD Classification Level 3A
  - ±1000-V Charged-Device Model (CDM) ESD Classification Level C5
- Supports 5-V V<sub>CC</sub> Operation
- Inputs Accept Voltages to 5.5 V
- Supports Down Translation to V<sub>CC</sub>
- Max t<sub>pd</sub> of 6 ns at 3.3 V and 50 pF load
- Low Power Consumption, 10-µA Max I<sub>CC</sub>
- ±24-mA Output Drive at 3.3 V
- Ioff supports Partial-Power-Down Mode and Back-**Drive Protection**

### **Applications**

- Automotive Infotainment
- **Automotive Cluster**
- Automotive ADAS
- **Automotive Body Electronics**
- Automotive HEV/EV Powertrain

### 3 Description

This automotive AEC-Q100 qualified single positiveedge-triggered D-type flip-flop is designed for 1.65-V to 5.5-V V<sub>CC</sub> operation.

When data at the data (D) input meets the setup time requirement, the data is transferred to the Q output on the positive-going edge of the clock pulse. Clock triggering occurs at a voltage level and is not directly related to the rise time of the clock pulse. Following the hold-time interval, data at the D input can be changed without affecting the level at the output.


This device is fully specified for partial-power-down applications using  $I_{\text{off}}$ . The  $I_{\text{off}}$  circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

#### Device Information<sup>(1)</sup>

PART NUMBER	PACKAGE	BODY SIZE		
SN74LVC1G79QDCKRQ1	SC70 (5)	2.00 mm x 1.25 mm		

(1) For all available packages, see the orderable addendum at the end of the data sheet.

#### Logic Diagram (Positive Logic)

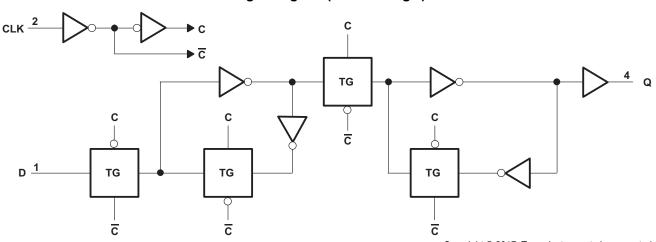

Copyright © 2017, Texas Instruments Incorporated

SCES874 – MARCH 2017 www.ti.com



## **Table of Contents**

1	Features 1	8	Detailed Description	11
2	Applications 1		8.1 Overview	11
3	Description 1		8.2 Functional Block Diagram	11
4	Revision History2		8.3 Feature Description	11
5	Pin Configuration and Functions3		8.4 Device Functional Modes	12
6	Specifications4	9	Application and Implementation	13
•	6.1 Absolute Maximum Ratings		9.1 Application Information	13
	6.2 ESD Ratings		9.2 Typical Application	13
	6.3 Recommended Operating Conditions	10	Power Supply Recommendations	14
	6.4 Thermal Information	11	Layout1	14
	6.5 Electrical Characteristics		11.1 Layout Guidelines	14
	6.6 Timing Requirements		11.2 Layout Example	14
	6.7 Timing Requirements	12	Device and Documentation Support	15
	6.8 Switching Characteristics: $C_L = 15 \text{ pF}$ , $T_A = -40^{\circ}\text{C}$ to		12.1 Documentation Support	
	+85°C 7		12.2 Receiving Notification of Documentation Updates	15
	6.9 Switching Characteristics: $C_L = 30$ or 50 pF, $T_A =$		12.3 Community Resources	15
	-40°C to +85°C7		12.4 Trademarks	15
	6.10 Switching Characteristics: C <sub>L</sub> = 30 pF or 50 pF, T <sub>A</sub>		12.5 Electrostatic Discharge Caution	15
	= -40°C to +125°C		12.6 Glossary	15
	6.11 Operating Characteristics	13	Mechanical, Packaging, and Orderable	
7	Parameter Measurement Information9		Information	15
•	raiametei weasurement imoniation			


## 4 Revision History

DATE	REVISION	NOTES
March 2017	*	Initial release.

Submit Documentation Feedback



## 5 Pin Configuration and Functions



See mechanical drawings for dimensions.

#### **Pin Functions**

PIN		I/O	DESCRIPTION
NAME	DCK	1/0	DESCRIPTION
D	1	I	Data input
CLK	2	I	Positive-Edge-Triggered Clock input
GND	3	_	Ground
Q	4	0	Non-inverted output
V <sub>CC</sub>	5	_	Positive Supply

# TEXAS INSTRUMENTS

#### 6 Specifications

#### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

			MIN	MAX	UNIT
$V_{CC}$	Supply voltage		-0.5	6.5	V
VI	Input voltage <sup>(2)</sup>		-0.5	6.5	V
Vo	Voltage range applied to any output in the high-in	Voltage range applied to any output in the high-impedance or power-off state (2)			
Vo	Voltage range applied to any output in the high or	-0.5	V <sub>CC</sub> + 0.5	V	
I <sub>IK</sub>	Input clamp current	V <sub>I</sub> < 0		-50	mA
I <sub>OK</sub>	Output clamp current	V <sub>O</sub> < 0		<b>-</b> 50	mA
Io	Continuous output current			±50	mA
	Continuous current through V <sub>CC</sub> or GND			±100	mA
T <sub>stg</sub>	Storage temperature	-65	150	°C	
TJ	Junction Temperature			150	°C

<sup>(1)</sup> Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

#### 6.2 ESD Ratings

			VALUE	UNIT
V <sub>(ESD)</sub>		Human-body model (HBM), per AEC Q100-002 <sup>(1)</sup>	±4000	.,
	Electrostatic discharge	Charged-device model (CDM), per AEC Q100-011	±1000	V

(1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

<sup>(2)</sup> The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.

<sup>(3)</sup> The value of V<sub>CC</sub> is provided in the *Recommended Operating Conditions* table.

www.ti.com

## 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)(1)

			MIN	MAX	UNIT					
.,	0 1 1	Operating	1.65	5.5	.,					
V <sub>CC</sub>	Supply voltage	Data retention only	1.5		V					
		V <sub>CC</sub> = 1.65 V to 1.95 V	0.65 × V <sub>CC</sub>							
.,		V <sub>CC</sub> = 2.3 V to 2.7 V	1.7		.,					
V <sub>IH</sub>	High-level input voltage	V <sub>CC</sub> = 3 V to 3.6 V	2		V					
		V <sub>CC</sub> = 4.5 V to 5.5 V	0.7 × V <sub>CC</sub>							
		V <sub>CC</sub> = 1.65 V to 1.95 V		0.35 × V <sub>CC</sub>						
.,		V <sub>CC</sub> = 2.3 V to 2.7 V		0.7	,,					
$V_{IL}$	Low-level input voltage	V <sub>CC</sub> = 3 V to 3.6 V		0.8	V					
		V <sub>CC</sub> = 4.5 V to 5.5 V		0.3 × V <sub>CC</sub>	1					
VI	Input voltage	,	0	5.5	V					
Vo	Output voltage		0	V <sub>cc</sub>	V					
		V <sub>CC</sub> = 1.65 V		-4						
		$V_{CC} = 2.3 \text{ V}$								
I <sub>OH</sub>	High-level output current	м		-16	mA					
		V <sub>CC</sub> = 3 V		-24						
		V <sub>CC</sub> = 4.5 V		-32						
		V <sub>CC</sub> = 1.65 V		4						
		V <sub>CC</sub> = 2.3 V		8						
l <sub>OL</sub>	Low-level output current	м		16	mA					
		V <sub>CC</sub> = 3 V		24						
		V <sub>CC</sub> = 4.5 V		32						
		$V_{CC} = 1.8 \text{ V} \pm 0.15 \text{ V}, 2.5 \text{ V} \pm 0.2 \text{ V}$		20						
Δt/Δν	Input transition rise or fall rate	$V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$		10	ns/V					
		V <sub>CC</sub> = 5 V ± 0.5 V		5						
T <sub>A</sub>	Operating free-air temperature	<u>'</u>	-40	125	°C					

<sup>(1)</sup> All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. See *Implications of Slow or Floating CMOS Inputs*, SCBA004.

#### 6.4 Thermal Information

		SN74LVC1G79-Q1	
	THERMAL METRIC <sup>(1)</sup>	DCK	UNIT
		5 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	277.6	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	179.5	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	75.9	°C/W
ΨЈТ	Junction-to-top characterization parameter	49.7	°C/W
ΨЈВ	Junction-to-board characterization parameter	75.1	°C/W

<sup>(1)</sup> For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

# TEXAS INSTRUMENTS

#### 6.5 Electrical Characteristics

over recommended operating free-air temperature range (unless otherwise noted)

DADAMETED	TEST SOMBITIONS	.,	-40°C	to +85°C	−40°C to	+125°C	
PARAMETER	TEST CONDITIONS	V <sub>cc</sub>	MIN	TYP <sup>(1)</sup> MAX	MIN	TYP <sup>(1)</sup> MAX	UNIT
	I <sub>OH</sub> = -100 μA	1.65 V to 5.5 V	V <sub>CC</sub> - 0.1		V <sub>CC</sub> - 0.1		
	$I_{OH} = -4 \text{ mA}$	1.65 V	1.2		1.2		
V	$I_{OH} = -8 \text{ mA}$	2.3 V	1.9		1.9		V
V <sub>OH</sub>	$I_{OH} = -16 \text{ mA}$	3 V	2.4		2.4		V
	$I_{OH} = -24 \text{ mA}$	3 V	2.3		2.3		
	$I_{OH} = -32 \text{ mA}$	4.5 V	3.8		3.8		
	$I_{OL} = 100 \mu\text{A}$ 1.65 \text{ 1.65 }			0.1		0.1	
	I <sub>OL</sub> = 4 mA	1.65 V		0.45		0.45	
V	I <sub>OL</sub> = 8 mA	2.3 V		0.3		V	
V <sub>OL</sub>	I <sub>OL</sub> = 16 mA	3 V		0.4		0.4	
	I <sub>OL</sub> = 24 mA	3 V		0.55		0.55	
	I <sub>OL</sub> = 32 mA	4.5 V		0.55		0.55	
I <sub>I</sub> All inputs	$V_I = 5.5 \text{ V or GND}$	0 to 5.5 V		±10		±5	μΑ
I <sub>off</sub>	$V_I$ or $V_O = 5.5 \text{ V}$	0		±10		±10	μΑ
I <sub>CC</sub>	$V_I = 5.5 \text{ V or GND}, \qquad I_O = 0$	1.65 V to 5.5 V		10		10	μΑ
Δl <sub>CC</sub>	One input at $V_{CC}$ – 0.6 V, Other inputs at $V_{CC}$ or GND	3 V to 5.5 V		500		500	μA
Ci	$V_I = V_{CC}$ or GND	3.3 V		4		4	pF

<sup>(1)</sup> All typical values are at  $V_{CC}$  = 3.3 V,  $T_A$  = 25°C.

#### 6.6 Timing Requirements

over operating free-air temperature range (unless otherwise noted) (see Figure 3)

				-40°C to +85°C							
PARAMETER		V <sub>CC</sub> = 1.8 ± 0.15 V		V <sub>CC</sub> = 2.5 ± 0.2 V		V <sub>CC</sub> = 3.3 V ± 0.3 V		V <sub>CC</sub> = 5 V ± 0.5 V		UNIT	
			MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
f <sub>clock</sub>	Clock frequency			160		160		160		160	MHz
t <sub>w</sub>	Pulse duration, CLK high or low		2.5		2.5		2.5		2.5		ns
	Catus time before CLIVA	Data high	2.2		1.4		1.3		1.2		
L <sub>Su</sub>	Setup time before CLK↑	Data low	2.6		1.4		1.3		1.2		ns
t <sub>h</sub>	Hold time, data after CLK↑		0.3		0.4		1		0.5		ns

## 6.7 Timing Requirements

over operating free-air temperature range (unless otherwise noted) (see Figure 3)

				-40°C to +125°C								
PARAMETER		V <sub>CC</sub> = 1.8 ± 0.15 V		V <sub>CC</sub> = 2.5 ± 0.2 V		V <sub>CC</sub> = 3.3 V ± 0.3 V		V <sub>CC</sub> = 5 V ± 0.5 V		UNIT		
			MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX		
f <sub>clock</sub>	Clock frequency			160		160		160		160	MHz	
t <sub>w</sub>	Pulse duration, CLK high or low		2.5		2.5		2.5		2.5		ns	
	Catum time before CLIVA	Data high	2.2		1.4		1.3		1.2			
t <sub>su</sub>	Setup time before CLK↑	Data low	2.6		1.4		1.3		1.2		ns	
t <sub>h</sub>	Hold time, data after CLK↑		0.3		0.4		1		0.5		ns	



www.ti.com SCES874 – MARCH 2017

## 6.8 Switching Characteristics: $C_L = 15 \text{ pF}$ , $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$

over recommended operating free-air temperature range,  $C_L = 15 \text{ pF}$  (unless otherwise noted) (see Figure 3)

	PARAMETER					T <sub>A</sub>	= -40°C	to +85°	С			
		FROM (INPUT)	TO (OUTPUT)	V <sub>CC</sub> = 1.8 V ± 0.15 V		V <sub>CC</sub> = 2.5 V ± 0.2 V		V <sub>CC</sub> = 3.3 V ± 0.3 V		V <sub>CC</sub> = 5 V ± 0.5 V		UNIT
				MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
	$f_{\text{max}}$			160		160		160		160		MHz
L	t <sub>pd</sub>	CLK	Q	2.5	9.1	1.2	6	1	4	0.8	3.8	ns

## 6.9 Switching Characteristics: $C_L = 30$ or 50 pF, $T_A = -40$ °C to +85°C

over recommended operating free-air temperature range, C<sub>L</sub> = 30 pF or 50 pF (unless otherwise noted) (see Figure 4)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V <sub>CC</sub> = 1.8 V ± 0.15 V		V <sub>CC</sub> = 2.5 V ± 0.2 V		V <sub>CC</sub> = 3.3 V ± 0.3 V		V <sub>CC</sub> = 5 V ± 0.5 V		UNIT
			MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
$f_{max}$			160		160		160		160		MHz
t <sub>pd</sub>	CLK	Q	3.9	9.9	2	7	1.7	5	1	4.5	ns

## 6.10 Switching Characteristics: $C_L = 30$ pF or 50 pF, $T_A = -40$ °C to +125°C

over recommended operating free-air temperature range,  $C_L = 30 \text{ pF}$  or 50 pF (unless otherwise noted) (see Figure 4)

	PARAMETER		то (оитрит)	T <sub>A</sub> = -40°C to +125°C								
		FROM (INPUT)		V <sub>CC</sub> = 1.8 V ± 0.15 V		V <sub>CC</sub> = 2.5 V ± 0.2 V		V <sub>CC</sub> = 3.3 V ± 0.3 V		V <sub>CC</sub> = 5 V ± 0.5 V		UNIT
				MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
	$f_{max}$			160		160		160		160		MHz
	t <sub>pd</sub>	CLK	Q	3.9	12	2	8.5	1.7	6	1	5	ns

## 6.11 Operating Characteristics

 $T_{\Lambda} = 25^{\circ}C$ 


. H								
	PARAMETER	TEST	V <sub>CC</sub> = 1.8 V	V <sub>CC</sub> = 2.5 V	$V_{CC} = 3.3 \text{ V}$	V <sub>CC</sub> = 5 V	UNIT	
	PARAMETER	CONDITIONS	TYP	TYP	TYP	TYP	ONII	
Cpd	Power dissipation capacitance	f = 10 MHz	26	26	27	30	pF	

SCES874 – MARCH 2017 www.ti.com

# TEXAS INSTRUMENTS

#### 6.12 Typical Characteristics

This plot shows the different  $I_{CC}$  values for various voltages on the data input (D). Voltage sweep on the input is from 0 V to 6.5 V.



20 VCC = 3.3 V VCC = 5.0 V 18 16 Supply Current Icc [mA] 14 12 10 8 6 2 0 2 2.5 3 3.5 4 4.5 5 5.5 0.5 Data (D) Input Voltage [V]


Figure 1. Supply Current (I<sub>CC</sub>) vs Data (D) Input Voltage - 1.8 V and 2.5 V

Figure 2. Supply Current (I $_{\rm CC}$ ) vs Data (D) Input Voltage - 3.3 V and 5 V

Submit Documentation Feedback




## 7 Parameter Measurement Information



TEST	S1
t <sub>PLH</sub> /t <sub>PHL</sub>	Open
$t_{PLZ}/t_{PZL}$	<b>V</b> <sub>LOAD</sub>
t <sub>PHZ</sub> /t <sub>PZH</sub>	GND

**LOAD CIRCUIT** 

.,	INI	PUTS		.,			.,
V <sub>cc</sub>	V,	t,/t,	V <sub>M</sub>	<b>V</b> <sub>LOAD</sub>	C <sub>L</sub>	R <sub>∟</sub>	V <sub>A</sub>
1.8 V ± 0.15 V	V <sub>cc</sub>	≤2 ns	V <sub>cc</sub> /2	2 × V <sub>cc</sub>	15 pF	<b>1 M</b> Ω	0.15 V
$2.5~\textrm{V}~\pm~0.2~\textrm{V}$	V <sub>cc</sub>	≤2 ns	V <sub>cc</sub> /2	2 × V <sub>cc</sub>	15 pF	<b>1 M</b> Ω	0.15 V
$3.3~V~\pm~0.3~V$	3 V	≤2.5 ns	1.5 V	6 V	15 pF	<b>1 M</b> Ω	0.3 V
5 V ± 0.5 V	V <sub>cc</sub>	≤2.5 ns	V <sub>cc</sub> /2	2 × V <sub>cc</sub>	15 pF	<b>1 M</b> Ω	0.3 V

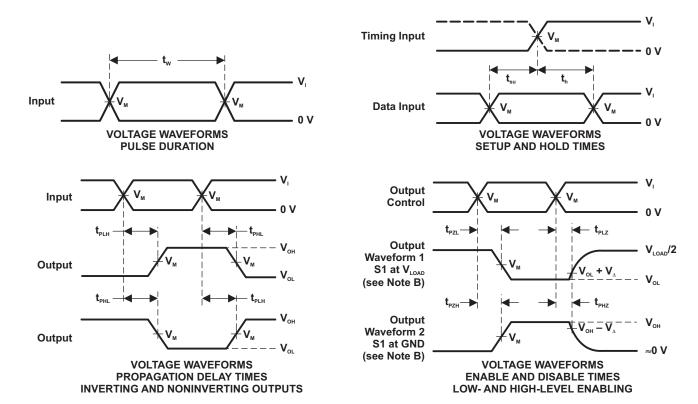

NOTES: A. C, includes probe and jig capacitance.


- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_{o}$  = 50  $\Omega$ .
- D. The outputs are measured one at a time, with one transition per measurement.
- E.  $t_{\text{PLZ}}$  and  $\dot{t}_{\text{PHZ}}$  are the same as  $t_{\text{dis}}$ .
- F.  $t_{\mbox{\tiny PZL}}$  and  $t_{\mbox{\tiny PZH}}$  are the same as  $t_{\mbox{\tiny en}}.$
- G.  $t_{PlH}$  and  $t_{PHl}$  are the same as  $t_{pol}$
- H. All parameters and waveforms are not applicable to all devices.

Figure 3. Load Circuit and Voltage Waveforms

SCES874 – MARCH 2017 www.ti.com

# TEXAS INSTRUMENTS


#### **Parameter Measurement Information (continued)**

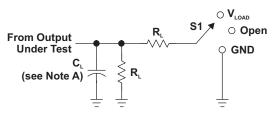

TEST	S1
t <sub>PLH</sub> /t <sub>PHL</sub>	Open
t <sub>PLZ</sub> /t <sub>PZL</sub>	V <sub>LOAD</sub>
t <sub>PHZ</sub> /t <sub>PZH</sub>	GND

**LOAD CIRCUIT** 

.,	INI	PUTS		V			.,
V <sub>cc</sub>	V,	t,/t,	V <sub>M</sub>	V <sub>LOAD</sub>	C <sub>L</sub>	R <sub>⊾</sub>	V <sub>A</sub>
1.8 V ± 0.15 V	V <sub>cc</sub>	≤2 ns	V <sub>cc</sub> /2	2 × V <sub>cc</sub>	30 pF	<b>1 k</b> Ω	0.15 V
2.5 V ± 0.2 V	V <sub>cc</sub>	≤2 ns	V <sub>cc</sub> /2	2 × V <sub>cc</sub>	30 pF	500 Ω	0.15 V
3.3 V ± 0.3 V	3 V	≤2.5 ns	1.5 V	6 V	50 pF	500 Ω	0.3 V
5 V ± 0.5 V	V <sub>cc</sub>	≤2.5 ns	V <sub>cc</sub> /2	2 × V <sub>cc</sub>	50 pF	500 Ω	0.3 V

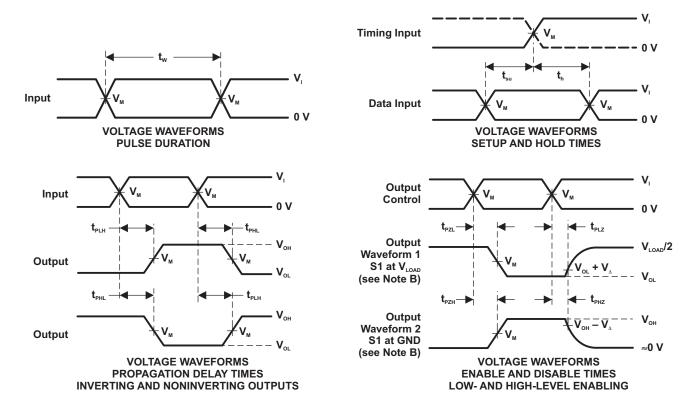

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_0 = 50 \,\Omega$ .
- D. The outputs are measured one at a time, with one transition per measurement.
- E.  $t_{PLZ}$  and  $\dot{t}_{PHZ}$  are the same as  $t_{dis}$ .
- F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
- G.  $t_{\text{PLH}}^{\text{F2L}}$  and  $t_{\text{PHL}}^{\text{F2L}}$  are the same as  $t_{\text{pd}}^{\text{eff}}$
- H. All parameters and waveforms are not applicable to all devices.

Figure 4. Load Circuit and Voltage Waveforms

Submit Documentation Feedback

8 Detailed Description

## 8.1 Overview

www.ti.com

The SN74LVC1G79-Q1 is a single positive-edge-triggered D-type flip-flop and is AEC-Q100 qualified for automotive applications. Data at the input (D) is transferred to the output (Q) on the positive-going edge of the clock pulse when the setup time requirement is met. Because the clock triggering occurs at a voltage level, it is not directly related to the rise time of the clock pulse. This allows for data at the input to be changed without affecting the level at the output, following the hold-time interval.

#### 8.2 Functional Block Diagram

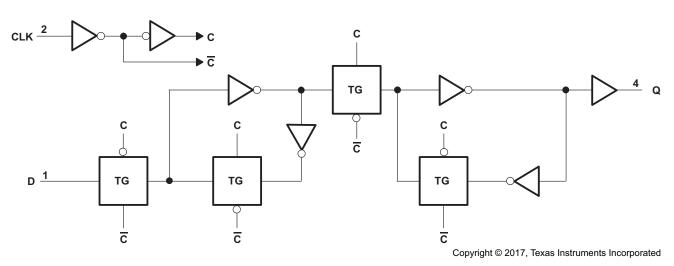


Figure 5. Logic Diagram (Positive Logic)

#### 8.3 Feature Description

#### 8.3.1 Balanced High-Drive CMOS Push-Pull Outputs

A balanced output allows the device to sink and source similar currents. The high drive capability of this device creates fast edges into light loads so routing and load conditions should be considered to prevent ringing. Additionally, the outputs of this device are capable of driving larger currents than the device can sustain without being damaged. It is important for the power output of the device to be limited to avoid thermal runaway and damage due to over-current. The electrical and thermal limits defined the in the *Absolute Maximum Ratings* must be followed at all times.

#### 8.3.2 Standard CMOS Inputs

Standard CMOS inputs are high impedance and are typically modeled as a resistor in parallel with the input capacitance given in the *Electrical Characteristics*. The worst case resistance is calculated with the maximum input voltage, given in the *Recommended Operating Conditions*, and the maximum input leakage current, given in the *Electrical Characteristics*, using ohm's law ( $R = V \div I$ ).

Signals applied to the inputs need to have fast edge rates, as defined by  $\Delta t/\Delta v$  in *Recommended Operating Conditions* to avoid excessive currents and oscillations. If tolerance to a slow or noisy input signal is required, a device with a Schmitt-trigger input should be utilized to condition the input signal prior to the standard CMOS input.

SCES874 – MARCH 2017 www.ti.com

## TEXAS INSTRUMENTS

#### **Feature Description (continued)**

#### 8.3.3 Clamp Diodes

The inputs and outputs to this device have negative clamping diodes.

#### **CAUTION**

Voltages beyond the values specified in the *Absolute Maximum Ratings* table can cause damage to the device. The input negative-voltage and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.




Figure 6. Electrical Placement of Clamping Diodes for Each Input and Output

#### 8.3.4 Partial Power Down (Ioff)

The inputs and outputs for this device enter a high impedance state when the supply voltage is 0 V. The maximum leakage into or out of any input or output pin on the device is specified by I<sub>off</sub> in the *Electrical Characteristics*.

#### 8.3.5 Over-Voltage Tolerant Inputs

Input signals to this device can be driven above the supply voltage so long as they remain below the maximum input voltage value specified in the *Absolute Maximum Ratings*.

#### 8.4 Device Functional Modes

Table 1 shows the functional modes of SN74LVC1G79-Q1.

**Table 1. Function Table** 

INPU	INPUTS					
CLK	D	Y				
<b>↑</b>	Н	Н				
<b>↑</b>	L	L				
L	Χ	$Q_0$				

**Application and Implementation** 

#### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

#### 9.1 Application Information

A useful application for the SN74LVC1G79-Q1 is using it as a data latch with low-voltage data retention. This application implements the use of a microcontroller GPIO pin to act as a clock to set the output state and a second GPIO to provide the input data. If the SN74LVC1G79-Q1 is being powered from 1.8V and there is concern that a power glitch could exist as low as 1.5V, the device will retain the state of the Q output. An example of this data retention is shown in Figure 8 where the V<sub>CC</sub> drops to 1.5V and the Q output maintains the HIGH output state when V<sub>CC</sub> returns to 1.8V. If the V<sub>CC</sub> voltage drops below 1.5V, data retention is not guaranteed.

#### 9.2 Typical Application

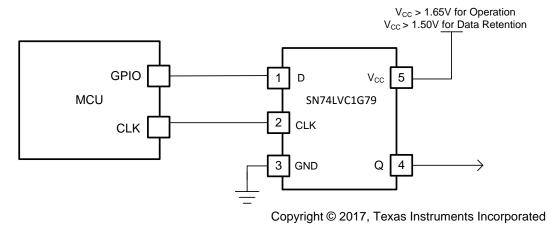


Figure 7. Low Voltage Data Retention with SN74LVC1G79-Q1

#### 9.2.1 Design Requirements

The SN74LVC1G79-Q1 device uses CMOS technology and has balanced output drive. Take care to avoid bus contention because it can drive currents that would exceed maximum limits.

#### 9.2.2 Detailed Design Procedure

- 1. Recommended input conditions:
  - For rise time and fall time specifications, see  $\Delta t/\Delta v$  in Recommended Operating Conditions.
  - For specified high and low levels, see V<sub>IH</sub> and V<sub>IL</sub> in Recommended Operating Conditions.
  - Input voltages are recommended to not go below 0 V and not exceed 5.5 V for any V<sub>CC</sub>. See Recommended Operating Conditions.
- 2. Recommended output conditions:

- Load currents should not exceed ±50 mA. See Absolute Maximum Ratings.
- Output voltages are recommended to not go below 0 V and not exceed the  $V_{CC}$  voltage. See Recommended Operating Conditions.

### **Typical Application (continued)**

#### 9.2.3 Application Curve

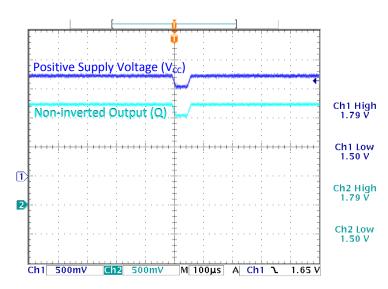


Figure 8. Data Retention with V<sub>CC</sub> glitch down to 1.5V

### 10 Power Supply Recommendations

The power supply can be any voltage between the minimum and maximum supply voltage rating listed in *Recommended Operating Conditions*. A 0.1- $\mu$ F bypass capacitor is recommended to be connected from the VCC terminal to GND to prevent power disturbance. To reject different frequencies of noise, use multiple bypass capacitors in parallel. Capacitors with values of 0.1  $\mu$ F and 1  $\mu$ F are commonly used in parallel. The bypass capacitor must be installed as close to the power terminal as possible for best results.

#### 11 Layout

#### 11.1 Layout Guidelines

When a PCB trace turns a corner at a 90° angle, a reflection can occur. A reflection occurs primarily because of the change of width of the trace. At the apex of the turn, the trace width increases to 1.414 times the width. This increase upsets the transmission-line characteristics, especially the distributed capacitance and self–inductance of the trace which results in the reflection. Not all PCB traces can be straight and therefore some traces must turn corners. Figure 9 shows progressively better techniques of rounding corners. Only the last example (BEST) maintains constant trace width and minimizes reflections.

#### 11.2 Layout Example

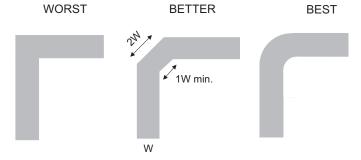


Figure 9. Trace Example

Submit Documentation Feedback



www.ti.com

#### 12 Device and Documentation Support

#### 12.1 Documentation Support

#### 12.1.1 Related Documentation

For related documentation see the following:

Implications of Slow or Floating CMOS Inputs, SCBA004 Understanding and Interpreting Standard Logic Data sheets SZZA036 Power-up Behavior of Clocked Devices SCHA005A

#### 12.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

#### 12.3 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community TI's Engineer-to-Engineer (E2E) Community. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

#### 12.4 Trademarks

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

#### 12.5 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## 12.6 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

#### 13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical packaging and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser based versions of this data sheet, refer to the left hand navigation.

www.ti.com 10-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
	('')	(2)			(0)	(4)	(5)		(0)
SN74LVC1G79QDCKRQ1	Active	Production	SC70 (DCK)   5	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	16S
SN74LVC1G79QDCKRQ1.A	Active	Production	SC70 (DCK)   5	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	16S
SN74LVC1G79QDCKRQ1.B	Active	Production	SC70 (DCK)   5	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	16S
SN74LVC1G79QDCKTQ1	Active	Production	SC70 (DCK)   5	250   SMALL T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	16S
SN74LVC1G79QDCKTQ1.B	Active	Production	SC70 (DCK)   5	250   SMALL T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	16S

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

## PACKAGE OPTION ADDENDUM

www.ti.com 10-Nov-2025

#### OTHER QUALIFIED VERSIONS OF SN74LVC1G79-Q1:

◆ Catalog : SN74LVC1G79

● Enhanced Product : SN74LVC1G79-EP

NOTE: Qualified Version Definitions:

• Catalog - TI's standard catalog product

• Enhanced Product - Supports Defense, Aerospace and Medical Applications

**PACKAGE MATERIALS INFORMATION** 

www.ti.com 24-Apr-2020

### TAPE AND REEL INFORMATION





	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74LVC1G79QDCKRQ1	SC70	DCK	5	3000	178.0	9.0	2.4	2.5	1.2	4.0	8.0	Q3
SN74LVC1G79QDCKTQ1	SC70	DCK	5	250	178.0	9.0	2.4	2.5	1.2	4.0	8.0	Q3

www.ti.com 24-Apr-2020

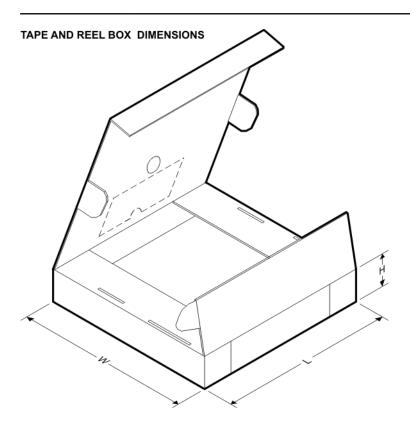

#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74LVC1G79QDCKRQ1	SC70	DCK	5	3000	180.0	180.0	18.0
SN74LVC1G79QDCKTQ1	SC70	DCK	5	250	180.0	180.0	18.0



SMALL OUTLINE TRANSISTOR



#### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
  2. This drawing is subject to change without notice.
  3. Reference JEDEC MO-203.

- 4. Support pin may differ or may not be present.5. Lead width does not comply with JEDEC.
- 6. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25mm per side



SMALL OUTLINE TRANSISTOR



NOTES: (continued)

7. Publication IPC-7351 may have alternate designs.8. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE TRANSISTOR



NOTES: (continued)

- 9. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 10. Board assembly site may have different recommendations for stencil design.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025