



ABSTRACT

This user's guide can be used as a guide for integrating the TPS6594-Q1 and LP8764-Q1 power management integrated circuits (PMICs) into a system powering the Automotive Jacinto 7 J721S2, TDA4VE, TDA4VL or TDA4AL processor.

Table of Contents

1 Introduction.....	2
2 Device Versions.....	2
3 Processor Connections.....	4
3.1 Power Mapping.....	4
3.2 Control Mapping.....	7
4 Supporting Functional Safety Systems.....	11
4.1 Achieving ASIL-B System Requirements.....	12
4.2 Achieving up to ASIL-D System Requirements.....	12
5 Static NVM Settings.....	14
5.1 Application-Based Configuration Settings.....	14
5.2 Device Identification Settings.....	16
5.3 BUCK Settings.....	16
5.4 LDO Settings.....	19
5.5 VCCA Settings.....	20
5.6 GPIO Settings.....	20
5.7 Finite State Machine (FSM) Settings.....	23
5.8 Interrupt Settings.....	23
5.9 POWERGOOD Settings.....	28
5.10 Miscellaneous Settings.....	28
5.11 Interface Settings.....	30
5.12 Multi-Device Settings.....	31
5.13 Watchdog Settings.....	31
6 Pre-Configurable Finite State Machine (PFSM) Settings.....	31
6.1 Configured States.....	32
6.2 PFSM Triggers.....	34
6.3 Power Sequences.....	36
7 Application Examples.....	50
7.1 Moving Between States; ACTIVE and RETENTION.....	50
7.2 Entering and Exiting Standby.....	51
7.3 Entering and Exiting LP_STANDBY.....	52
7.4 Runtime Customization.....	52
8 References.....	54

Trademarks

Jacinto™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

1 Introduction

This user's guide describes a power distribution network (PDN), PDN-0A, using two TPS6594-Q1 devices and one LP8764-Q1 device to supply the J721S2, TDA4VE, TDA4VL, or TDA4AL processor with independent MCU and Main power rails. J721S2/TDA4VE/TDA4VL/TDA4AL Triple PMIC PDN-0A enables board level isolation of the MCU safety island and main voltage resources as required for implementing two desirable features of the processor:

1. MCU processor acts as independent safety monitor (MCU Safety Island) over the Main processing resources to ensure safe system operations.
2. MCU processor maintains minimum system operations (MCU Only) to significantly reduce processor power dissipation thereby extending battery life during stand-by use cases and reducing component temperature.

The following topics are described to clarify platform system operation:

1. PDN power resource connections
2. PDN digital control connections
3. Primary and secondary PMIC static NVM contents
4. PMIC sequencing settings to support different PDN power state transitions for an advanced processor system

PMIC and processor data manuals provide recommended operating conditions, electrical characteristics, recommended external components, package details, register maps, and overall component functionality. In the event of any inconsistency between any user's guide, application report, or other referenced material, the data sheet specification is the definitive source.

2 Device Versions

There are different orderable part numbers (OPNs) of the devices available with unique NVM settings to support different end product use cases and processor types. The unique NVM settings for each PMIC device are optimized per PDN design to support different processors, processing loads, SDRAM types, system functional safety levels, and end product features (such as low power modes, processor voltages, and memory subsystems). The NVM settings can be identified by both NVM_ID and NVM_REV registers. Each PMIC device is distinguished by the part number, NVM_ID, and NVM_REV values listed in [Table 2-1](#).

Table 2-1. Dual TPS6594-Q1 Orderable Part Numbers for Independent MCU and Main PDN System

PDN USE CASE	PDN	Orderable Part Number	TI_NVM_ID (TI_NVM_REV)	Orderable Part Number	TI_NVM_ID (TI_NVM_REV)	Orderable Part Number	TI_NVM_ID(TI_NVM_REV)
<ul style="list-style-type: none"> • Up to 9 A⁽¹⁾ on the Primary PMIC 3-phase CPU rail • Up to 12 A⁽¹⁾ on the Secondary PMIC 4-phase CORE rail • Up to 3.4 A⁽¹⁾ on the SDRAM, with support for LPDDR4 • Supports Processor 2 GHz maximum clock with high-speed SERDES operations • Supports 32 Gb of LPDDR4 SDRAM with 4266MTs data rate • Supports Functional Safety up to ASIL-D level with MCU Safety Island • Supports MCU-only and Retention low power modes • Supports I/O level of 3.3 V or 1.8 V • Supports optional end product features: <ul style="list-style-type: none"> – Compliant high-speed SD Card memory – Compliant USB 2.0 Interface – On-board Efuse programming of high security processors 	0A	TPS65941120 RWERQ1	0x20 (0x04)	TPS65941421 RWERQ1	0x21 (0x02)	LP876411B5 RQKRQ1	0xB5 (0x02)

(1) TI recommends having 15% margin between the maximum expected load current and the maximum current allowed per each PMIC output rail.

3 Processor Connections

This section details how the dual TPS6594-Q1 and LP8764-Q1 power resources and GPIO signals are connected to the processor and other peripheral components.

3.1 Power Mapping

[Figure 3-1](#) shows the power mapping between the dual TPS6594-Q1 PMIC and LP8764-Q1 PMIC power resources and processor voltage domains required to support independent MCU and Main power rails. In this configuration, both PMICs use a 3.3 V input voltage. For Functional Safety applications, there is a protection FET before VCCA that connects to the OVPGDRV pin of the primary PMIC, allowing voltage monitoring of the input supply to the PMICs.

For SD card dual-voltage I/O support (3.3 V and 1.8 V), the TLV7103318-Q1 device can be used. A processor GPIO control signal with a logic high default value is used to set SD VIO to 3.3 V initially. During processor power up, the boot loader SW can set GPIO signal low to select 1.8 V level as needed for high-speed card operation per SD specification. The GPIO allows control of the TLV7103318-Q1 voltage without the need for the MCU processor to establish I2C communication with the PMICs during boot from SD card operations.

This PDN uses six discrete power components with three being required and three are optional depending upon end product features. The two TPS22965-Q1 Load Switches connect VCCA_3V3 power rail to supply OV protected 3.3 V to processor I/O domains. Two load switches are required in order to enable isolation between MCU and Main processor sub-sections for MCU Safety Island or MCU Only low power operations. The unused feedback pin, FB_B3, of the TPS65941120-Q1 has been configured per NVM settings, [Table 5-3](#), to provide voltage monitoring for VDD_MCUIO_3V3_LS power rail. The unused feedback pin, FB_B4 of the LP876411B5-Q1 has been configured per NVM settings, [Table 5-3](#), to provide voltage monitoring for VDD_IO_3V3 power rail. The FB_B4 feedback pin enables all of the necessary processor power supply inputs to have voltage monitoring coverage as needed for functional safety ASIL-B and higher systems. The third discrete device is a TLV73318P-Q1 LDO which supplies the LPDDR4 SDRAM component with required 1.8V supply, which is monitored by the unused feedback pin, FB_B3, of the LP876411B5-Q1. The fourth discrete power component is an optional TLV73333-Q1 LDO that can be used for USB support. The fifth discrete power component is an optional TLV77103318-Q1 LDO for SD power. The sixth discrete component is TLV73318P-Q1 LDO that can be used if an end product uses a high security processor type and desires the capability to program Efuse values on-board. If this feature is not desired, then this LDO can be omitted and processor pins terminated per data manual recommendations.

Note

The PMIC voltage monitors on unused FB_Bx must be connected to the voltages shown in the power map. The VMON_ABIST_EN=1 for all the PMICs. If the proper voltage is not connected to the FB_Bx when the monitor is enabled then the self-test fails, the BIST_FAIL_INT interrupt is set, and the device goes to the hardware SAFE RECOVERY state, see [Figure 6-1](#), and main processor voltages are disabled.

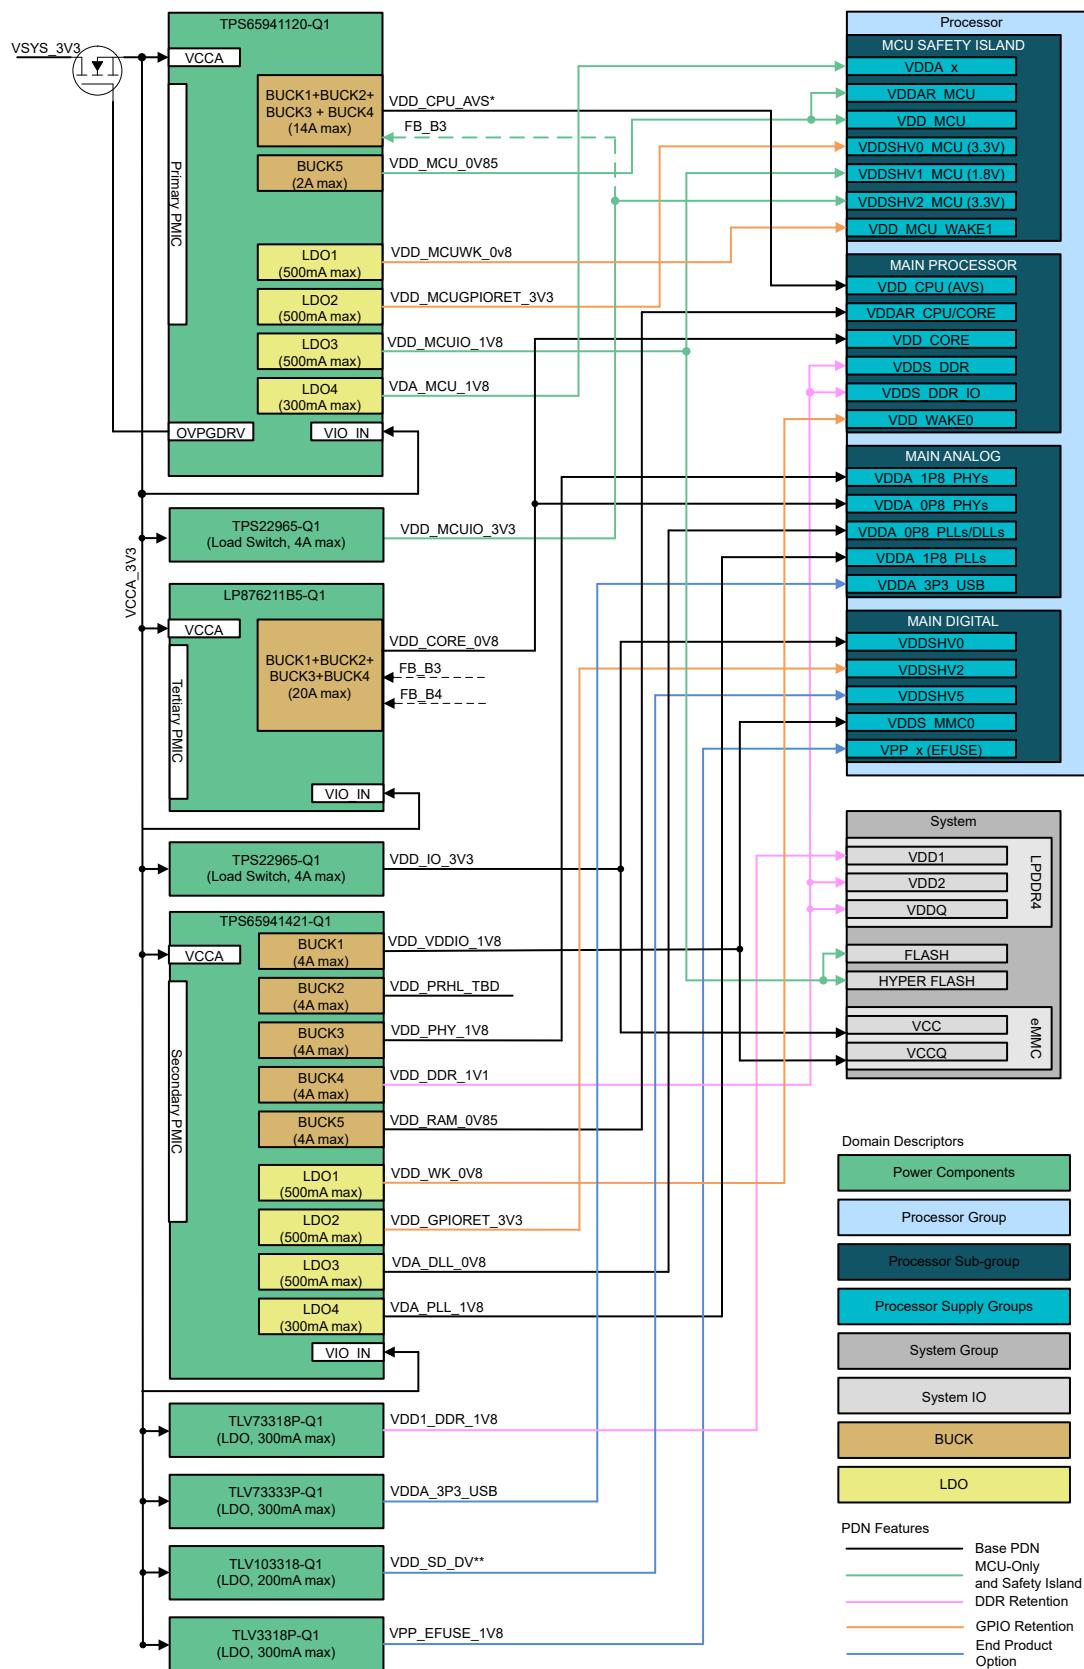


Figure 3-1. Power Connections

- * VDD_CPU_AV*, boot voltage of 0.8 V then software sets device specific AVS; 0.68 V – 0.72 V.
- ** VDD_SD_DV, 3.3 V then software changes to 1.8 V per HS-SD.

Table 3-1 identifies which power resources are required to support different system features. In the Active SoC column, there are additional options for including or excluding the VPP_x(EFUSE) rail, the SD CARD rail, and the USB rail.

Table 3-1. PDN Power Mapping and System Features

Power Mapping			System Features ⁽¹⁾						
Device	Power Resource	Power Rails	Processor and Memory Domains	Active SoC	MCU - only	GPIO Retention	DDR Retention	SD Card	USB Interface
TPS65941 120-Q1	BUCK1234	VDD_CPU_AV8	VDD_CPU	R					
	FB_B3	VDDD_MC_UIO_3V3	VDDSHV2_MCU (3.3 V)	R	R				
	BUCK5	VDD MCU _0V85	VDDAR MCU, VDD MCU	R	R				
	LDO1	VDD MCU WK_0V8	VDD MCU_WAKE1	R	O ⁽²⁾	R ⁽²⁾			
	LDO2	VDD MCU _GPIORET _3V3	VDDSHV0_MCU	R	O ⁽²⁾	R ⁽²⁾			
	LDO3	VDD MCU IO_1V8	VDDSHV1_MCU (1.8 V)	R	R				
	LDO4	VDA MCU _1V8	VDDA_x	R	R				
TPS65941 421-Q1	BUCK1	VDD IO_1 V8	VDDS_MMCO	R					
	BUCK3	VDD PHY _1V8	VDDA_1P8_x	R					
	BUCK4	VDD DDR _1V1	VDDDS_DDRRx	R	O ⁽³⁾		R ⁽³⁾		
			Mem: VDD2, VDDQ						
	BUCK5	VDD RAM _0V85	VDDAR_x	R					
	LDO1	VDD WK_0V8	VDD_WAKE0	R	O ⁽²⁾	R ⁽²⁾			
	LDO2	VDD GPI ORET_3V3	VDDSHV2	R	O ⁽²⁾	R ⁽²⁾			
	LDO3	VDA DLL_0V8	VDDA_0P8_x	R					
LP876411 B5-Q1	BUCK1234	VDD COR E_0V8	VDD_CORE, VDDA_0P8_x	R					
	Load Switch	VDD MCU IO_3V3	VDDSHV2_MCU (3.3 V)	R	R				
TPS22965-Q1	Load Switch	VDD IO_3 V3	VDDSHV0 (3.3 V)	R					
TLV73318 P-Q1	LDO	VDD1_DD R_1V8	Mem: VDD1	R	O ⁽³⁾		R ⁽³⁾		
TLV73333 P-Q1	LDO	VDDA_3P3_USB	VDDA_3P3_USB						R
TLV103318 -Q1	LDO	VDD SD DV	VDDSHV5					R	
TLV73318 P-Q1	LDO	VPP_EFU SE_1V8	VPP_x	O					

(1) 'R' is required and 'O' is optional.

(2) LDO1 and LDO2 of the TPS65941120-Q1 and LDO1 and LDO2 of the TPS65941421-Q1 remain on when TRIGGER_I2C_7, in FSM_I2C_TRIGGER register, is set.

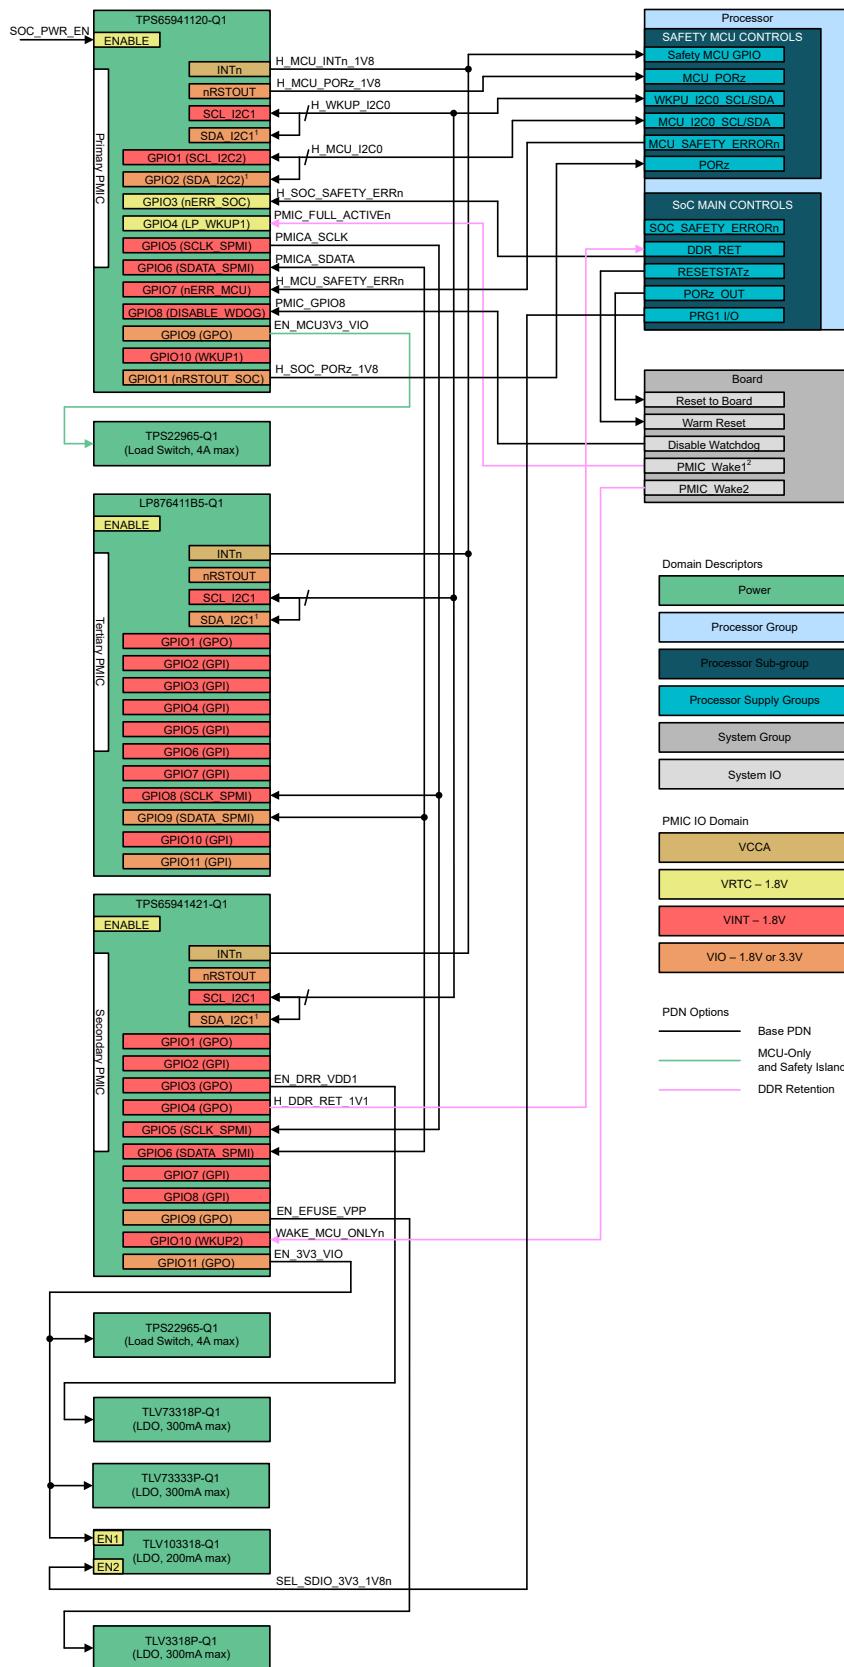
(3) BUCK4 of the TPS65941421-Q1 and the TLV73318P-Q1 which is controlled by the TPS65941421-Q1 GPIO3 remain active while TRIGGER_I2C_5, in FSM_I2C_TRIGGER, is set.

3.2 Control Mapping

Figure 3-2 shows the digital control signal mapping between processor and PMIC devices. For the three PMIC devices to work together, the PMICs must establish an SPMI communication channel. The SPMI allows the two TPS6594-Q1 to synchronize their internal Pre-Configurable State Machines (PFSM) so that they operate as one PFSM across all power and digital resources. The GPIO_5 and GPIO_6 pins on the TPS6594-Q1 and the GPIO_8 and GPIO_9 pins of the LP8764-Q1 are assigned for this functionality.

Other digital connections from the PMICs to the processor provide error monitoring, processor reset, processor wake up, and system low-power modes. Specific GPIO pins have been assigned to key signals in order to ensure proper operation during low power modes when only a few GPIO pins remain operational.

The digital connections shown in TPS6594-Q1 Digital Connections allow system features including 'MCU-only, MCU Safety Island' and DDR Retention modes, functional safety up to ASIL-D, and compliant dual voltage SD card operation.


Figure 3-2. PDN-0A Digital Connections

1. PMIC IO can have distinct power domains for input and output functionality. The SDA function for I2C1 and I2C2 use the VINT voltage domain as an input and the VIO voltage domain as an output. Please refer to the

- device [data sheet](#) for a complete description. The PMIC voltage domains indicated are for the PDN-0A NVM configuration.
2. WKUP2 triggers a transition to MCU Only state. LP_WKUP1 and WKUP1 transition to the ACTIVE state
[Figure 6-1](#)

Note

The PMIC voltage domain of an IO can be different depending upon configuration. When configured as an input GPIO3 and GPIO4 are in the VRTC domain. When configured as an output, GPIO3 and GPIO4 are in the VINT domain.

Note

In addition to the I2C signals, four additional signals are open-drain outputs and require a pullup to a specific power rail. Please refer to [Table 3-2](#) for a list of the signals and the specific power rail.

Table 3-2. Open-drain signals and Power Rail

PDN Signal	Pullup Power Rail
H_MCU_INTn	VDD_MCUIO_1V8
H_MCU_PORz_1V8	VDA_MCU_1V8
H_SOC_PORz_1V8	VDA_MCU_1V8
H_DDR_RET_1V1	VDD_DDR_1V1_REG
H_WKUP_I2C0	VDD_MCUIO_3V3
H_MCU_I2C0_SCL/SDA	VDD_MCUIO_3V3

Please use [Table 3-3](#) as a guide to understand GPIO assignments required for each PDN system feature. If the feature listed is not required, the digital connection can be removed; however, the GPIO pin is still configured per NVM defined default function shown. After the processor has booted up, the processor can reconfigure unused GPIOs to support new functions. GPIO reconfiguration is possible as long as that function is only needed after boot and default function does not cause any conflicts with normal operations (for example, two outputs driving same net). For details on how functional safety related connections help achieve functional safety system-level goals, see [Section 4](#).

Table 3-3. Digital Connections by System Feature

Device	GPIO Mapping			System Features ⁽¹⁾					
	PMIC Pin	NVM Function	PDN Signals	Active SoC	Functional Safety	MCU - only MCU-Safety Island	GPIO Retention	DDR Retention	SD Card
TPS65941 120-Q1	nPWRON/ENABLE	Enable	SOC_PWR_ON	R					
	INT	INT	H_MCU_INTn		R				
	nRSTOUT	nRSTOUT	H_MCU_PORz_1V8	R		R			
	SCL_I2C1	SCL_I2C1	H_WKUP_I2C0	R					
	SDA_I2C1	SDA_I2C1	H_WKUP_I2C0	R					
	GPIO_1	SCL_I2C2	H_MCU_I2C0_SCL		R				
	GPIO_2	SDA_I2C2	H_MCU_I2C0_SDA		R				
	GPIO_3	nERR_SoC	H_SOC_SAFETY_ERRn	R					
	GPIO_4	LP_WKUP ⁽²⁾	PMIC_FULL_ACTIVEn				R	R	
	GPIO_5	SCLK_SPMI	PMICA_SCLK				R		
	GPIO_6	SDATA_SPMI	PMICA_SDATA				R		
	GPIO_7	nERR_MCU	H_MCU_SAFETY_ERRn		R				
	GPIO_8	DISABLE_WDOG	PMICA_GPIO8	(4)	(4)				
	GPIO_9	GPO	EN_MCU3V3IO	R		R			
TPS65941 421-Q1	GPIO_10	WKUP1	PMICA_GPIO10/H_PMIC_PWR_EN1	O					
	GPIO_11	nRSTOUT_SOC	H_SOC_PORz_1V8			R			
	nPWRON/ENABLE	ENABLE	Unused						
	nINT	nINT	H_MCU_INTn						
	nRSTOUT	nRSTOUT	Unused						
	SCL_I2C1	SCL_I2C1	H_WKUP_I2C0	R					
	SDA_I2C1	SCL_I2C1	H_WKUP_I2C0	R					
	GPIO_1	GPO	Unused ⁽⁵⁾						
	GPIO_2	GPI	Unused ⁽³⁾					R	
	GPIO_3	GPO	EN_DDR_VDD1	R		O		R	
	GPIO_4	GPO	H_DDR_RET_1V1					R	
	GPIO_5	SCLK_SPMI	PMICB_SCLK				R		
	GPIO_6	SDATA_SPMI	PMICB_SDATA				R		

Table 3-3. Digital Connections by System Feature (continued)

Device	GPIO Mapping			System Features ⁽¹⁾					
	PMIC Pin	NVM Function	PDN Signals	Active SoC	Functional Safety	MCU - only MCU-Safety Island	GPIO Retention	DDR Retention	SD Card
LP876411 B5-Q1	nINT	nINT	H_MCU_INTn		R				
	nRSTOUT	nRSTOUT	Unused						
	SCL_I2C1	SCL_I2C1	H_WKUP_I2C0		R				
	SDATA_I2C1	SDATA_I2C1	H_WKUP_I2C0		R				
	GPIO_1	GPIO_1	Unused						
	GPIO_2	GPIO_2	Unused						
	GPIO_3	GPIO_3	Unused						
	GPIO_4	GPIO_4	Unused						
	GPIO_5	GPIO_5	Unused						
	GPIO_6	GPIO_6	Unused						
	GPIO_7	GPIO_7	Unused						
	GPIO_8	SCLK_SPMI	PMICC_SCLK			R			
	GPIO_9	SDATA_SPMI	PMICC_SDATA			R			
	GPIO_10	GPIO_10	Unused						

- (1) R is Required. O is optional.
- (2) LP_WKUP1 function is masked in the static settings. Instructions for unmasking the function are provided in [Section 7.1.3](#), [Section 7.2](#) and [Section 7.3](#).
- (3) If it is desired to disable the watchdog through hardware, GPIO_8 is required and must be set high by the time nRSTOUT goes high. After nRSTOUT is high, the watchdog state is latched and the pin can be configured for other functions through software.
- (4) This GPIO is not required for power sequencing or PMIC functionality and can be configured by software for a different purpose if desired.
- (5) GPIO4 of the TPS65941111 is not part of the power sequences, [Section 6.3](#). This GPIO must be configured by the SOC at runtime.

4 Supporting Functional Safety Systems

By using the PDN-0A power solution, the system can leverage the following PMIC functional safety features:

- Independent Power Control of MCU and Main Rails
- Independent Monitoring and Reset for MCU and Main Rails
- Input Supply Monitoring
- Output Voltage and Current Monitoring
- Question and Answer Watchdog
- Fault Reporting Interrupts
- Enable Drive Pin that provides an independent path to disable system actuators
- Error Pin Monitoring
- Internal Diagnostics including voltage monitoring, temperature monitoring, and Built-In Self-Test

Refer to the Safety Manual of the TPS6594-Q1 and LP8764-Q1 devices for full descriptions and analysis of the PMIC functional safety features. These functional safety features can assist in achieving up to ASIL-D rating for a system. Additionally, these features help in achieving the functional safety assumptions utilized by the processor to achieve up to ASIL-D rating. See the Safety Manual for Jacinto™ 7 Processors for a complete list of functional safety system assumptions.

4.1 Achieving ASIL-B System Requirements

To achieve a system functional safety level of ASIL-B, the following PDN features are available:

- PMIC over voltage and under voltage monitoring on the power resource voltage outputs
- Watchdog monitoring of safety processor
- MCU error monitoring
- MCU reset
- I²C communication
- Error indicator, EN_DRV, for driving external circuitry (optional)
- Read-back of EN_DRV pin

The PDN has an in-line, external power FET, as shown in [Figure 3-1](#), between the input supply and PMICs. The voltage before and after the FET is monitored by the PMIC, and the PMIC controls the FET through the OVPGDRV pin. The FET can quickly isolate the PMICs when an over-voltage event greater than 6 V is detected on the input supply to protect the system from being damaged. This system protection includes all power rails sourced from the FET. Any power connected upstream from the FET is not protected from over voltage events. In [Figure 3-1](#) the load switches that supply power to the MCU and Main I/O domains, the discrete LDO supplying the DDR, and the discrete LDO supplying EFUSE are all connected after the FET to extend the over voltage protection to these processor domains and discrete power resources.

The PMIC internal over voltage and under voltage monitoring and their respective monitoring threshold levels are enabled by default and can be updated through I²C after startup. PMIC power rails connected directly to the processor are monitored by default. The unused feedback pin of BUCK3 on TPS65941120-Q1, FB_B3, is assigned to monitor the MCU IO supply voltage, VDD_MCUIO_3V3. For monitoring other supplies, the unused feedback pins of the LP876411B5- Q1 (FB_B3 or FB_B4) are assigned to monitor the DDR supply voltage, VDD1_DDR_1V8 and the SoC IO supply voltage, VDD_IO_3V3.

The internal Q&A Watchdog is enabled on the primary TPS6594-Q1 device. Once the device is in ACTIVE state, the trigger or Q&A watchdog settings can be configured through the secondary I²C in the device. The primary and secondary I²C CRC is not enabled by default but must be enabled with the I2C_2 trigger described in section Table-6-1. Once enabled the secondary I²C is disabled for 2ms. It is recommended to enable I²C CRC and wait a minimum of 2ms before starting the Q&A Watchdog. The steps for configuring and starting the watchdog can be found in the TPS6594-Q1 data sheet. Setting the DISABLE_WDOG signal high on primary TPS6594-Q1 GPIO_8 disables the watchdog timer if this feature needs to be suspended during initial development or is not required in the system. An example of re-purposing GPIO_8 is provided in [Section 7.4](#).

GPIO_7 of the primary TPS6594-Q1 PMIC is configured as the MCU error signal monitor, and must be enabled though the ESM_MCU_EN register bit. MCU reset is supported through the connection between the primary PMIC nRSTOUT pin and the MCU_PORz of the processor. Lastly, there are two I²C ports between the TPS6594-Q1 and the processor. The first is used for all non-watchdog communication, such as voltage level control, and the second allows the watchdog monitoring to be on an independent communication channel.

There is an option to use the EN_DRV of the primary TPS6594-Q1 PMIC to indicate an error has been detected and the system is entering SAFE state. This signal can be utilized if the system has external circuitry that needs to be driven by an error event. In this PDN, the EN_DRV is not utilized, but available if needed.

4.2 Achieving up to ASIL-D System Requirements

For ASIL-C or ASIL-D systems, the following features in addition to the ones described in [Section 4.1](#) can be used:

- PMIC over-voltage monitoring and protection on the input to the PMIC (VCCA)
- PMIC current monitoring on all output power rails
- SoC error monitoring
- Switch short-to-ground detection on BUCK regulator pins (SW_Bx)
- Residual Voltage Monitoring
- Read-back of Logic Output Pins
 - nINT of all PMICs
 - nRSTOUT and nRSTOUT_SOC of the primary PMIC

The current monitoring is enabled by default for all BUCKs and LDOs for the TPS6594-Q1 and LP8764-Q1 devices.

GPIO_3 of the primary TPS6594-Q1 PMIC is configured as the SoC error signal monitor. Similar to the MCU error signal monitor, this feature is enabled through I²C using the ESM_SOC_EN register bit. The SoC reset functionality is supported through the connection of GPIO_11 on the primary TPS6594-Q1, configured as nRSTOUT_SoC, to the PORz pin of the processor.

Table 4-1. System Level Safety Features

ASIL-B						ASIL-D	
Safety Monitoring Processor	External SW Wdog	INTn	Safety MCU Processing ESM Safety MCU Reset	Safety Status Signal with IO Read-Back feature	System Input Voltage Monitoring	SoC Main Processing ESM	IO Read-Back Feature
SoC: MCU Island R5 Cores	PMICA: Q&A Watchdog and I2C2	PMICA ⁽¹⁾ and PMICB ⁽²⁾ : nINT	PMICA: nERR_MCU connected to SOC:MCU_SAF ETY_ERRz PMICA: nRSTOUT connected to MCU_PORz_1 V8	PMICA: ENDRV	PMICA: VSYS_SENSE -OV with Safety FET OVPGDRV PMICA, PMICB and PMICC with VCCA OV & UV and SoC (VMON1) -UV	PMICA: nERR_SoC connected to SOC: SOC_SAFETY_ERRz	PMICA: nINT, nRSTOUT, nRSTOUT_SO C PMICB: nINT PMICC: nINT

(1) PMICA = TPS65941120-Q1

(2) PMICB = TPS65941421-Q1

Table 4-2. Power Monitoring Safety Features

				ASIL-B	ASIL-D Adds	
Device	Power Resource	PDN Power Rail	Safe State Power Group ⁽¹⁾	Supply Voltage Monitoring	Supply Current Monitoring	Residual Voltage Monitoring
TPS65941120-Q1 (PMIC-A)	BUCK1-4	VDD_CPU_AVs	SOC	PMIC-A - OV & UV	PMIC-A -CM	PMIC-A -RVM
	BUCK5	VDD_MCU_0V85	MCU	PMIC-A - OV & UV	PMIC-A -CM	PMIC-A -RVM
	LDO1	VDD_MCUWK_0V8	MCU	PMIC-A - OV & UV	PMIC-A -CM ⁽²⁾	PMIC-A -RVM ⁽²⁾
	LDO2	VDD_MCU_GPIO_RET_3V3	MCU	PMIC-A - OV & UV	PMIC-A -CM	PMIC-A -RVM
	LDO3	VDD_MCUIO_1V8	MCU	PMIC-A - OV & UV	PMIC-A -CM	PMIC-A -RVM
	LDO4	VDA_MCU_1V8	MCU	PMIC-A - OV & UV	PMIC-A -CM	PMIC-A -RVM

Table 4-2. Power Monitoring Safety Features (continued)

				ASIL-B	ASIL-D Adds	
TPS65941421-Q1 (PMIC-B)	BUCK1	VDD_IO_1V8	SOC	PMIC-B - OV & UV	PMIC-B -CM	PMIC-B -RVM
	BUCK3	VDD_PHY_1V8	SOC	PMIC-B - OV & UV	PMIC-B -CM	PMIC-B -RVM
	BUCK4	VDD_DDR_1V1	SOC	PMIC-B - OV & UV	PMIC-B -CM	PMIC-B -RVM
	BUCK5	VDD_RAM_0V85	SOC	PMIC-B - OV & UV	PMIC-B -CM	PMIC-B -RVM
	LDO1	VDD_WK_0V8	SOC	PMIC-B - OV & UV	PMIC-B -CM	PMIC-B -RVM
	LDO2	VDD_GPIORET_3V3	SOC	PMIC-B - OV & UV	PMIC-B -CM	PMIC-B -RVM
	LDO3	VDA_DLL_0V8	SOC	PMIC-B - OV & UV	PMIC-B -CM	PMIC-B -RVM
	LDO4	VDA_PLL_1V8	SOC	PMIC-B - OV & UV	PMIC-B -CM	PMIC-B -RVM
LP876411B5-Q1	BUCK1-4	VDD_CORE_0V8	SOC	PMIC-C - OV & UV	PMIC-C -CM	PMIC-C -RVM
TPS22965-Q1	Ld Sw A	VDD MCUIO_3V3	MCU	PMIC-A (FB_B3) - OV & UV ⁽⁵⁾	NA ^{(3) (4)}	
TPS22965-Q1	Ld Sw B	VDD_IO_3V3	SOC	PMIC-C (FB_B4) - OV & UV ⁽⁵⁾	NA ^{(3) (4)}	
TLV3318P-Q1	LDO-A	VDD1_DDR_1V8	SOC	PMIC-C (FB_B3) -OV & UV ⁽⁵⁾	NA	
TLV7103318-Q1	LDO-B	VDD_SD_DV	None	NA ⁽²⁾	NA ⁽²⁾	
TLV73333P-Q1	LDO-C	VDDA_3P3_USB	None	NA ⁽²⁾	NA ⁽²⁾	
TLV73318P-Q1	LDO-D	VDD_EFUSE_1V8	None	NA ⁽²⁾	NA ⁽²⁾	

(1) Rail Group settings for the TPS65941120-Q1, TPS65941421-Q1 and LP876411B5-Q1 are found in [Table 5-7](#).(2) Power rails VDDSHV5, VPP_CORE, VPP_MCU, VDDA_3P3_USB, and VDD1_LPDDR4_1V8 are *not safety critical*.(3) Power rails VDD_IO_1V8/3V3 are typically *not safety critical* since other means are available (for example, *black-channel checkers*) to provide diagnostic coverage to detect faults in SoC signaling interfaces (for example, CAN, UART, and SPI).(4) If an SoC GPIO control signal is used in a *safety critical* interface, then adding voltage and current monitoring to specific VIO power rail may be needed per customer's end product design.

(5) PMIC-C, Buck3 and 4 have unused remote sense feedback inputs that can be assigned to provide OV and UV voltage monitoring after SoC SW boot for 2x external power rails per desired functional safety needs. Optional OV/UV monitoring of VDD_DDR_1V1 and VDD_IO_3V3 power rails are examples.

5 Static NVM Settings

The TPS6594-Q1 and LP8764-Q1 devices consist of user register space and an NVM. The settings in NVM, which are loaded into the user registers during the transition from INIT to BOOT BIST, are provided in this section. Note: The user registers can be changed during state transitions, such as moving from STANDBY to ACTIVE mode. The user register map is described in the TPS6594-Q1 and LP8764-Q1 data sheets.

5.1 Application-Based Configuration Settings

In the TPS6594-Q1 data sheet, there are seven application-based configurations for each BUCK to operate within. The following list includes the different configurations available:

- 4.4 MHz VOUT Less than 1.9 V, Multiphase or High COUT Single Phase
- 2.2 MHz Single Phase for DDR Termination
- 4.4 MHz VOUT Less than 1.9 V, Low COUT, Single Phase Only
- 4.4 MHz VOUT Greater than 1.7 V, Single Phase Only
- 2.2 MHz Full VOUT Range and VIN Greater than 4.5 V, Single Phase Only
- 2.2 MHz VOUT Less than 1.9 V Multiphase or Single Phase
- 2.2 MHz Full VOUT and Full VIN Range, Single Phase Only

In the LP8764-Q1 data sheet, there are also seven application-based configurations:

- 4.4MHz Single-Phase and Multi-Phase Configuration

- 2.2MHz Single-Phase Configuration for DDR Termination
- 4.4MHz Single-Phase Configuration Low Output Voltage
- 4.4MHz Single-Phase Configuration High Output Voltage
- 2.2MHz Single-Phase Configuration with 5.0V VIN
- 2.2MHz Single-Phase and Multi-Phase Configuration
- 2.2MHz Single-Phase Generic Configuration

The seven configurations also have optimal output inductance values that optimize the performance of each buck under these various conditions. [Table 5-1](#) shows the default configurations for the BUCKs. The loop parameters associated with the use cases cannot be changed after device startup.

Table 5-1. Application Use Case Settings

Device	BUCK Rail	Default Application Use Case	Recommended Inductor Value
TPS65941120-Q1	BUCK1	2.2 MHz VOUT Less than 1.9 V Multiphase or Single Phase	470 nH
	BUCK2	2.2 MHz VOUT Less than 1.9 V Multiphase or Single Phase	470 nH
	BUCK3	2.2 MHz VOUT Less than 1.9 V Multiphase or Single Phase	470 nH
	BUCK4	2.2 MHz VOUT Less than 1.9 V Multiphase or Single Phase	470 nH
	BUCK5	2.2 MHz VOUT Less than 1.9 V Multiphase or Single Phase	470 nH
TPS65941421-Q1	BUCK1	2.2 MHz VOUT Less than 1.9 V Multiphase or Single Phase	470 nH
	BUCK2	2.2 MHz VOUT Less than 1.9 V Multiphase or Single Phase	470 nH
	BUCK3	2.2 MHz VOUT Less than 1.9 V Multiphase or Single Phase	470 nH
	BUCK4	2.2 MHz VOUT Less than 1.9 V Multiphase or Single Phase	470 nH
	BUCK5	2.2 MHz VOUT Less than 1.9 V Multiphase or Single Phase	470 nH
LP876411B5-Q1	BUCK1	2.2MHz Single-Phase and Multi-Phase Configuration	470 nH
	BUCK2	2.2MHz Single-Phase and Multi-Phase Configuration	470 nH
	BUCK3	2.2MHz Single-Phase and Multi-Phase Configuration	470 nH
	BUCK4	2.2MHz Single-Phase and Multi-Phase Configuration	470 nH

5.2 Device Identification Settings

These settings are used to distinguish which device is detected in a system. These settings cannot be changed after device startup.

Table 5-2. Device Identification NVM Settings

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
DEV_REV	DEVICE_ID	0x82		0x82		0x86	
NVM_CODE_1	TI_NVM_ID	0x20		0x21		0xb5	
NVM_CODE_2	TI_NVM_REV	0x4		0x2		0x2	
PHASE_CONFIG	MP_CONFIG	0x0	4+1	0x1	1+1+1+1+1	0x0	4

5.3 BUCK Settings

These settings detail the voltages, configurations, and monitoring of the BUCK rails stored in the NVM. All these settings can be changed through I²C after startup. Some settings, typically the enable bits, are also changed by the PFSM, as described in [Section 6.3](#).

After the [Section 6.3.8](#) sequence has completed, the BUCK_x_EN bit is set for BUCK1 and BUCK5 in the TPS65941120-Q1. BUCK_x_EN is set for the BUCK1, BUCK3, BUCK4 and BUCK5 in the TPS65941421-Q1. BUCK_x_EN is set for the BUCK1 in the LP876411B5-Q1. The BUCK_x_VMON_EN bit is set for BUCK1, BUCK3 and BUCK5 in the TPS65941120-Q1. The BUCK_x_VMON_EN bit is set for BUCK1, BUCK3, BUCK4 and BUCK5 in the TPS65941421-Q1. The BUCK_x_VMON_EN bit is set for BUCK1, BUCK3 and BUCK4 in the LP876411B5-Q1. The BUCK_x_RV_SEL bit is cleared for all BUCKs. The other bits remain unchanged, but are still accessible via I²C.

Table 5-3. BUCK NVM Settings

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
BUCK1_CTRL	BUCK1_EN	0x0	Disabled; BUCK1 regulator	0x0	Disabled; BUCK1 regulator	0x0	Disabled; BUCK1 regulator
	BUCK1_FPWM	0x1	PWM operation only.	0x0	PFM and PWM operation (AUTO mode).	0x1	PWM operation only.
	BUCK1_FPWM_MP	0x0	Automatic phase adding and shedding.	0x0	Automatic phase adding and shedding.	0x0	Automatic phase adding and shedding.
	BUCK1_VMON_EN	0x0	Disabled; OV, UV, SC and ILIM comparators.	0x0	Disabled; OV, UV, SC and ILIM comparators.	0x0	Disabled; OV, UV, SC and ILIM comparators.
	BUCK1_VSEL	0x0	BUCK1_VOUT_1	0x0	BUCK1_VOUT_1	0x0	BUCK1_VOUT_1
	BUCK1_PLDN	0x1	Enabled; Pull-down resistor	0x1	Enabled; Pull-down resistor	0x1	Enabled; Pull-down resistor
	BUCK1_RV_SEL	0x1	Enabled	0x1	Enabled	0x1	Enabled
BUCK1_CONF	BUCK1_SLEW RATE	0x3	5.0 mV/μs	0x3	5.0 mV/μs	0x3	5.0 mV/μs
	BUCK1_ILIM	0x5	5.5 A	0x5	5.5 A	0x7	7.5 A
BUCK2_CTRL	BUCK2_EN	0x0	Disabled; BUCK2 regulator	0x0	Disabled; BUCK2 regulator	0x0	Disabled; BUCK2 regulator
	BUCK2_FPWM	0x1	PWM operation only.	0x0	PFM and PWM operation (AUTO mode).	0x1	PWM operation only.
	BUCK2_VMON_EN	0x0	Disabled; OV, UV, SC and ILIM comparators.	0x0	Disabled; OV, UV, SC and ILIM comparators.	0x0	Disabled; OV, UV, SC and ILIM comparators.
	BUCK2_VSEL	0x0	BUCK2_VOUT_1	0x0	BUCK2_VOUT_1	0x0	BUCK2_VOUT_1
	BUCK2_PLDN	0x1	Enabled; Pull-down resistor	0x1	Enabled; Pull-down resistor	0x1	Enabled; Pull-down resistor
	BUCK2_RV_SEL	0x1	Enabled	0x0	Disabled	0x1	Enabled

Table 5-3. BUCK NVM Settings (continued)

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
BUCK2_CONF	BUCK2_SLEW_RATE	0x3	5.0 mV/μs	0x3	5.0 mV/μs	0x3	5.0 mV/μs
	BUCK2_ILIM	0x5	5.5 A	0x5	5.5 A	0x7	7.5 A
BUCK3_CTRL	BUCK3_EN	0x0	Disabled; BUCK3 regulator	0x0	Disabled; BUCK3 regulator	0x0	Disabled; BUCK3 regulator
	BUCK3_FPWM	0x1	PWM operation only.	0x0	PFM and PWM operation (AUTO mode).	0x1	PWM operation only.
	BUCK3_FPWM_MP	0x0	Automatic phase adding and shedding.	0x0	Automatic phase adding and shedding.	0x0	Automatic phase adding and shedding.
	BUCK3_VMON_EN	0x0	Disabled; OV, UV, SC and ILIM comparators.	0x0	Disabled; OV, UV, SC and ILIM comparators.	0x0	Disabled; OV, UV, SC and ILIM comparators.
	BUCK3_VSEL	0x0	BUCK3_VOUT_1	0x0	BUCK3_VOUT_1	0x0	BUCK3_VOUT_1
	BUCK3_PLDN	0x1	Enabled; Pull-down resistor	0x1	Enabled; Pull-down resistor	0x1	Enabled; Pull-down resistor
	BUCK3_RV_SEL	0x0	Disabled	0x1	Enabled	0x0	Disabled
BUCK3_CONF	BUCK3_SLEW_RATE	0x5	1.3 mV/μs	0x3	5.0 mV/μs	0x2	10 mV/μs
	BUCK3_ILIM	0x4	4.5 A	0x5	5.5 A	0x4	4.5 A
BUCK4_CTRL	BUCK4_EN	0x0	Disabled; BUCK4 regulator	0x0	Disabled; BUCK4 regulator	0x0	Disabled; BUCK4 regulator
	BUCK4_FPWM	0x1	PWM operation only.	0x0	PFM and PWM operation (AUTO mode).	0x1	PWM operation only.
	BUCK4_VMON_EN	0x0	Disabled; OV, UV, SC and ILIM comparators.	0x0	Disabled; OV, UV, SC and ILIM comparators.	0x0	Disabled; OV, UV, SC and ILIM comparators.
	BUCK4_VSEL	0x0	BUCK4_VOUT_1	0x0	BUCK4_VOUT_1	0x0	BUCK4_VOUT_1
	BUCK4_PLDN	0x1	Enabled; Pull-down resistor	0x1	Enabled; Pull-down resistor	0x1	Enabled; Pull-down resistor
	BUCK4_RV_SEL	0x0	Disabled	0x1	Enabled	0x0	Disabled
BUCK4_CONF	BUCK4_SLEW_RATE	0x2	10 mV/μs	0x3	5.0 mV/μs	0x2	10 mV/μs
	BUCK4_ILIM	0x4	4.5 A	0x5	5.5 A	0x4	4.5 A
BUCK5_CTRL	BUCK5_EN	0x0	Disabled; BUCK5 regulator	0x0	Disabled; BUCK5 regulator		
	BUCK5_FPWM	0x1	PWM operation only.	0x0	PFM and PWM operation (AUTO mode).		
	BUCK5_VMON_EN	0x0	Disabled; OV, UV, SC and ILIM comparators.	0x0	Disabled; OV, UV, SC and ILIM comparators.		
	BUCK5_VSEL	0x0	BUCK5_VOUT_1	0x0	BUCK5_VOUT_1		
	BUCK5_PLDN	0x1	Enable Pull-down resistor	0x1	Enable Pull-down resistor		
	BUCK5_RV_SEL	0x1	Enabled	0x1	Enabled		
BUCK5_CONF	BUCK5_SLEW_RATE	0x3	5.0 mV/μs	0x3	5.0 mV/μs		
	BUCK5_ILIM	0x3	3.5 A	0x3	3.5 A		
BUCK1_VOUT_1	BUCK1_VSET1	0x37	0.800 V	0xb2	1.80 V	0x37	0.800 V
BUCK1_VOUT_2	BUCK1_VSET2	0x37	0.800 V	0xb2	1.80 V	0x37	0.800 V
BUCK2_VOUT_1	BUCK2_VSET1	0x37	0.800 V	0x73	1.10 V	0x37	0.800 V
BUCK2_VOUT_2	BUCK2_VSET2	0x37	0.800 V	0x73	1.10 V	0x37	0.800 V
BUCK3_VOUT_1	BUCK3_VSET1	0xfd	3.30 V	0xb2	1.80 V	0x0	0.3 V

Table 5-3. BUCK NVM Settings (continued)

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
BUCK3_VOUT_2	BUCK3_VSET2	0xfd	3.30 V	0xb2	1.80 V	0x0	0.3 V
BUCK4_VOUT_1	BUCK4_VSET1	0x0	0.3 V	0x73	1.10 V	0x0	0.3 V
BUCK4_VOUT_2	BUCK4_VSET2	0x0	0.3 V	0x73	1.10 V	0x0	0.3 V
BUCK5_VOUT_1	BUCK5_VSET1	0x41	0.850 V	0x41	0.850 V		
BUCK5_VOUT_2	BUCK5_VSET2	0x41	0.850 V	0x41	0.850 V		
BUCK1_PG_WIN_DOW	BUCK1_OV_THR	0x3	+5% / +50 mV	0x3	+5% / +50 mV	0x3	+5% / +50 mV
	BUCK1_UV_THR	0x3	-5% / -50 mV	0x3	-5% / -50 mV	0x3	-5% / -50 mV
BUCK2_PG_WIN_DOW	BUCK2_OV_THR	0x3	+5% / +50 mV	0x7	+10% / +100mV	0x3	+5% / +50 mV
	BUCK2_UV_THR	0x3	-5% / -50 mV	0x7	-10% / -100mV	0x3	-5% / -50 mV
BUCK3_PG_WIN_DOW	BUCK3_OV_THR	0x7	+10% / +100mV	0x3	+5% / +50 mV	0x0	+3% / +30mV
	BUCK3_UV_THR	0x7	-10% / -100mV	0x3	-5% / -50 mV	0x0	-3% / -30mV
BUCK4_PG_WIN_DOW	BUCK4_OV_THR	0x0	+3% / +30mV	0x3	+5% / +50 mV	0x0	+3% / +30mV
	BUCK4_UV_THR	0x0	-3% / -30mV	0x3	-5% / -50 mV	0x0	-3% / -30mV
BUCK5_PG_WIN_DOW	BUCK5_OV_THR	0x3	+5% / +50 mV	0x3	+5% / +50 mV		
	BUCK5_UV_THR	0x3	-5% / -50 mV	0x3	-5% / -50 mV		

5.4 LDO Settings

These settings detail the voltages, configurations, and monitoring of the LDO rails stored in the NVM. All these settings can be changed through I²C after startup. Some settings, typically the enable bits, are also changed by the PFSM, as described in [Section 6.3](#).

After the [Section 6.3.8](#) sequence has completed, the LDOx_EN and LDOx_VMON_EN bits are set and the LDOx_RV_SEL bit is cleared for all LDOs. The other bits remain unchanged, but are still accessible via I²C.

Table 5-4. LDO NVM Settings

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1	
		Value	Description	Value	Description
LDO1_CTRL	LDO1_EN	0x0	Disabled; LDO1 regulator.	0x0	Disabled; LDO1 regulator.
	LDO1_SLOW_RA MP	0x0	25mV/us max ramp up slew rate for LDO output from 0.3V to 90% of LDO1_VSET	0x0	25mV/us max ramp up slew rate for LDO output from 0.3V to 90% of LDO1_VSET
	LDO1_PLDN	0x1	125 Ohm	0x1	125 Ohm
	LDO1_VMON_EN	0x0	Disable OV and UV comparators.	0x0	Disable OV and UV comparators.
	LDO1_RV_SEL	0x1	Enabled	0x1	Enabled
LDO2_CTRL	LDO2_EN	0x0	Disabled; LDO2 regulator.	0x0	Disabled; LDO2 regulator.
	LDO2_SLOW_RA MP	0x0	25mV/us max ramp up slew rate for LDO output from 0.3V to 90% of LDO2_VSET	0x0	25mV/us max ramp up slew rate for LDO output from 0.3V to 90% of LDO2_VSET
	LDO2_PLDN	0x1	125 Ohm	0x1	125 Ohm
	LDO2_VMON_EN	0x0	Disabled; OV and UV comparators.	0x0	Disabled; OV and UV comparators.
	LDO2_RV_SEL	0x1	Enabled	0x1	Enabled
LDO3_CTRL	LDO3_EN	0x0	Disabled; LDO3 regulator.	0x0	Disabled; LDO3 regulator.
	LDO3_SLOW_RA MP	0x0	25mV/us max ramp up slew rate for LDO output from 0.3V to 90% of LDO3_VSET	0x0	25mV/us max ramp up slew rate for LDO output from 0.3V to 90% of LDO3_VSET
	LDO3_PLDN	0x1	125 Ohm	0x1	125 Ohm
	LDO3_VMON_EN	0x0	Disabled; OV and UV comparators.	0x0	Disabled; OV and UV comparators.
	LDO3_RV_SEL	0x1	Enabled	0x1	Enabled
LDO4_CTRL	LDO4_EN	0x0	Disabled; LDO4 regulator.	0x0	Disabled; LDO4 regulator.
	LDO4_SLOW_RA MP	0x0	25mV/us max ramp up slew rate for LDO output from 0.3V to 90% of LDO4_VSET	0x0	25mV/us max ramp up slew rate for LDO output from 0.3V to 90% of LDO4_VSET
	LDO4_PLDN	0x1	125 Ohm	0x1	125 Ohm
	LDO4_VMON_EN	0x0	Disabled; OV and UV comparators.	0x0	Disabled; OV and UV comparators.
	LDO4_RV_SEL	0x1	Enabled	0x1	Enabled
LDO1_VOUT	LDO1_VSET	0x8	0.80 V	0x8	0.80 V
	LDO1_BYPASS	0x0	Linear regulator mode.	0x0	Linear regulator mode.
LDO2_VOUT	LDO2_VSET	0x3a	3.30 V	0x3a	3.30 V
	LDO2_BYPASS	0x1	Bypass mode.	0x1	Bypass mode.
LDO3_VOUT	LDO3_VSET	0x1c	1.80 V	0x8	0.80 V
	LDO3_BYPASS	0x0	Linear regulator mode.	0x0	Linear regulator mode.
LDO4_VOUT	LDO4_VSET	0x38	1.800 V	0x38	1.800 V
LDO1_PG_WIND OW	LDO1_OV_THR	0x3	+5% / +50 mV	0x3	+5% / +50 mV
	LDO1_UV_THR	0x3	-5% / -50 mV	0x3	-5% / -50 mV
LDO2_PG_WIND OW	LDO2_OV_THR	0x7	+10% / +100mV	0x7	+10% / +100mV
	LDO2_UV_THR	0x7	-10% / -100mV	0x7	-10% / -100mV
LDO3_PG_WIND OW	LDO3_OV_THR	0x3	+5% / +50 mV	0x3	+5% / +50 mV
	LDO3_UV_THR	0x3	-5% / -50 mV	0x3	-5% / -50 mV

Table 5-4. LDO NVM Settings (continued)

Register Name	Field Name	TPS65941120-Q1			TPS65941421-Q1		
		Value	Description	Value	Description	Value	Description
LDO4_PG_WIND OW	LDO4_OV_THR	0x3	+5% / +50 mV	0x3	+5% / +50 mV	0x3	-5% / -50 mV
	LDO4_UV_THR	0x3	-5% / -50 mV	0x3	-5% / -50 mV	0x3	-5% / -50 mV

5.5 VCCA Settings

These settings detail the default monitoring enabled on VCCA. All these settings can be changed though I²C after startup.

Table 5-5. VCCA NVM Settings

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
VCCA_VMON_C TRL	VMON_DEGLITC H_SEL	0x1	20 us	0x1	20 us	0x1	VCCA 20us, VMON/ BUCK 20us
	VCCA_VMON_E N	0x1	Enabled; OV and UV comparators.	0x1	Enabled; OV and UV comparators.	0x1	Enabled; OV and UV comparators.
VCCA_PG_WIND OW	VCCA_OV_THR	0x7	+10%	0x7	+10%	0x7	+10%
	VCCA_UV_THR	0x7	-10%	0x7	-10%	0x7	-10%
	VCCA_PG_SET	0x0	3.3 V	0x0	3.3 V	0x0	3.3 V
GENERAL_REG _1	FAST_VCCA_OV P	0x0	slow, 4us deglitch filter enabled	0x0	slow, 4us deglitch filter enabled		
GENERAL_REG _3	LPM_EN_DISAB LES_VCCA_VM ON	0x1	VCCA_VMON enabled if VCCA_VMON_EN=1 and LPM_EN=0	0x1	VCCA_VMON enabled if VCCA_VMON_EN=1 and LPM_EN=0	0x1	VCCA_VMON enabled if VCCA_VMON_EN=1 and LPM_EN=0

5.6 GPIO Settings

These settings detail the default configurations of the GPIO rails. All these settings can be changed though I²C after startup. Note that the contents of the GPIOx_SEL field determine which other fields in the GPIOx_CONF and GPIO_OUT_x registers are applicable. To understand which NVM fields apply to each GPIOx_SEL option, see the *Digital Signal Descriptions* section in TPS6594-Q1 data sheet and LP8764-Q1 data sheet.

Table 5-6. GPIO NVM Settings

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
GPIO1_CONF	GPIO1_OD	0x0	Push-pull output	0x0	Push-pull output	0x0	Push-pull output
	GPIO1_DIR	0x0	Input	0x0	Input	0x0	Input
	GPIO1_SEL	0x1	SCL_I2C2/CS_SPI	0x0	GPIO1	0x0	GPIO1
	GPIO1_PU_SEL	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected
	GPIO1_PU_PD_EN	0x0	Disabled; Pull-up/pull- down resistor.	0x1	Enabled; Pull-up/pull- down resistor.	0x1	Enabled; Pull-up/pull- down resistor.
	GPIO1_DEGLITC_H_EN	0x0	No deglitch, only synchronization.	0x1	8 us deglitch time.	0x1	8 us deglitch time.
GPIO2_CONF	GPIO2_OD	0x0	Push-pull output	0x0	Push-pull output	0x0	Push-pull output
	GPIO2_DIR	0x0	Input	0x0	Input	0x0	Input
	GPIO2_SEL	0x2	SDA_I2C2/SDO_SPI	0x0	GPIO2	0x0	GPIO2
	GPIO2_PU_SEL	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected
	GPIO2_PU_PD_EN	0x0	Disabled; Pull-up/pull- down resistor.	0x1	Enabled; Pull-up/pull- down resistor.	0x1	Enabled; Pull-up/pull- down resistor.
	GPIO2_DEGLITC_H_EN	0x0	No deglitch, only synchronization.	0x1	8 us deglitch time.	0x1	8 us deglitch time.

Table 5-6. GPIO NVM Settings (continued)

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
GPIO3_CONF	GPIO3_OD	0x0	Push-pull output	0x0	Push-pull output	0x0	Push-pull output
	GPIO3_DIR	0x0	Input	0x1	Output	0x0	Input
	GPIO3_SEL	0x2	NERR_SOC	0x0	GPIO3	0x0	GPIO3
	GPIO3_PU_SEL	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected
	GPIO3_PU_PD_EN	0x1	Enabled; Pull-up/pull-down resistor.	0x0	Disabled; Pull-up/pull-down resistor.	0x1	Enabled; Pull-up/pull-down resistor.
	GPIO3_DEGLITC_H_EN	0x1	8 us deglitch time.	0x0	No deglitch, only synchronization.	0x1	8 us deglitch time.
GPIO4_CONF	GPIO4_OD	0x0	Push-pull output	0x1	Open-drain output	0x0	Push-pull output
	GPIO4_DIR	0x0	Input	0x1	Output	0x0	Input
	GPIO4_SEL	0x6	LP_WKUP1	0x0	GPIO4	0x0	GPIO4
	GPIO4_PU_SEL	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected
	GPIO4_PU_PD_EN	0x1	Enabled; Pull-up/pull-down resistor.	0x0	Disabled; Pull-up/pull-down resistor.	0x1	Enabled; Pull-up/pull-down resistor.
	GPIO4_DEGLITC_H_EN	0x1	8 us deglitch time.	0x0	No deglitch, only synchronization.	0x1	8 us deglitch time.
GPIO5_CONF	GPIO5_OD	0x0	Push-pull output	0x0	Push-pull output	0x0	Push-pull output
	GPIO5_DIR	0x1	Output	0x0	Input	0x0	Input
	GPIO5_SEL	0x1	SCLK_SPMI	0x1	SCLK_SPMI	0x0	GPIO5
	GPIO5_PU_SEL	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected
	GPIO5_PU_PD_EN	0x1	Enabled; Pull-up/pull-down resistor.	0x0	Disabled; Pull-up/pull-down resistor.	0x1	Enabled; Pull-up/pull-down resistor.
	GPIO5_DEGLITC_H_EN	0x0	No deglitch, only synchronization.	0x0	No deglitch, only synchronization.	0x1	8 us deglitch time.
GPIO6_CONF	GPIO6_OD	0x0	Push-pull output	0x0	Push-pull output	0x0	Push-pull output
	GPIO6_DIR	0x0	Input	0x0	Input	0x0	Input
	GPIO6_SEL	0x1	SDATA_SPMI	0x1	SDATA_SPMI	0x0	GPIO6
	GPIO6_PU_SEL	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected
	GPIO6_PU_PD_EN	0x1	Enabled; Pull-up/pull-down resistor.	0x0	Disabled; Pull-up/pull-down resistor.	0x1	Enabled; Pull-up/pull-down resistor.
	GPIO6_DEGLITC_H_EN	0x0	No deglitch, only synchronization.	0x0	No deglitch, only synchronization.	0x1	8 us deglitch time.
GPIO7_CONF	GPIO7_OD	0x0	Push-pull output	0x0	Push-pull output	0x0	Push-pull output
	GPIO7_DIR	0x0	Input	0x0	Input	0x0	Input
	GPIO7_SEL	0x1	NERR MCU	0x0	GPIO7	0x0	GPIO7
	GPIO7_PU_SEL	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected
	GPIO7_PU_PD_EN	0x1	Enabled; Pull-up/pull-down resistor.	0x1	Enabled; Pull-up/pull-down resistor.	0x1	Enabled; Pull-up/pull-down resistor.
	GPIO7_DEGLITC_H_EN	0x1	8 us deglitch time.	0x1	8 us deglitch time.	0x1	8 us deglitch time.

Table 5-6. GPIO NVM Settings (continued)

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
GPIO8_CONF	GPIO8_OD	0x0	Push-pull output	0x0	Push-pull output	0x0	Push-pull output
	GPIO8_DIR	0x0	Input	0x0	Input	0x0	Input
	GPIO8_SEL	0x3	DISABLE_WDOG	0x0	GPIO8	0x1	SCLK_SPMI
	GPIO8_PU_SEL	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected
	GPIO8_PU_PD_EN	0x1	Enabled; Pull-up/pull-down resistor.	0x1	Enabled; Pull-up/pull-down resistor.	0x0	Disabled; Pull-up/pull-down resistor.
	GPIO8_DEGLITC_H_EN	0x1	8 us deglitch time.	0x1	8 us deglitch time.	0x0	No deglitch, only synchronization.
GPIO9_CONF	GPIO9_OD	0x0	Push-pull output	0x0	Push-pull output	0x0	Push-pull output
	GPIO9_DIR	0x1	Output	0x0	Input	0x0	Input
	GPIO9_SEL	0x0	GPIO9	0x0	GPIO9	0x1	SDATA_SPMI
	GPIO9_PU_SEL	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected
	GPIO9_PU_PD_EN	0x0	Disabled; Pull-up/pull-down resistor.	0x1	Enabled; Pull-up/pull-down resistor.	0x0	Disabled; Pull-up/pull-down resistor.
	GPIO9_DEGLITC_H_EN	0x0	No deglitch, only synchronization.	0x1	8 us deglitch time.	0x0	No deglitch, only synchronization.
GPIO10_CONF	GPIO10_OD	0x0	Push-pull output	0x0	Push-pull output	0x0	Push-pull output
	GPIO10_DIR	0x0	Input	0x0	Input	0x0	Input
	GPIO10_SEL	0x6	WKUP1	0x7	WKUP2	0x0	GPIO10
	GPIO10_PU_SEL	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected
	GPIO10_PU_PD_EN	0x1	Enabled; Pull-up/pull-down resistor.	0x1	Enabled; Pull-up/pull-down resistor.	0x1	Enabled; Pull-up/pull-down resistor.
	GPIO10_DEGLITC_H_EN	0x1	8 us deglitch time.	0x1	8 us deglitch time.	0x1	8 us deglitch time.
GPIO11_CONF	GPIO11_OD	0x1	Open-drain output	0x0	Push-pull output		
	GPIO11_DIR	0x1	Output	0x1	Output		
	GPIO11_SEL	0x2	NRSTOUT_SOC	0x0	GPIO11		
	GPIO11_PU_SEL	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected		
	GPIO11_PU_PD_EN	0x0	Disabled; Pull-up/pull-down resistor.	0x0	Disabled; Pull-up/pull-down resistor.		
	GPIO11_DEGLITC_H_EN	0x0	No deglitch, only synchronization.	0x0	No deglitch, only synchronization.		
NPWRON_CONF / ENABLE_CONF	NPWRON_SEL	0x0	ENABLE	0x0	ENABLE		
	ENABLE_PU_SEL	0x0	Pull-down resistor selected	0x0	Pull-down resistor selected		
	ENABLE_PU_PD_EN	0x1	Enabled; Pull-up/pull-down resistor.	0x1	Enabled; Pull-up/pull-down resistor.		
	ENABLE_DEGLITCH_EN	0x1	8 us deglitch time when ENABLE, 50 ms deglitch time when NPWRON.	0x1	8 us deglitch time when ENABLE, 50 ms deglitch time when NPWRON.		
	ENABLE_POL	0x0	Active high	0x0	Active high	0x0	Active high
	NRSTOUT_OD	0x1	Open-drain output	0x1	Open-drain output		

Table 5-6. GPIO NVM Settings (continued)

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
GPIO_OUT_1	GPIO1_OUT	0x0	Low	0x0	Low	0x0	Low
	GPIO2_OUT	0x0	Low	0x0	Low	0x0	Low
	GPIO3_OUT	0x0	Low	0x0	Low	0x0	Low
	GPIO4_OUT	0x0	Low	0x0	Low	0x0	Low
	GPIO5_OUT	0x0	Low	0x0	Low	0x0	Low
	GPIO6_OUT	0x0	Low	0x0	Low	0x0	Low
	GPIO7_OUT	0x0	Low	0x0	Low	0x0	Low
	GPIO8_OUT	0x0	Low	0x0	Low	0x0	Low
GPIO_OUT_2	GPIO9_OUT	0x0	Low	0x0	Low	0x0	Low
	GPIO10_OUT	0x0	Low	0x0	Low	0x0	Low
	GPIO11_OUT	0x0	Low	0x0	Low		

5.7 Finite State Machine (FSM) Settings

These settings describe how the PMIC output rails are assigned to various system-level states. Also, the default trigger for each system-level state is described. All these settings can be changed through I²C after startup.

Table 5-7. FSM NVM Settings

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
RAIL_SEL_1	BUCK1_GRP_SEL	0x2	SOC rail group	0x2	SOC rail group	0x2	SOC rail group
	BUCK2_GRP_SEL	0x2	SOC rail group	0x0	No group assigned	0x2	SOC rail group
	BUCK3_GRP_SEL	0x1	MCU rail group	0x2	SOC rail group	0x0	No group assigned
	BUCK4_GRP_SEL	0x0	No group assigned	0x1	MCU rail group	0x0	No group assigned
RAIL_SEL_2	BUCK5_GRP_SEL	0x1	MCU rail group	0x2	SOC rail group		
	LDO1_GRP_SEL	0x1	MCU rail group	0x2	SOC rail group		
	LDO2_GRP_SEL	0x1	MCU rail group	0x1	MCU rail group		
	LDO3_GRP_SEL	0x1	MCU rail group	0x2	SOC rail group		
RAIL_SEL_3	LDO4_GRP_SEL	0x1	MCU rail group	0x2	SOC rail group		
	VCCA_GRP_SEL	0x1	MCU rail group	0x1	MCU rail group	0x1	MCU rail group
FSM_TRIG_SEL_1	MCU_RAIL_TRIG	0x2	MCU power error	0x2	MCU power error	0x2	MCU power error
	SOC_RAIL_TRIG	0x3	SOC power error	0x3	SOC power error	0x3	SOC power error
	OTHER_RAIL_T_RIG	0x3	SOC power error	0x3	SOC power error	0x3	SOC power error
	SEVERE_ERR_T_RIG	0x0	Immediate shutdown	0x0	Immediate shutdown	0x0	Immediate shutdown
FSM_TRIG_SEL_2	MODERATE_ER_R_TRIG	0x1	Orderly shutdown	0x1	Orderly shutdown	0x1	Orderly shutdown

5.8 Interrupt Settings

These settings detail the default configurations for what is monitored by nINT pin. All these settings can be changed through I²C after startup.

Table 5-8. Interrupt NVM Settings

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
FSM_TRIGGER_MASK_1	GPIO1_FSM_MASK	0x1	Masked	0x1	Masked	0x1	Masked
	GPIO1_FSM_MASK_POL	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'
	GPIO2_FSM_MASK	0x1	Masked	0x1	Masked	0x1	Masked
	GPIO2_FSM_MASK_POL	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'
	GPIO3_FSM_MASK	0x1	Masked	0x1	Masked	0x1	Masked
	GPIO3_FSM_MASK_POL	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'
	GPIO4_FSM_MASK	0x1	Masked	0x1	Masked	0x1	Masked
	GPIO4_FSM_MASK_POL	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'
FSM_TRIGGER_MASK_2	GPIO5_FSM_MASK	0x1	Masked	0x1	Masked	0x1	Masked
	GPIO5_FSM_MASK_POL	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'
	GPIO6_FSM_MASK	0x1	Masked	0x1	Masked	0x1	Masked
	GPIO6_FSM_MASK_POL	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'
	GPIO7_FSM_MASK	0x1	Masked	0x1	Masked	0x1	Masked
	GPIO7_FSM_MASK_POL	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'
	GPIO8_FSM_MASK	0x1	Masked	0x1	Masked	0x1	Masked
	GPIO8_FSM_MASK_POL	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'
FSM_TRIGGER_MASK_3	GPIO9_FSM_MASK	0x1	Masked	0x1	Masked	0x1	Masked
	GPIO9_FSM_MASK_POL	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'
	GPIO10_FSM_MASK	0x1	Masked	0x1	Masked	0x1	Masked
	GPIO10_FSM_MASK_POL	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'
	GPIO11_FSM_MASK	0x1	Masked	0x1	Masked		
	GPIO11_FSM_MASK_POL	0x0	Low; Masking sets signal value to '0'	0x0	Low; Masking sets signal value to '0'		

Table 5-8. Interrupt NVM Settings (continued)

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
MASK_BUCK1_2	BUCK1_ILIM_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	BUCK1_OV_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	BUCK1_UV_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	BUCK2_ILIM_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	BUCK2_OV_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	BUCK2_UV_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
MASK_BUCK3_4	BUCK3_ILIM_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	BUCK3_OV_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	BUCK3_UV_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	BUCK4_OV_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	BUCK4_UV_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	BUCK4_ILIM_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
MASK_BUCK5	BUCK5_ILIM_MASK	0x0	Interrupt generated	0x0	Interrupt generated		
	BUCK5_OV_MASK	0x0	Interrupt generated	0x0	Interrupt generated		
	BUCK5_UV_MASK	0x0	Interrupt generated	0x0	Interrupt generated		
MASK_LDO1_2	LDO1_OV_MASK	0x0	Interrupt generated	0x0	Interrupt generated		
	LDO1_UV_MASK	0x0	Interrupt generated	0x0	Interrupt generated		
	LDO2_OV_MASK	0x0	Interrupt generated	0x0	Interrupt generated		
	LDO2_UV_MASK	0x0	Interrupt generated	0x0	Interrupt generated		
	LDO1_ILIM_MASK	0x0	Interrupt generated	0x0	Interrupt generated		
	LDO2_ILIM_MASK	0x0	Interrupt generated	0x0	Interrupt generated		
MASK_LDO3_4	LDO3_OV_MASK	0x0	Interrupt generated	0x0	Interrupt generated		
	LDO3_UV_MASK	0x0	Interrupt generated	0x0	Interrupt generated		
	LDO4_OV_MASK	0x0	Interrupt generated	0x0	Interrupt generated		
	LDO4_UV_MASK	0x0	Interrupt generated	0x0	Interrupt generated		
	LDO3_ILIM_MASK	0x0	Interrupt generated	0x0	Interrupt generated		
	LDO4_ILIM_MASK	0x0	Interrupt generated	0x0	Interrupt generated		
MASK_VMON	VCCA_OV_MASK	0x1	Interrupt not generated. ⁽¹⁾	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	VCCA_UV_MASK	0x1	Interrupt not generated. ⁽¹⁾	0x1	Interrupt not generated.	0x1	Interrupt not generated.

Table 5-8. Interrupt NVM Settings (continued)

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
MASK_GPIO1_8_FALL	GPIO1_FALL_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	GPIO2_FALL_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	GPIO3_FALL_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	GPIO4_FALL_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	GPIO5_FALL_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	GPIO6_FALL_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	GPIO7_FALL_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	GPIO8_FALL_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
MASK_GPIO1_8_RISE	GPIO1_RISE_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	GPIO2_RISE_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	GPIO3_RISE_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	GPIO4_RISE_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	GPIO5_RISE_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	GPIO6_RISE_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	GPIO7_RISE_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	GPIO8_RISE_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
MASK_GPIO9_11 / MASK_GPIO9_10	GPIO9_FALL_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	GPIO9_RISE_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	GPIO10_FALL_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	GPIO11_FALL_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.		
	GPIO10_RISE_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
MASK_STARTUP	NPWRON_STAR_T_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.		
	ENABLE_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x1	Interrupt not generated.
	FSD_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	SOFT_REBOOT_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated

Table 5-8. Interrupt NVM Settings (continued)

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
MASK_MISC	TWARN_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	BIST_PASS_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	EXT_CLK_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.	0x1	Interrupt not generated.
MASK_MODERATE_ERR	BIST_FAIL_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	REG_CRC_ERR_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	SPMI_ERR_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	NPWRON_LONG_MASK	0x1	Interrupt not generated.	0x1	Interrupt not generated.		
	NINT_READBACK_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	NRSTOUT_READBACK_MASK	0x0	Interrupt generated	0x1	Interrupt not generated.	0x1	Interrupt not generated.
MASK_FSM_ERR	IMM_SHUTDOWN_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	MCU_PWR_ERR_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	SOC_PWR_ERR_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	ORD_SHUTDOWN_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
MASK_COMM_ERR	COMM_FRM_ERR_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	COMM_CRC_ERR_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	COMM_ADDR_ERR_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	I2C2_CRC_ERR_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
	I2C2_ADDR_ERR_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated
MASK_READBACK_ERR	EN_DRV_READBACK_MASK	0x0	Interrupt generated	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	NRSTOUT_SOC_READBACK_MASK	0x0	Interrupt generated	0x1	Interrupt not generated.	0x1	Interrupt not generated.
MASK_ESM	ESM_SOC_PIN_MASK	0x0	Interrupt generated	0x1	Interrupt not generated.		
	ESM_SOC_RST_MASK	0x0	Interrupt generated	0x1	Interrupt not generated.		
	ESM_SOC_FAIL_MASK	0x0	Interrupt generated	0x1	Interrupt not generated.		
	ESM MCU_PIN_MASK	0x0	Interrupt generated	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	ESM MCU_RST_MASK	0x0	Interrupt generated	0x1	Interrupt not generated.	0x1	Interrupt not generated.
	ESM MCU_FAIL_MASK	0x0	Interrupt generated	0x1	Interrupt not generated.	0x1	Interrupt not generated.

Table 5-8. Interrupt NVM Settings (continued)

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
GENERAL_REG_1	PFSM_ERR_MASK	0x0	Interrupt generated	0x0	Interrupt generated	0x0	Interrupt generated

- (1) The VCCA_OV_MASK and VCCA_UV_MASK are cleared in both PMICs after the completing BOOT_BIST but before starting the sequence, [Section 6.3.8](#).

5.9 POWERGOOD Settings

These settings detail the default configurations for what is monitored by PGOOD pin. All these settings can be changed though I²C after startup.

Table 5-9. POWERGOOD NVM Settings

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
PGOOD_SEL_1	PGOOD_SEL_B_UCK1	0x0	Masked	0x0	Masked	0x0	Masked
	PGOOD_SEL_B_UCK2	0x0	Masked	0x0	Masked	0x0	Masked
	PGOOD_SEL_B_UCK3	0x0	Masked	0x0	Masked	0x0	Masked
	PGOOD_SEL_B_UCK4	0x0	Masked	0x0	Masked	0x0	Masked
PGOOD_SEL_2	PGOOD_SEL_B_UCK5	0x0	Masked	0x0	Masked		
PGOOD_SEL_3	PGOOD_SEL_LD_O1	0x0	Masked	0x0	Masked		
	PGOOD_SEL_LD_O2	0x0	Masked	0x0	Masked		
	PGOOD_SEL_LD_O3	0x0	Masked	0x0	Masked		
	PGOOD_SEL_LD_O4	0x0	Masked	0x0	Masked		
PGOOD_SEL_4	PGOOD_SEL_V_CCA	0x0	Masked	0x0	Masked	0x0	Masked
	PGOOD_SEL_T_DIE_WARN	0x0	Masked	0x0	Masked	0x0	Masked
	PGOOD_SEL_N_RSTOUT	0x0	Masked	0x0	Masked	0x0	Masked
	PGOOD_SEL_N_RSTOUT_SOC	0x0	Masked	0x0	Masked	0x0	Masked
	PGOOD_POL	0x0	PGOOD signal is high when monitored inputs are valid	0x0	PGOOD signal is high when monitored inputs are valid	0x0	PGOOD signal is high when monitored inputs are valid
	PGOOD_WINDOW	0x1	Both undervoltage and overvoltage are monitored	0x1	Both undervoltage and overvoltage are monitored	0x0	Only undervoltage is monitored

5.10 Miscellaneous Settings

These settings detail the default configurations of additional settings, such as spread spectrum, BUCK frequency, and LDO timeout. All these settings can be changed though I²C after startup.

Table 5-10. Miscellaneous NVM Settings

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
PLL_CTRL	EXT_CLK_FREQ	0x0	1.1 MHz	0x0	1.1 MHz	0x0	1.1 MHz

Table 5-10. Miscellaneous NVM Settings (continued)

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
CONFIG_1	TWARN_LEVEL	0x0	130C	0x0	130C	0x0	130C
	I2C1_HS	0x0	Standard, fast or fast+ by default, can be set to Hs-mode by Hs-mode controller code.	0x0	Standard, fast or fast+ by default, can be set to Hs-mode by Hs-mode controller code.	0x0	Standard, fast or fast+ by default, can be set to Hs-mode by Hs-mode controller code.
	I2C2_HS	0x0	Standard, fast or fast+ by default, can be set to Hs-mode by Hs-mode controller code.	0x0	Standard, fast or fast+ by default, can be set to Hs-mode by Hs-mode controller code.	0x0	Standard, fast or fast+ by default, can be set to Hs-mode by Hs-mode controller code.
	EN_ILIM_FSM_CTRL	0x0	Buck/LDO regulators ILIM interrupts do not affect FSM triggers.	0x0	Buck/LDO regulators ILIM interrupts do not affect FSM triggers.	0x0	Buck regulators ILIM interrupts do not affect FSM triggers.
	NSLEEP1_MASK	0x0	NSLEEP1(B) affects FSM state transitions.	0x1	NSLEEP1(B) does not affect FSM state transitions.	0x1	NSLEEP1(B) does not affect FSM state transitions.
	NSLEEP2_MASK	0x0	NSLEEP2(B) affects FSM state transitions.	0x1	NSLEEP2(B) does not affect FSM state transitions.	0x1	NSLEEP2(B) does not affect FSM state transitions.
CONFIG_2	BB_CHARGER_EN	0x0	Disabled	0x0	Disabled		
	BB_VEOC	0x0	2.5V	0x0	2.5V		
	BB_ICHR	0x0	100uA	0x0	100uA		
RECOV_CNT_REG_2	RECOV_CNT_THRESHOLD	0xf	0xf	0xf	0xf	0xf	0xf
BUCK_RESET_REG	BUCK1_RESET	0x0	0x0	0x0	0x0	0x0	0x0
	BUCK2_RESET	0x0	0x0	0x0	0x0	0x0	0x0
	BUCK3_RESET	0x0	0x0	0x0	0x0	0x0	0x0
	BUCK4_RESET	0x0	0x0	0x0	0x0	0x0	0x0
	BUCK5_RESET	0x0	0x0	0x0	0x0		
SPREAD_SPECTRUM_1	SS_EN	0x0	Spread spectrum disabled	0x0	Spread spectrum disabled	0x0	Spread spectrum disabled
	SS_MODE	0x1	Mixed dwell	0x1	Mixed dwell	0x1	Mixed dwell
	SS_DEPTH	0x0	No modulation	0x0	No modulation	0x0	No modulation
SPREAD_SPECTRUM_2	SS_PARAM1	0x7	0x7	0x7	0x7	0x7	0x7
	SS_PARAM2	0xc	0xc	0xc	0xc	0xc	0xc
FREQ_SEL	BUCK1_FREQ_SEL	0x0	2.2 MHz	0x0	2.2 MHz	0x0	2.2 MHz
	BUCK2_FREQ_SEL	0x0	2.2 MHz	0x0	2.2 MHz	0x0	2.2 MHz
	BUCK3_FREQ_SEL	0x0	2.2 MHz	0x0	2.2 MHz	0x0	2.2 MHz
	BUCK4_FREQ_SEL	0x0	2.2 MHz	0x0	2.2 MHz	0x0	2.2 MHz
	BUCK5_FREQ_SEL	0x0	2.2 MHz	0x0	2.2 MHz		
FSM_STEP_SIZE	PFSM_DELAY_STEP	0xb	102.4μs (typ)	0xb	102.4μs (typ)	0xb	102.4μs (typ)
LDO_RV_TIMEOUT_REG_1	LDO1_RV_TIMEOUT	0xf	16ms	0xf	16ms		
	LDO2_RV_TIMEOUT	0xf	16ms	0xf	16ms		

Table 5-10. Miscellaneous NVM Settings (continued)

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
LDO_RV_TIMEO UT_REG_2	LDO3_RV_TIME_OUT	0xf	16ms	0xf	16ms		
	LDO4_RV_TIME_OUT	0xf	16ms	0xf	16ms		
USER_SPARE_R EGS	USER_SPARE_1	0x0	0x0	0x0	0x0	0x0	0x0
	USER_SPARE_2	0x0	0x0	0x0	0x0	0x0	0x0
	USER_SPARE_3	0x0	0x0	0x0	0x0	0x0	0x0
	USER_SPARE_4	0x0	0x0	0x0	0x0	0x0	0x0
ESM_MCU_MODE_CFG	ESM_MCU_EN	0x0	ESM_MCU disabled.	0x0	ESM_MCU disabled.	0x0	ESM_MCU disabled.
ESM_SOC_MODE_CFG	ESM_SOC_EN	0x0	ESM_SoC disabled.	0x0	ESM_SoC disabled.		
CUSTOMER_NV M_ID_REG	CUSTOMER_NV M_ID	0x0	0x0	0x0	0x0	0x0	0x0
RTC_CTRL_2	XTAL_EN	0x1	Crystal oscillator is enabled	0x0	Crystal oscillator is disabled		
	LP_STANDBY_SEL	0x0	LDOINT is enabled in standby state.	0x0	LDOINT is enabled in standby state.	0x0	Normal standby state is used.
	FAST_BIST	0x0	Logic and analog BIST is run at BOOT BIST.	0x0	Logic and analog BIST is run at BOOT BIST.	0x0	Logic and analog BIST is run at BOOT BIST.
	STARTUP_DEST	0x3	ACTIVE	0x3	ACTIVE	0x3	ACTIVE
	XTAL_SEL	0x1	9 pF	0x1	9 pF		
PFSM_DELAY_REG_1	PFSM_DELAY1	0x4e	0x4e	0x0	0x0	0x0	0x0
PFSM_DELAY_REG_2	PFSM_DELAY2	0x9d	0x9d	0x9d	0x9d	0x9d	0x9d
PFSM_DELAY_REG_3	PFSM_DELAY3	0x0	0x0	0x0	0x0	0x0	0x0
PFSM_DELAY_REG_4	PFSM_DELAY4	0x0	0x0	0x0	0x0	0x0	0x0
GENERAL_REG_0	FAST_BOOT_BIST	0x0	LBIST is run during boot BIST	0x0	LBIST is run during boot BIST	0x0	LBIST is run during boot BIST
GENERAL_REG_1	REG_CRC_EN	0x1	Register CRC enabled	0x1	Register CRC enabled	0x1	Register CRC enabled

5.11 Interface Settings

These settings detail the default interface, interface configurations, and device addresses. These settings cannot be changed after device startup.

Table 5-11. Interface NVM Settings

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
SERIAL_IF_CONFIG	I2C_SPI_SEL	0x0	I2C	0x0	I2C	0x0	I2C
	I2C1_SPI_CRC_EN	0x0	CRC disabled	0x0	CRC disabled	0x0	CRC disabled
	I2C2_CRC_EN	0x0	CRC disabled	0x0	CRC disabled	0x0	CRC disabled
I2C1_ID_REG	I2C1_ID	0x48	0x48	0x4c	0x4C	0x58	0x58
I2C2_ID_REG	I2C2_ID	0x12	0x12	0x13	0x13	0x14	0x14

5.12 Multi-Device Settings

These settings detail whether the device is operating as a primary or secondary in the system. These settings cannot be changed after device startup.

Table 5-12. Multi-Device NVM Settings

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
SPMI_CONFIG_1	SPMI_CRC_EN	0x1	SPMI CRC check enabled	0x1	SPMI CRC check enabled	0x1	SPMI CRC check enabled
	BIT 1	0x1	Controller mode	0x0	Secondary mode	0x0	Secondary mode
	SPMI_CLK_SEL	0x2	5MHz	0x2	5MHz	0x2	5MHz
SPMI_CONFIG_2	SPMI_IF_SEL	0x0	Debug feature and uses controller logic to implement logical secondary.	0x0	Debug feature and uses controller logic to implement logical secondary.	0x0	Debug feature and uses controller logic to implement logical secondary.
	SPMI_RETRY_LIMMIT	0x3	Three retries in case of error detected	0x3	Three retries in case of error detected	0x3	Three retries in case of error detected
	SPMI_WD_AUTO_BOOT	0x1	SPMI auto boot enabled	0x1	SPMI auto boot enabled	0x1	SPMI auto boot enabled
	SPMI_EN	0x1	SPMI enabled	0x1	SPMI enabled	0x1	SPMI enabled
	SPMI_WD_EN	0x1	SPMI WD enabled	0x1	SPMI WD enabled	0x1	SPMI WD enabled
SPMI_CONFIG_3	SPMI_WD_BOOT_INTERVAL	0x8	0x8	0x8	0x8	0x8	0x8
	SPMI_WD_RUNTIME_INTERVAL	0x8	0x8	0x8	0x8	0x8	0x8
SPMI_CONFIG_4	SPMI_WD_RESPONSE_TIMEOUT	0x8	0x8	0x8	0x8	0x8	0x8
	SPMI_PFSM_RESPONSE_TIMEOUT	0x8	0x8	0x8	0x8	0x8	0x8
SPMI_CONFIG_5	SPMI_WD_RUNTIME_BIST_TIMEOUT	0x8	0x8	0x8	0x8	0x8	0x8
	SPMI_WD_BOOT_BIST_TIMEOUT	0x8	0x8	0x8	0x8	0x8	0x8
SPMI_CONFIG_6	BOOT_DELAY	0x0	0x0	0x0	0x0	0x0	0x0
SPMI_ID	SPMI_SID	0x5	0x5	0x3	0x3	0xc	0xc
	SPMI_MID	0x0	0x0	0x0	0x0	0x0	0x0

5.13 Watchdog Settings

These settings detail the default watchdog addresses. These settings can be changed through I²C after startup.

Table 5-13. Watchdog NVM Settings

Register Name	Field Name	TPS65941120-Q1		TPS65941421-Q1		LP876411B5-Q1	
		Value	Description	Value	Description	Value	Description
WD_LONGWIN_CFG	WD_LONGWIN	0xff	0xff	0x0	0x0	0x0	0x0
WD_THR_CFG	WD_EN	0x1	Watchdog enabled.	0x0	Watchdog disabled.	0x0	Watchdog disabled.

6 Pre-Configurable Finite State Machine (PFSM) Settings

This section describes the default PFSM settings of the TPS6594-Q1 devices. These settings cannot be changed after device startup.

6.1 Configured States

In this PDN, the PMIC devices have the following four configured power states:

- Standby
- Active
- MCU Only
- Pwr SoC Error
- Retention

In [Figure 6-1](#), the configured PDN power states are shown, along with the transition conditions to move between the states. Additionally, the transitions to hardware states, such as SAFE RECOVERY and LP_STANDBY are shown. The hardware states are part of the fixed device power Finite State Machine (FSM) and described in the TPS6594-Q1 and LP8764-Q1 data sheets, see [Section 8](#).

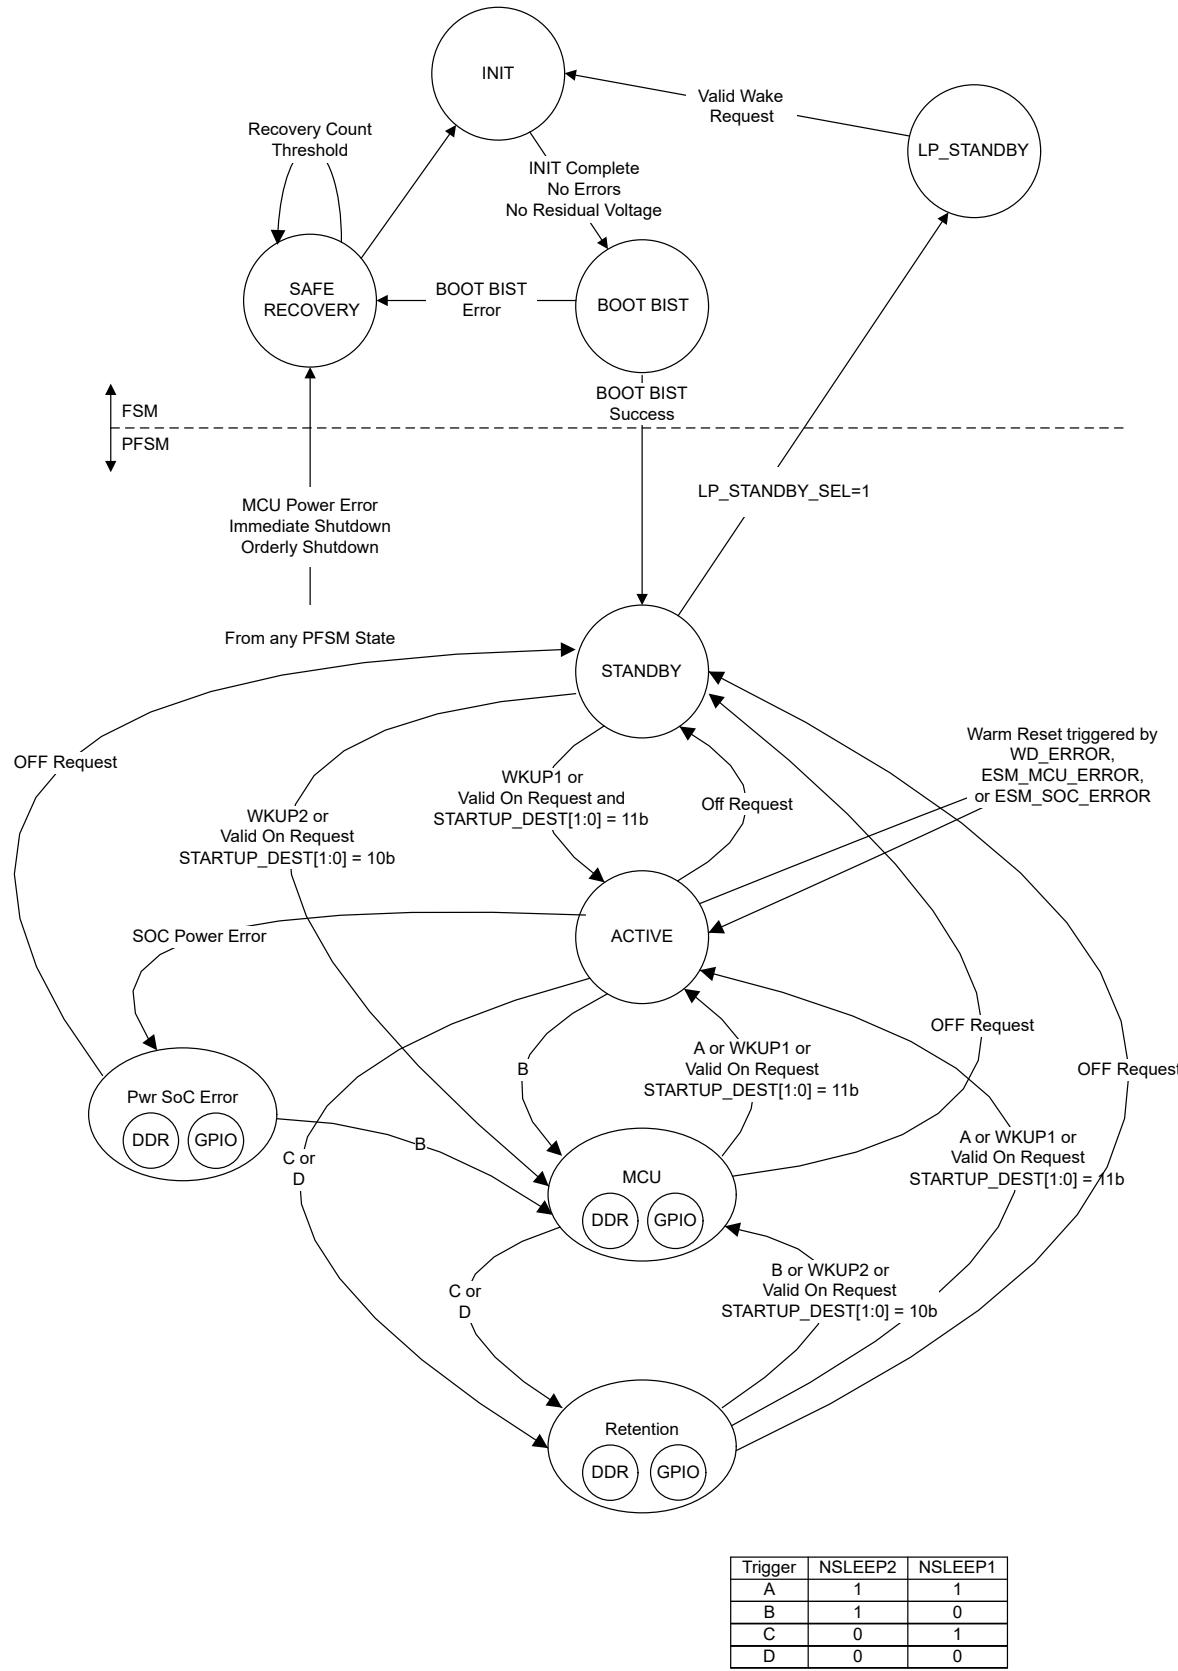


Figure 6-1. Pre-Configurable Finite State Machine (PFSM) Mission States and Transitions

When the PMICs transition from the FSM to the PFSM, several initialization instructions are performed to disable the residual voltage checks on both the BUCK and LDO regulators. Additionally, the FIRST_STARTUP_DONE

bit is set and VCCA OV and UV masks are cleared (which are set in the static configurations, [Table 5-8](#)). After these instructions are executed the PMICs wait for a valid ON Request before entering the ACTIVE state. The definition for each power state is described below:

STANDBY The PMICs are powered by a valid supply on the system power rail (VCCA > VCCA_UV). All device resources are powered down in the STANDBY state. EN_DRV is forced low in this state. The processor is in the Off state, no voltage domains are energized. Refer to the [Section 6.3.2](#) sequence description.

The STANDBY state is also entered when an error occurs and the PMIC transitions out of the PFSM mission states and into the FSM states. When the device returns from the FSM state to PFSM the first state is represented by STANDBY with all of the resources powered down and EN_DRV forced low. The sequence [Section 6.3.1](#) is performed before the PMIC leaves the PFSM and enters the FSM state SAFE_RECOVERY.

ACTIVE The PMICs are powered by a valid supply. The PMICs are fully functional and supply power to all PDN loads. The processor has completed a recommended power up sequence with all voltage domains energized in both MCU and Main processor sections. Refer to the [Section 6.3.8](#) sequence description.

Retention The PMICs are powered by a valid supply. When the PMICs I2C_7 triggers are set (DDR Retention), 2 SoC voltage domains (vdds_ddr_bias and vdds_ddr) remain energized, in addition to the LPDDR4, while all other domains are off to minimize total system power. When the PMICs I2C_5 triggers are set (GPIO Retention), 4 voltage domains (vdd_mcu_wake1, vddshv0_mcu, vdd_wake0, vddshv2) remain energized, while all other domains are off to minimize total system power. EN_DRV is forced low in this state. Refer to the [Section 6.3.9](#) sequence description.

6.2 PFSM Triggers

As shown in [Figure 6-1](#), there are various triggers that can enable a state transition between configured states. [Table 6-1](#) describes each trigger and its associated state transition from highest priority (Immediate Shutdown) to lowest priority (I2C_3). Active triggers of higher priority block triggers of lower priority and the associated sequence.

Table 6-1. State Transition Triggers

Trigger	Priority (ID)	Immediate (IMM)	REENTERANT	PFSM Current State	PFSM Destination State	Power Sequence or Function Executed
Immediate Shutdown ⁽⁸⁾	1	True	False	STANDBY, ACTIVE, MCU ONLY, Suspend-to-RAM	SAFE ⁽¹⁾	TO_SAFE_SEVERE
MCU Power Error	2	True	False	STANDBY, ACTIVE, MCU ONLY, Suspend-to-RAM	SAFE ⁽¹⁾	TO_SAFE
Orderly Shutdown ⁽⁸⁾	3	True	False	STANDBY, ACTIVE, MCU ONLY, Suspend-to-RAM	SAFE ⁽¹⁾	TO_SAFE_ORDERLY
OFF Request	5 ⁽¹⁰⁾	False	False	STANDBY, ACTIVE, MCU ONLY, Suspend-to-RAM	STANDBY ⁽²⁾	TO_STANDBY
WDOG Error	6	False	True	ACTIVE	ACTIVE	ACTIVE_TO_WARM
ESM MCU Error	7	False	True	ACTIVE	ACTIVE	
ESM SOC Error	8	False	True	ACTIVE	ACTIVE	ESM_SOC_ERROR
WDOG Error	9	False	True	MCU ONLY	MCU ONLY	MCU_TO_WARM
ESM MCU Error	10	False	True	MCU ONLY	MCU ONLY	
SOC Power Error	11	False	False	ACTIVE	SOC Power Error	PWR_SOC_ERR
I2C_1 bit is high ⁽³⁾	12	False	True	ACTIVE, MCU ONLY	No State Change	Execute RUNTIME BIST

Table 6-1. State Transition Triggers (continued)

Trigger	Priority (ID)	Immediate (IMM)	REENTERANT	PFSM Current State	PFSM Destination State	Power Sequence or Function Executed
I2C_2 bit is high ⁽³⁾	13	False	True	ACTIVE, MCU ONLY	No State Change	Enable I ² C CRC on I ² C1 and I ² C2 on all devices. ⁽⁴⁾
ON Request	14	False	False	STANDBY, ACTIVE, MCU ONLY, Suspend-to-RAM	ACTIVE	TO_ACTIVE
WKUP1 goes high	15	False	False	STANDBY, ACTIVE, MCU ONLY, Suspend-to-RAM	ACTIVE	
NSLEEP1 and NSLEEP2 are high ⁽⁵⁾	16	False	False	STANDBY, ACTIVE, MCU ONLY, Suspend-to-RAM	ACTIVE	
MCU On Request	17	False	False	STANDBY, ACTIVE ⁽⁷⁾ , MCU ONLY, Suspend-to-RAM	MCU ONLY	TO MCU
WKUP2 goes high	18	False	False	STANDBY, ACTIVE ⁽⁷⁾ , MCU ONLY, Suspend-to-RAM	MCU ONLY	
NSLEEP1 goes low and NSLEEP2 goes high ⁽⁵⁾	19	False	False	ACTIVE, MCU ONLY, Suspend-to-RAM	MCU ONLY	
NSLEEP1 goes low and NSLEEP2 goes low ⁽⁵⁾	20	False	False	ACTIVE, MCU ONLY	Suspend-to-RAM	TO_RETENTION
NSLEEP1 goes high and NSLEEP2 goes low ⁽⁵⁾	21	False	False	ACTIVE, MCU ONLY	Suspend-to-RAM	
I2C_0 bit goes high ⁽³⁾	22 ⁽⁹⁾	False	False	STANDBY, ACTIVE, MCU ONLY	STANDBY ⁽²⁾	TO_STANDBY
I2C_3 bit goes high ⁽³⁾	23 ⁽⁹⁾	False	False	ACTIVE, MCU ONLY	No State Change	Devices are prepared for OTA NVM update. ⁽⁶⁾

- (1) From the SAFE state, the PFSM automatically transitions to the hardware FSM state of SAFE_RECOVERY. From the SAFE_RECOVERY state, the recovery counter is incremented and compared to the recovery count threshold (see RECOV_CNT_REG_2, in [Table 5-10](#)). If the recovery count threshold is reached, then the PMICs halt recovery attempts and require a power cycle. Refer to the [data sheet](#) for more details.
- (2) If the LP_STANDBY_SEL bit is set in the TPS65941120-Q1 (see RTC_CTRL_2, in [Table 5-10](#)), then the PFSM transitions to the hardware FSM state of LP_STANDBY. When LP_STANDBY is entered, then please use the appropriate mechanism to wakeup the device as determined by the means of entering LP_STANDBY. Refer to the [data sheet](#) for more details. LP_STANDBY_SEL in the TPS65941421-Q1 and LP876411B5-Q1 are not applicable to the PFSM triggers.
- (3) I2C_0, I2C_1, I2C_2 and I2C_3 are self-clearing triggers.
- (4) Enabling the I²C CRC, enables the CRC on both I²C1 and I²C2, however, the I²C2 is disabled for 2ms after the CRC is enabled. Be aware when using the watchdog Q&A before enabling I²C CRC. The recommendation is to enable the I²C CRC first, and then after 2ms, start the watchdog Q&A.
- (5) NSLEEP1 and NSLEEP2 of the primary PMIC can be accessed through the GPIO pin or through a register bit. If either the register bit or the GPIO pin is pulled high, the NSLEEPx value is read as a *high* logic level.
- (6) After completion of an OTA update, the processor is required to initiate a reset of the PMICs to apply the new NVM settings.
- (7) When in the ACTIVE mode, the ON Request to MCU ONLY trigger cannot be accessed while other higher priority triggers, like NSLEEP1=NSLEEP2=HIGH, are still active.
- (8) These triggers can originate from either the TPS65941120-Q1, TPS65941421-Q1, and LP876411B5-Q1.
- (9) Trigger IDs 22 and 23 are not available until the NSLEEP bits are masked: NSLEEP2_MASK=NSLEEP1_MASK=1.
- (10) Trigger IDs 0, 4, and 24 (not shown) are enabled and activated by the power sequences. These triggers are used to manage the transition between the PFSM and the FSM.

6.3 Power Sequences

6.3.1 TO_SAFE_SEVERE and TO_SAFE

The TO_SAFE_SEVERE and TO_SAFE are distinct sequences that occur before transitioning to the SAFE state. Both sequences shut down all rails without delay and force EN_DRV low. The TO_SAFE_SEVERE sequence immediately ceases BUCK switching and enables the pulldown resistors of the BUCKs and LDOs. The pulldown is enabled to prevent any damage of the PMICs in case of over voltage on VCCA or thermal shutdown. The timing is illustrated in [Figure 6-2](#). The TO_SAFE sequence does not reset the BUCK regulators until after the regulators are turned off.

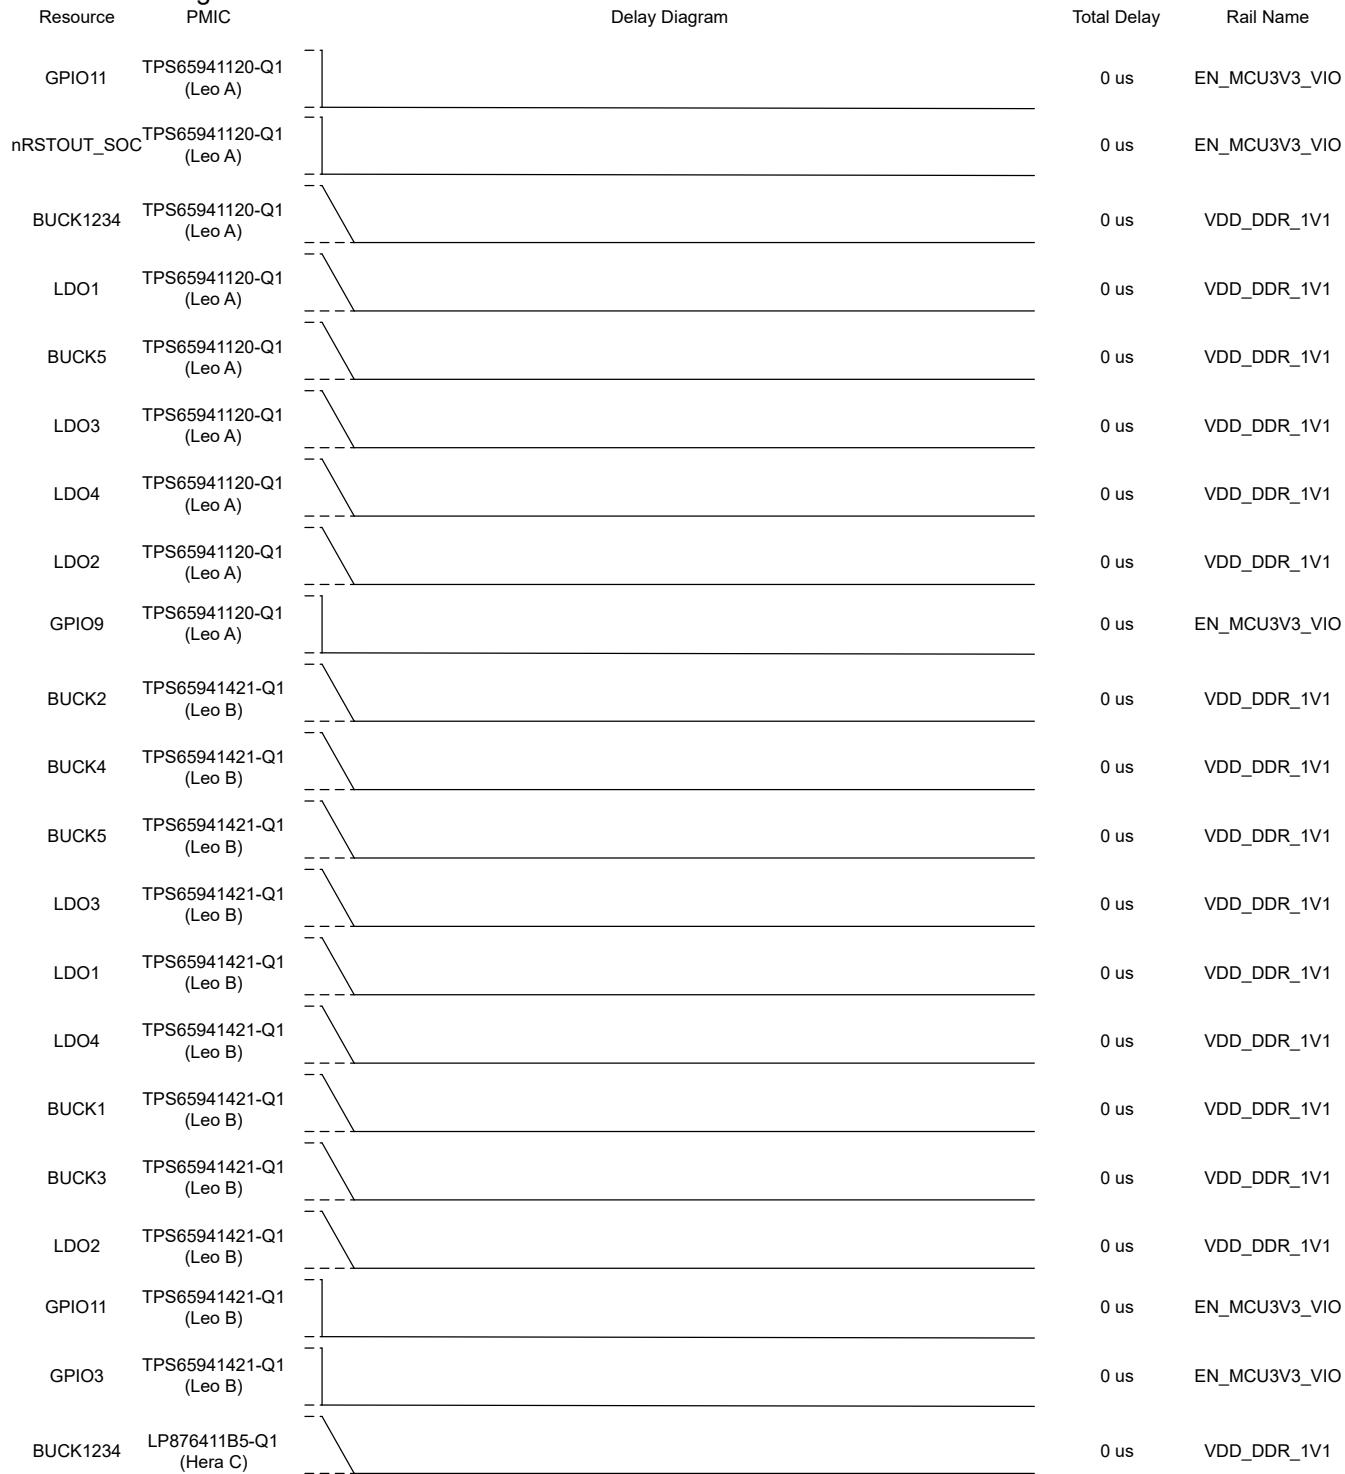


Figure 6-2. TO_SAFE_SEVERE and TO_SAFE Power Sequences

Note
TO_SAFE_SEVERE and TO_SAFE Power Sequences

After the power sequence shown in [Figure 6-2](#), the TO_SAFE sequence executes the following instructions:

```
//TPS65941120 and TPS65941421
// Clear AMUXOUT_EN, CLKMON_EN, set LPM_EN
REG_WRITE_MASK_IMM ADDR=0x81 DATA=0x04 MASK=0xE3
// Reset all BUCK regulators
REG_WRITE_MASK_IMM ADDR=0x87 DATA=0x1F MASK=0xE0
//PL876411B5
//Reset all BUCK regulators
REG_WRITE_MASK_IMM ADDR=0x87 DATA=0x0F MASK=0xF0
```

The resetting of the BUCK regulators is done in preparation to transitioning to the SAFE_RECOVERY state. SAFE_RECOVERY means that the PMIC leaves the mission state. The SAFE_RECOVERY state is where the recovery mechanism increments the recovery counter and determines if the recovery count threshold (see [Table 5-10](#)) is reached before attempting to recover.

The TO_SAFE_SEVERE sequence executes the following instruction after the power sequence:

```
// TPS65941120 and TPS65941421
// Clear AMUXOUT_EN, CLKMON_EN, set LPM_EN
REG_WRITE_MASK_IMM ADDR=0x81 DATA=0x04 MASK=0xE3
```

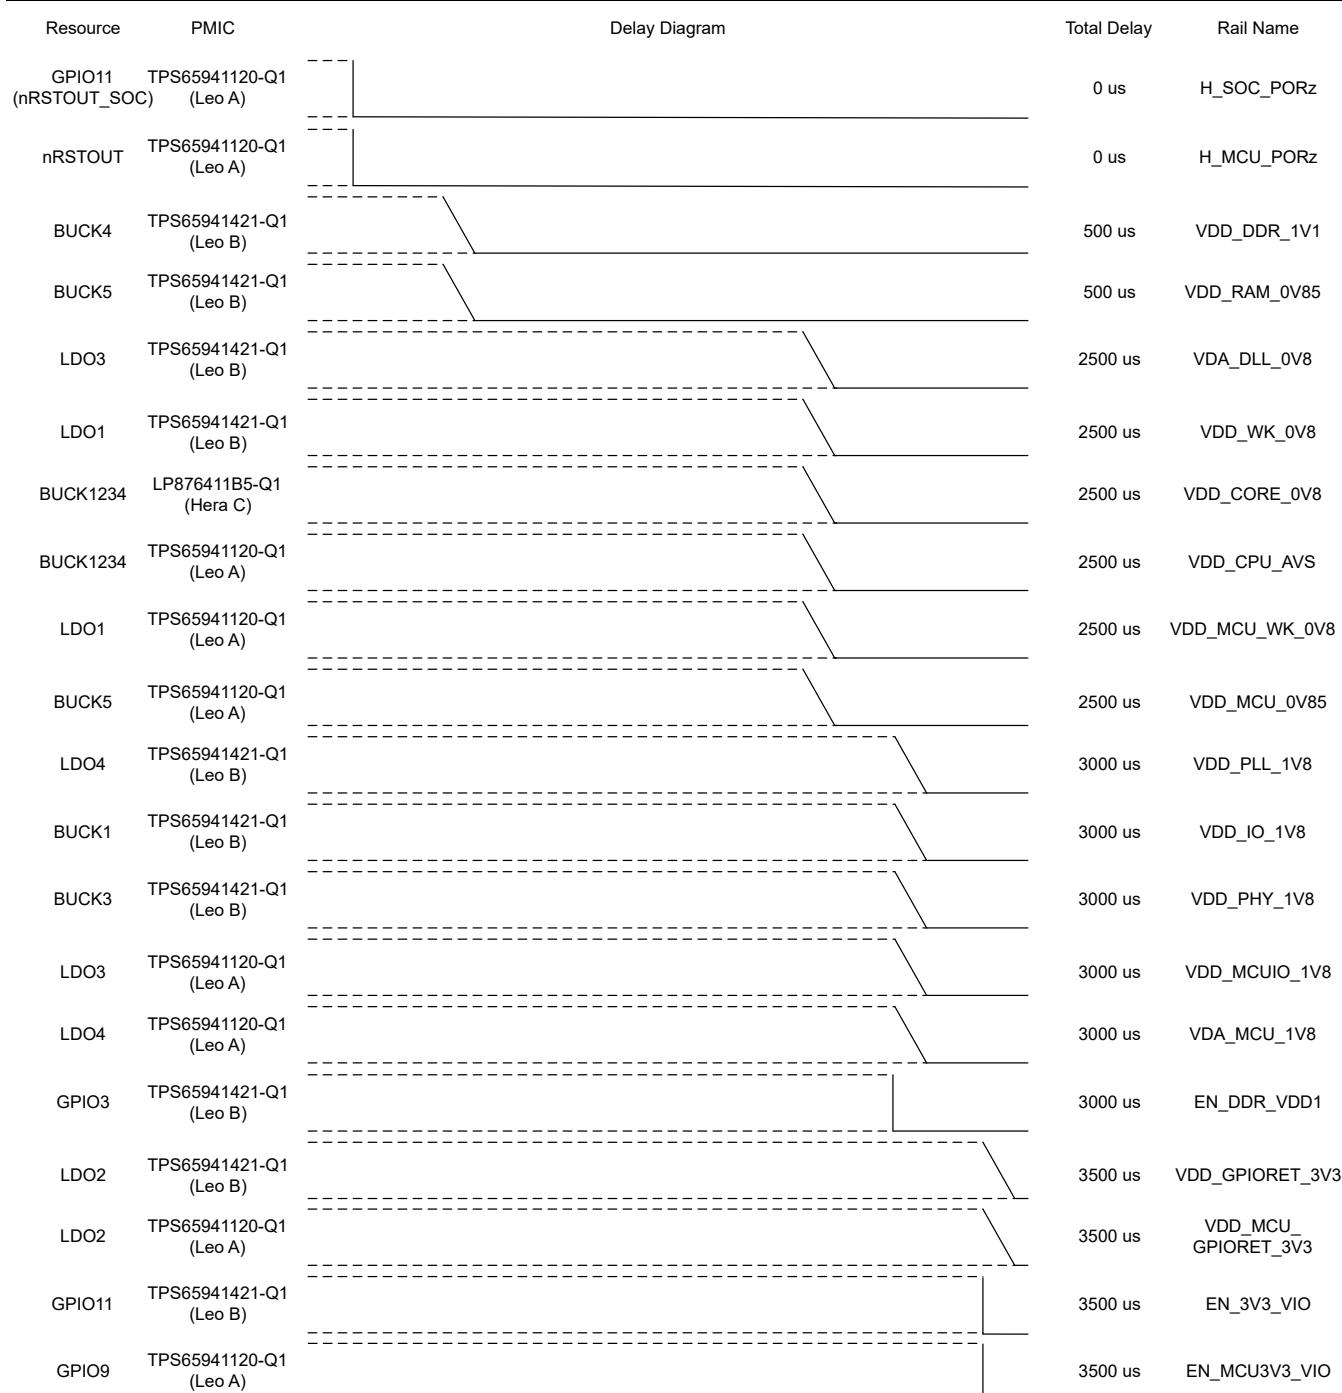
The TPS65941120 has an additional delay of 500 ms at the end of the TO_SAFE_SEVERE sequence. It is important to note that the recovery is not attempted until after the sequence delay is complete.

6.3.2 TO_SAFE_ORDERLY and TO_STANDBY

If a moderate error occurs, an orderly shutdown trigger is generated. This trigger shuts down the PMIC outputs using the recommended power down sequence and proceed to the SAFE state.

If an OFF request occurs, such as the ENABLE pin of the primary TPS6594-Q1 device being pulled low, the same power down sequence occurs, except that the PMICs go to STANDBY (LP_STANDBY_SEL=0) or LP_STANDBY (LP_STANDBY_SEL=1) states, rather than going to the SAFE state. The power sequence for both of these events is shown in [Figure 6-3](#).

Both the TO_SAFE_ORDERLY and TO_STANDBY sequences set the SPMI_LP_EN and FORCE_EN_DRV_LOW in the TPS65941120 while only the SPMI_LP_EN is set in the TPS65941421 and LP876411B5.

Pre-Configurable Finite State Machine (PFSM) Settings

Figure 6-3. TO_SAFE_ORDERLY and TO_STANDBY Power Sequence

At the end of the TO_SAFE_ORDERLY the PMICs executes a delay based on the value stored in register R2, which is runtime configurable and has a default value of approximately 16 ms, before executing the following instructions:

```

//TPS65941120 and TPS65941421
// Clear AMUXOUT_EN, CLKMON_EN, set LPM_EN
REG_WRITE_MASK_IMM ADDR=0x81 DATA=0x04 MASK=0xE3
// Reset all BUCK regulators
REG_WRITE_MASK_IMM ADDR=0x87 DATA=0x1F MASK=0xE0
//LP876411B5
//Reset all BUCK regulators
REG_WRITE_MASK_IMM ADDR=0x87 DATA=0x0F MASK=0xF0

```

The resetting of the BUCK regulators is done in preparation to transitioning to the SAFE_RECOVERY state. SAFE_RECOVERY means that the PMIC leaves the mission state. The SAFE_RECOVERY state is where the recovery mechanism increments the recovery counter and determines if the recovery count threshold (see [Table 5-10](#)) is reached before attempting to recover.

At the end of the TO_STANDBY sequence, the 16 ms delay is found in the TPS65941120 device only and the same AMUXOUT_EN, CLKMON_EN, and LPM_EN bit manipulations are made in all PMICs. The BUCKs are not reset. After these instructions, the TPS65941120 performs an additional check to determine if the LP_STANDBY_SEL (see [Table 5-10](#)) is true. If true then the PMICs enter the LP_STANDBY state and leave the mission state. If the LP_STANDBY_SEL is false, then the PMICs remain in the mission state defined by STANDBY in [Configured States](#).

6.3.3 ACTIVE_TO_WARM

The ACTIVE_TO_WARM sequence can be triggered by either a watchdog or ESM MCU error. In the event of a trigger, the nRSTOUT and nRSTOUT_SOC signals are driven low and the recovery count (register RECOV_CNT_REG_1) increments. Then, all BUCKs and LDOs are reset to their default voltages. The PMICs remain in the ACTIVE state.

Note

GPIOs do not reset during the sequence as shown in [Figure 6-4](#)

At the beginning of the sequence the following instructions are executed:

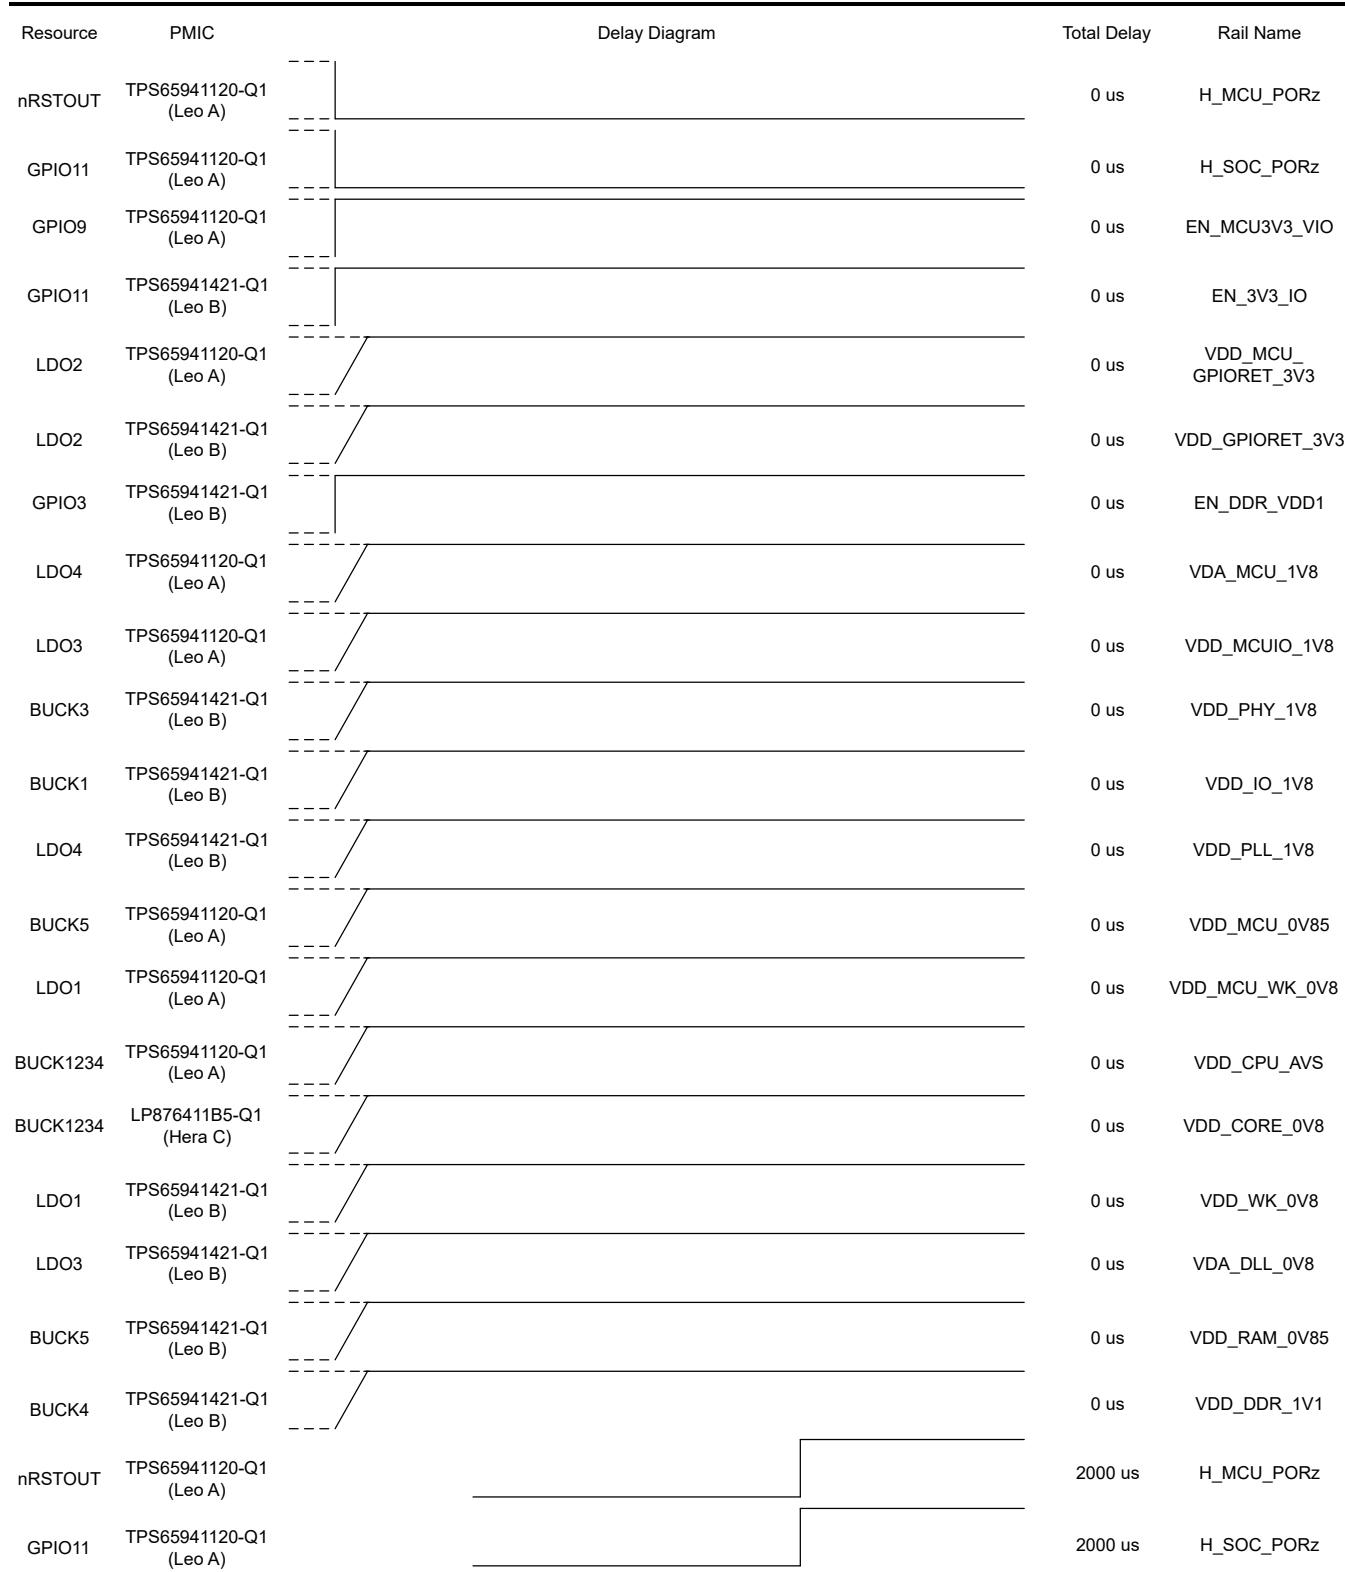
```
//TPS65941120
// Set FORCE_EN_DRV_LOW
REG_WRITE_MASK_IMM ADDR=0x82 DATA=0x08 MASK=0xF7
// Clear nRSTOUT and nRSTOUT_SOC
REG_WRITE_MASK_IMM ADDR=0x81 DATA=0x00 MASK=0xFC
// Increment the recovery counter
REG_WRITE_MASK_IMM ADDR=0xa5 DATA=0x01 MASK=0xFE
```

Note

The watchdog or ESM error is an indication of a significant error that has taken place outside of the PMIC. The PMIC does not actually transition through the safe recovery as with an MCU_POWER_ERR, however, in order to maintain consistency all of the regulators are returned to the values stored in NVM and the recovery counter is incremented. If the recovery counter exceeds the recovery count threshold the resulting RECOV_CNT_INT sends the PMICs to the safe recovery state.

Note

After the ACTIVE_TO_WARM sequence the processor is responsible for managing the EN_DRV and recovery counter. At the end of the sequence the 'FORCE_EN_DRV_LOW' bit is cleared so that the MCU can set the ENABLE_DRV bit.


Figure 6-4. ACTIVE_TO_WARM Power Sequence
Note

The regulator transitions do not represent enabling of the regulators but the time at which the voltages are restored to their default values. Since this sequence originates from the ACTIVE state all of the regulators are on.

6.3.4 ESM_SOC_ERROR

In the event of an ESM_SOC error, the nRSTOUT_SOC signal is driven low and then driven high again after 200 μ s. There is no change to the power rails. The sequence is shown in [Figure 6-5](#).

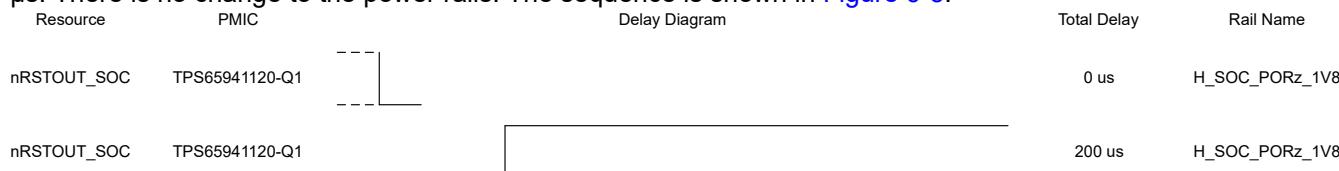


Figure 6-5. ESM_SOC_ERROR Sequence

6.3.5 PWR_SOC_ERROR

In the event of an error on any of the power rails which are part of the SOC power rail group, the PWR_SOC_ERROR sequence is performed. The nRSTOUT_SOC pin is pulled low and the SOC power rails execute a normal processor power down sequence except the MCU power group remains energized as shown in [Figure 6-6](#). The state of the I2C_7 trigger in both TPS6594-Q1 devices determines whether the DDR supplies and control signal remain energized (I2C_7=1) or disabled (I2C_7=0). The I2C_6 trigger in both TPS6594-Q1 devices determines whether the SOC GPIO retention supplies remain energized.

In the start of the sequence the following instructions are executed:

```
// TPS65941120
// Set AMUXOUT_EN and CLKMON_EN, clear LPM_EN and nRSTOUT_SOC
REG_WRITE_MASK_IMM ADDR=0x81 DATA=0x18 MASK=0xE1
// Clear SPMI_LPM_EN
REG_WRITE_MASK_IMM ADDR=0x82 DATA=0x00 MASK=0xEF
//TPS65941421
// Set AMUXOUT_EN and CLKMON_EN, clear LPM_EN
REG_WRITE_MASK_IMM ADDR=0x81 DATA=0x18 MASK=0xE3
// Clear SPMI_LPM_EN
REG_WRITE_MASK_IMM ADDR=0x82 DATA=0x00 MASK=0xEF
//LP876411B5
// Set CLKMON_EN, clear LPM_EN
REG_WRITE_MASK_IMM ADDR=0x81 DATA=0x08 MASK=0xF3
// Clear SPMI_LPM_EN
REG_WRITE_MASK_IMM ADDR=0x82 DATA=0x00 MASK=0xEF
```

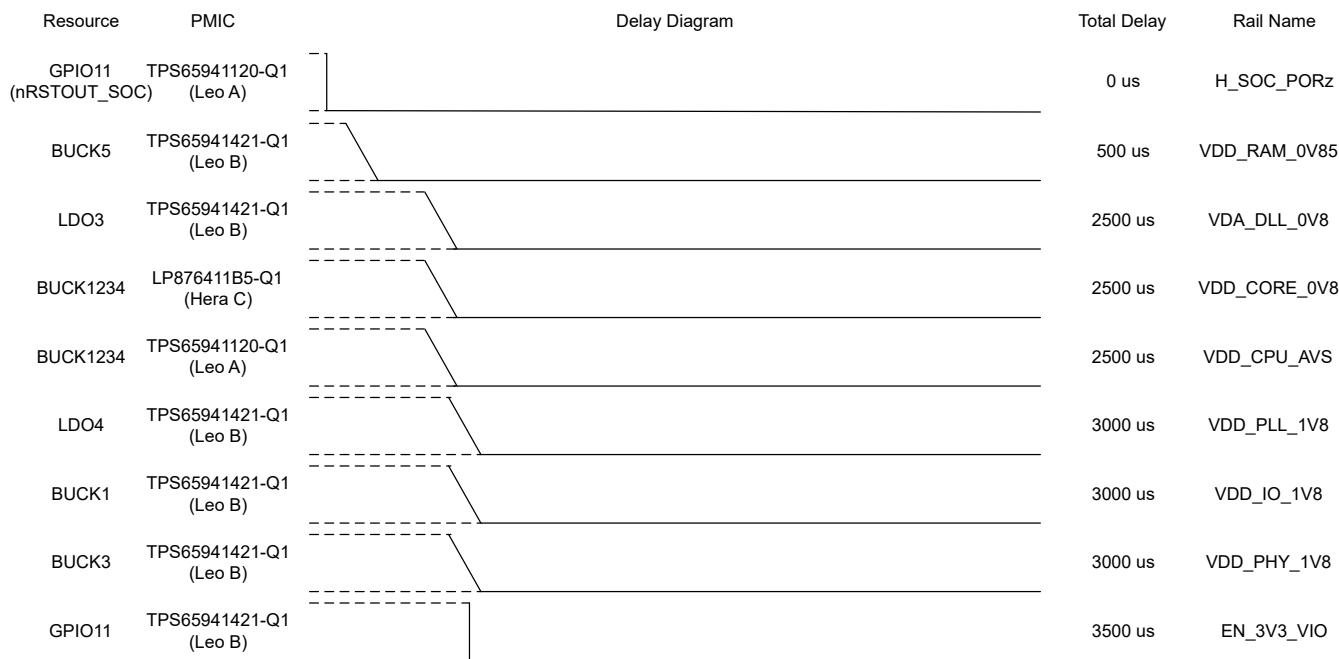


Figure 6-6. PWR_SOC_ERROR with I2C Triggers High in both PMICs



Resource	PMIC	Delay Diagram	Total Delay	Rail Name	FSM I2C Trigger
GPIO11	TPS65941120-Q1 (Leo A)		0 us	H_SOC_PORz (nRSTOUT_SOC)	
BUCK4	TPS65941421-Q1 (Leo B)		500 us	VDD_DDR_1V1	I2C_7 = 0
BUCK5	TPS65941421-Q1 (Leo B)		500 us	VDD_RAM_0V85	
LDO3	TPS65941421-Q1 (Leo B)		2500 us	VDA_DLL_0V8	
LDO1	TPS65941421-Q1 (Leo B)		2500 us	VDD_WK_0V8	I2C_6 = 0
BUCK1234	LP876411B5-Q1 (Hera C)		2500 us	VDD_CORE_0V8	
BUCK1234	TPS65941120-Q1 (Leo A)		2500 us	VDD_CPU_AV8	
LDO4	TPS65941421-Q1 (Leo B)		3000 us	VDD_PLL_1V8	
BUCK1	TPS65941421-Q1 (Leo B)		3000 us	VDD_IO_1V8	
BUCK3	TPS65941421-Q1 (Leo B)		3000 us	VDD_PHY_1V8	
GPIO3	TPS65941421-Q1 (Leo B)		3000 us	EN_DDR_VDD1	I2C_7 = 0
LDO2	TPS65941421-Q1 (Leo B)		3500 us	VDD_GPIORET_3V3	I2C_6 = 0
GPIO11	TPS65941421-Q1 (Leo B)		3500 us	EN_3V3_VIO	

Figure 6-7. PWR_SOC_ERROR with I2C Triggers low in both PMICs

6.3.6 MCU_TO_WARM

The MCU_TO_WARM sequence is triggered by a WATCHDOG or ESM_MCU error. The MCU_TO_WARM, similar to the ACTIVE_TO_WARM sequence does not result in a state change. The event and sequence originate from the MCU_ONLY state and stays in the MCU_ONLY state. In the sequence, the recover counter (found in register, RECOV_CNT_REG_1) is incremented and the nRSTOUT (MCU_PORz) signal is driven low. The MCU relevant BUCK and LDOs are reset to their default voltages at the time indicated in [Figure 6-8](#), and finally the MCU_PORz signal is set high after 2ms.

Note

GPIOs do not reset during the MCU warm reset event.

Also, at the beginning of the sequence the following instructions are executed to increment the recovery counter and configure the PMICs:

```
// TPS65941120
// Set FORCE_EN_DRV_LOW
REG_WRITE_MASK_IMM ADDR=0x82 DATA=0x08 MASK=0xF7
// Clear nRSTOUT
REG_WRITE_MASK_IMM ADDR=0x81 DATA=0x00 MASK=0xFE
// Increment Recovery Counter
REG_WRITE_MASK_IMM ADDR=0xa5 DATA=0x01 MASK=0xFE
```

Note

The watchdog or MCU error is an indication of a significant error which has taken place outside of the PMIC. The PMIC does not actually transition through the safe recovery as with an MCU_POWER_ERR, however, in order to maintain consistency all of the regulators are returned to the values stored in NVM and the recovery counter is incremented. If the recovery counter exceeds the recovery count threshold the PMICs stay in the safe recovery state.

Note

After the MCU_TO_WARM sequence the MCU is responsible for managing the EN_DRV and recovery counter. At the end of the sequence the 'FORCE_EN_DRV_LOW' bit is cleared so that the MCU can set the ENABLE_DRV bit.

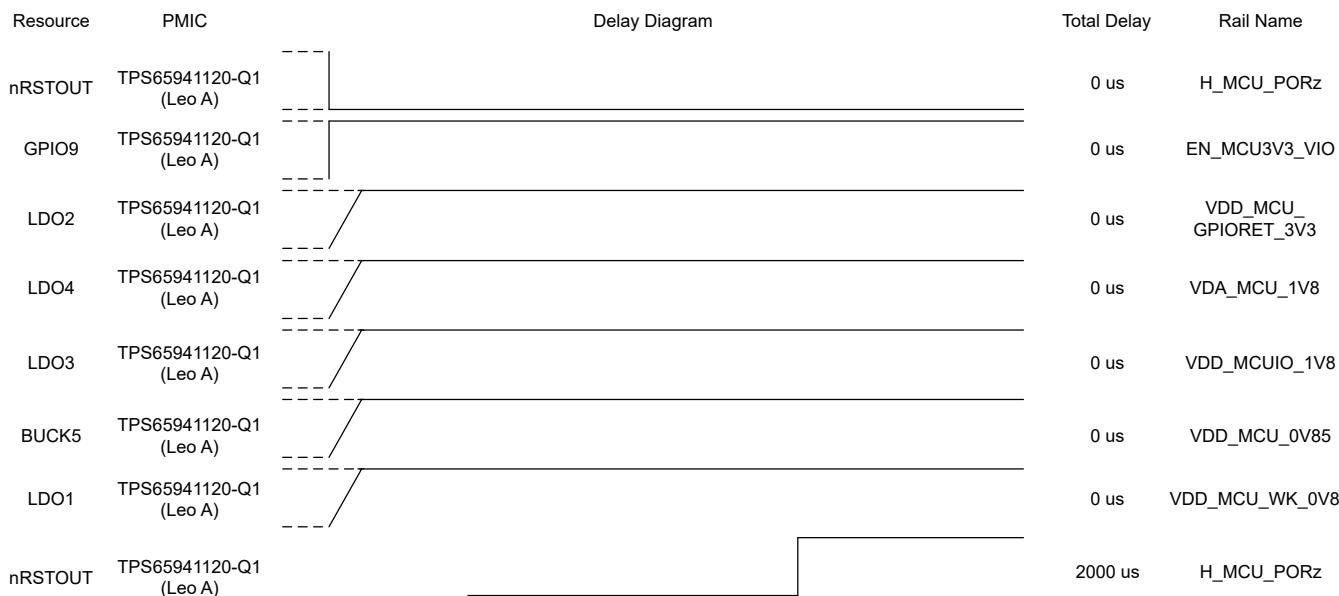


Figure 6-8. MCU_TO_WARM Sequence

Note

The regulator transitions do not represent enabling of the regulators but the time at which the voltages are restored to their default values. Since this sequence originates from the MCU_ONLY state these regulators are on.

6.3.7 TO_MCU

The TO_MCU sequence first turns off rails and GPIOs which are assigned to the SOC power group. The sequence enables the MCU rails, in the event that they are not already active (when transitioning from STANDBY to MCU_ONLY for example). This sequence can be changed based off the value stored in the I2C_6 and I2C_7 register bit of all PMICs. The I2C_6 and I2C_7 settings must be the same in each PMIC before triggering the sequence. If the I2C_7 bits are low, then EN_DDR_VDD1 and VDD_DDR_1V1 are disabled; If the I2C_6 bits are low, then VDD_GPIORET_3V3 and VDD_WK_0V8 are disabled as seen in [Figure 6-10](#). If the I2C_7 bits are high, then EN_DDR_VDD1 and VDD_DDR_1V1 are enabled; If the I2C_6 bits are high, then VDD_GPIORET_3V3 and VDD_WK_0V8 are enabled as seen in [Figure 6-9](#).

The first instructions of the TO_MCU sequence perform writes to the MISC_CTRL and ENABLE_DRV_STAT registers.

```

// TPS65941120
// Set AMUXOUT_EN, CLKMON_EN
// Clear LPM_EN, NRSTOUT_SOC
REG_WRITE_MASK_IMM ADDR=0x81 DATA=0x18 MASK=0xE1
// Clear SPMI_LP_EN
REG_WRITE_MASK_IMM ADDR=0x82 DATA=0x00 MASK=0xEF
// TPS65941421
// Set AMUXOUT_EN, CLKMON_EN
// Clear LPM_EN
REG_WRITE_MASK_IMM ADDR=0x81 DATA=0x18 MASK=0xE3
// Clear SPMI_LP_EN
REG_WRITE_MASK_IMM ADDR=0x82 DATA=0x00 MASK=0xEF
// LP876411B5
// Set CLKMON_EN
// Clear LPM_EN

```

```

REG_WRITE_MASK_IMM ADDR=0x81 DATA=0x08 MASK=0xF3
// Clear SPMI_LP_EN
REG_WRITE_MASK_IMM ADDR=0x82 DATA=0x00 MASK=0xEF

```

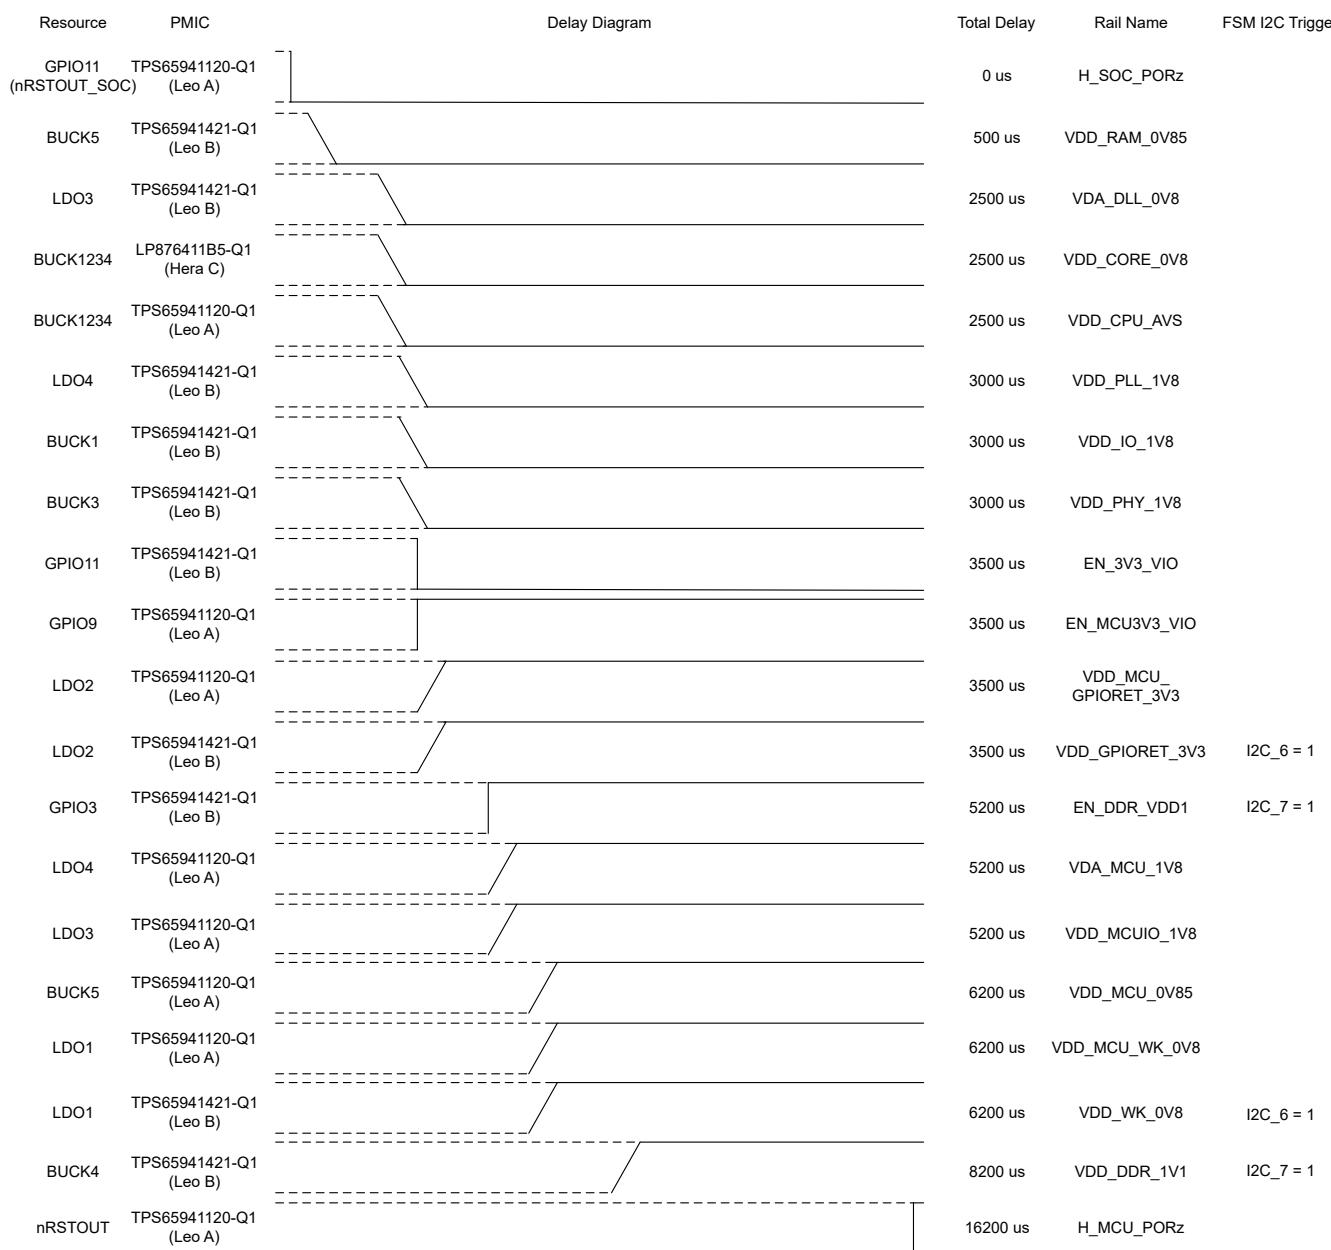


Figure 6-9. TO_MCU with I2C Triggers high in both PMICs

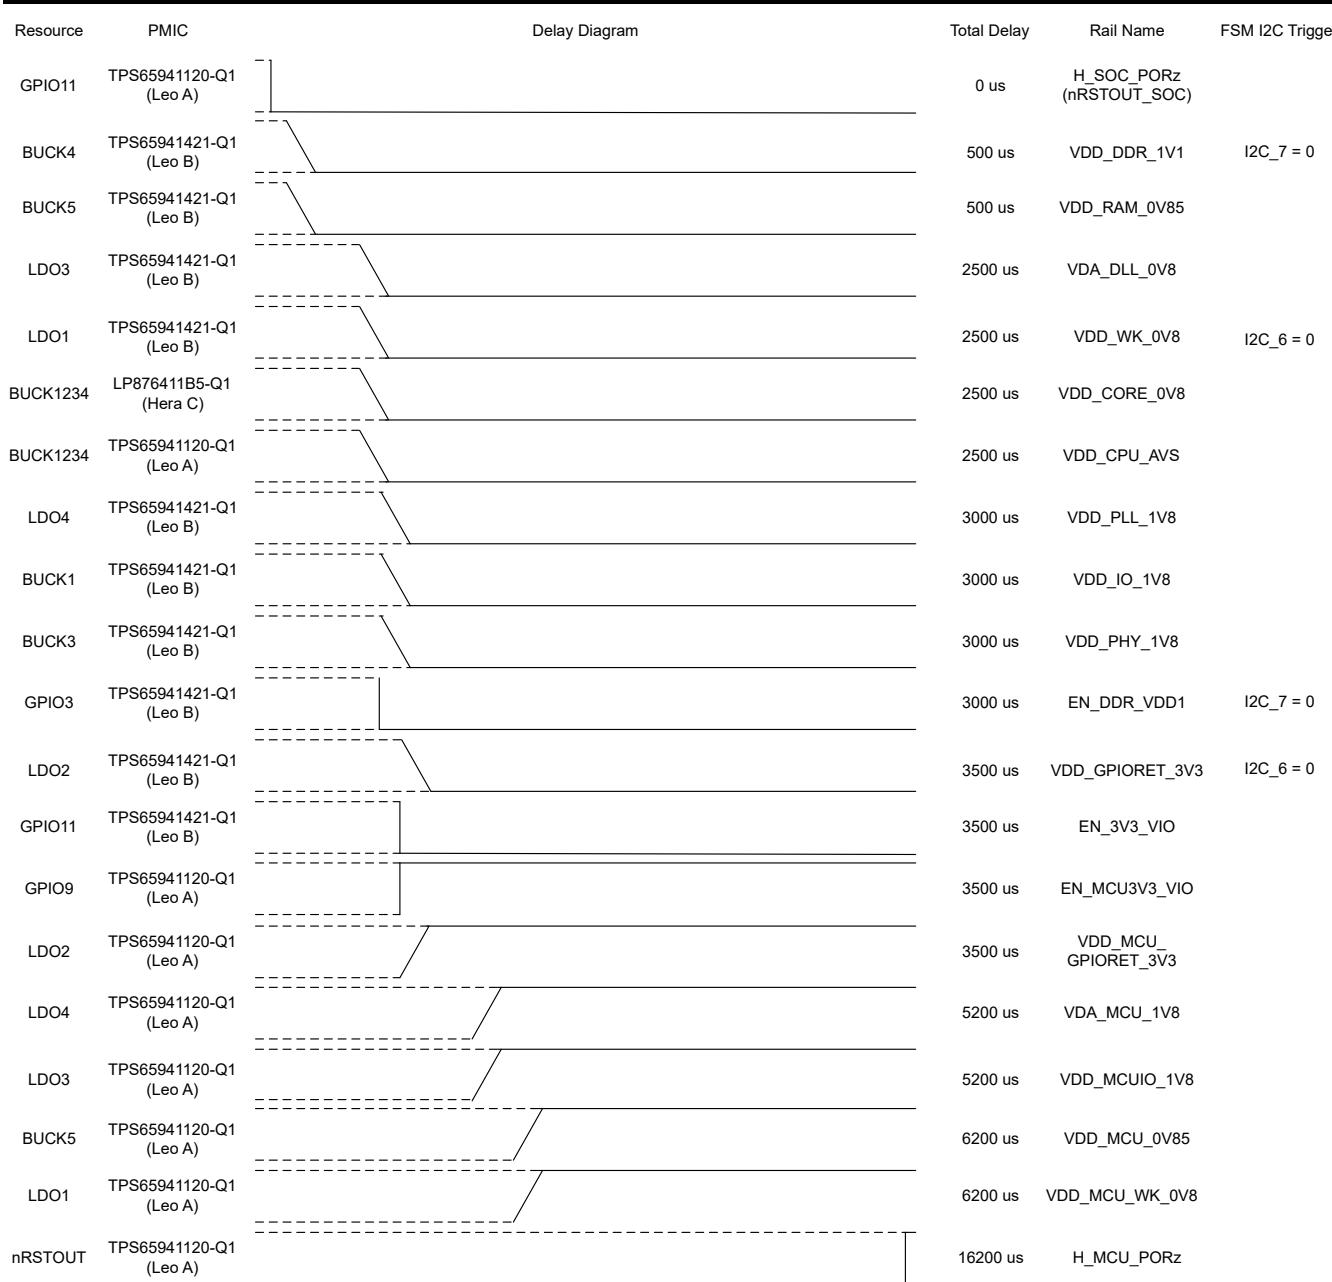


Figure 6-10. TO_MCU Sequence with I2C Triggers low in both PMICs

The last instructions of the TO_MCU sequence also perform writes to the MISC_CTRL and ENABLE_DRV_STAT registers after the delay defined in the PFSM_DELAY_REG_1.

```
// TPS659411120
SREG_READ_REG ADDR=0xCD REG=R1
DELAY_SREG R1
// Clear FORCE_EN_DRV_LOW
REG_WRITE_MASK_IMM ADDR=0x82 DATA=0x00 MASK=0xF7
// Set NRSTOUT (MCU PORZ)
REG_WRITE_MASK_IMM ADDR=0x81 DATA=0x01 MASK=0xFE
```

Note

After the TO_MCU sequence the MCU is responsible for managing the EN_DRV.

6.3.8 TO_ACTIVE

When a trigger causes the TO_ACTIVE sequence to execute, all rails power up in the recommended power up sequence as shown in .

At the beginning of the TO_ACTIVE sequence both PMICs clear SPMI_LP_EN and LPM_EN and set AMUXOUT_EN and CLKMON_EN.

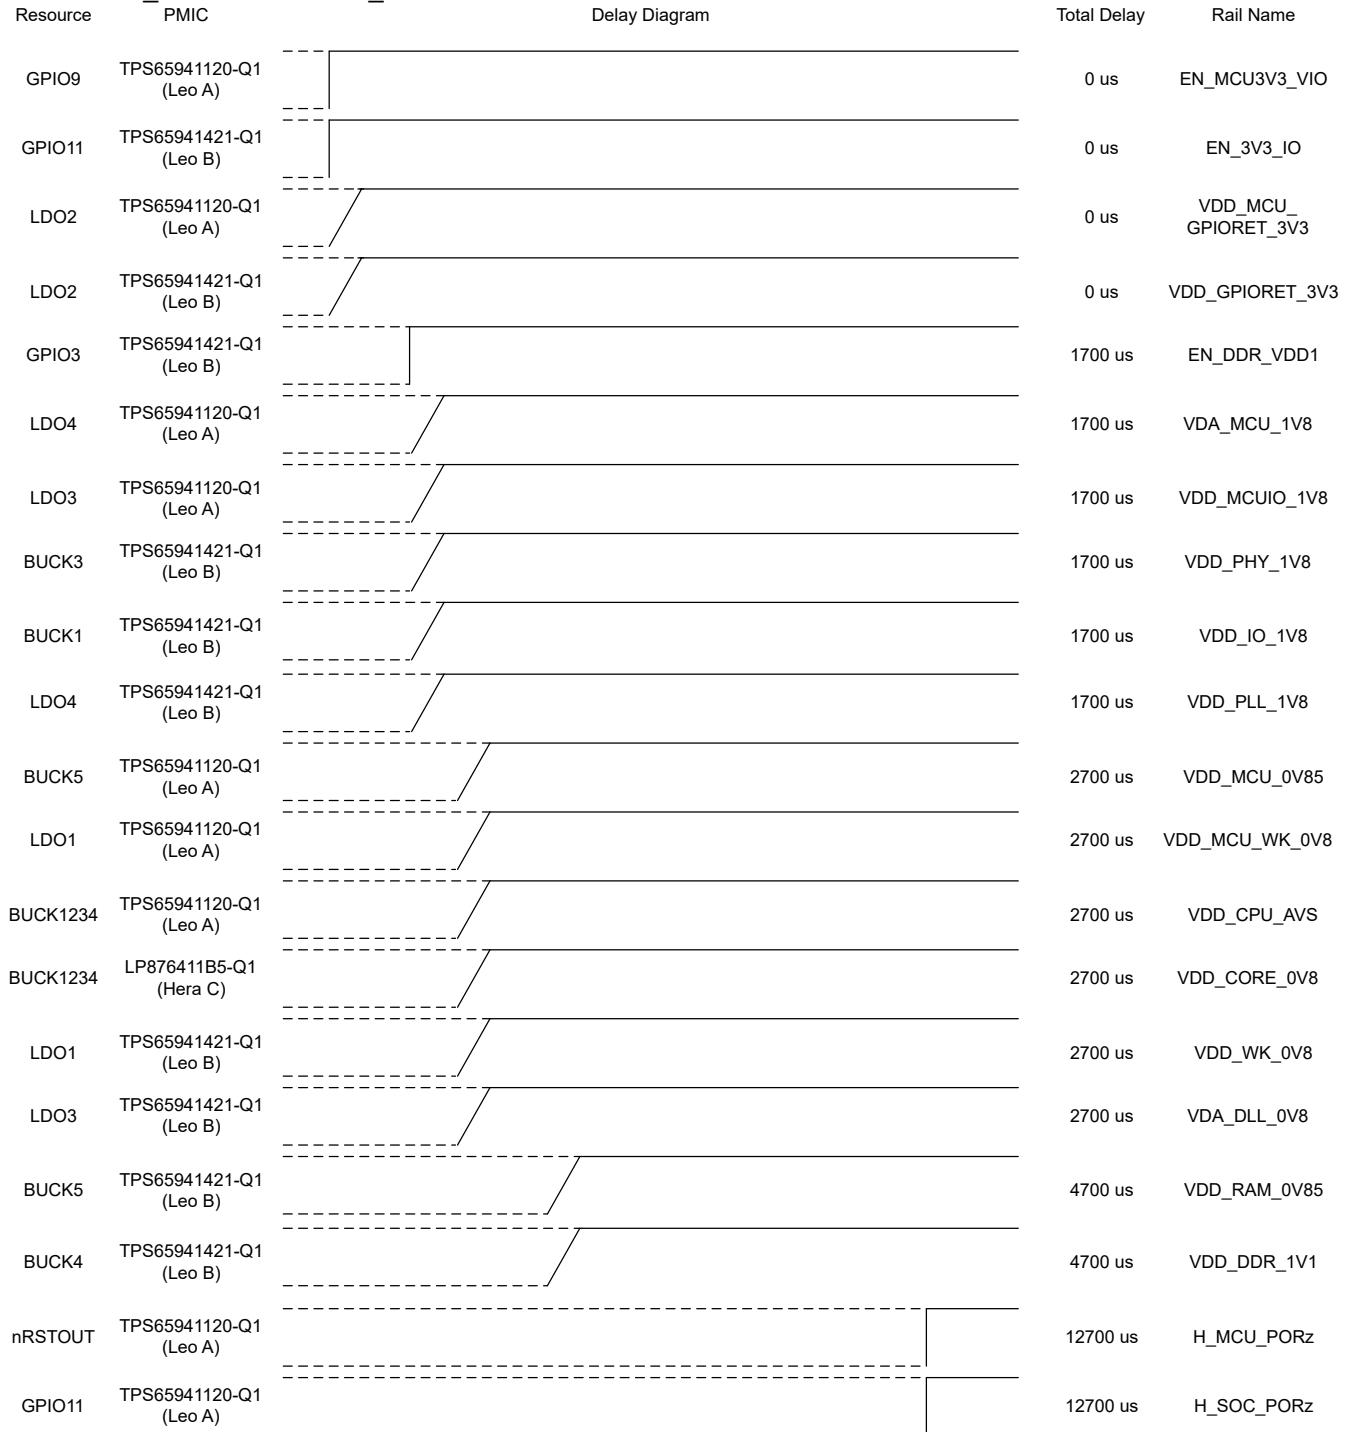


Figure 6-11. TO_ACTIVE Sequence

At the end of the TO_ACTIVE sequence the 'FORCE_EN_DRV_LOW' bit is cleared.

Note

After the TO_ACTIVE sequence the MCU is responsible for managing the EN_DRV.

6.3.9 TO_RETENTION

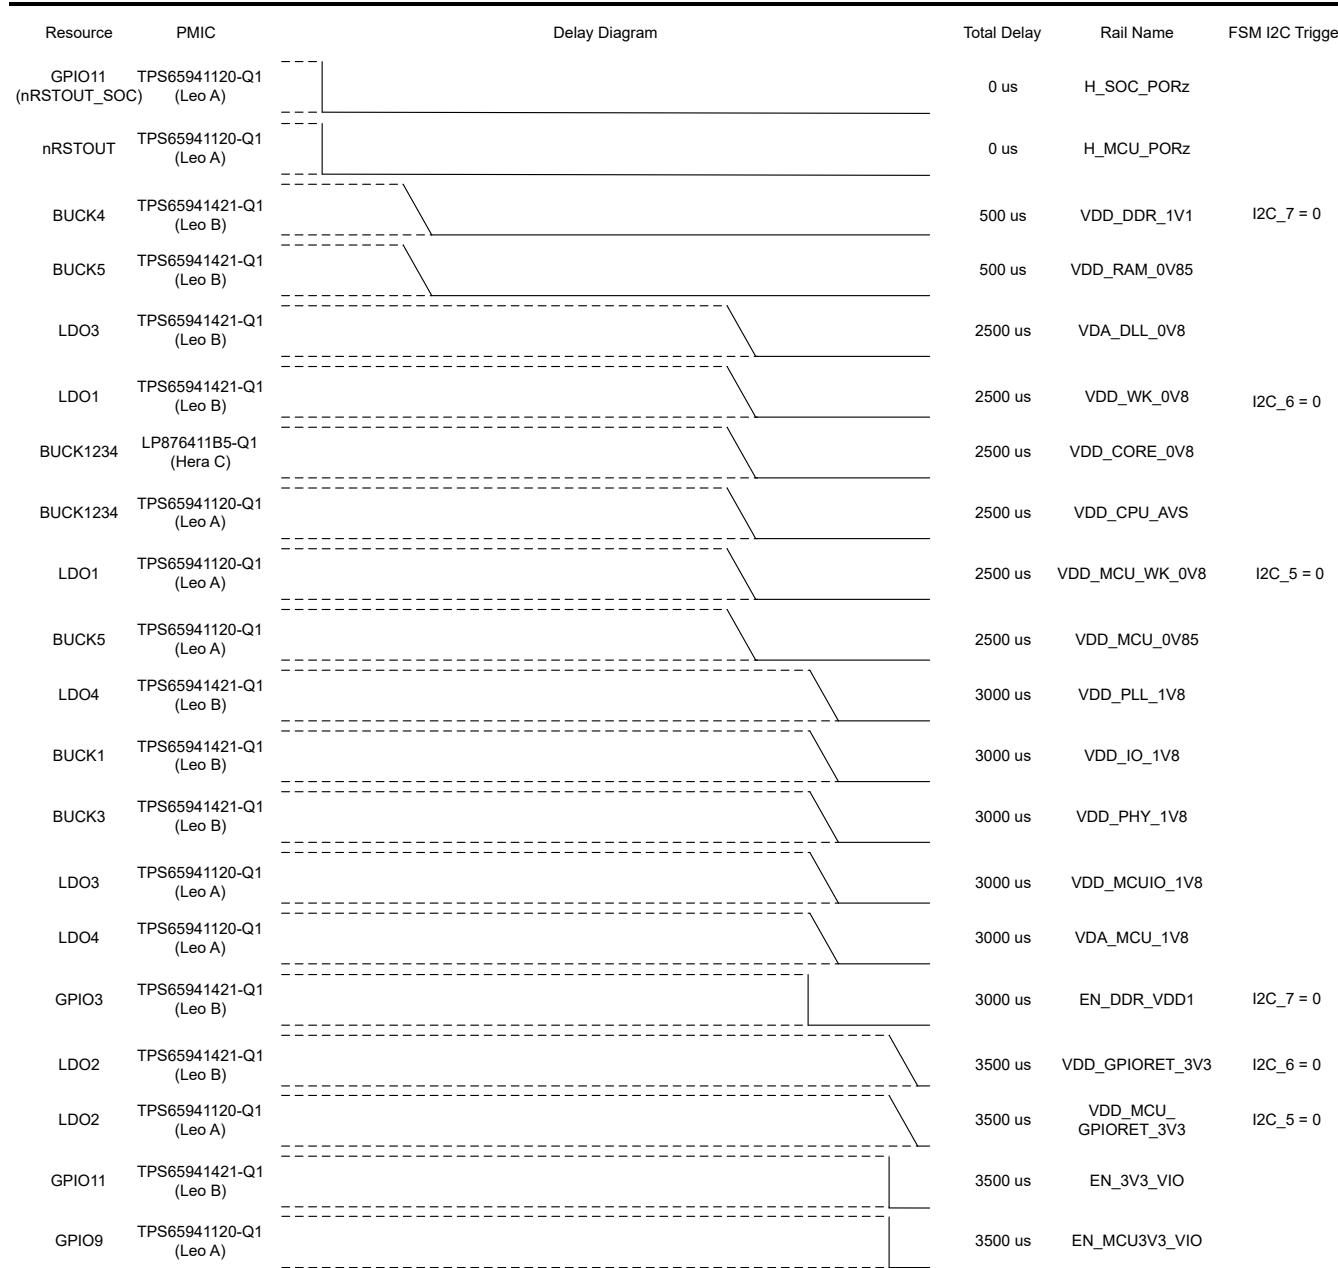
The C and D triggers, defined by the NSLEEPx bits or pins, trigger the TO_RETENTION sequence. This sequence disables all power rails and GPIOs that are not supplying the retention rails, as described in [Figure 3-1](#). The sequence can be modified using the I2C_5, I2C_6, and I2C_7 bits found in register FSM_I2C_TRIGGER. These bits need to be set by I²C in both PMICs before a trigger for the retention state occurs. If the I2C_5, I2C_6, and I2C_7 bits are set high in all PMICs, they enter the DDR and GPIO retention state as shown in [Figure 6-13](#). If I2C_5, I2C_6, and I2C_7 are set low, these components associated with DDR and GPIO retention do not remain active, as shown in [Figure 6-12](#).

Note

The I2C_x bits need to be set or cleared by I²C in both PMICs before a trigger to the retention state occurs. The I2C_x triggers are not self-clearing and must be maintained during operation.

The following PMIC PFSM instructions are executed automatically in the beginning of the power sequence to configure the PMICs:

```
// TPS65941120
// Set LPM_EN, Clear NRSTOUT_SOC and NRSTOUT
REG_WRITE_MASK_IMM ADDR=0x81 DATA=0x04 MASK=0xF8
// Set SPMI_LP_EN and FORCE_EN_DRV_LOW
REG_WRITE_MASK_IMM ADDR=0x82 DATA=0x18 MASK=0xE7
// TPS65941421 LP876411B5
// Set SPMI_LP_EN
REG_WRITE_MASK_IMM ADDR=0x82 DATA=0x10 MASK=0xEF
```

Pre-Configurable Finite State Machine (PFSM) Settings

Figure 6-12. TO_RETENTION when I2C triggers are low in both PMICs

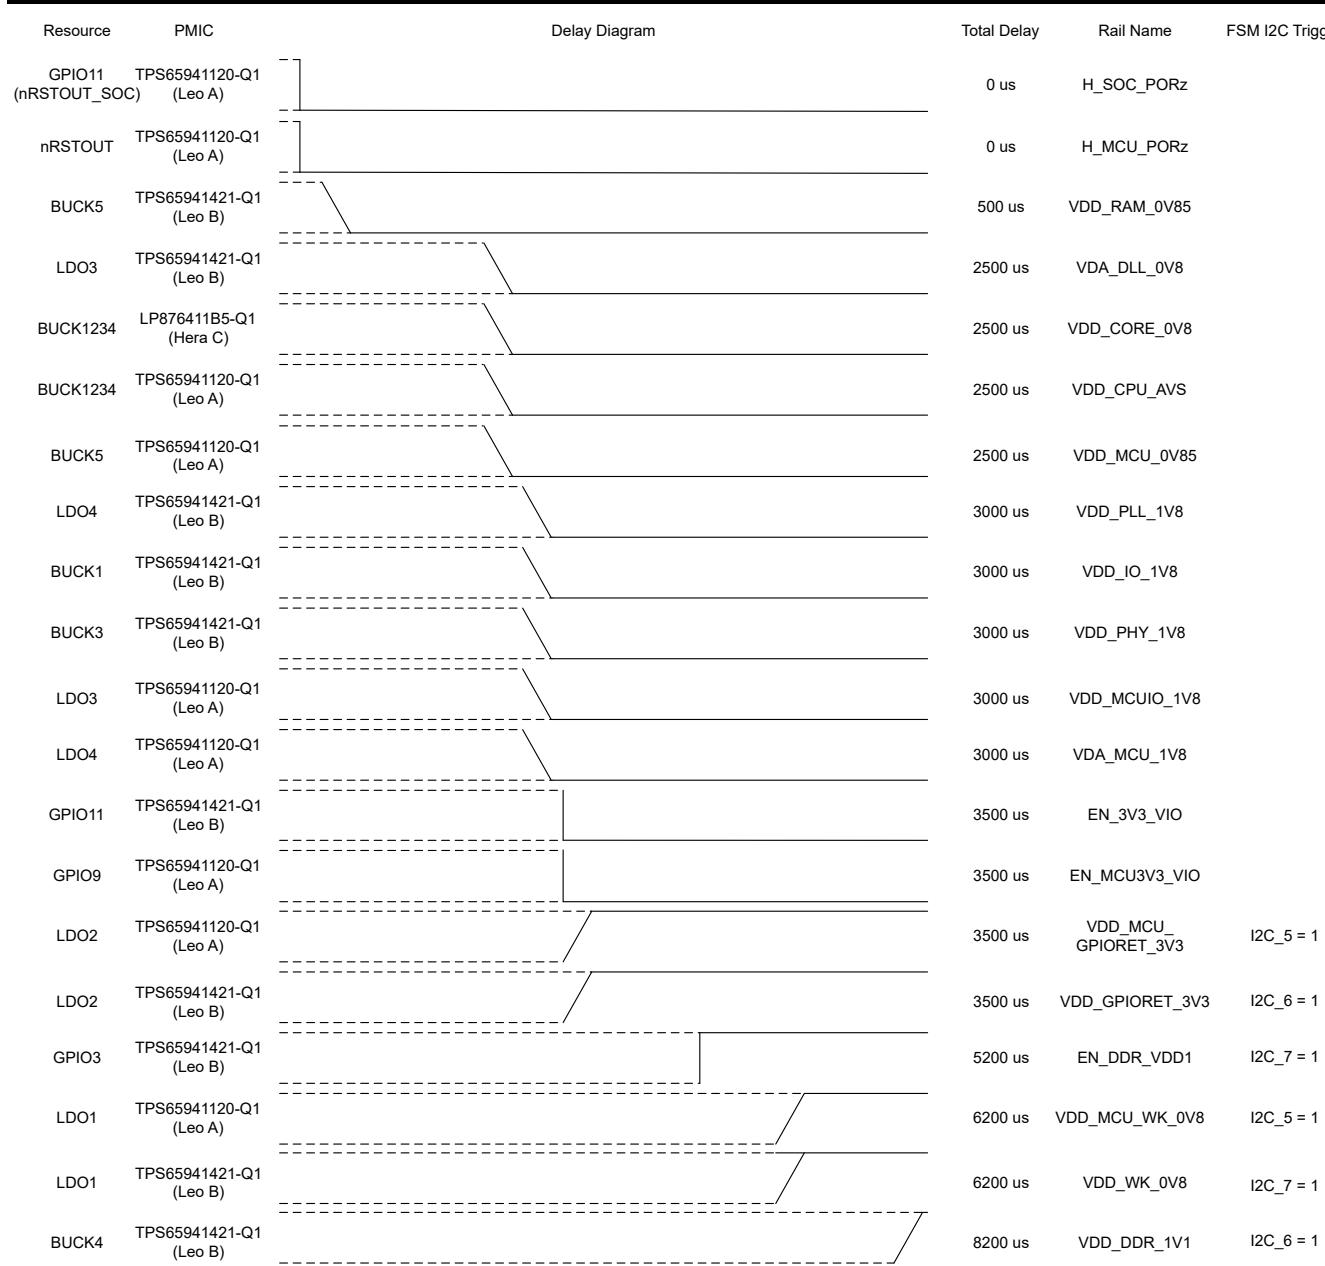


Figure 6-13. TO_RETENTION when I2C triggers are high in both PMICs

At the end of the sequence, both PMICs set the LPM_EN and clear the CLKMON_EN and AMUXOUT_EN. The TPS65941120 device also performs an additional 16 ms delay based upon the contents of the register (PFSM_DELAY_REG_2) to ensure that the TPS65941120 sequence finishes last.

7 Application Examples

This section provides examples of how to interact with the PMICs from the perspective of the MCU and over I²C. **Table 7-1** shows how the I²C commands are presented in the following sections. These examples, when used in conjunction with the [data sheet](#), can be generalized and applied to other use cases.

Table 7-1. I²C Instruction Format

	I ² C Address	Register Address	Data	Mask
Write	0x48, 0x4C or 0x58	0x00 - 0xFF	0x00 - 0xFF	0x00 - 0xFF
Read	0x48, 0x4C or 0x58	0x00 - 0xFF	NA	NA

Note

When the MASK is non-zero, this assumes a read has taken place and then a logical operation applied to only change the desired bit fields before writing the data back.

7.1 Moving Between States; ACTIVE and RETENTION

The default configuration of the NVM transitions the PMICs to the ACTIVE state when the ENABLE pin on the TPS65941120 goes high (rising edge triggered). The nINT pin goes low to indicate to the MCU that interrupts have occurred in the PMICs. After a normal power up sequence the interrupts are the ENABLE_INT and BIST_PASS_INT. The ENABLE_INT prohibits the PMICs from processing any lower priority triggers below the 'ON Request' in [Table 6-1](#). The blocking of the lower priority triggers is why the PMICs are in the ACTIVE state even though the NSLEEP1 and NSLEEP2 bits are both cleared. Once the ENABLE_INT is cleared the state is defined by [Table 7-2](#). The following sections describe the I²C commands for transitioning between the different states.

Table 7-2. State Table

NSLEEP1	NSLEEP2	I ² C_7	I ² C_6	I ² C_5	State
1	1	NA	NA	NA	ACTIVE
0	1	0	0	NA	MCU ONLY without DDR Retention
0	1	1	1	NA	MCU ONLY with DDR Retention and Main GPIO Retention
0	1	1	0	NA	MCU ONLY with DDR Retention
0	1	0	1	NA	MCU ONLY with Main GPIO Retention
Do not Care	0	1	1	1	DDR Retention with GPIO Retention
	0	0	1	1	GPIO Retention
	0	1	0	0	DDR Retention
	0	0	0	0	Retention

7.1.1 ACTIVE

In this example the, PMIC is already in the ACTIVE state after a normal power up event. The PMIC is kept in the ACTIVE state by setting the NSLEEP1 and NSLEEP2 bits before clearing the ENABLE_INT.

```
Write 0x48:0x86:0x03:0xFC      // Set NSLEEP1 and NSLEEP2 in TPS65951213
Write 0x48:0x66:0x01:0xFE      // Clear BIST_PASS_INT
Write 0x48:0x65:0x26:0xD9      // Clear all potential sources of the On Request
```

7.1.2 MCU ONLY

Transitioning to the MCU ONLY state from the ACTIVE state, requires configuring the I2C_7 trigger before changing the NSLEEP bits. The configuration must be consistent between both PMICs.

```
Write 0x48:0x85:0x80:0x7F    // Set I2C_7 Triggers on TPS65941120
Write 0x4C:0x85:0x80:0x7F    // Set I2C_7 Triggers on TPS65941421
Write 0x48:0x86:0x02:0xFC    // Set NSLEEP2 to trigger TO_MCU power sequence
```

Instead of writing to the NSLEEP bits to return to the ACTIVE state, it is also possible to use the WKUP1 pin on GPIO4 to return the PMIC to the ACTIVE state. Because of the similarity this is shown in the context of the RETENTION state.

7.1.3 RETENTION

As shown in [Section 6.3.9](#), the MCU is powered off and therefore the transition out of the RETENTION to the MCU ONLY or the ACTIVE states must be configured before entering RETENTION. Similar to the MCU ONLY state the I2C_7 triggers must be set for both TPS6594-Q1 PMICs. In this example GPIO4 on the TPS65941120 is used to wake the device from RETENTION to ACTIVE.

```
Write 0x48:0x85:0x80:0x7F    // I2C_7 is high
Write 0x4C:0x85:0x80:0x7F
Write 0x48:0x34:0xC0;0x3F    // Set GPIO4 to WKUP1 (goes to ACTIVE state)
Write 0x48:0x64:0x08:0xF7    // clear interrupt of gpio4, write to clear
Write 0x48:0x4F:0x00:0xF7    // unmask interrupt for GPIO4 falling edge
Write 0x48:0x86:0x00:0xFC    // trigger the TO_RETENTION power sequence
After the GPIO4 has gone low and the PMICs have returned to the ACTIVE state
Write 0x48:0x86:0x03:0xFC    // Set NSLEEPx bits for ACTIVE state
Write 0x48:0x64:0x08:0xF7    // clear interrupt of gpio4
Write 0x4C:0x3D:0x00:0xFD    // clear PMICB:GPIO2, DDR_RET
```

In this example the TPS65941120 RTC Timer is used to wake the device from RETENTION to ACTIVE.

```
Write 0x48:0x85:0x80:0x7F    // I2C_7 is high
Write 0x4C:0x85:0x80:0x7F
Write 0x48:0xC3:0x01;0xFE    // Enable Crystal
Write 0x48:0xC5:0x05:0xF8    // minute timer, enable TIMER interrupts
Write 0x48:0xC2:0x01:0xFE    // start timer, if the timer values are non-zero clear before starting
Write 0x48:0x86:0x00:0xFC    // trigger the TO_RETENTION power sequence
After the RTC Timer interrupt has occurred and the PMICs have returned to the ACTIVE state
Write 0x48:0x86:0x03:0xFC    // Set NSLEEPx bits for ACTIVE state
Write 0x48:0xC5:0x00:0xFB    // disable timer interrupt, clear bit 2
Write 0x48:0xC4:0x00:0xDF    // clear timer interrupt, clear bit 5
```

7.2 Entering and Exiting Standby

STANDBY can be entered from the ACTIVE or the RETENTION states. In order to stay in the mission state of STANDBY and not enter the hardware state LP_STANDBY the LP_STANDBY_SEL bit must be cleared.

Similar to the RETENTION state, the STANDBY state turns off all regulators that power the processor. The ACTIVE state is the only destination state available that the STANDBY state returns to.

When the ENABLE pin goes low, the TO_STANDBY sequence is triggered. When the ENABLE pin goes high again, the PMICs return to the ACTIVE state, defined in the STARTUP_DEST bits. The TO_STANDBY sequence is also triggered by the I2C_0 trigger. When triggered from I2C_0 the PMIC can be triggered to return to the ACTIVE states by GPIO4, GPIO10, or and RTC timer or alarm. In this example, I2C_0 trigger is used to enter the STANDBY state and the GPIO4 is used to enter the ACTIVE state.

```
Write 0x48:0xC3:0x00:0xF7    // LP_STANDBY_SEL=0
Write 0x48:0x7D:0xC0:0x3F    // Mask NSLEEP bits
Write 0x48:0x34:0xC0;0x3F    // Set GPIO4 to WKUP1 (goes to ACTIVE state)
Write 0x48:0x64:0x08:0xF7    // clear interrupt of GPIO4
Write 0x48:0x4F:0x00:0xF7    // unmask interrupt for GPIO4 falling edge
Write 0x48:0x85:0x01:0xFE    // set I2C_0 trigger, trigger TO_STANDBY sequence
After the GPIO4 has gone low and the PMICs have returned to the ACTIVE state
```

```

Write 0x48:0x7D:0x00:0x3F // unmask NSLEEP bits
Write 0x48:0x86:0x03:0xFC // Set NSLEEPx bits for ACTIVE state
Write 0x48:0x64:0x08:0xF7 // clear interrupt of GPIO4

```

7.3 Entering and Exiting LP_STANDBY

Entering the LP_STANDBY hardware state is the same as entering STANDBY. Exiting LP_STANDBY is different and requires different initializations before entering LP_STANDBY. Also, when the PMICs return from LP_STANDBY the PFSM triggers are gated by the ENABLE_INT while in STANDBY the triggers were gated by the GPIO interrupt.

```

Write 0x48:0xC3:0x08:0xF7 // LP_STANDBY_SEL=1
Write 0x48:0x7D:0xC0:0x3F // Mask NSLEEP bits
Write 0x48:0x34:0xC0;0x3F // Set GPIO4 to WKUP1 (goes to ACTIVE state)
Write 0x48:0xC3:0x60;0x9F // Set the STARTUP_DEST=ACTIVE
Write 0x48:0x64:0x08:0xF7 // clear interrupt of GPIO4
Write 0x48:0x4F:0x00:0xF7 // unmask interrupt for GPIO4 falling edge
Write 0x48:0x85:0x01:0xFE // set I2C_0 trigger, trigger TO_STANDBY sequence
After the GPIO4 has gone low and the PMICs have returned to the ACTIVE state
Write 0x48:0x7D:0x00:0x3F // unmask NSLEEP bits
Write 0x48:0x86:0x03:0xFC // Set NSLEEPx bits for ACTIVE state
Write 0x48:0x64:0x08:0xF7 // clear interrupt of GPIO4
Write 0x48:0x65:0x02:0xFD // clear ENABLE_INT

```

7.4 Runtime Customization

The TPS65941120 GPIO8 is configured as an input to disable the watchdog. Typically, during development this pin is tied high, so that when the nRSTOUT bit is set WD_PWRHOLD is also set. The configuration of this pin can be utilized for other features or functions but this requires servicing the watchdog before it expires. The watchdog long window is 772 seconds, [Table 5-13](#).

```

Write 0x12:0x09:0x00:0xBF // Disable Watchdog
Write 0x48:0x38:0x01:0x00 // configure GPIO8 as a pushpull output

```

When it is time to enable and configure the watchdog, then in addition to enabling the watchdog the WD_PWR_HOLD must be cleared.

```

Write 0x12:0x09:0x00:0xFB // Clear WD_PWRHOLD
Write 0x12:0x09:0x40:0xBF // Enable Watchdog

```

In addition to the GPIO8 of the TPS65941120 there are also the feedback pins for BUCK4 on the TPS65941120. This monitor can be used independently since the BUCK4 regulator is multiphased with BUCKs 1, 2 and 3. When enabling a monitor, the built in self-test is performed. Please refer to the [data sheet](#) for an explanation of the monitor self-test. If the self-test fails this results in a Moderate error that triggers the TO_SAFE_ORDERLY power sequence.

Unlike the GPIO, the BUCK monitor can become part of the PFSM by assigning a group to the BUCK regulator and unmasking the OV/UV interrupts. Per [Table 5-7](#), the BUCK4_GRP_SEL is not assigned a group.

Table 7-3. Rail Group Associations

Selected Rail group Selection	PFSM Trigger	Description
No Group Assigned	None	OV/UV can set nINT pin for MCU interrogation.
MCU Rail Group	MCU Power Error	OV/UV can trigger TO_SAFE
Soc Rail Group	SoC Power Error	OV/UV can trigger
Other Rail Group	Orderly Shutdown	OV/UV can trigger TO_SAFE_ORDERLY

In this example BUCK4 is used to monitor a 0.8V supply. The wait statement ensures that the built in self-test of the monitors is completed before the OV and UV monitors are unmasked. Refer to the [TPS6594-Q1Power](#)

[Management IC \(PMIC\) with 5 Bucks and 4 LDOs for Safety- Relevant Automotive Applications data sheet](#) for more details.

```
Write 0x48:0x14:0x37:0x00    // Set to 0.8V
Write 0x48:0x0B:0x07:0xF1    // Set slew rate to 0.31mV/us
Write 0x48:0x41:0xA0:0x0F    // SOC rail group
Write 0x48:0x4A:0x30:0xCF    // Mask OV/UV
Write 0x48:0x0A:0x10:0xEF    // Enable BUCK4 Monitor
// Startup = 220us, ramp = 42us, settling = 105us, OV/UV test=50us
wait 500us
Write 0x48:0x4A:0x00:0xCF    // Unmask OV/UV
```

With the TO_SAFE and TO_SAFE_ORDERLY sequences the PMICs transition through the SAFE RECOVERY state as well as hardware states INIT and BOOT BIST. Through this transition the user registers are restored with the NVM settings. For both the GPIO and BUCK monitor customizations, these customizations are not preserved and must be re-applied with every power cycle and transition through the hardware states.

8 References

For additional information regarding the PMIC or processor devices, use the following:

- Texas Instruments, [*TPS6594-Q1 Power Management IC \(PMIC\) with 5 Bucks and 4 LDOs for Safety-Relevant Automotive Applications*](#) data sheet
- Texas Instruments, [*4x 5-A \(20-A\) multiphase buck converter PMIC with functional safety features for automotive SoCs*](#) data sheet
- Texas Instruments, [*Optimized TPS65941213-Q1 and TPS65941111-Q1 PMIC User Guide for J721E, PDN-0C \(Rev. A\)*](#)
- Texas Instruments, [*TPS6594-Q1 Safety Manual*](#) (request through mySecure)
- Texas Instruments, [*LP8764-Q1 Safety Manual*](#) (request through mySecure)
- Texas Instruments, [*TPS6594-Q1 Schematic PCB Checklist*](#) application note
- Texas Instruments, [*TDA4VE TDA4AL TDA4VL Jacinto™ Processors, Silicon Revision 1.0*](#) data sheet

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2023, Texas Instruments Incorporated