

# C2000™ real-time microcontrollers: F28002x series

Cost-optimized built for power conversion applications



## C2000 real-time microcontrollers

### Real-time control

- Premium MIPS performance from 100MHz DSP core with extended Floating-Point Unit (FPU)
- Advanced Trigonometric Math Unit (TMU) accelerator enhanced with nonlinear PID to minimize compute cycle time
- Flexible and advanced PWMs to control wide range of simple and complex power topologies


### Real-time connectivity and distributed control

- Fast Serial Interface (FSI) provides robust high-speed chip-to-chip or board-to-board communication (~200 MBPS) across an isolation barrier, enabling distributed control
- Host Interface Controller (HIC) for high-speed parallel interface to master that enables complimentary functions onto a host processor

### System flexibility

- Premium 12-bit A/D converters (3.45 MSPS) + post-processing block
- Fast comparators for protection and peak current mode control
- Configurable Logic Block (CLB) brings FPGA-like customization and absolute encoder support

Real-time control meets system cost optimization and performance scalability with the F28002x series of C2000 real-time MCUs. Built for server power, single-axis servo, variable frequency AC drives, appliances, smart sensing, solar inverters and automotive on-board charging and DC/DC applications.

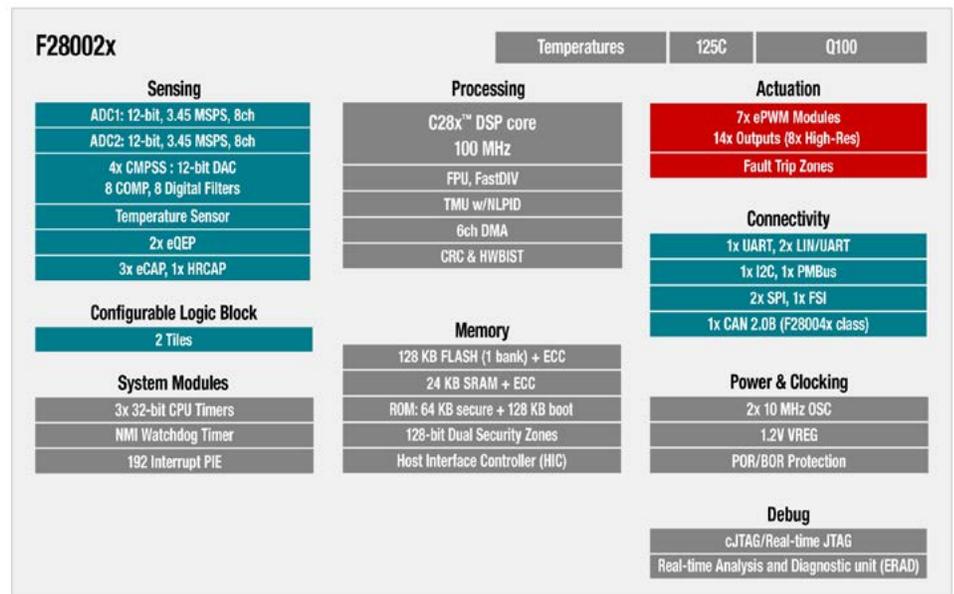


[Learn more about the product](#)

F28002x real-time control MCU	C28x CPU MHz/MIPS	Flash memory	Available package types	Configurable Logic Block	HIC, FSI
TMS320F280021	100	32KB	48QFP, Q100	-	YES
TMS320F280023	100	64KB	48QFP, 64QFP, 80QFP, Q100	-	YES
TMS320F280023C	100	64KB	48QFP, 64QFP, 80QFP	YES	YES
TMS320F280025	100	128KB	48QFP, 64QFP, 80QFP, Q100	-	YES
TMS320F280025C	100	128KB	48QFP, 64QFP, 80QFP, Q100	YES	YES

F28002x real-time MCU	Description
<b>Getting Started</b>	<a href="#">Datasheet</a>
	<a href="#">Technical Reference Manual (TRM)</a>
	<a href="#">F28002x controlCARD and experimenter's kit bundle</a>
	<a href="#">C2000Ware software</a>
	<a href="#">Digital Power software development kit</a>
	<a href="#">Motor Control software development kit</a>

## Portfolio

The F28002x real-time MCU series builds on the third generation improvements introduced in the F2838x, F2837x and F28004x series. The F28002x series extends the portfolio within Gen 3 allowing customers to scale from high-end to mid-end to low-end while maintaining feature differentiation and quality performance. The C2000 microcontroller portfolio provides pin-to-pin and code compatibility across existing device families, alleviating effort for developers working with products that scale with performance. The nature of these device families makes it easy to migrate and build a range of products on similar technology, enabling a sustainable platform solution.

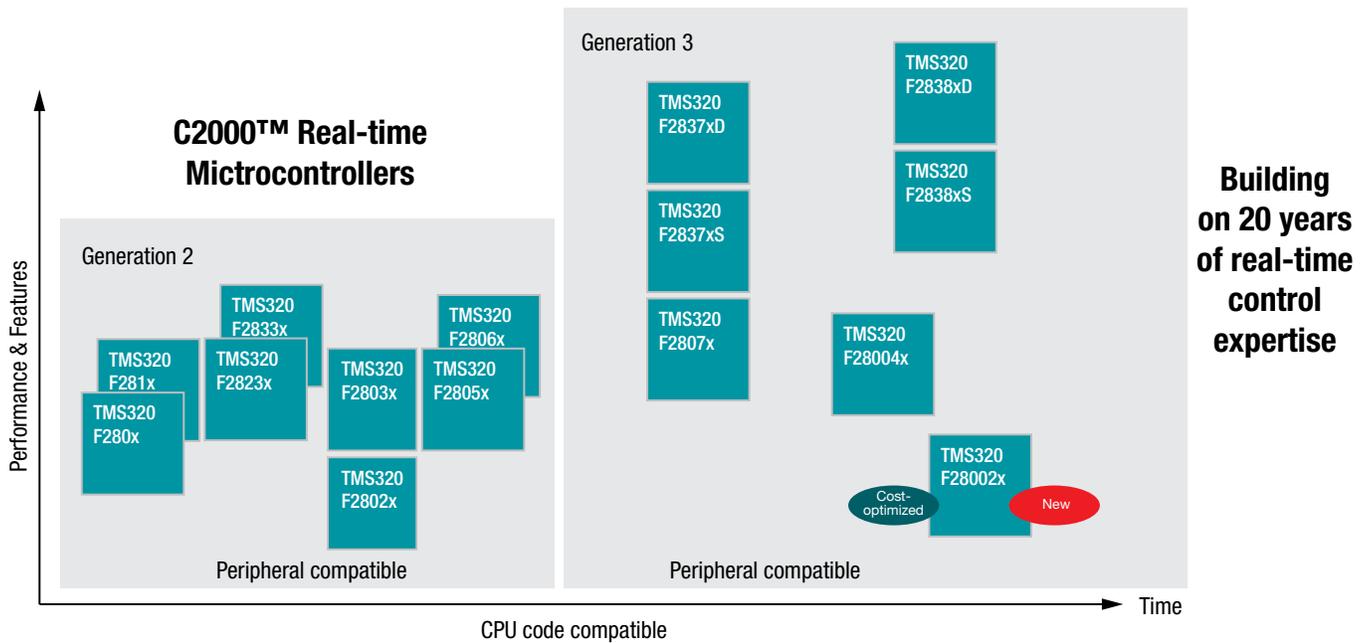

## Comparison of F28002x series with Gen 2 and Gen 3 series

	GEN 3		GEN 2	
	F280025	F280049	F28027	F28035
Total MIPS	100	200	60	120
CPU	100	100	60	60
FPU	YES + FastDIV	YES	NO	NO
TMU	YES + NLPID	YES	NO	NO
DMA	YES	YES	NO	NO
CLA	NO	Type-2	NO	Type-1
Flash (KB)	128	256	64	128
RAM (KB)	24	100	20	20
ADC	2x12-bit	3x 12 bit	1X 12-bit	1x 12-bit
Sample & Hold	2	3	2	2
ADC Channels	16	21	16	16
ADC Post Processing	YES	YES	NO	NO
Comparators	4	7	2	3
CMPSS	CMPSS	CMPSS	NO	NO
Sigma-Delta Filter	0	4	0	0
ePWM Technology	Type-4	Type-4	Type-2	Type-2
PWM Channels	14	16	14	14
HRPWM Channels	8	16	7	7
CLB	YES	YES	NO	NO
HIC	YES	NO	NO	NO
QEP	2	2	0	1
CAN	1	2	0	1
UART	3	2	1	1
LIN	2	1	0	0
I2C	2	1	1	1
SPI	2	2	1	2
FSI	1	1	0	0
PMBus	1	1	0	0
GPIOs	14, 24, 26, 39	24, 25, 26, 40	20, 22	26, 33, 45
Packages	48, 64, 80	56,64,100	38,48	56, 64, 80
1ku price	\$1.52 - \$3.30	\$4.85 - \$7.95	\$2.20 - \$4.08	\$3.05 - \$5.80

### Generation 3 Key Enhancements

- New process technology allows for more features, accelerators (TMU), on-chip memory, peripherals, and lower power consumption
- Flexible register load capability, dead-band generation, advance trip-zone functionality, more high resolution PWMs, and flexible crossbars for premium advanced control and protection mechanisms
- Improvements to sensing capability through additional ADCs, new Comparator Subsystem (CMPSS) with windowed comparators, and ADC post-processing hardware
- Latest peripherals like high-speed Fast Serial Interface (FSI) at up to 200 Mbps
- New Configurable Logic Block (CLB) provides further system integration and customization
- Memory enhancements with addition of ECC, parity, dual-zone security memory and DMA

The platform bar and C2000, are trademarks of Texas Instruments.

All other trademarks are the property of their respective owner

© 2020 Texas Instruments Incorporated



SPRB208B

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale ([www.ti.com/legal/termsofsale.html](http://www.ti.com/legal/termsofsale.html)) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2020, Texas Instruments Incorporated