

TMS320x2834x Delfino External Interface (XINTF)

Reference Guide



Literature Number: SPRUFN4A
March 2009–Revised January 2010

Preface	5
1 Functional Description	8
1.1 Differences from the TMS320x281x XINTF	8
1.2 Differences from the TMS320x2833x/TMS320x2823x XINTF	9
1.3 Accessing XINTF Zones	9
1.4 Write-Followed-by-Read Pipeline Protection	10
2 XINTF Configuration Overview	11
2.1 Procedure to Change the XINTF Configuration and Timing Registers	11
2.2 XINTF Clocking	12
2.3 Write Buffer	13
2.4 XINTF Access Lead/Active/Trail Wait-State Timing Per Zone	13
2.5 XREADY Sampling For Each Zone	14
2.6 Bank Switching	14
2.7 Zone Data Bus Width	15
3 External DMA Support (XHOLD, XHOLDA)	17
4 Configuring Lead, Active, and Trail Wait States	18
4.1 USEREADY = 0	18
4.2 Synchronous Mode (USEREADY = 1, READYMODE = 0)	19
4.3 Asynchronous Mode (USEREADY = 1, READYMODE = 1)	19
5 Configuring XBANK Cycles	23
6 XINTF Registers	24
6.1 XINTF Timing Registers	24
6.2 XINTF Configuration Register	28
6.3 XBANK Register	30
6.4 XREVISION Register	30
6.5 XRESET Register	30
7 Signal Descriptions	32
8 Waveforms	33
Appendix A Revision History	38

List of Figures

1	External Interface Block Diagram	10
2	Access Flow Diagram	12
3	Relationship Between XTIMCLK and SYSCLKOUT	13
4	Typical 16-bit Data Bus XINTF Connections	15
5	Typical 32-bit Data Bus XINTF Connections	15
6	XTIMING0/6/7 Register	24
7	XINTF Configuration Register (XINTCNF2)	28
8	XBANK Register	30
9	XREVISION Register	30
10	XRESET Register	31
11	XTIMCLK and XCLKOUT Mode Waveforms	34
12	Generic Read Cycle (XTIMCLK = SYSCLKOUT mode)	35
13	Generic Read Cycle (XTIMCLK = ½ SYSCLKOUT mode)	36
14	Generic Write Cycle (XTIMCLK = SYSCLKOUT mode)	37

List of Tables

1	16-bit Mode Behavior	15
2	32-bit Mode Behavior	16
3	Pulse Duration in Terms of XTIMCLK Cycles	18
4	Relationship Between Lead/Tail Values and the XTIMCLK/X2TIMING Modes	21
5	Relationship Between Active Values and the XTIMCLK/X2TIMING Modes	22
6	XINTF Configuration and Control Register Mapping	24
7	XTIMING0/6/7 Register Field Descriptions	24
8	XINTF Configuration Register Field Descriptions	28
9	XBANK Register Field Descriptions	30
10	XREVISION Register Field Descriptions	30
11	XRESET Register Field Descriptions	31
12	XINTF Signal Descriptions	32
13	Revisions	38

Read This First

This document describes the external interface (XINTF) used in the 2834x Delfino™ device. The XINTF is a nonmultiplexed asynchronous bus.

Notational Conventions

This document uses the following conventions.

- Hexadecimal numbers are shown with the suffix h or with a leading 0x. For example, the following number is 40 hexadecimal (decimal 64): 40h or 0x40.
- Registers in this document are shown in figures and described in tables.
 - Each register figure shows a rectangle divided into fields that represent the fields of the register. Each field is labeled with its bit name, its beginning and ending bit numbers above, and its read/write properties below. A legend explains the notation used for the properties.
 - Reserved bits in a register figure designate a bit that is used for future device expansion.

Related Documentation From Texas Instruments

The following documents describe the related devices and related support tools. Copies of these documents are available on the Internet at www.ti.com. *Tip:* Enter the literature number in the search box provided at www.ti.com.

Data Manual—

[SPRS516](#) — TMS320C28346, TMS320C28345, TMS320C28344, TMS320C28343, TMS320C28342, TMS320C28341 Delfino Microcontrollers Data Manual. This document contains the pinout, signal descriptions, as well as electrical and timing specifications for the C2834x devices.

[SPRZ267](#) — TMS320C2834x Delfino MCU Silicon Errata. This document describes the advisories and usage notes for different versions of silicon.

CPU User's Guides—

[SPRU430](#) — TMS320C28x CPU and Instruction Set Reference Guide describes the central processing unit (CPU) and the assembly language instructions of the TMS320C28x fixed-point digital signal processors (DSPs). It also describes emulation features available on these DSPs.

[SPRUE02](#) — TMS320C28x Floating Point Unit and Instruction Set Reference Guide. This document describes the floating-point unit and includes the instructions for the FPU.

Peripheral Guides—

[SPRU566](#) — TMS320x28xx, 28xxx DSP Peripheral Reference Guide describes the peripheral reference guides of the 28x digital signal processors (DSPs).

[SPRUFN1](#) — TMS320x2834x Delfino System Control and Interrupts Reference Guide. This document describes the various interrupts and system control features of the x2834x microcontroller (MCUs).

[SPRUFN4](#) — TMS320x2834x Delfino External Interface (XINTF) Reference Guide. This document describes the XINTF, which is a nonmultiplexed asynchronous bus, as it is used on the x2834x device.

- [SPRUFN5](#)** — **TMS320x2834x Delfino Boot ROM Reference Guide.** This document describes the purpose and features of the bootloader (factory-programmed boot-loading software) and provides examples of code. It also describes other contents of the device on-chip boot ROM and identifies where all of the information is located within that memory.
- [SPRUG80](#)** — **TMS320x2834x Delfino Multichannel Buffered Serial Port (McBSP) Reference Guide.** This document describes the McBSP available on the x2834x devices. The McBSPs allow direct interface between a microcontroller (MCU) and other devices in a system.
- [SPRUG78](#)** — **TMS320x2834x Delfino Direct Memory Access (DMA) Reference Guide.** This document describes the DMA on the x2834x microcontroller (MCUs).
- [SPRUFZ6](#)** — **TMS320x2834x Delfino Enhanced Pulse Width Modulator (ePWM) Module Reference Guide.** This document describes the main areas of the enhanced pulse width modulator that include digital motor control, switch mode power supply control, UPS (uninterruptible power supplies), and other forms of power conversion.
- [SPRUG77](#)** — **TMS320x2834x Delfino High-Resolution Pulse Width Modulator (HRPWM) Reference Guide.** This document describes the operation of the high-resolution extension to the pulse width modulator (HRPWM).
- [SPRUG79](#)** — **TMS320x2834x Delfino Enhanced Capture (eCAP) Module Reference Guide.** This document describes the enhanced capture module. It includes the module description and registers.
- [SPRUG74](#)** — **TMS320x2834x Delfino Enhanced Quadrature Encoder Pulse (eQEP) Module Reference Guide.** This document describes the eQEP module, which is used for interfacing with a linear or rotary incremental encoder to get position, direction, and speed information from a rotating machine in high performance motion and position control systems. It includes the module description and registers.
- [SPRUEU4](#)** — **TMS320x2834x Delfino Enhanced Controller Area Network (eCAN) Reference Guide.** This document describes the eCAN that uses established protocol to communicate serially with other controllers in electrically noisy environments.
- [SPRUG75](#)** — **TMS320x2834x Delfino Serial Communication Interface (SCI) Reference Guide.** This document describes the SCI, which is a two-wire asynchronous serial port, commonly known as a UART. The SCI modules support digital communications between the CPU and other asynchronous peripherals that use the standard non-return-to-zero (NRZ) format.
- [SPRUG73](#)** — **TMS320x2834x Delfino Serial Peripheral Interface (SPI) Reference Guide.** This document describes the SPI - a high-speed synchronous serial input/output (I/O) port - that allows a serial bit stream of programmed length (one to sixteen bits) to be shifted into and out of the device at a programmed bit-transfer rate.
- [SPRUG76](#)** — **TMS320x2834x Delfino Inter-Integrated Circuit (I2C) Reference Guide.** This document describes the features and operation of the inter-integrated circuit (I2C) module.
- Tools Guides—**
- [SPRU513](#)** — **TMS320C28x Assembly Language Tools v5.0.0 User's Guide** describes the assembly language tools (assembler and other tools used to develop assembly language code), assembler directives, macros, common object file format, and symbolic debugging directives for the TMS320C28x device.
- [SPRU514](#)** — **TMS320C28x Optimizing C/C++ Compiler v5.0.0 User's Guide** describes the TMS320C28x™ C/C++ compiler. This compiler accepts ANSI standard C/C++ source code and produces TMS320 DSP assembly language source code for the TMS320C28x device.
- [SPRU608](#)** — **TMS320C28x Instruction Set Simulator Technical Overview** describes the simulator, available within the Code Composer Studio for TMS320C2000 IDE, that simulates the instruction set of the C28x™ core.

[SPRU625](#) — **TMS320C28x DSP/BIOS 5.32 Application Programming Interface (API) Reference Guide** describes development using DSP/BIOS.

Application Reports—

[SPRAB26](#) — **TMS320x2833x/2823x to TMS320x2834x Delfino Migration Overview**. This application report describes differences between the Texas Instruments TMS320x2833x/2823x and the TMS320x2834x devices to assist in application migration.

External Interface (XINTF)

The external interface (XINTF) is a nonmultiplexed asynchronous bus, similar to the TMS320x281x external interface.

This guide is applicable for the XINTF found on the TMS320x2833x family of processors. This includes all Flash-based and RAM-based devices within the 2833x family.

1 Functional Description

The XINTF is mapped into three fixed memory-mapped zones as defined in [Figure 1](#).

Each of the 28x XINTF zones has a chip-select signal that is toggled when an access is made to that particular zone. On some devices the chip-select signals for two zones may be internally ANDed together to form a single shared chip select. In this manner, the same memory is connected to both zones or external decode logic can be used to separate the two.

Each of the three zones can also be programmed with a specified number of wait states, strobe signal set-up and hold timing. The number of wait states, set-up and hold timing is separately specified for a read access and a write access. In addition, each zone can be programmed for extending wait states externally using the XREADY signal or not. The programmable wait-state, chip-select and programmable strobe timing enables glueless interface to external memories and peripherals.

You specify the set-up/hold and access wait states for each XINTF zone by configuring the associated XTIMINGx registers. The access timing is based on an internal clock called XTIMCLK. XTIMCLK can be set to the same rate as the SYSCLKOUT or to one-half of SYSCLKOUT. The rate of XTIMCLK applies to all of the XINTF zones. XINTF bus cycles begin on the rising edge of XCLKOUT and all timings and events are generated with respect to the rising edge of XTIMCLK.

1.1 Differences from the TMS320x281x XINTF

The XINTF described in this document is functionally very similar to the TMS320x281x XINTF. The main differences are:

- **Data Bus Width:**

Each XINTF zone can be configured individually to use a 16-bit or 32-bit data bus. Using the 32-bit mode improves performance since 32 bits of data can be read or written in a single access. The data bus width does not change the size of the XINTF zones or memory reach.

- **Address Bus Reach:**

The address reach has been extended to 20 address lines. Zone 6 and Zone 7 both use the full address reach of 1M x 16 words each. The 281x address reach is 512k x 16 words.

- **Direct Memory Access (DMA):**

All three XINTF zones are connected to the on-chip DMA module. The DMA can be used to copy code and data to or from the XINTF while the CPU is processing other data. The 281x devices do not include a DMA.

- **XINTF Clock Enable:**
The XINTF clock (XTIMCLK) is disabled by default to save power. XTIMCLK can be enabled by writing a 1 to bit 12 of the PCLKCR3 register. PCLKCR3 is documented in the device-specific system control and interrupts user's guide. Turning off XTIMCLK does not turn off XCLKOUT. There is a separate control to turn off XCLKOUT. On the 281x, XTIMCLK is always enabled.
- **XINTF Pin MUXing:**
Many of the XINTF pins are MUXed with general purpose I/O. The GPIO mux registers must be configured for XINTF operation before you can use the XINTF. On the 281x, the XINTF has dedicated pins.
- **Number of Zones and Chip Select Signals:**
The number of XINTF zones has been reduced to 3: Zone 0, Zone 6 and Zone 7. Each of these zones has a dedicated chip select signal. Zone 0 is still read-followed-by write protected as described in [Section 1.4](#). On the 2812 devices, some zone chip-select signals are shared between zones. Zone 0 and Zone 1 share XZCS0AND1 and Zone 6 and Zone 7 share XZCS6AND7.
- **Zone 7 Memory Mapping:**
Zone 7 is always mapped. On the 281x devices the MPNMC input signal determines if Zone 7 is mapped. Zone 6 and 7 do not share any locations. On 281x, Zone 7 is mirrored within Zone 6.
- **Zone Memory Map Locations:**
Zone 0 starts at address 0x4000 and is 4K x 16. On 281x Zone 0 starts at address 0x2000 and is 8K x 16. Zone 6 and 7 are both 1M x 16 and start at 0x100000 and 0x200000 respectively. On 281x these two zones are 512K x 16 and 16K x 16.
- **EALLOW protection:**
The XINTF registers are now EALLOW protected. On 281x, the XINTF registers were not EALLOW protected.
- **XBANK Cycle Selection**
The requirement that the number of delay cycles selected be based on the ratio of XTIMCLK and XCLKOUT has been removed.

For timing information always refer to the latest data manual for your particular device.

1.2 Differences from the TMS320x2833x/TMS320x2823x XINTF

The XINTF described in this document is functionally very similar to the TMS320x2833x/2823x XINTF. The main differences are:

- **XA0 and WE1**
For the F2833x/F2823x devices, XA0 and $\overline{WE1}$ share a single pin; however, for the C2834x device, they are separate pins.
- **XINTF Pin MUXing:**
On 2833x/2823x the GPBMUX2 register bits would configure the respective pins as XD[31:16] if the selection "2" or "3" was made. On C2834x, only selection "2" makes these pins XD[31:16]. Selection "3" configures them as various peripheral pins.
- **XBANK Cycle Selection**
The requirement that the number of delay cycles selected be based on the ratio of XTIMCLK and XCLKOUT has been removed.

For timing information always refer to the latest data manual for your particular device.

1.3 Accessing XINTF Zones


An XINTF zone is a region in the 28x memory map that is directly connected to the external interface. [Figure 1](#) shows zone locations. The memory or peripheral attached to a zone can be accessed directly with the CPU or Code Composer Studio.

Each XINTF zone can be individually configured with unique read and write access timing and each has an associated zone chip-select signal. This chip-select signal is pulled low so that an access to that zone is currently taking place. On 2834x device, all zone chip select signals are independent.

The external address bus, XA, is 20 bits wide and is shared by all of the zones. What external addresses are generated depends on which zones are being accessed, as follow:

- Zone 0 uses external addresses 0x00000 - 0x00FFF. That is, an access to the first location in Zone 0 will issue external addresses 0x00000 along with chip select 0 ($\overline{XZCS0}$). An access to the last location in the zone will issue address 0x00FFF with $\overline{XZCS0}$.
- Zone 6 and 7 both use external addresses 0x00000 - 0xFFFFF. Depending on which zone is accessed, the appropriate zone chip select signal ($\overline{XZCS6}$ or $\overline{XZCS7}$) will also go low.

Figure 1. External Interface Block Diagram

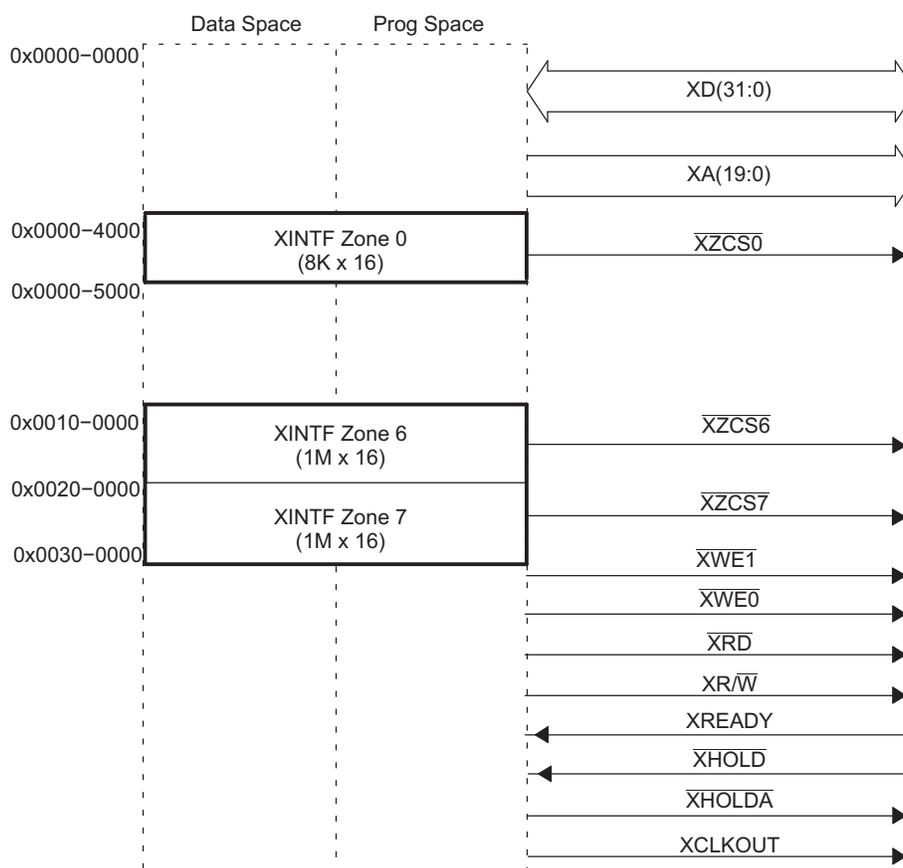


- A Each zone can be programmed with different wait states, setup and hold timings. A dedicated zone chip select (\overline{XZCS}) signal toggles when an access to a particular zone is performed. These features enable glueless connection to many external memories and peripherals.
- B Zones 1 - 5 are reserved for future expansion.
- C When the XINTF clock is enabled in PCLKCR3, all zones are enabled.

1.4 Write-Followed-by-Read Pipeline Protection


In the 28x CPU pipeline, the read phase of an operation occurs before the write phase. Due to this ordering, a write followed by a read access can actually occur in the opposite order: read followed by write.

For example, the following lines of code perform a write to one location followed by a read from another. Due to the 28x CPU pipeline, the read operation will be issued before the write as shown:

```
MOV    @REG1, AL
TBIT   @REG2, #BIT_X
```



On 28x devices, regions of memory where peripheral registers are common are protected from this order reversal by hardware. These regions of memory are said to be read-followed-by-write pipeline protected. XINTF Zone 0 is by default read-followed-by-write pipeline protected. Write and read accesses to Zone 0 are executed in the same order that they are written. For example, a write followed by a read is executed in the same order it was written as shown below:

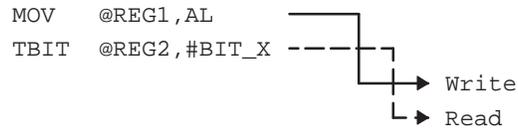

The 28x CPU automatically protects writes followed by reads to the same memory location. The protection mechanism described above is for cases where the address is not the same, but within a given region of protected memory. In this case, the order of execution is preserved by the CPU automatically inserting enough NOP cycles for the write to complete before the read occurs.

This execution ordering becomes a concern only when peripherals are mapped to the XINTF. A write to one register may update status bits in another register. In this case, the write to the first register must finish before the read to the second register takes place. If the write and read operations are performed in the natural pipeline order, the wrong status may be read since the write would happen after the read. This reversal is not a concern when memory is mapped to the XINTF. Thus, Zone 0 would not typically be used to access memory but instead would be used only to access external peripherals.

If other zones are used to access peripherals that require write-followed-by-read instruction order to be preserved the following solutions can be used:

- Add up to 3 NOP assembly instructions between a write and read instructions. Fewer than three can be used if the code is analyzed and it is found that the pipeline stalls for other reasons.
- Move other instructions before the read to make sure that the write and read are at least three CPU cycles apart.
- Use the `-mv` compiler option to automatically insert NOP assembly instructions between write and read accesses. This option should be used with caution because this out-of-order execution is a concern only when accessing peripherals mapped to XINTF and not normal memory accesses.

2 XINTF Configuration Overview


This section is an overview of the XINTF parameters that can be configured to fit particular system requirements. The exact configuration used depends on the operating frequency of the 28x, switching characteristics of the XINTF, and the timing requirements of the external devices. Detailed information on each of these parameters is given in the following sections.

Because a change to the XINTF configuration parameters will cause a change to the access timing, code that configures these parameters should not execute from the XINTF itself.

2.1 Procedure to Change the XINTF Configuration and Timing Registers

During an XINTF configuration or timing change no accesses to the XINTF can be in progress. This includes instructions still in the CPU pipeline, write accesses in the XINTF write buffer, data reads or writes, instruction pre-fetch operations and DMA accesses. To be sure that no access takes place during the configuration follow these steps:


1. Make sure that the DMA is not accessing the XINTF.
2. Follow the procedure shown in [Figure 2](#) to safely modify the XTIMING0/6/7, XBANK, or XINTCNF2 registers.

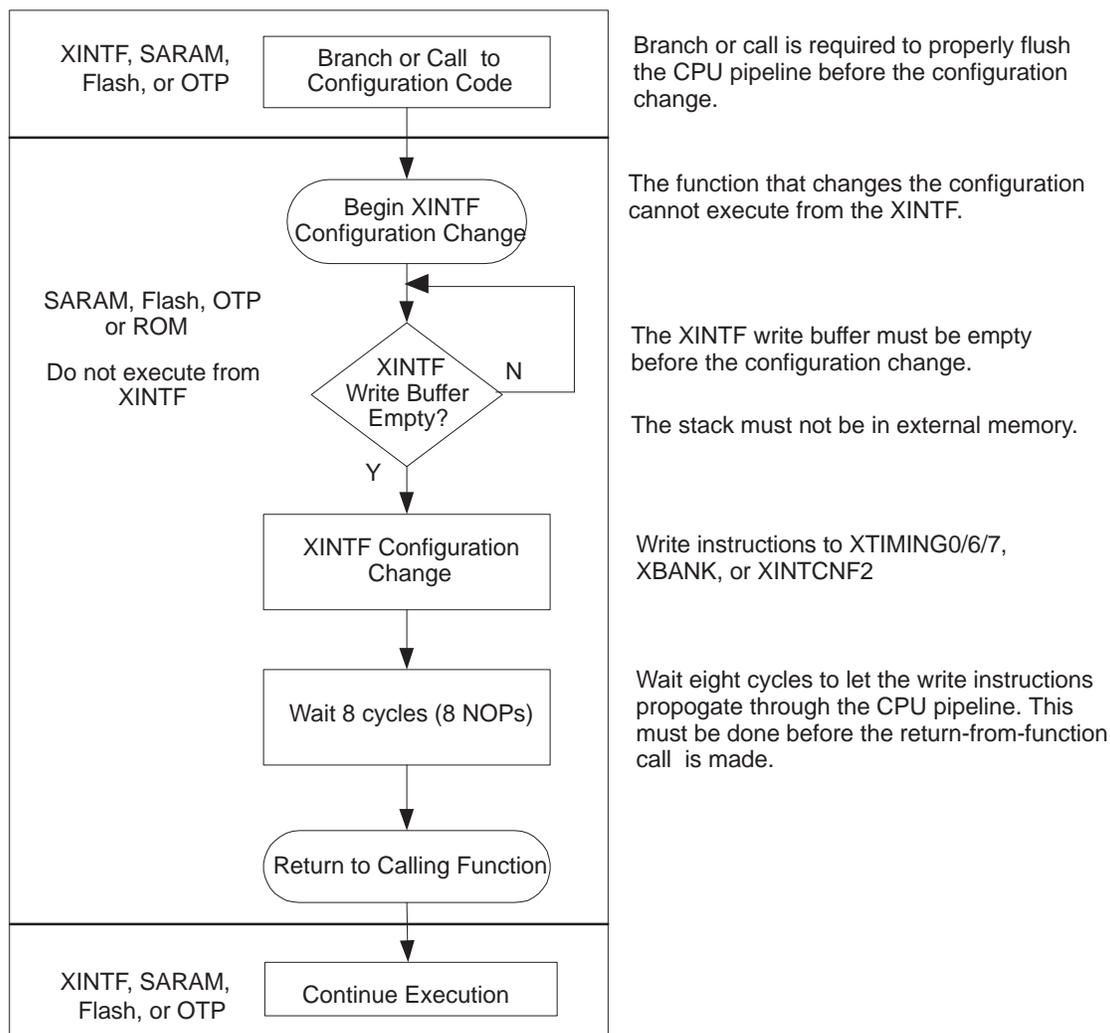Figure 2. Access Flow Diagram


2.2 XINTF Clocking

There are two clocks used by the XINTF module: XTIMCLK and XCLKOUT. [Figure 3](#) shows the relationship between these two clocks and the CPU clock, SYSCLKOUT.

Figure 3. Relationship Between XTIMCLK and SYCLKOUT

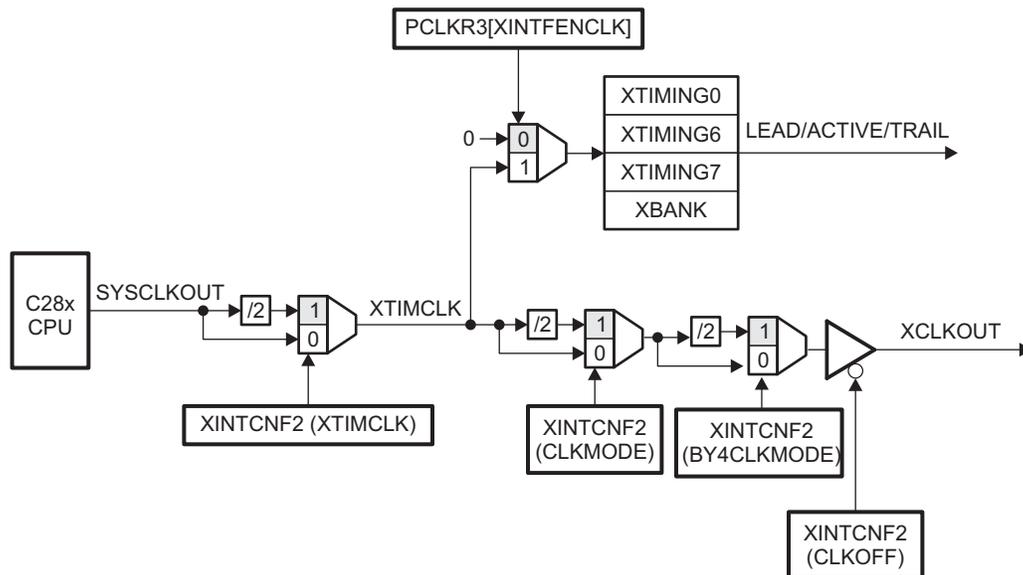

All accesses to all of the XINTF zones are based on the frequency of the internal XINTF clock, XTIMCLK. When configuring the XINTF, you must choose the ratio for the internal XINTF clock, XTIMCLK, with respect to SYCLKOUT. XTIMCLK can be configured to be either equal or one-half of SYCLKOUT by writing to the XTIMCLK bit in the XINTFCNF2 register. By default XTIMCLK is one-half of SYCLKOUT.

All XINTF accesses begin on the rising edge of the external clock out, XCLKOUT. In addition, external logic may be clocked off of XCLKOUT. The frequency of XCLKOUT can be configured as a ratio of the internal XINTF clock, XTIMCLK. XCLKOUT can be configured to be either equal or one-half of XTIMCLK by writing to the CLKMODE bit in the XINTFCNF2 register. By default, XCLKOUT is one-half of XTIMCLK, or one-fourth of the CPU clock, SYCLKOUT.

To reduce system noise, you may choose to not output XCLKOUT on a pin. This is done by writing a 1 to the XINTCNF2[CLKOFF] bit.

2.3 Write Buffer

By default, write access buffering is disabled. In most cases, to improve performance of the XINTF, you should enable write buffering. Up to three writes to the XINTF can be buffered without stalling the CPU. The write buffer depth is configured in the XINTCNF2 register.

2.4 XINTF Access Lead/Active/Trail Wait-State Timing Per Zone

An XINTF zone is a region of memory-mapped addresses that directly access the external interface. The timing of any read or write access to an XINTF zone can be divided into the following three portions: Lead, Active, and Trail. The number of XTIMCLK cycle wait states for each portion of an access can be configured for each XINTF zone in the corresponding zone XTIMING register. Timing for read accesses can be configured separately from timing for write accesses. In addition, to facilitate connections to slow external devices the X2TIMING bit can be used to double the specified lead/active and trail wait states for a particular zone.

During the lead portion, the chip-select signal for the zone being accessed is taken low and the address is placed on the address bus (XA). The total lead period, in XTIMCLK cycles can be configured in the zone's XTIMING register. By default, the lead period is set to the maximum six XTIMCLK cycles for both read and write accesses.

During the active period, the access to the external device is made. For a read access, the read strobe (\overline{XRD}) is brought low and data is latched into the DSP. For a write access, the write enable ($\overline{XWE0}$) strobe is brought low and data is placed on the data bus (XD). If the zone is configured to sample the XREADY signal, the external device can control the XREADY signal to further extend the active period beyond the programmed wait states.

The total active period for any access that does not sample XREADY is 1 XTIMCLK cycle plus the number wait states specified in the corresponding XTIMING register. By default, the active wait states are set to the 14 XTIMCLK cycles for both read and write accesses.

The trail period serves as a hold time in which the chip-select signal remains low but the read and write strobes are brought back high. The total trail period, in XTIMCLK cycles can be configured in the zone's XTIMING register. By default the trail period is set to the maximum six XTIMCLK cycles for both read and write accesses.

Based on system requirements, the lead, active and trail wait state values can be configured to best fit the devices connected to a particular XINTF zone. The following should be considered when selecting the timing parameters:

- Minimum wait state requirements as described in [Section 4](#)
- The timing characteristics of the XINTF, as described in the device data manual
- The timing requirements of the external device
- Any additional delays between the 28x device and the external device

2.5 XREADY Sampling For Each Zone

By sampling XREADY, the external device can extend the active portion of the access. All of the XINTF zones on a device share the same XREADY input signal but each XINTF zone can individually be configured to either sample or ignore the XREADY signal. In addition, the sampling can be specified as synchronous or asynchronous for each zone.

- Synchronous sampling
If XREADY is sampled synchronously, then the XREADY signal must meet set-up and hold timing relative to one XTIMCLK edge before the end of the active period. That is, XREADY will be sampled one XTIMCLK cycle before the total lead + active cycles specified for the access.
- Asynchronous sampling
If XREADY is sampled asynchronously, then the XREADY signal must meet set-up and hold timing relative to three XTIMCLK cycles before the end of the active period. That is, XREADY will be sampled three XTIMCLK cycles before the total lead + active cycles specified for the access.

In both the synchronous and asynchronous case if the XREADY sample is found to be low, the active portion of the cycle is extended by one XTIMCLK cycle and XREADY is sampled again during the next XTIMCLK cycle. This pattern continues until XREADY is sampled high at which time the access will complete normally.

If a zone is configured to sample XREADY, then it is done so for both read and write accesses to that zone. By default each XINTF zone is configured to sample XREADY in the asynchronous mode. When using the XREADY signal, you should consider minimum XINTF wait state requirements as described in [Section 4](#). The minimum requirements are different when sampling XREADY in the synchronous mode vs the asynchronous mode, depending on the following:

- The timing characteristics of the XINTF, as described in the device data sheet.
- The timing requirements of the external device.
- Any additional delays between the 28x device and the external device.


2.6 Bank Switching

When jumping from one XINTF zone to another XINTF zone, a slow device may require extra cycles in order to release the bus in time for another device to gain access. Bank switching allows you to specify a particular zone for which extra cycles will be added for any access that crosses into or out of the specified zone.

2.7 Zone Data Bus Width

Each XINTF zone can individually be configured for a 16-bit or 32-bit wide data bus. When an XINTF zone is configured for 16-bit mode ($XTIMINGx[XSIZE] = 3$), the $\overline{XWE0}$ signal is the active low write strobe. $\overline{XWE1}$ is not applicable. In this case, a typical XINTF bus connection looks as shown in Figure 4. The behavior of the $\overline{XWE0}$ and $\overline{XWE1}$ signals is summarized in Table 1 and Table 2.

Figure 4. Typical 16-bit Data Bus XINTF Connections

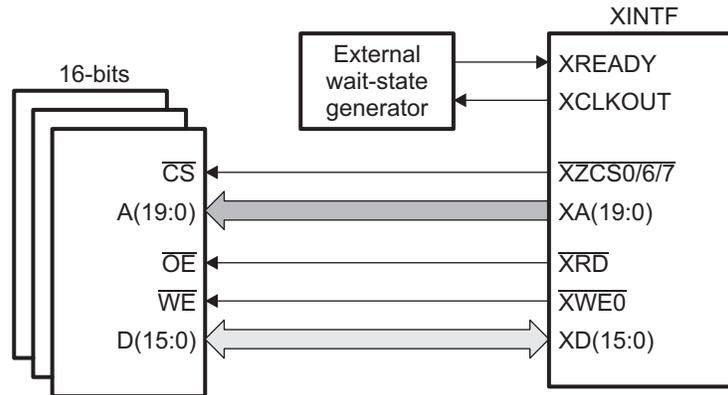

When an XINTF zone is configured for 32-bit mode ($XTIMINGx[XSIZE] = 1$), the $\overline{XWE1}$ signal is the active low write strobe $\overline{XWE1}$. $\overline{XWE1}$ is used, along with $\overline{XWE0}$ for 32-bit bus operation as shown in Figure 5.

For the F2833x/F2823x devices, XA0 and WE1 share a single pin; however, for the C2834x device, they are separate pins.

Figure 5. Typical 32-bit Data Bus XINTF Connections

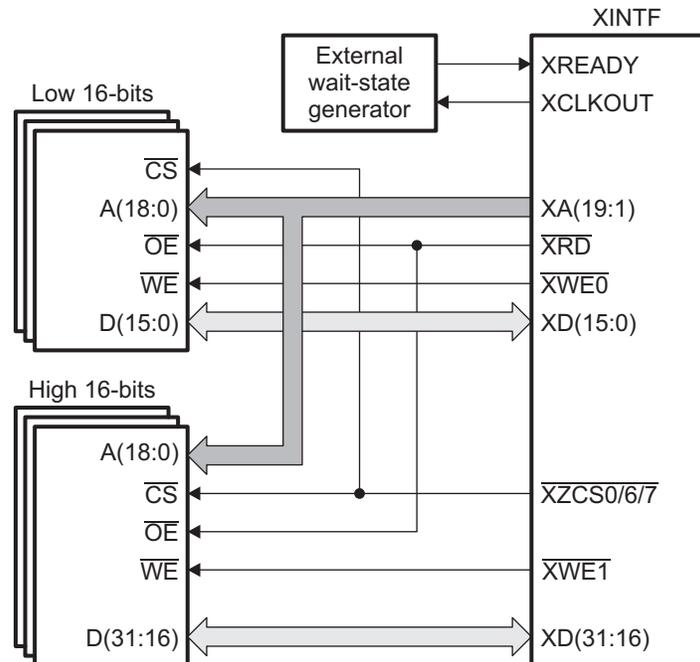


Table 1. 16-bit Mode Behavior

16-bit Mode Write Access	$\overline{XWE1}$	$\overline{XWE0}$
no access	NA	1
16-bit value	NA	0

Table 2. 32-bit Mode Behavior

32-bit Mode Write Access	$\overline{XWE1}$	$\overline{XWE0}$
no access	1	1
16-bit value at even address	1	0
16-bit value at odd address	0	1
32-bit value	0	0

3 External DMA Support (\overline{XHOLD} , \overline{XHOLDA})

The XINTF supports direct memory access (DMA) to its local (off-chip) program and data spaces. This is accomplished with the \overline{XHOLD} signal input and \overline{XHOLDA} output. When \overline{XHOLD} is asserted (low active) a request to the external interface is generated to hold all outputs from the external interface a high impedance state. Upon completion of all outstanding accesses to the external interface, \overline{XHOLDA} is asserted (low active). \overline{XHOLDA} signals external devices that the external interface has its outputs in high-impedance state and that another device can control access to external memory or peripherals.

The HOLD Mode bit in XINTCNF2 register enables the automatic generation of a \overline{XHOLDA} signal and granting access of the external bus, when a valid \overline{XHOLD} signal is detected. While in HOLD mode, the CPU can continue to execute code from on-chip memory attached to the memory bus. If an attempt is made to access the external interface while \overline{XHOLDA} is low, a not ready condition is generated, halting the processor. Status bits in the XINTCNF2 register will indicate the state of the \overline{XHOLD} and \overline{XHOLDA} signals.

If \overline{XHOLD} is active, and the CPU attempts a write to the XINTF, the write is not buffered and the CPU will stall. The write buffer is disabled.

The HOLD mode bit in XINTCNF2 register bit will take precedence over the \overline{XHOLD} input signal. Thus enabling customer code to determine when or not a \overline{XHOLD} request is to be honored.

The \overline{XHOLD} input signal is synchronized at the input to the XINTF before any actions are taken. Synchronization is with respect to XTIMCLK.

The HOLDS bit in XINTCNF2 register reflects the current synchronized state of the \overline{XHOLD} input.

On reset, the HOLD mode bit is enabled, allowing for bootload of external memory using an \overline{XHOLD} request. If \overline{XHOLD} signal is active low during reset, the \overline{XHOLDA} signal is driven low as per normal operation.

During power up, any undefined values in the \overline{XHOLD} synchronizing latches are ignored and would eventually be flushed out when the clock stabilizes. Hence, synchronizing latches do not need to be reset.

If an \overline{XHOLD} active low signal is detected, the \overline{XHOLDA} signal is only driven low after all pending XINTF cycles are completed. Any pending CPU cycles are blocked and the CPU is held in a not-ready state if they are targeted for the XINTF.

Definitions:

Pending XINTF Cycle— Any cycle that is currently in the XINTF FIFO queue.

Pending CPU Cycle— Any cycle that is not in the FIFO queue but is active on the core memory bus.

The \overline{XHOLD} signal should not be removed until the \overline{XHOLDA} signal becomes active. Unpredictable results will occur if this rule should be violated.

The state of the XINTF external signals is as follows in HOLD mode:

Signal	HOLD Granted Mode
XA(19: 0)	High-impedance
XD(31:0)	High-impedance
$\overline{XWE1}$	High-impedance
\overline{XRD} , $\overline{XWE0}$, $\overline{XR/W}$	High-impedance
$\overline{XZCS0}$	High-impedance
$\overline{XZCS6}$	High-impedance
$\overline{XZCS7}$	High-impedance

4 Configuring Lead, Active, and Trail Wait States

XINTF signal timing can be tuned to match specific external device requirements such as setup and hold times for both read and write accesses. The timing parameters can be configured individually for each XINTF zone in the XTIMING registers. Each zone can also be configured to either ignore the XREADY signal or sample it. This allows you to maximize the efficiency of the XINTF based on the memory or peripheral being accessed.

Table 3 shows the relationship between the parameters that can be configured in the XTIMING registers and the duration of the pulse in terms of XTIMCLK cycles, $t_{c(XTIM)}$.

Table 3. Pulse Duration in Terms of XTIMCLK Cycles

Description	Duration (ns) ⁽¹⁾ ⁽²⁾	
	X2TIMING = 0	X2TIMING = 1
LR Lead period, read access	$XRDLEAD \times t_{c(xtim)}$	$(XRDLEAD \times 2) \times t_{c(xtim)}$
AR Active period, read access	$(XRDACTIVE + WS + 1) \times t_{c(xtim)}$	$(XRDACTIVE \times 2 + WS + 1) \times t_{c(xtim)}$
TR Trail period, read access	$XRDTRAIL \times t_{c(xtim)}$	$(XRDTRAIL \times 2) \times t_{c(xtim)}$
LW Lead period, write access	$XWRLEAD \times t_{c(xtim)}$	$(XWRLEAD \times 2) \times t_{c(xtim)}$
AW Active period, write access	$(XWRACTIVE + WS + 1) \times t_{c(xtim)}$	$(XWRACTIVE \times 2 + WS + 1) \times t_{c(xtim)}$
TW Trail period, write access	$XWRTRAIL \times t_{c(xtim)}$	$(XWRTRAIL \times 2) \times t_{c(xtim)}$

⁽¹⁾ $t_{c(xtim)}$ - Cycle time, XTIMCLK

⁽²⁾ WS refers to the number of wait states inserted by hardware when using XREADY. If the zone is configured to ignore XREADY (USEREADY = 0) then WS = 0.

NOTE: Minimum wait-state configurations must be used for each zone's XTIMING register. These wait-state requirements are in addition to any timing requirements as specified by the device to which it is interfaced. For information on requirements for a particular device, see the data sheet for that device.

No internal device hardware is included to detect illegal settings.

4.1 USEREADY = 0

If the XREADY signal is ignored (USEREADY = 0), then the following requirement must be met:

Lead:	$LR \geq 2 \times t_{c(XTIM)}$
	$LW \geq 3 \times t_{c(XTIM)}$
Active:	$AR \geq 6 \times t_{c(XTIM)}$
	$AW \geq 1 \times t_{c(XTIM)}$
Trail:	$TW \geq 3 \times t_{c(XTIM)}$

These requirements result in the following XTIMING register configuration restrictions:

	XRDLEAD	XRDACTIVE	XRDTRAIL	XWRLEAD	XWRACTIVE	XWRTRAIL	X2TIMING
Valid	≥ 2	≥ 6	≥ 0	≥ 3	≥ 1	≥ 3	0 ⁽¹⁾

⁽¹⁾ If X2TIMING is enabled, specified Lead, Active, and Trail restrictions can be divided by 2 for values with even numbers.

Examples of valid and invalid timings when not sampling XREADY:

	XRDLEAD	XRDACTIVE	XRDTRAIL	XWRLEAD	XWRACTIVE	XWRTRAIL	X2TIMING
Invalid ⁽¹⁾	0	0	0	0	0	0	0, 1
Valid ⁽²⁾	2	6	0	3	1	3	0 ⁽³⁾

⁽¹⁾ No hardware to detect illegal XTIMING configurations

⁽²⁾ Based on 300-MHz system clock speed.

⁽³⁾ If X2TIMING is enabled, specified Lead, Active, and Trail restrictions can be divided by 2 for values with even numbers.

4.2 Synchronous Mode (USEREADY = 1, READYMODE = 0)

If the XREADY signal is sampled in the synchronous mode (USEREADY = 1, READYMODE = 0), then the following requirements must be met:

- | | | |
|---|---------|--|
| 1 | Lead: | $LR \geq 2 \times t_{c(XTIM)}$
$LW \geq 3 \times t_{c(XTIM)}$ |
| 2 | Active: | $AR \geq 6 \times t_{c(XTIM)}$
$AW \geq 2 \times t_{c(XTIM)}$ |
| 3 | Trail: | $TW \geq 3 \times t_{c(XTIM)}$ |

NOTE: Restriction does not include external hardware wait states.

These requirements result in the following XTIMING register configuration restrictions (based on 300-MHz system clock speed):

XRDLEAD	XRDACTIVE	XRDTRAIL	XWRLEAD	XWRACTIVE	XWRTRAIL	X2TIMING
≥ 2	≥ 6	≥ 0	≥ 3	≥ 2	≥ 3	0 ⁽¹⁾

⁽¹⁾ If X2TIMING is enabled, specified Lead, Active, and Trail restrictions can be divided by 2 for values with even numbers.

Examples of valid and invalid timings when using synchronous XREADY:

	XRDLEAD	XRDACTIVE	XRDTRAIL	XWRLEAD	XWRACTIVE	XWRTRAIL	X2TIMING
Invalid ⁽¹⁾	0	0	0	0	0	0	0, 1
Invalid ⁽¹⁾	1	0	0	1	0	0	0, 1
Valid ⁽²⁾	2	6	0	3	2	3	0 ⁽³⁾

⁽¹⁾ No hardware to detect illegal XTIMING configurations

⁽²⁾ Based on 300-MHz system clock speed

⁽³⁾ If X2TIMING is enabled, specified Lead, Active, and Trail restrictions can be divided by 2 for values with even numbers.

4.3 Asynchronous Mode (USEREADY = 1, READYMODE = 1)

If the XREADY signal is sampled in asynchronous mode (USEREADY = 1, READYMODE = 1), then the following requirements must be met:

- | | | |
|---|---------|--|
| 1 | Lead: | $LR \geq 2 \times t_{c(XTIM)}$
$LW \geq 3 \times t_{c(XTIM)}$ |
| 2 | Active: | $AR \geq 6 \times t_{c(XTIM)}$
$AW \geq 4 \times t_{c(XTIM)}$ |
| 3 | Trail: | $TW \geq 3 \times t_{c(XTIM)}$ |

These requirements result in the following three possible XTIMING register configurations:

NOTE: Restrictions do not include external hardware wait states.

These requirements result in the following XTIMING register configuration restrictions (based on 300-MHz system clock speed):

XRDLEAD	XRDACTIVE	XRDTRAIL	XWRLEAD	XWRACTIVE	XWRTRAIL	X2TIMING
≥ 2	≥ 6	0	≥ 3	≥ 4	0	0 ⁽¹⁾

⁽¹⁾ If X2TIMING is enabled, specified Lead, Active, and Trail restrictions can be divided by 2 for values with even numbers.

Examples of valid and invalid timings when using asynchronous XREADY:

	XRDLEAD	XRDACTIVE	XRDTRAIL	XWRLEAD	XWRACTIVE	XWRTRAIL	X2TIMING
Invalid ⁽¹⁾	0	0	0	0	0	0	0, 1
Invalid ⁽¹⁾	1	0	0	1	0	0	0, 1
Invalid ⁽¹⁾	1	1	0	1	1	0	0
Valid ⁽²⁾	2	6	0	3	4	3	0 ⁽³⁾

⁽¹⁾ No hardware to detect illegal XTIMING configurations

⁽²⁾ Based on 300-MHz system clock speed

⁽³⁾ If X2TIMING is enabled, specified Lead, Active, and Trail restrictions can be divided by 2 for values with even numbers.

Table 4 and Table 5 show the relationship between Lead/Active/Trail values and the XTIMCLK/X2TIMING modes.

Table 4. Relationship Between Lead/Trail Values and the XTIMCLK/X2TIMING Modes

Lead/Trail Value	[XTIMCLK] ⁽¹⁾	X2TIMING ⁽²⁾	Lead SYSCLKOUT Cycles	Trail SYSCLKOUT Cycles
Formula	0	0	Lead Value * 1	Trail Value * 1
	0	1	Lead Value * 2	Trail Value * 2
	1	0	Lead Value * 2	Trail Value * 2
	1	1	Lead Value * 4	Trail Value * 4
0	X	X	Not a valid value (do not use)	0
1	0	0	1	1
	0	1	2	2
	1	0	2	2
	1	1	4	4
2	0	0	2	2
	0	1	4	4
	1	0	4	4
	1	1	8	8
3	0	0	3	3
	0	1	6	6
	1	0	6	6
	1	1	12	12

⁽¹⁾ XINTCNF2[XTIMCLK] configures the ratio between SYSCLKOUT and XTIMCLK.

⁽²⁾ X2TIMING is configured per zone in the zone specific XTIMING register.

Table 5. Relationship Between Active Values and the XTIMCLK/X2TIMING Modes

Active Value	XTIMCLK ⁽¹⁾	X2TIMING ⁽²⁾	Total Active SYSCLKOUT Cycles (includes 1 implied active cycle)
Formula	0	0	Active Value * 1 + 1
	0	1	Active Value * 2 + 1
	1	0	Active Value * 2 + 2
	1	1	Active Value * 4 + 2
	0	0	1 or Invalid if XREADY used (USEREADY = 1)
	1	X	2 or Invalid if XREADY used (USEREADY = 1)
1	0	0	2
	0	1	3
	1	0	4
	1	1	6
2	0	0	3
	0	1	5
	1	0	6
	1	1	10
3	0	0	4
	0	1	7
	1	0	8
	1	1	14
4	0	0	5
	0	1	9
	1	0	10
	1	1	18
5	0	0	6
	0	1	11
	1	0	12
	1	1	22
6	0	0	7
	0	1	13
	1	0	14
	1	1	26
7	0	0	8
	0	1	15
	1	0	16
	1	1	30

⁽¹⁾ XINTCNF2[XTIMCLK] configures the ratio between SYSCLKOUT and XTIMCLK.

⁽²⁾ X2TIMING is configured per zone in the zone specific XTIMING register.

5 Configuring XBANK Cycles

When jumping from one XINTF zone to another XINTF zone, a slow device may require extra cycles in order to release the bus in time for another device to gain access. Bank switching allows you to specify a particular zone for which extra cycles will be added for any access that crosses into or out of the specified zone. The zone and number of cycles is configured in the XBANK register.

In addition to the extra bank switching cycles set by XBANK[BCYC], there are some instances where the XINTF will add one additional XCLKOUT cycle during bank switching depending on XTIMCLK and XCLKOUT as well as the Lead, Active, and Trail configured.

Following are the cases in which this occurs:

1. XTIMCLK=SYSCLKOUT and XCLKOUT=SYSCLKOUT
2. XTIMCLK=SYSCLKOUT and XCLKOUT=SYSCLKOUT/2 and L+A+T+1=Multiple of 2
3. XTIMCLK=SYSCLKOUT and XCLKOUT=SYSCLKOUT/4 and L+A+T+1=Multiple of 4

where:

- L = Configured Lead value of the current access
- A = Configured Active value of the current access
- T = Configured Trail value of the current access

6 XINTF Registers

Table 6 shows the XINTF configuration registers. Modification of these registers will affect the timing of XINTF accesses and should be performed only by code running outside of the XINTF.

Table 6. XINTF Configuration and Control Register Mapping

Name	Address	Size (x16)	Description ⁽¹⁾
XTIMING0	0x0000-0B20	2	XINTF Timing Register, Zone 0
XTIMING6 ⁽²⁾	0x0000-0B2C	2	XINTF Timing Register, Zone 6
XTIMING7	0x0000-0B2E	2	XINTF Timing Register, Zone 7
XINTCNF2 ⁽³⁾	0x0000-0B34	2	XINTF Configuration Register
XBANK	0x0000-0B38	1	XINTF Bank Control Register
XREVISION	0x0000-0B3A	1	XINTF Revision Register
XRESET	0x0000 083D	1	XINTF Reset Register

⁽¹⁾ All XINTF registers are EALLOW protected.

⁽²⁾ XTIMING1 - XTIMING5 are reserved for future expansion and are not currently used.

⁽³⁾ XINTCNF1 is reserved and not currently used.

The individual timing parameters can be programmed into the XTIMING registers described in Figure 6.

6.1 XINTF Timing Registers

Each XINTF zone has one timing register. Changes to this register will affect the timing of that particular zone. Changes to a zone's timing register should be made only by code executing outside of that zone.

NOTE:

- Minimum wait-state requirements for different modes are shown in Section 2.
- The external device to which the 28x is interfaced may have additional timing constraints. See the vendor documentation for details.
- No logic is included to detect illegal settings.

Figure 6. XTIMING0/6/7 Register

31				22	21	18	17	16
Reserved				X2TIMING	Reserved		XSIZE	
R-0				R/W-1	R-0		R/W-1	
15		14	13	12	11	9	8	
READYMODE	USEREADY	XRDLEAD		XRDACTIVE		XRDTRAIL		
R/W-1	R/W-1	R/W-1		R/W-1		R/W-1		
7		6	5	2		1	0	
XRDTRAIL	XWRLEAD	XWRACTIVE			XWRTRAIL			
R/W-1	R/W-1	R/W-1			R/W-1			

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 7. XTIMING0/6/7 Register Field Descriptions

Bit	Field	Value	Description ⁽¹⁾
31:23	Reserved	0	
22	X2TIMING	0	This bit specifies the scaling factor of the XRDLEAD, XRDACTIVE, XRDTRAIL, XWRLEAD, XWRACTIVE, and XWRTRAIL values for the zone. The values are scaled 1:1
		1	The values are scaled 2:1 (doubled). This the default mode of operation on power up and reset.
21:18	Reserved	0	

⁽¹⁾ This register is EALLOW protected.

Table 7. XTIMING0/6/7 Register Field Descriptions (continued)

Bit	Field	Value	Description ⁽¹⁾	
17:16	XSIZE		These two bits must always be written to as either 0, 1 (32-bit data bus) or 1, 1 (16-bit data bus). Any other combination is reserved and will result in incorrect XINTF behavior.	
		00	Reserved - results in incorrect XINTF behavior	
		01	32-bit interface. In this mode the zone will use all 32 data lines. The XA0/ $\overline{WE1}$ signal will behave as $\overline{WE1}$ as described in .	
		10	Reserved - results in incorrect XINTF behavior	
15	READYMODE	11	16-bit interface. In this mode the zone will only use 16 data lines. The XA0/ $\overline{WE1}$ signal will behave as XA0. (default at reset)	
			Sets the XREADY input sampling for the zone as synchronous or asynchronous. This bit is ignored if XREADY is not sampled (USEREADY = 0).	
14	USEREADY	0	XREADY input is synchronous for the zone.	
		1	XREADY input is asynchronous for the zone. (default at reset)	
14	USEREADY	0	Determines if accesses to the zone will sample or ignore the XREADY input signal. The XREADY signal is ignored when accesses are made to the zone.	
		1	The XREADY signal can further extend the active portion of an access to the zone past the minimum defined by the XRDACTIVE and XWRACTIVE fields.	
13:12	XRDLEAD		Two-bit field that defines the read cycle lead wait state period, in XTIMCLK cycles. If the X2TIMING bit is set, then the number of wait states are doubled. See Section 4 for minimum requirements in different modes.	
			X2TIMING Read Lead Period	
		00	X Invalid	
		01	0	1 XTIMCLK cycle
			1	2 XTIMCLK cycles
		10	0	2 XTIMCLK cycles
1	4 XTIMCLK cycles			
11	0	3 XTIMCLK cycles		
	1	6 XTIMCLK cycles (default)		
11:9	XRDACTIVE		Three-bit field that defines the read cycle active wait state period, in XTIMCLK cycles. The active period is by default 1 XTIMCLK cycle. Therefore, the total active period is (1 + XWRACTIVE) XTIMCLK cycles. If the X2TIMING bit is set, then the number of wait states are doubled. See Section 4 for minimum requirements in different modes.	
			X2TIMING Read Active Period Waitstates	
		000	0 0	
		001	0	1 XTIMCLK cycle
			1	2 XTIMCLK cycles
		010	0	2 XTIMCLK cycles
			1	4 XTIMCLK cycles
		011	0	3 XTIMCLK cycles
			1	6 XTIMCLK cycles
		100	0	4 XTIMCLK cycles
			1	8 XTIMCLK cycles
		101	0	5 XTIMCLK cycles
			1	10 XTIMCLK cycles
		110	0	6 XTIMCLK cycles
1	12 XTIMCLK cycles			
111	0	7 XTIMCLK cycles		
	1	14 XTIMCLK cycles (default)		

Table 7. XTIMING0/6/7 Register Field Descriptions (continued)

Bit	Field	Value	Description ⁽¹⁾	
8:7	XRDRAIL		Two-bit field that defines the read cycle trail wait state period, in XTIMCLK cycles. If the X2TIMING bit is set, then the number of wait states are doubled. See Section 4 for minimum requirements in different modes.	
			X2TIMING Read Trail Period	
		00	0 0	
		01	0	1 XTIMCLK cycle
			1	2 XTIMCLK cycles
		10	0	2 XTIMCLK cycles
1	4 XTIMCLK cycles			
11	0	3 XTIMCLK cycles		
	1	6 XTIMCLK cycles (default)		
6:5	XWRLEAD		Two-bit field that defines the write cycle lead wait state period, in XTIMCLK cycles. If the X2TIMING bit is set, then the number of wait states are doubled. See Section 4 for minimum requirements in different modes.	
			X2TIMING Write Lead Period	
		00	0 0	
		01	0	1 XTIMCLK cycle
			1	2 XTIMCLK cycles
		10	0	2 XTIMCLK cycles
1	4 XTIMCLK cycles			
11	0	3 XTIMCLK cycles		
	1	6 XTIMCLK cycles (default)		
4:2	XWRACTIVE		Three-bit field that defines the write cycle active wait state period, in XTIMCLK cycles. The active period is by default 1 XTIMCLK cycle. Therefore, the total active period is (1 + XWRACTIVE) XTIMCLK cycles. If the X2TIMING bit is set, then the number of wait states are doubled. See Section 4 for minimum requirements in different modes.	
			X2TIMING Write Active Period Waitstates	
		000	0 0	
		001	0	1 XTIMCLK cycle
			1	2 XTIMCLK cycles
		010	0	2 XTIMCLK cycles
			1	4 XTIMCLK cycles
		011	0	3 XTIMCLK cycles
			1	6 XTIMCLK cycles
		100	0	4 XTIMCLK cycles
			1	8 XTIMCLK cycles
		101	0	5 XTIMCLK cycles
1	10 XTIMCLK cycles			
110	0	6 XTIMCLK cycles		
	1	12 XTIMCLK cycles		
111	0	7 XTIMCLK cycles		
	1	14 XTIMCLK cycles (default)		

Table 7. XTIMING0/6/7 Register Field Descriptions (continued)

Bit	Field	Value	Description ⁽¹⁾	
1:0	XWRTRAIL		Two-bit field that defines the write cycle trail wait state period, in XTIMCLK cycles. If the X2TIMING bit is set, then the number of wait states are doubled. See Section 4 for minimum requirements in different modes.	
			X2TIMING Write Trail Period	
		00	x	
		01	0	1 XTIMCLK cycle
			1	2 XTIMCLK cycles
		10	0	2 XTIMCLK cycles
1	4 XTIMCLK cycles			
11	0	3 XTIMCLK cycles		
	1	6 XTIMCLK cycles (default)		

6.2 XINTF Configuration Register

Figure 7. XINTF Configuration Register (XINTCNF2)

	Reserved	
	R-0	
31	20	16
23	19	18
Reserved	BY4CLKMODE	XTIMCLK
R-0	R/W-1	R/W-1
15	12	8
Reserved	HOLDAS	HOLDS
R-0	R-x	R-y
7	6	5
WLEVEL	Reserved	Reserved
R-0	R-0	R-1
4	3	2
CLKOFF	CLKMODE	WRBUFF
R/W-0	R/W-1	R/W-0
1	0	0

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8. XINTF Configuration Register Field Descriptions


Bit	Field	Value	Description ⁽¹⁾																																				
31:18	Reserved																																						
19	BY4CLKMODE	0 1	<p>XCLKOUT divide by 4 mode. (divide /4 of XTIMCLK). At reset, since both CLKMODE and BY4CLKMODE are set the XCLKOUT frequency will be /8 of SYSCLKOUT</p> <p>If this is set to 0, XCLKOUT is equal to XTIMCLK/CLKMODE.</p> <p>If this bit is set to 1, XCLKOUT is a divide by 2 of XTIMCLK/LKMODE.</p> <p>Following will be the XCLKOUT frequency for various settings of the Clock division bits:</p> <table style="margin-left: 40px; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">XTIMCLK</th> <th style="text-align: left;">CLKMODE</th> <th style="text-align: left;">BY4CLKMODE</th> <th style="text-align: left;">XCLKOUT</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td><td>0</td><td>SYSCLKOUT</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>SYSCLKOUT/2</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>SYSCLKOUT/2</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>SYSCLKOUT/4</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>SYSCLKOUT/2</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>SYSCLKOUT/4</td></tr> <tr><td>1</td><td>1</td><td>0</td><td>SYSCLKOUT/4</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>SYSCLKOUT/8</td></tr> </tbody> </table>	XTIMCLK	CLKMODE	BY4CLKMODE	XCLKOUT	0	0	0	SYSCLKOUT	0	0	1	SYSCLKOUT/2	0	1	0	SYSCLKOUT/2	0	1	1	SYSCLKOUT/4	1	0	0	SYSCLKOUT/2	1	0	1	SYSCLKOUT/4	1	1	0	SYSCLKOUT/4	1	1	1	SYSCLKOUT/8
XTIMCLK	CLKMODE	BY4CLKMODE	XCLKOUT																																				
0	0	0	SYSCLKOUT																																				
0	0	1	SYSCLKOUT/2																																				
0	1	0	SYSCLKOUT/2																																				
0	1	1	SYSCLKOUT/4																																				
1	0	0	SYSCLKOUT/2																																				
1	0	1	SYSCLKOUT/4																																				
1	1	0	SYSCLKOUT/4																																				
1	1	1	SYSCLKOUT/8																																				
18:16	XTIMCLK	000 001 010 100 101 110 111	<p>These bits select the fundamental clock for the timing of lead, active and trail switching operations as defined by the XTIMING and XBANK registers: This setting affects all of the XINTF zones. Changes to the XTIMCLK ratio should be made only by code executing outside of the XINTF. Note: XTIMCLK is disabled by default. It must be enabled in the PCLKCR3 register before the XINTF registers can be written to.</p> <p>000 XTIMCLK = SYSCLKOUT/1</p> <p>001 XTIMCLK = SYSCLKOUT/2 (default)</p> <p>010 Reserved</p> <p>100 Reserved</p> <p>101 Reserved</p> <p>110 Reserved</p> <p>111 Reserved</p>																																				
15:12	Reserved																																						

⁽¹⁾ This register is EALLOW protected.

Table 8. XINTF Configuration Register Field Descriptions (continued)

Bit	Field	Value	Description ⁽¹⁾
11	HOLDAS	0 1	This bit reflects the current state of the $\overline{\text{XHOLDA}}$ output signal. It can be read by the user to determine if the external interface is currently granting access to an external device. $\overline{\text{XHOLDA}}$ output signal is low. $\overline{\text{XHOLDA}}$ output signal is high.
10	HOLDS	0 1	This bit reflects the current state of the $\overline{\text{XHOLD}}$ input signal. It can be read by the user to determine if an external device is requesting access to the external bus. $\overline{\text{XHOLD}}$ input signal is low. $\overline{\text{XHOLD}}$ input signal is high.
9	HOLD	0 1	This bit grants a request to an external device that drives the $\overline{\text{XHOLD}}$ input signal and the $\overline{\text{XHOLDA}}$ output signal. If this bit is set while $\overline{\text{XHOLD}}$ and $\overline{\text{XHOLDA}}$ are both low (external bus accesses granted) then the $\overline{\text{XHOLDA}}$ signal is forced high (at the end of the current cycle) and the external interface is taken out of high-impedance mode. On a reset $\overline{\text{XRS}}$, this bit is set to zero. If, on a reset, the $\overline{\text{XHOLD}}$ signal is active low, then the bus and all signal strobes must be in high-impedance state and the $\overline{\text{XHOLDA}}$ signal is also driven active-low. When HOLD mode is enabled and $\overline{\text{XHOLDA}}$ is active-low (external bus grant active) then the core can still execute code from internal memory. If an access is made to the external interface, then a not ready signal is generated and the core is stalled until the $\overline{\text{XHOLD}}$ signal is removed. 0 Automatically grants a request to an external device that is driving both the $\overline{\text{XHOLD}}$ input signal and the $\overline{\text{XHOLDA}}$ output signal low (default) 1 Does not grant a request to an external device that drives the $\overline{\text{XHOLD}}$ input signal low while the $\overline{\text{XHOLDA}}$ output signal stays high.
8	Reserved		
7:6	WLEVEL	00 01 10 11	The current number of writes buffered are detectable as follows: 00 Empty 01 1 value currently in the write buffer 10 2 values currently in the write buffer 11 3 values currently in the write buffer
5:4	Reserved		
3	CLKOFF	0 1	Turn XCLKOUT mode off. This is done for power savings and noise reduction. This bit is set to 0 on a reset. 0 XCLKOUT is enabled. (default) 1 XCLKOUT is disabled.
2	CLKMODE	0 1	XCLKOUT divide by 2 mode. All bus timings, irrespective of which mode is enabled, will start from the rising edge of XCLKOUT. The default mode of operation on power up and reset is /2 mode. Changes to the CLKMODE bit should be made only by code executing outside of the XINTF. 0 XCLKOUT is equal to XTIMCLK 1 XCLKOUT is a divide by 2 of XTIMCLK (default)
1:0	WRBUFF	00 01 10 11	Write Buffer Depth. The write buffer allows the processor to continue execution without waiting for XINTF write accesses to complete. The write buffer depth is selectable as follows: 00 No write buffering. The CPU will be stalled until the write completes on the XINTF. (default) Note: Default mode on reset ($\overline{\text{XRS}}$). 01 One write is buffered and the CPU will stall for the second write. The CPU is stalled until the write cycle begins on the XINTF (there could be a read cycle currently active on the XINTF). 10 Two writes are buffered and the CPU will stall for the third write. The CPU will be stalled until the first write begins its cycle on the XINTF. 11 Three writes are buffered. The CPU is stalled if a fourth write follows. The CPU will be stalled until the first write begins its cycle on the XINTF. Order of execution is preserved, e.g., writes are performed in the order they were accepted. The processor is stalled on XINTF reads until all pending writes are done and the read access completes. If the buffer is full, any pending reads or writes to the buffer will stall the processor. The Write Buffer Depth can be changed; however, it is recommended that the write buffer depth be changed only when the buffer is empty (this can be checked by reading the "Write Buffer Level" bits). Writing to these bits when the level is not zero may have unpredictable results.

6.3 XBANK Register

Figure 8. XBANK Register



LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 9. XBANK Register Field Descriptions

Bit	Field	Value	Description ⁽¹⁾																
15:6	Reserved																		
5:3	BCYC		<p>These bits specify the number of XTIMCLK cycles to add between any consecutive access that crosses into or out of the specified zone, be it a read or write, program or data space. The number of XTIMCLK cycles can be 0 to 7.</p> <p>On a reset (\overline{XRS}), the value defaults to 7 XTIMCLK cycles (14 SYSCLKOUT cycles).</p> <table style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">000</td><td>0 cycle</td></tr> <tr><td style="text-align: center;">001</td><td>1 XTIMCLK cycle</td></tr> <tr><td style="text-align: center;">010</td><td>2 XTIMCLK cycles</td></tr> <tr><td style="text-align: center;">011</td><td>3 XTIMCLK cycles</td></tr> <tr><td style="text-align: center;">100</td><td>4 XTIMCLK cycles</td></tr> <tr><td style="text-align: center;">101</td><td>5 XTIMCLK cycles</td></tr> <tr><td style="text-align: center;">110</td><td>6 XTIMCLK cycles</td></tr> <tr><td style="text-align: center;">111</td><td>7 XTIMCLK cycles (default)</td></tr> </table>	000	0 cycle	001	1 XTIMCLK cycle	010	2 XTIMCLK cycles	011	3 XTIMCLK cycles	100	4 XTIMCLK cycles	101	5 XTIMCLK cycles	110	6 XTIMCLK cycles	111	7 XTIMCLK cycles (default)
000	0 cycle																		
001	1 XTIMCLK cycle																		
010	2 XTIMCLK cycles																		
011	3 XTIMCLK cycles																		
100	4 XTIMCLK cycles																		
101	5 XTIMCLK cycles																		
110	6 XTIMCLK cycles																		
111	7 XTIMCLK cycles (default)																		
2:0	BANK		<p>These bits specify the XINTF zone for which bank switching is enabled, ZONE 0 to ZONE 7. At reset, XINTF Zone 7 is selected.</p> <table style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">000</td><td>Zone 0</td></tr> <tr><td style="text-align: center;">001</td><td>Reserved</td></tr> <tr><td style="text-align: center;">010</td><td>Reserved</td></tr> <tr><td style="text-align: center;">011</td><td>Reserved</td></tr> <tr><td style="text-align: center;">100</td><td>Reserved</td></tr> <tr><td style="text-align: center;">101</td><td>Reserved</td></tr> <tr><td style="text-align: center;">110</td><td>Zone 6</td></tr> <tr><td style="text-align: center;">111</td><td>Zone 7 (selected at reset by default)</td></tr> </table>	000	Zone 0	001	Reserved	010	Reserved	011	Reserved	100	Reserved	101	Reserved	110	Zone 6	111	Zone 7 (selected at reset by default)
000	Zone 0																		
001	Reserved																		
010	Reserved																		
011	Reserved																		
100	Reserved																		
101	Reserved																		
110	Zone 6																		
111	Zone 7 (selected at reset by default)																		

⁽¹⁾ This register is EALLOW protected.

6.4 XREVISION Register

Figure 9. XREVISION Register


LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 10. XREVISION Register Field Descriptions

Bit	Field	Value	Description
15:0	REVISION		Current XINTF Revision. For internal use/reference. Test purposes only. Subject to change.

6.5 XRESET Register

Figure 10. XRESET Register

15	Reserved	1	0
			XHARD RESET
R-0			R/W-0

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 11. XRESET Register Field Descriptions

Bit	Field	Value	Description ⁽¹⁾
31	Reserved		
30	XHARDRESET	0	A hard reset may be used in cases where the CPU detects the XREADY signal is stuck low during a DMA transfer. Writing a 0 has no effect. This bit always reads back a 0.
		1	Force an XINTF hard reset. The XTIMING, XBANK, and XINTCNF2 registers will return to their default state and all XINTF signals will go to their inactive state. Any pending access will be lost including data in the write buffer. Any stall condition to DMA will be released.

⁽¹⁾ This register is EALLOW protected.

7 Signal Descriptions


Table 12. XINTF Signal Descriptions

Name	Type	Description
XD(31:0)	I/O/Z	Bidirectional 32-bit data bus. In 16-bit mode only XD(15:0) are used.
XA(31:1)	O/Z	Address bus. The address is placed on the bus on the rising edge of XCLKOUT and held on the bus until the next access. Specific devices may not have all 32 address lines. See the data sheet for a specific device.
$\overline{XWE1}$	O/Z	In 16-bit data mode (see Section 2.7), this signal is not applicable. In 32-bit data mode, this signal is the active low write strobe $\overline{XWE1}$. $\overline{XWE1}$ is used, along with $\overline{XWE0}$, for 32-bit bus operation as shown in .
XCLKOUT	O/Z	Single output clock derived from the XTIMCLK to be used for on-chip and off-chip wait-state generation and as a general-purpose clock source. XCLKOUT is either the same frequency or ½ the frequency of XTIMCLK, as defined by the CLKMODE bit in the XINTCNF2 register. At reset XCLKOUT = XTIMCLK/2 XTIMCLK = SYSCLKOUT/2
$\overline{XWE0}$	O/Z	Active low write strobe. In 16-bit mode, this signal is driven low on all bus modes and data size types. In 32-bit mode, it is driven as shown in . The write strobe waveform is specified, per zone basis, by the Lead, Active, Trail periods in the XTIMINGx registers.
\overline{XRD}	O/Z	Active low read strobe. This signal is driven low on all bus modes and data size types. The read strobe waveform is specified, per zone basis, by the Lead, Active, Trail periods in the XTIMINGx registers. Note: The \overline{XRD} and $\overline{XWE0}$ signals are mutually exclusive.
$\overline{XR\overline{W}}$	O/Z	Read-not-write control. When high, this signal indicates a read cycle is active, when low, it indicates a write cycle is active. This signal is normally held high. The $\overline{XR\overline{W}}$ signal performs similar functions to the \overline{XRD} and $\overline{XWE0}$ signals. Generally, users opt to use $\overline{XWE0}$ and $\overline{XWE1}$ because they are cleaner and easier to use.
$\overline{XZCS0}$ $\overline{XZCS6}$ $\overline{XZCS7}$	O	Zone chip-selects. These signals are active when an access to the addressed zone is performed.
XREADY	I	Indicates peripheral is READY to complete the access when asserted to 1. For each XINTF zone, this can be configured to be a synchronous or an asynchronous input. In synchronous mode, the XINTF interface block requires XREADY to be valid one XTIMCLK clock cycle before the end of the active period. In asynchronous mode, The XINTF interface block samples XREADY three XTIMCLK clock cycles before the end of the active period. XREADY is sampled at the XTIMCLK rate independent of the XCLKOUT mode.
\overline{XHOLD}	I	This signal, when active low, requests the XINTF to release the external bus (place all busses and strobes into high-impedance state). The XINTF releases the bus when any current access is complete and there are no pending accesses on the XINTF. This signal is an asynchronous input and is synchronized by XTIMCLK.
\overline{XHOLDA}	O/Z	This signal is driven active low, when the XINTF has granted an \overline{XHOLD} request. All XINTF busses and strobe signals will be in a high-impedance state. This signal is released when the \overline{XHOLD} signal is released. External devices should only drive the external bus when this signal is active low.

8 Waveforms


Figure 11 shows example timing waveforms for various XTIMCLK and XCLKOUT modes assuming X2TIMING = 0 and Lead = 2, Active = 2 and Trail = 2.

NOTE: The diagrams included in this document are conceptual, cycle-by-cycle representations of the XINTF behavior. They do not take into account any buffer delays and additional setup times that will be found on a physical device. For more exact device-specific timing information for the XINTF, see the data sheet electrical timing specifications for that device.

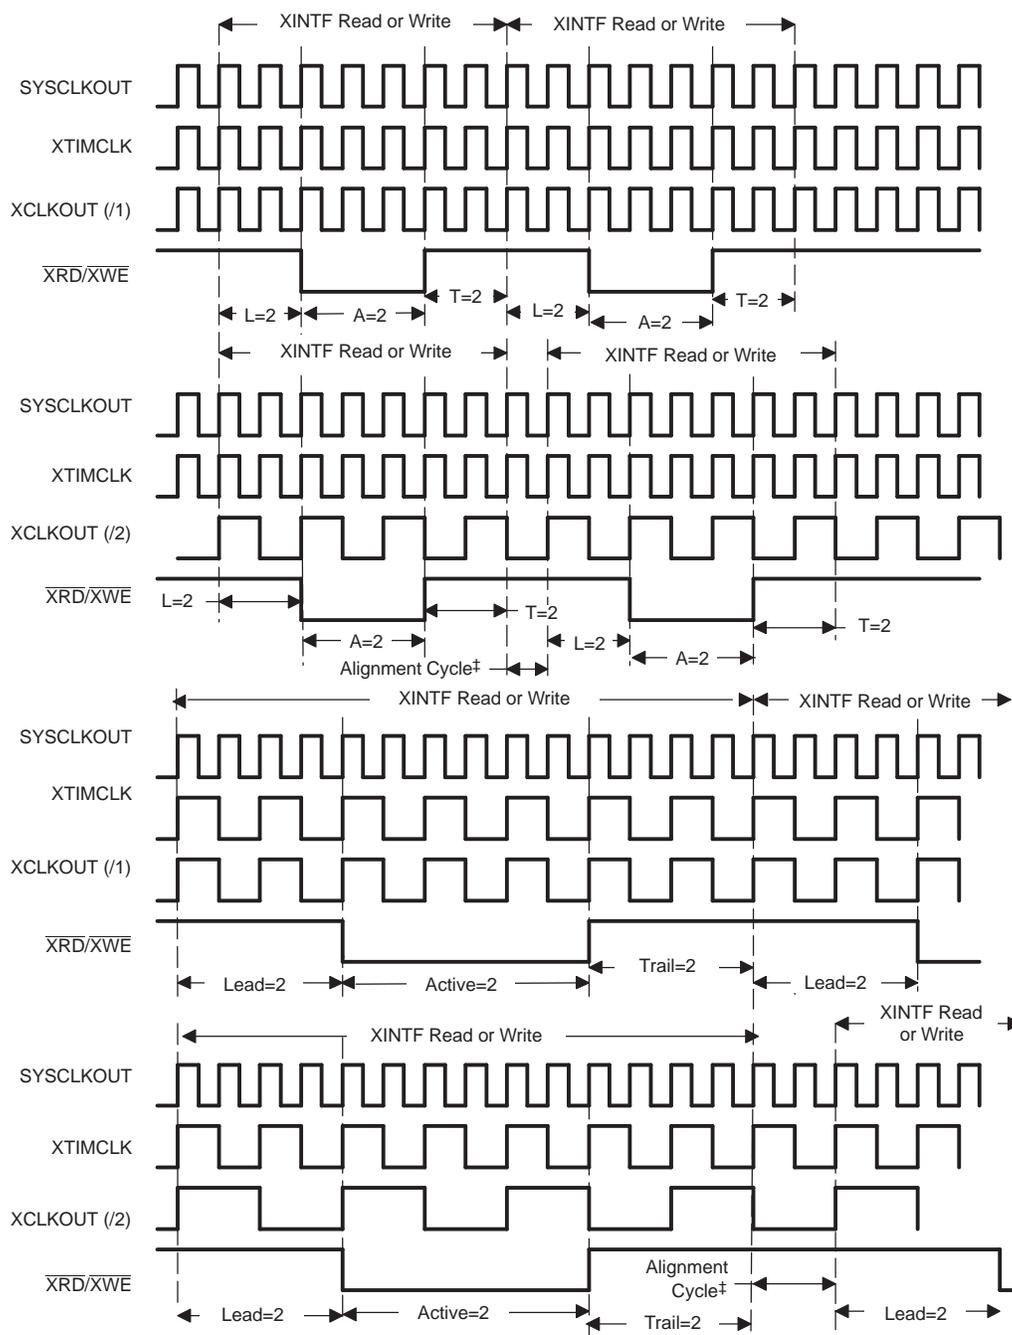Figure 11. XTIMCLK and XCLKOUT Mode Waveforms


- A $X2TIMING = 0$, $XRDLEAD/XWRLEAD = 2$, $XRDACTIVE/XWRACTIVE = 2$, $XRDTRAIL/XWRTRAIL = 2$
 B Alignment cycle. Necessary to make sure all bus cycles start on rising edge of XCLKOUT.


Figure 12. Generic Read Cycle (XTIMCLK = SYSCLKOUT mode)

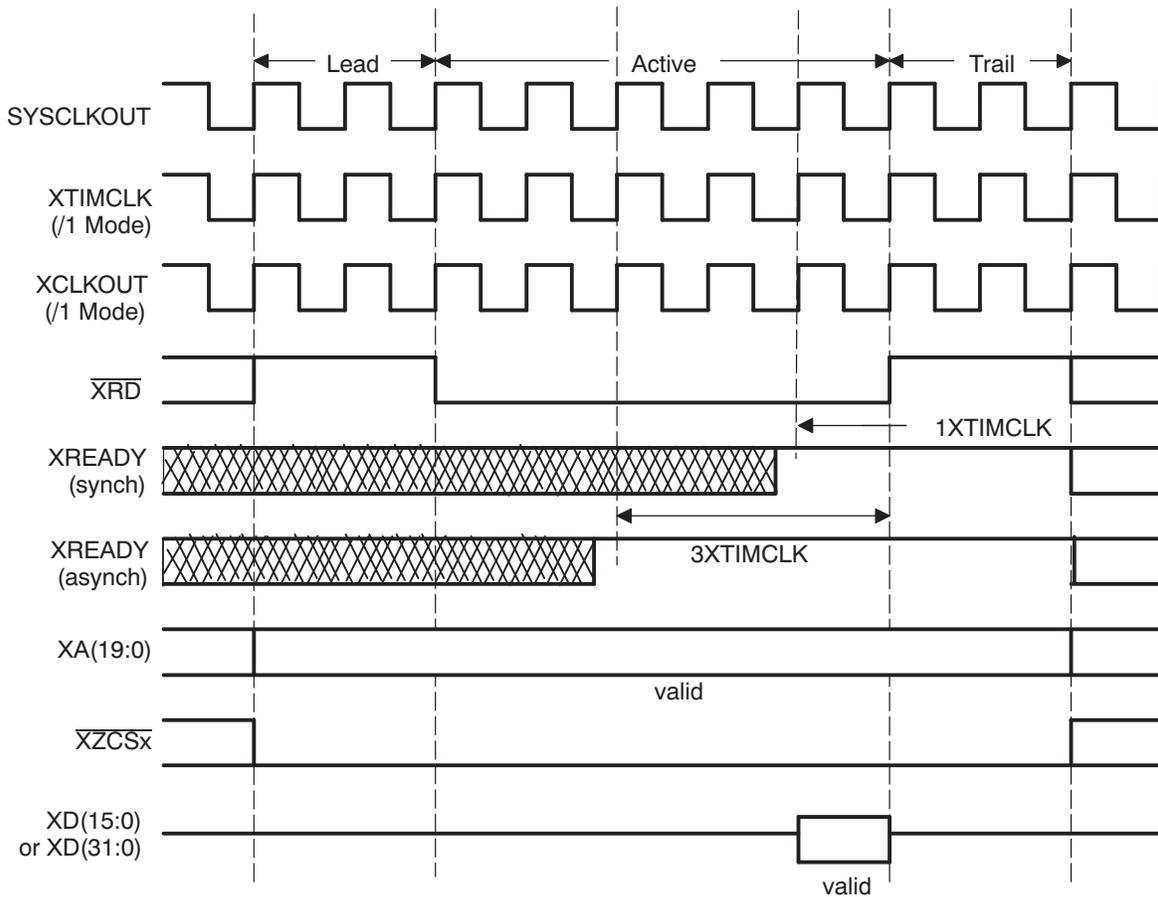

A XRDLEAD = 2, XRDACTIVE = 4, XRDTRAIL = 2


The XREADY signal can be sampled synchronously or asynchronously or ignored by each zone. If it is sampled synchronously, then the XREADY signal MUST meet set-up and hold timing relative to one XTIMCLK edge before the end of the active period. If it is sampled asynchronously, then the XREADY signal MUST meet set-up and hold timing relative to three XTIMCLK edges before the end of the active period. If XREADY is low at the sampling interval, an extra XTIMCLK period is added to the active phase and the XREADY input is sampled again on the next rising edge of XTIMCLK. XCLKOUT has no effect on the sampling interval.

Figure 13. Generic Read Cycle (XTIMCLK = 1/2 SYSCLKOUT mode)

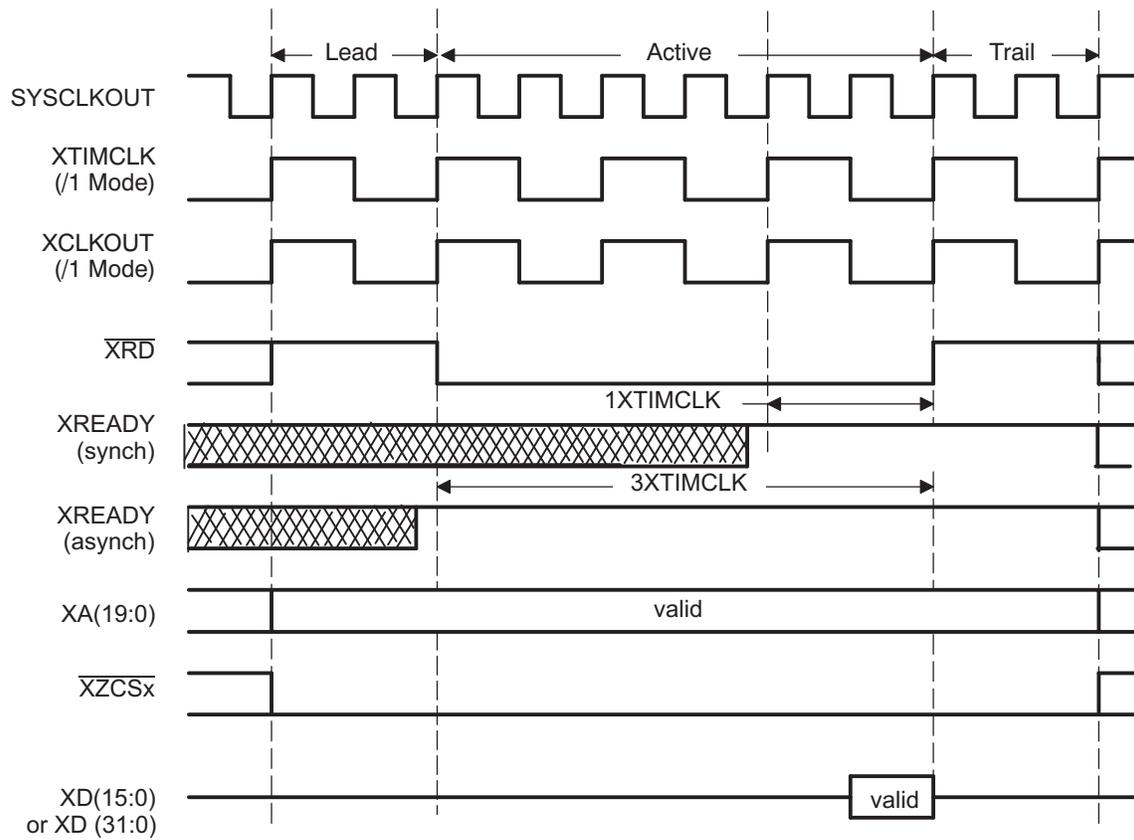

A XRDLEAD = 1, XRDACTIVE = 3, XRDTRAIL = 1

Figure 14. Generic Write Cycle (XTIMCLK = SYSCLKOUT mode)

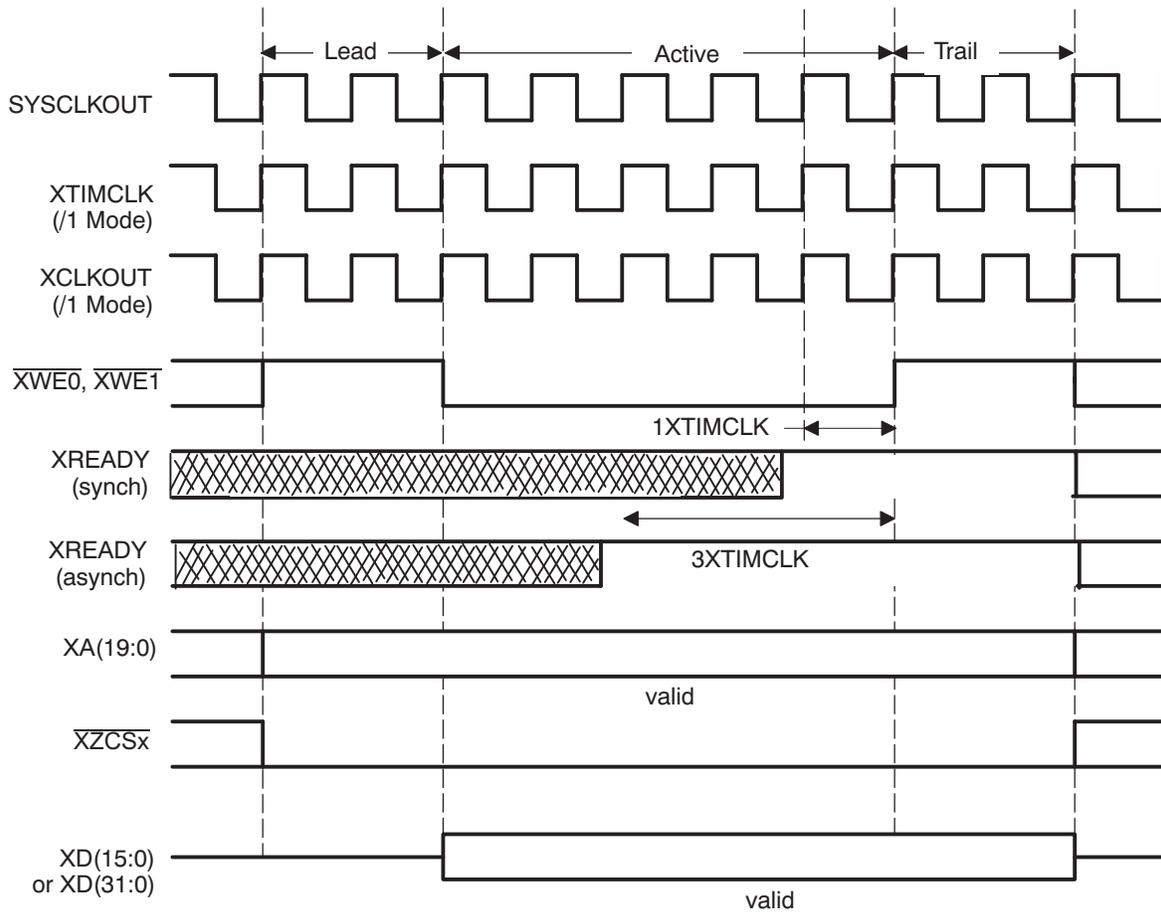

- A XWRACTIVE = 2, XWRACTIVE = 4, XWRTRAIL = 2
- B If the lead and active timing parameters are set low enough, it may not be possible to generate a valid XREADY signal. No hardware is added to detect this.

Appendix A Revision History

This document has been revised to include the following technical change(s).

Table 13. Revisions

Location	Edits/Additions/Deletes
Global	The term "X2TIMCLK" used in the footnotes is an invalid term. It was replaced with "X2TIMING."

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DLP® Products	www.dlp.com	Communications and Telecom	www.ti.com/communications
DSP	dsp.ti.com	Computers and Peripherals	www.ti.com/computers
Clocks and Timers	www.ti.com/clocks	Consumer Electronics	www.ti.com/consumer-apps
Interface	interface.ti.com	Energy	www.ti.com/energy
Logic	logic.ti.com	Industrial	www.ti.com/industrial
Power Mgmt	power.ti.com	Medical	www.ti.com/medical
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
RFID	www.ti-rfid.com	Space, Avionics & Defense	www.ti.com/space-avionics-defense
RF/IF and ZigBee® Solutions	www.ti.com/lprf	Video and Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless-apps

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2010, Texas Instruments Incorporated