

CSD88539ND 双通道 60V N 沟道 NexFET™ 功率 MOSFET

1 特性

- 超低 Q_g 和 Q_{gd}
- 雪崩级
- 无铅
- 符合 RoHS 标准
- 无卤素

2 应用范围

- 用于电机控制的半桥
- 同步降压转换器

3 说明

这款双通道 SO-8、60V、23mΩ NexFET™ 功率 MOSFET 设计用于在低电流电机控制应用中充当半桥。


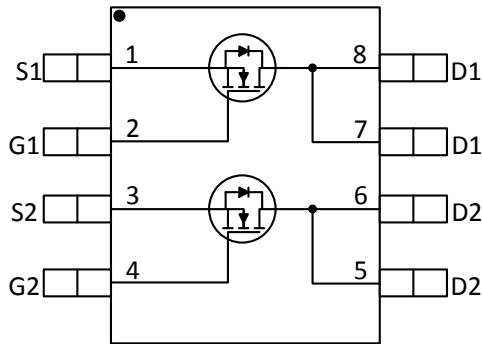


图 3-1. 顶视图

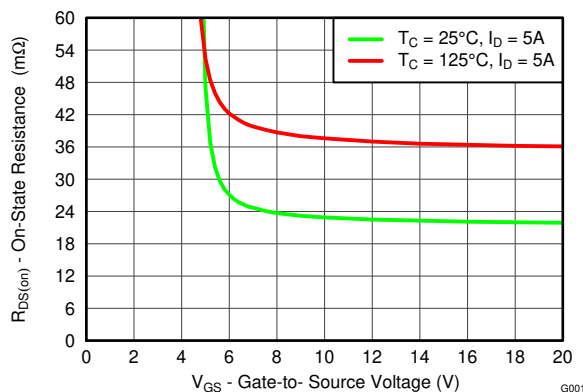

$R_{DS(on)}$ 与 V_{GS} 之间的关系

产品概要

$T_A = 25^\circ\text{C}$		典型值		单位
V_{DS}	漏源电压	60		V
Q_g	栅极电荷总量 (10V)	7.2		nC
Q_{gd}	栅漏栅极电荷	1.1		nC
$R_{DS(on)}$	漏源导通电阻	$V_{GS} = 6V$	27	mΩ
		$V_{GS} = 10V$	23	mΩ
$V_{GS(th)}$	阈值电压	3.0		V

订购信息(1)


器件	数量	介质	封装	出货
CSD88539ND	2500	13 英寸卷带	SO-8 塑料封装	卷带包装
CSD88539NDT	250	7 英寸卷带		

(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。

绝对最大额定值

$T_A = 25^\circ\text{C}$		值	单位
V_{DS}	漏源电压	60	V
V_{GS}	栅源电压	± 20	V
I_D	持续漏极电流 (受封装限制)	15	A
	持续漏极电流 (受芯片限制), $T_C = 25^\circ\text{C}$ 时测得	11.7	
	持续漏极电流(1)	6.3	
I_{DM}	脉冲漏极电流(2)	46	A
P_D	功率耗散(1)	2.1	W
T_J, T_{STG}	运行结温和储存温度范围	-55 至 150	$^\circ\text{C}$
E_{AS}	雪崩能量, 单一脉冲 $I_D = 22A, L = 0.1mH, R_G = 25\Omega$	24	mJ

- (1) $R_{\theta JA} = 60^\circ\text{C/W}$ (典型值), 在 0.06 英寸厚 FR4 PCB 上的 1 平方英寸、2oz. 铜焊盘上
- (2) 脉冲持续时间 $\leq 300\mu\text{s}$, 占空比 $\leq 2\%$

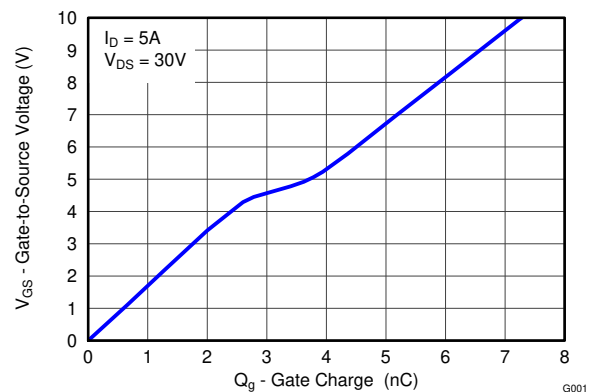

栅极电荷



Table of Contents

1 特性	1	4.3 Typical MOSFET Characteristics.....	4
2 应用范围	1	5 Device and Documentation Support	7
3 说明	1	5.1 Trademarks.....	7
4 Specifications	3	5.2 静电放电警告.....	7
4.1 Electrical Characteristics.....	3	6 Revision History	7
4.2 Thermal Information.....	3	7 Mechanical Data	7

4 Specifications

4.1 Electrical Characteristics

(T_A = 25°C unless otherwise stated)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
STATIC CHARACTERISTICS						
BV _{DSS}	Drain-to-Source Voltage	V _{GS} = 0 V, I _D = 250 μA	60			V
I _{DSS}	Drain-to-Source Leakage Current	V _{GS} = 0 V, V _{DS} = 48 V			1	μA
I _{GSS}	Gate-to-Source Leakage Current	V _{DS} = 0 V, V _{GS} = 20 V			100	nA
V _{GS(th)}	Gate-to-Source Threshold Voltage	V _{DS} = V _{GS} , I _D = 250 μA	2.6	3.0	3.6	V
R _{DS(on)}	Drain-to-Source On Resistance	V _{GS} = 6 V, I _D = 5 A		27	34	mΩ
		V _{GS} = 10 V, I _D = 5 A		23	28	mΩ
g _{fs}	Transconductance	V _{DS} = 30 V, I _D = 5 A		19		S
DYNAMIC CHARACTERISTICS						
C _{iss}	Input Capacitance	V _{GS} = 0 V, V _{DS} = 30 V, f = 1 MHz		570	741	pF
C _{oss}	Output Capacitance			70	91	pF
C _{rss}	Reverse Transfer Capacitance			2.0	2.6	pF
R _G	Series Gate Resistance			6.6	13.2	Ω
Q _g	Gate Charge Total (10 V)	V _{DS} = 30 V, I _D = 5 A		7.2	9.4	nC
Q _{gd}	Gate Charge Gate to Drain			1.1		nC
Q _{gs}	Gate Charge Gate to Source			2.7		nC
Q _{g(th)}	Gate Charge at V _{th}			1.8		nC
Q _{oss}	Output Charge	V _{DS} = 30 V, V _{GS} = 0 V		9.6		nC
t _{d(on)}	Turn On Delay Time	V _{DS} = 30 V, V _{GS} = 10 V, I _{DS} = 5 A, R _G = 0 Ω		5		ns
t _r	Rise Time			9		ns
t _{d(off)}	Turn Off Delay Time			14		ns
t _f	Fall Time			4		ns
DIODE CHARACTERISTICS						
V _{SD}	Diode Forward Voltage	I _{SD} = 5 A, V _{GS} = 0 V		0.8	1	V
Q _{rr}	Reverse Recovery Charge	V _{DS} = 30 V, I _F = 5A, di/dt = 300A/μs		37		nC
t _{rr}	Reverse Recovery Time			21		ns

4.2 Thermal Information




(T_A = 25°C unless otherwise stated)

THERMAL METRIC		MIN	TYP	MAX	UNIT
R _{θJL}	Junction-to-Lead Thermal Resistance ⁽¹⁾			20	°C/W
R _{θJA}	Junction-to-Ambient Thermal Resistance ^{(1) (2)}			75	

- (1) R_{θJC} is determined with the device mounted on a 1-inch² (6.45-cm²), 2-oz. (0.071-mm thick) Cu pad on a 1.5-inch × 1.5-inch (3.81-cm × 3.81-cm), 0.06-inch (1.52-mm) thick FR4 PCB. R_{θJC} is specified by design, whereas R_{θJA} is determined by the user's board design.
- (2) Device mounted on FR4 material with 1-inch² (6.45-cm²), 2-oz. (0.071-mm thick) Cu.

4.3 Typical MOSFET Characteristics

($T_A = 25^\circ\text{C}$ unless otherwise stated)

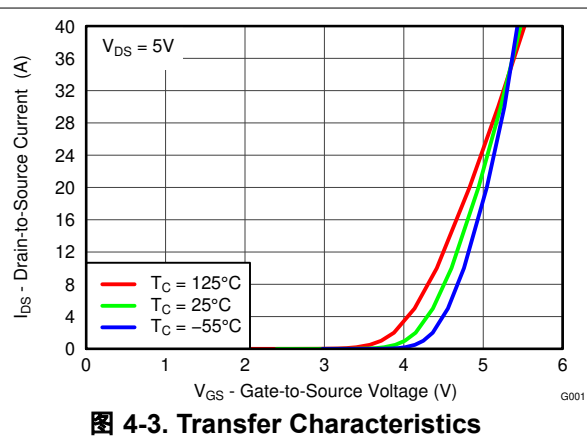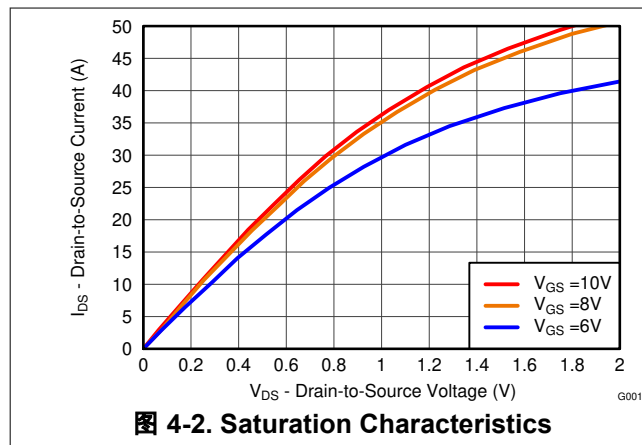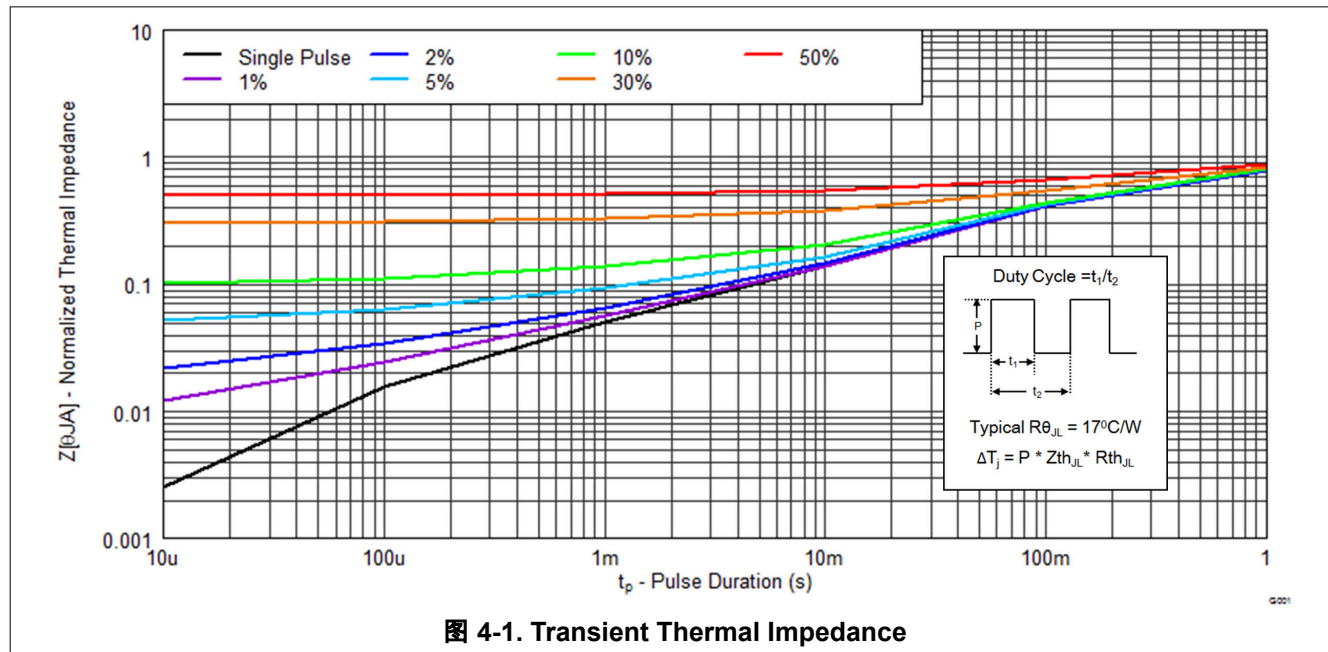

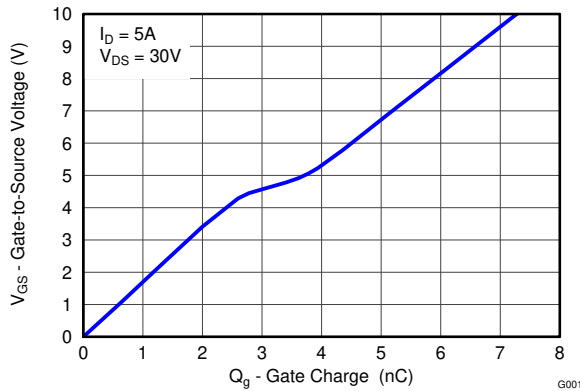


图 4-4. Gate Charge

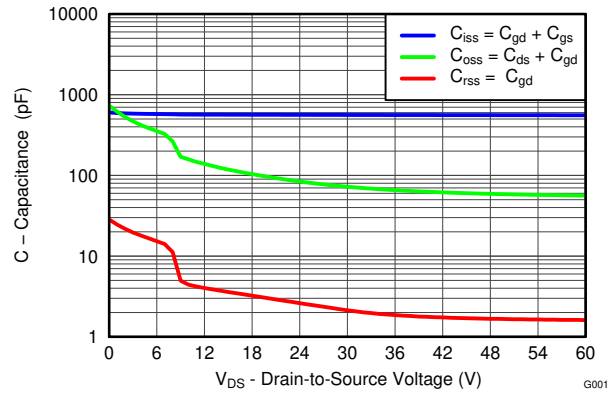


图 4-5. Capacitance

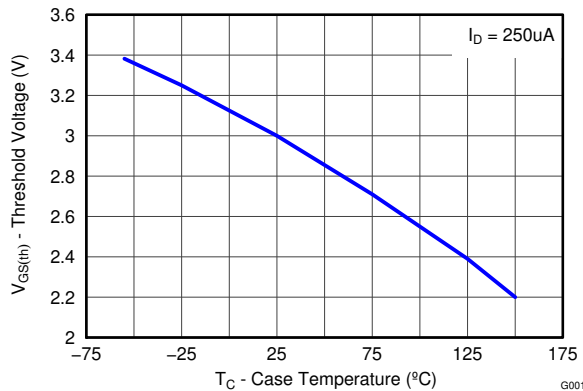


图 4-6. Threshold Voltage vs Temperature

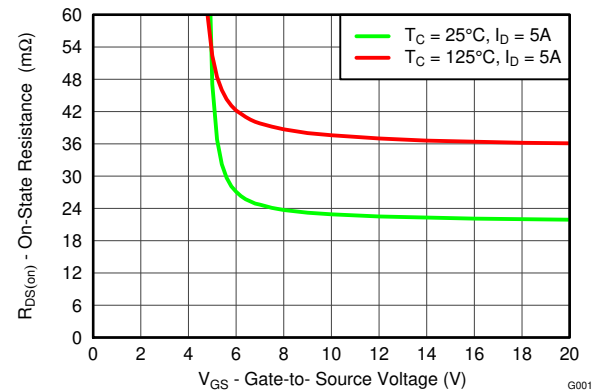


图 4-7. On-State Resistance vs Gate-to-Source Voltage

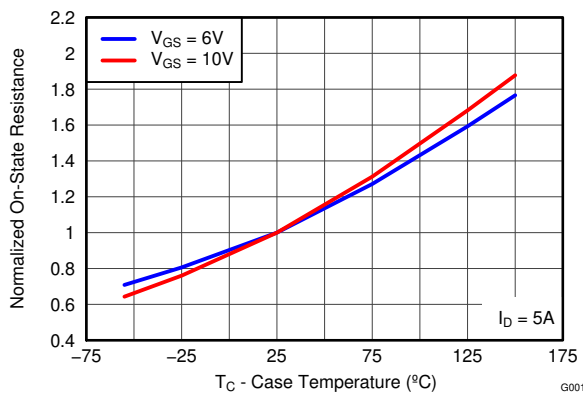


图 4-8. Normalized On-State Resistance vs Temperature

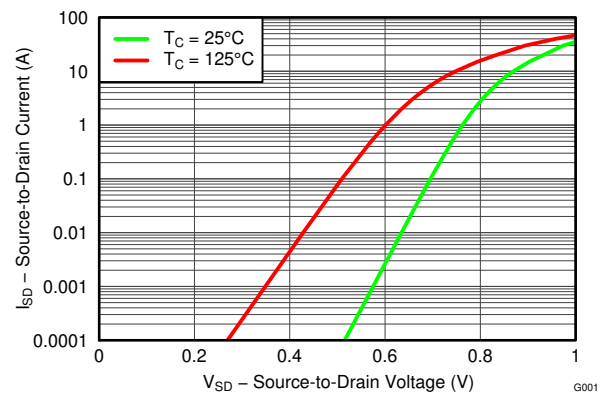


图 4-9. Typical Diode Forward Voltage

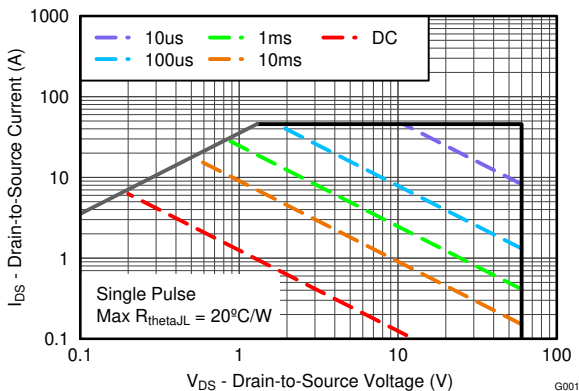


图 4-10. Maximum Safe Operating Area

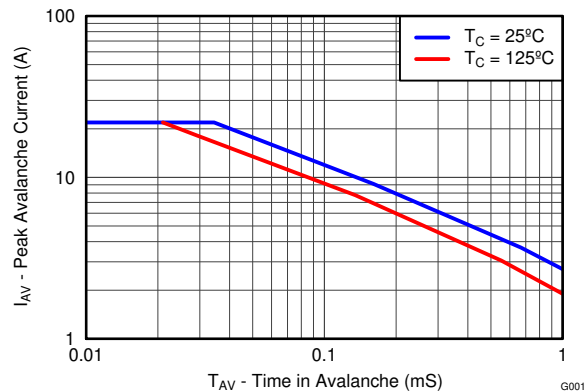


图 4-11. Single Pulse Unclamped Inductive Switching

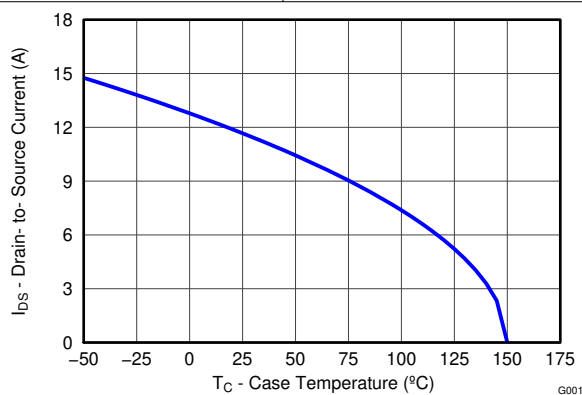


图 4-12. Maximum Drain Current vs Temperature

5 Device and Documentation Support

5.1 Trademarks

NexFET™ is a trademark of Texas Instruments.
所有商标均为其各自所有者的财产。

5.2 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

6 Revision History

注：以前版本的页码可能与当前版本的页码不同

Changes from Revision * (February 2014) to Revision A (December 2023)	Page
• 更新了整个文档中的表格、图和交叉参考的编号格式.....	1

7 Mechanical Data

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
CSD88539ND	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 150	88539N
CSD88539ND.B	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 150	88539N
CSD88539NDG4.B	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 150	88539N
CSD88539NDT	Active	Production	SOIC (D) 8	250 SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 150	88539N
CSD88539NDT.B	Active	Production	SOIC (D) 8	250 SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 150	88539N

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CSD88539NDT	SOIC	D	8	250	178.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
CSD88539NDT	SOIC	D	8	250	180.0	180.0	79.0

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
版权所有 © 2025，德州仪器 (TI) 公司