

DS160PT801 PCIe® 4.0、16Gbps、8 路（16 通道）重定时器

1 特性

- 8 路（16 通道）协议感知 PCI-Express 重定时器支持 16.0、8.0、5.0 和 2.5GT/s 接口
- 芯片间通信 (ICC) 支持双芯片链路宽度扩展，从而形成 16 通道第 4 代重定时器
- 支持公共时钟、不具有展频时钟 (SSC) 的单独参考时钟和具有 SSC 的单独参考时钟
- 支持 2x4 分叉
- 自适应接收 CTLE 和 DFE 支持超高的 PCIe 第 4 代通道损耗
- 支持均衡协商
- 低延迟架构
- 片上眼图张开度监视器 (EOM) 和 PCIe 接收裕度调节功能
- 小型 8.50mm × 13.40mm BGA 封装
- 直通引脚排列可在两个信号层中实现信号分接
- 与标准 1.00mm BGA PCB 制造兼容
- 双电源：1.17 V 和 1.8 V
- 通过外部 EEPROM 或 I2C 控制器进行 I2C 配置（高达 1MHz）
- 工业温度范围：-40°C 至 85°C

2 应用

- 机架式服务器
- 微服务器和塔式服务器
- 高性能计算
- 硬件加速器

3 说明

DS160PT801 是一款高性能 8 路（16 通道）PCI-Express 协议感知重定时器，支持所有高达 16 GT/s 的标准 PCIe 数据速率。它用于扩展高速 PCIe 串行链路（从芯片至芯片主板链路到更复杂的多连接器系统拓扑）的覆盖范围并提升稳定性。

DS160PT801 支持公共时钟和独立参考时钟架构，具有/不具有展频时钟。这为定义系统时钟架构提供了较大的灵活性。

DS160PT801 中的 8 个通道可分叉为两个 x4 链路，从而支持不同的系统拓扑。

紧凑但易于制造的 BGA 封装提供了出色的热性能，同时可在空间受限的应用（如 1RU 转接卡）中实现出色布局。此功能可降低整体解决方案尺寸、PCB 布线复杂性和 BOM 成本。


诊断功能包括带内接收器裕度调节、带外无损水平或垂直眼图裕度监视器、接收器环回、编码错误检测和片上温度传感器。这些功能有助于测量链路裕度，并可用于监测系统随时间推移的运行状况。

DS160PT801 可通过 SMBus 接口进行配置。初始配置可从外部 EEPROM 自动加载。

器件信息⁽¹⁾

器件型号	封装	封装尺寸（标称值）
DS160PT801	FCCSP (332)	8.50 mm x 13.40 mm

(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。

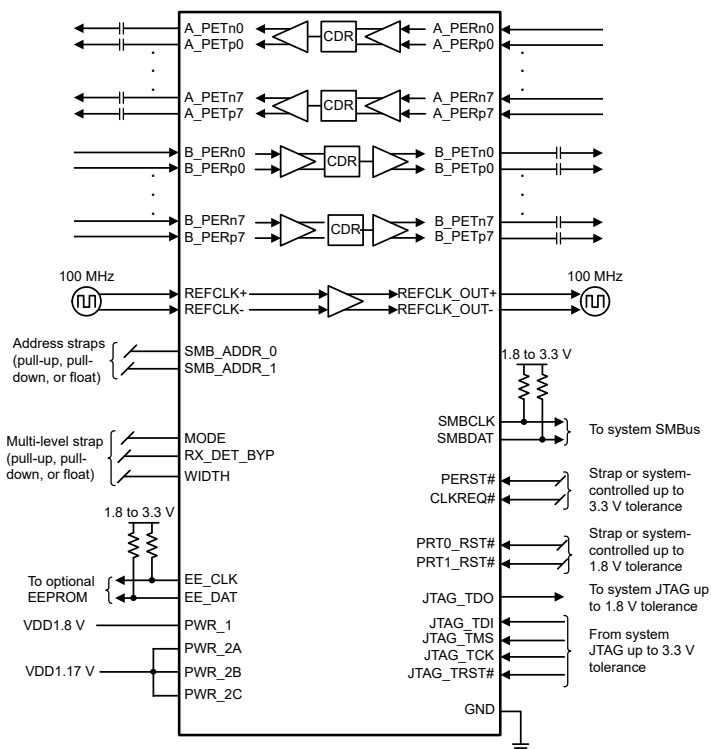

简化版原理图



Table of Contents

1 特性	1	6.2 Documentation Support	4
2 应用	1	6.3 接收文档更新通知	4
3 说明	1	6.4 支持资源	4
4 Revision History	2	6.5 Trademarks	4
5 Device Comparison	3	6.6 Electrostatic Discharge Caution	4
6 Device and Documentation Support	4	6.7 术语表	4
6.1 Device Support.....	4	7 Mechanical, Packaging, and Orderable Information	4

4 Revision History

注：以前版本的页码可能与当前版本的页码不同

Changes from Revision * (December 2020) to Revision A (June 2022)	Page
• 将数据表的状态从 <i>预告信息</i> 更改为 <i>量产数据</i>	1

5 Device Comparison

PART NUMBER	LINK WIDTH	PCIe GEN	DEVICE TYPE
DS160PT801	x8	4, 3, 2, 1	Retimer

6 Device and Documentation Support

6.1 Device Support

6.1.1 Development Support

- **IBIS-AMI model.** Simulate the DS160PT801's high-speed receiver and transmitter in tools which support IBIS-AMI simulations. Contact your local Texas Instruments sales representative for the latest status of available models.

6.1.2 12.1.2 Device Nomenclature

- **x2** - Two-lane PCI-Express Link, also referred to as by-2.
- **x4** - Four-lane PCI-Express Link, also referred to as by-4.
- **x8** - Eight-lane PCI-Express Link, also referred to as by-8.
- **x16** - Sixteen-lane PCI-Express Link, also referred to as by-16.
- **Bifurcation** - Dividing a by-M PCI-Express Link (for example, x8) into two or more separate by-N Links (for example, two x4), where $N < M$.
- **Stacking** - Combining multiple by-N devices (for example, two x8) to form a by-M interface (for example, x16), where $M > N$.

6.2 Documentation Support

6.2.1 Related Documentation

For related documentation, see the following:

- Texas Instrument, [DS160PT801 Evaluation Board reference design](#)

6.3 接收文档更新通知

要接收文档更新通知，请导航至 ti.com 上的器件产品文件夹。点击 [订阅更新](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

6.4 支持资源

TI E2E™ 支持论坛是工程师的重要参考资料，可直接从专家获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题可获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《使用条款》。

6.5 Trademarks

TI E2E™ is a trademark of Texas Instruments.

PCIe® is a registered trademark of PCI-SIG.

所有商标均为其各自所有者的财产。

6.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

6.7 术语表

TI 术语表 本术语表列出并解释了术语、首字母缩略词和定义。

7 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
DS160PT801ACBR	Active	Production	FCCSP (ACB) 332	2000 LARGE T&R	Yes	SNAGCU	Level-3-260C-168 HR	-40 to 85	D160PT801
DS160PT801ACBR.A	Active	Production	FCCSP (ACB) 332	2000 LARGE T&R	Yes	SNAGCU	Level-3-260C-168 HR	-40 to 85	D160PT801
DS160PT801ACBR.B	Active	Production	FCCSP (ACB) 332	2000 LARGE T&R	-	Call TI	Call TI	-40 to 85	
DS160PT801ACBT	Active	Production	FCCSP (ACB) 332	250 SMALL T&R	Yes	SNAGCU	Level-3-260C-168 HR	-40 to 85	D160PT801
DS160PT801ACBT.A	Active	Production	FCCSP (ACB) 332	250 SMALL T&R	Yes	SNAGCU	Level-3-260C-168 HR	-40 to 85	D160PT801
DS160PT801ACBT.B	Active	Production	FCCSP (ACB) 332	250 SMALL T&R	-	Call TI	Call TI	-40 to 85	

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.



⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

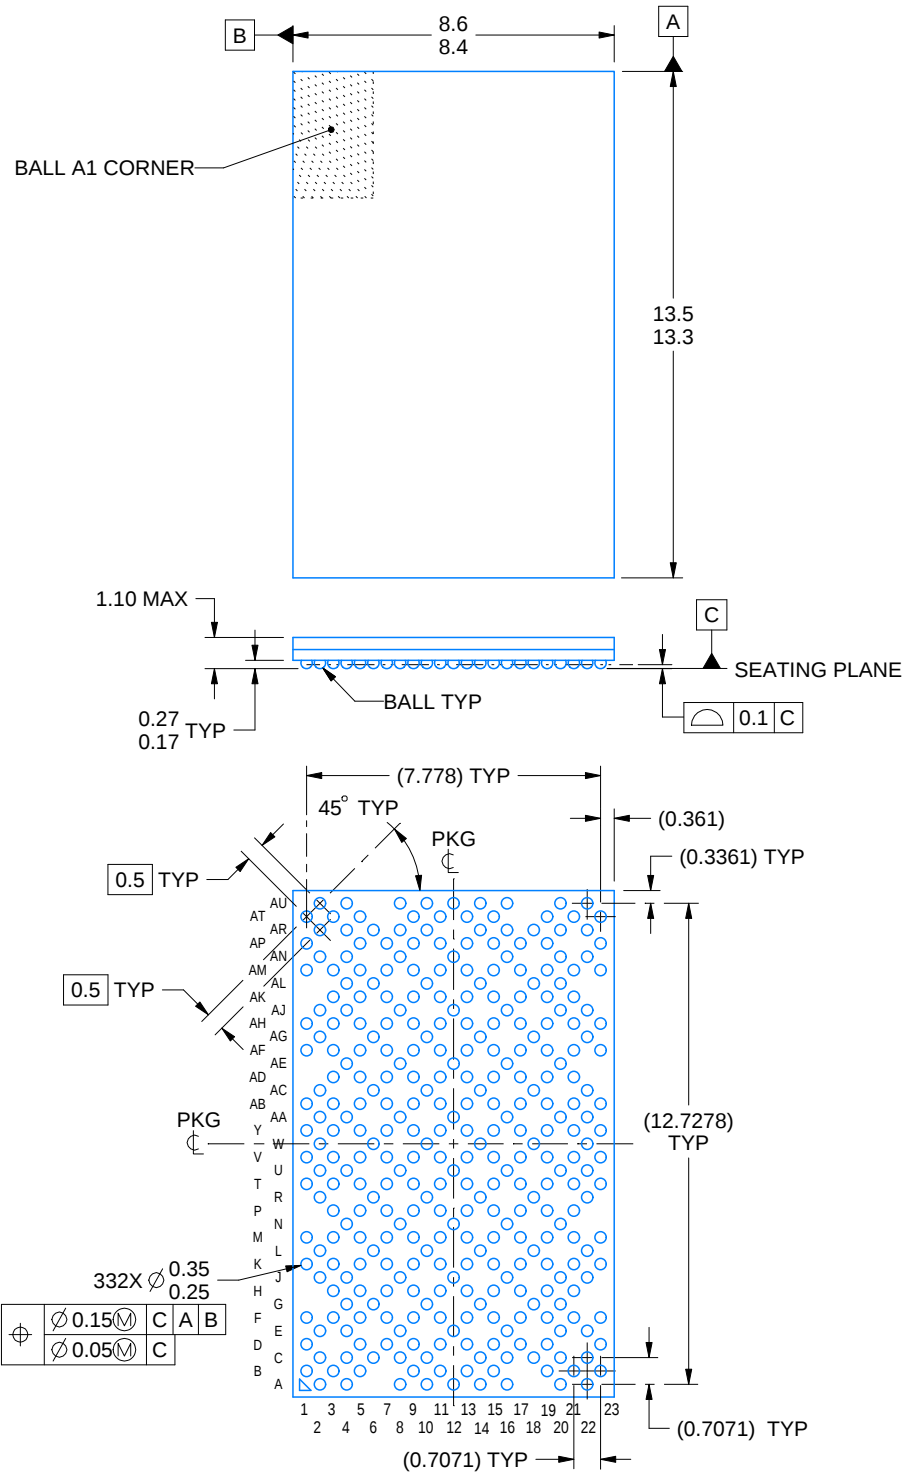

4223655/B 07/2017

NOTES:



1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

EXAMPLE BOARD LAYOUT

ACB0332A

FCBGA - 1.10 mm max height

BALL GRID ARRAY

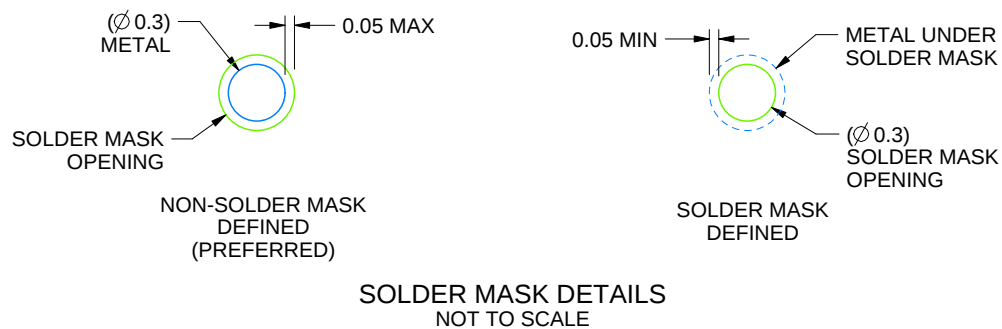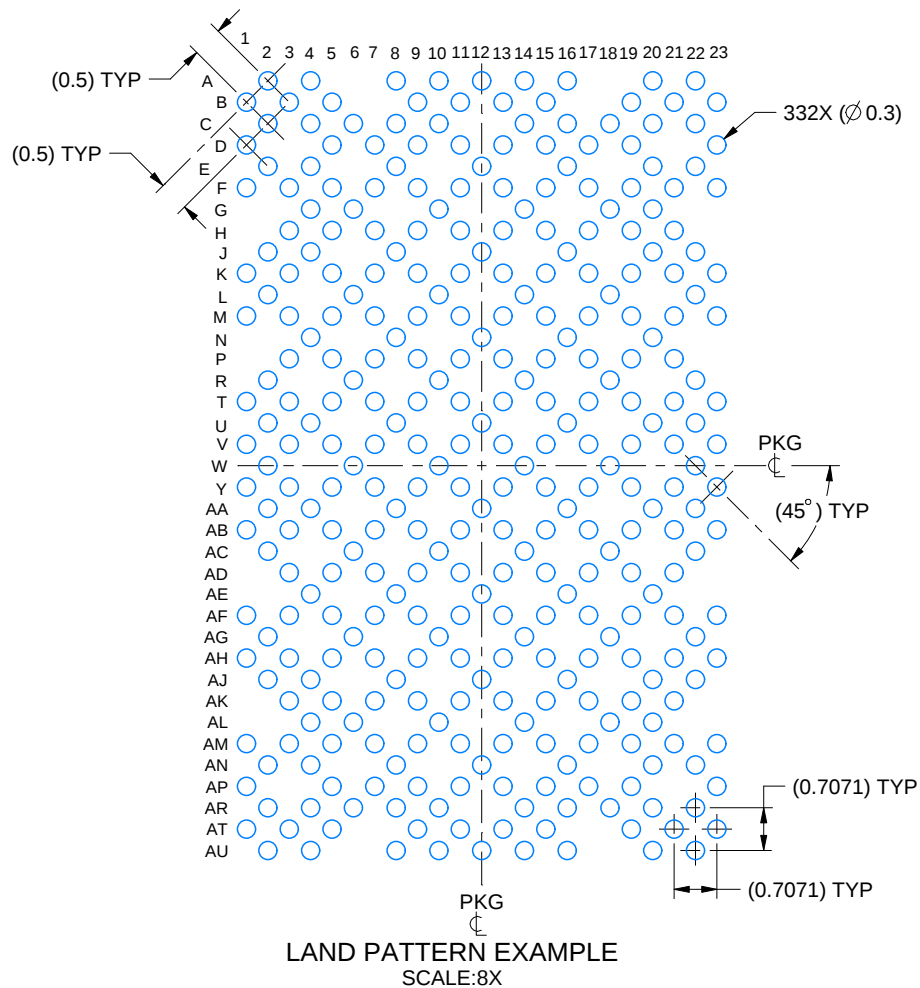

4223655/B 07/2017


NOTES: (continued)

- Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SPRU811 (www.ti.com/lit/spru811).

ACB0332A

FCBGA - 1.10 mm max height

BALL GRID ARRAY

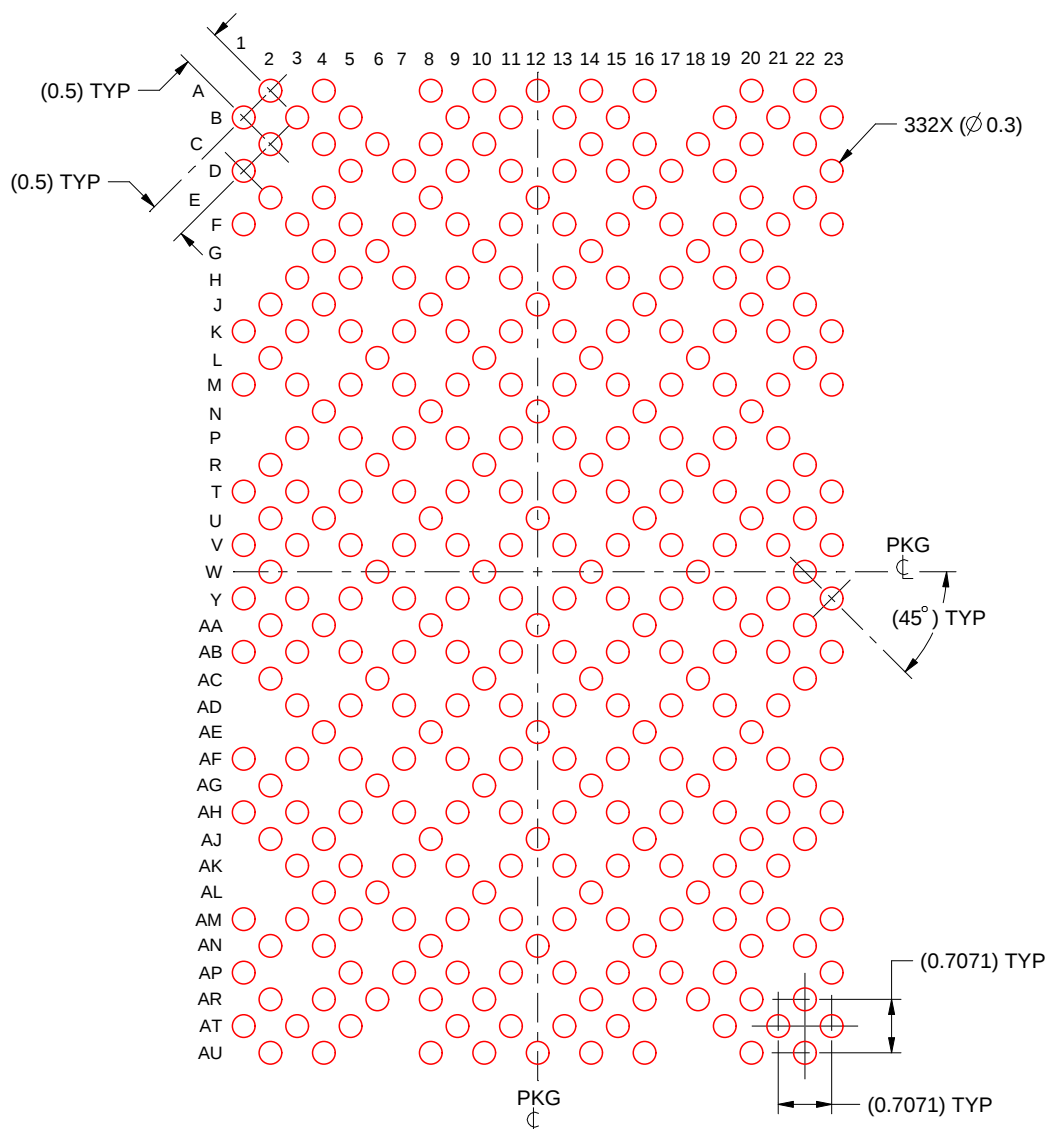

SOLDER PASTE EXAMPLE
BASED ON 0.15 mm THICK STENCIL
SCALE:10X

4223655/B 07/2017

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
版权所有 © 2025，德州仪器 (TI) 公司