

Data sheet acquired from Harris Semiconductor SCHS127D

High-Speed CMOS Logic Hex Inverter

February 1998 - Revised May 2004

### **Features**

- Typical Propagation Delay: 6ns at V<sub>CC</sub> = 5V,
   C<sub>L</sub> = 15pF, T<sub>A</sub> = 25<sup>o</sup>C, Fastest Part in QMOS Line
- Wide Operating Temperature Range . . . -55°C to 125°C
- Balanced Propagation Delay and Transition Times
- Significant Power Reduction Compared to LSTTL Logic ICs
- HCU Types
  - 2-V to 6-V Operation
  - High Noise Immunity: N<sub>IL</sub> = 20%, N<sub>IH</sub> = 30% of V<sub>CC</sub> at V<sub>CC</sub> = 5V
- CMOS Input Compatibility,  $I_I \le 1\mu A$  at  $V_{OL}$ ,  $V_{OH}$

# Description

The CD74HCU04 unbuffered hex inverter utilizes silicon-gate CMOS technology to achieve operation speeds similar to LSTTL gates, with the low power consumption of standard CMOS integrated circuits. These devices especially are useful in crystal oscillator and analog applications.

### **Ordering Information**

PART NUMBER	TEMP. RANGE ( <sup>O</sup> C)	PACKAGE
CD74HCU04E	-55 to 125	14 Ld PDIP
CD74HCU04M	-55 to 125	14 Ld SOIC
CD74HCU04MT	-55 to 125	14 Ld SOIC
CD74HCU04M96	-55 to 125	14 Ld SOIC
CD74HCU04PWR	-55 to 125	14 Ld TSSOP

NOTE: When ordering, use the entire part number. The suffixes 96 and R denote tape and reel. The suffix T denotes a small-quantity reel of 250.

### **Pinout**

(PDIP, SOIC, TSSOP)
TOP VIEW

1A 1 14 V<sub>CC</sub>
1Y 2 13 6A
2A 3 12 6Y
2Y 4 11 5A
3A 5 10 5Y
3Y 6 9 4A


GND 7

8 4Y

CD74HCU04

# CD74HCU04


# Functional Diagram

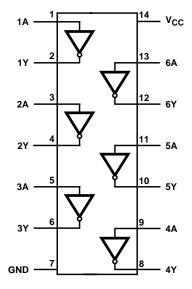

# Logic Symbol



# Schematic Diagram

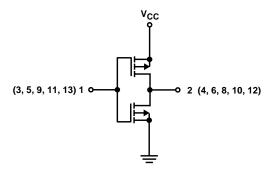

## CD74HCU04

### **Absolute Maximum Ratings**

DC Supply Voltage, V <sub>CC</sub> Voltages Referenced to Ground0.5V to +7V
DC Input Diode Current, I <sub>IK</sub>
For V <sub>I</sub> < -0.5V or V <sub>I</sub> > V <sub>CC</sub> + 0.5V
DC Output Diode Current, I <sub>OK</sub>
For $V_O < -0.5V$ or $V_O > V_{CC} + 0.5V$ ±20mA
DC Drain Current, per Output, I <sub>O</sub>
For $V_O > -0.5V$ or $V_O < V_{CC} + 0.5V$
DC V <sub>CC</sub> or Ground Current, I <sub>CC</sub>

### **Thermal Information**

Thermal Resistance (Typical, Note 1)	θ <sub>JA</sub> (°C/W)
E (PDIP) Package	80
M (SOIC) Package	86
PW (TSSOP) Package	113
Maximum Junction Temperature (Hermetic Package or	Die) 175 <sup>0</sup> C
Maximum Junction Temperature (Plastic Package) .	150 <sup>o</sup> C
Maximum Storage Temperature Range	-65°C to 150°C
Maximum Lead Temperature (Soldering 10s)	300°C
(SOIC - Lead Tips Only)	

# **Operating Conditions**

Temperature Range T <sub>A</sub>	-55°C to 125°C
Supply Voltage Range, V <sub>CC</sub>	2V to 6V
DC Input or Output Voltage, $V_I$ , $V_O$	$\dots$ . 0V to VCC

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating, and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

### NOTE:

1. The package thermal impedance is calculated in accordance with JESD 51-7.

## **DC Electrical Specifications**

			ST ITIONS		25	°C	-40°C T	O +85°C	-55°C T	O 125°C	
PARAMETER	SYMBOL	V <sub>I</sub> (V)	I <sub>O</sub> (mA)	v <sub>cc</sub> (v)	MIN	MAX	MIN	MAX	MIN	MAX	UNITS
High Level Input	V <sub>IH</sub>	-	-	2	1.7	-	1.7	-	1.7	-	V
Voltage				4.5	3.6	-	3.6	-	3.6	-	V
				6	4.8	-	4.8	-	4.8	-	V
Low Level Input	V <sub>IL</sub>	-	-	2	-	0.3	-	0.3	-	0.3	V
Voltage				4.5	-	0.8	-	0.8	-	0.8	V
				6	-	1.1	-	1.1	-	1.1	V
High Level Output	V <sub>OH</sub>	V <sub>IH or</sub>	-0.02	2	1.8	-	1.8	-	1.8	-	V
Voltage CMOS Loads		V <sub>IL</sub>	-0.02	4.5	4	-	4	-	4	-	V
			-0.02	6	5.5	-	5.5	-	5.5	-	V
High Level Output	7	V <sub>CC</sub> or	-4	4.5	3.98	-	3.84	-	3.7	-	V
Voltage TTL Loads		GND	-5.2	6	5.48	-	5.34	-	5.2	-	V
Low Level Output	V <sub>OL</sub>	V <sub>IH or</sub>	0.02	2	-	0.2	-	0.2	-	0.2	V
Voltage CMOS Loads		V <sub>IL</sub>	0.02	4.5	-	0.5	-	0.5	-	0.5	V
566 25000			0.02	6	-	0.5	-	0.5	-	0.5	V
Low Level Output	1		4	4.5	-	0.26	-	0.33	-	0.4	V
Voltage TTL Loads		V <sub>CC</sub> or GND	5.2	6	-	0.26	-	0.33	-	0.4	V
Input Leakage Current	II	V <sub>CC</sub> or GND	-	6	-	±0.1	-	±1	-	±1	μΑ
Quiescent Device Current	Icc	V <sub>CC</sub> or GND	0	6	ı	2		20	-	40	μΑ

## Switching Specifications Input $t_r$ , $t_f = 6ns$

		TEST	v <sub>cc</sub>		25°C		-40°C T	O 85°C	-55°C T	O 125°C	
PARAMETER	SYMBOL	CONDITIONS	(V)	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNITS
Propagation Delay,	t <sub>PLH</sub> , t <sub>PHL</sub>	C <sub>L</sub> = 50pF	2	-	-	70	-	90	-	105	ns
Input to Output Y (Figure 1)		C <sub>L</sub> = 50pF	4.5	-	-	14	-	18	-	21	ns
		C <sub>L</sub> = 15pF	5	-	5	-	-	-	-	-	ns
		C <sub>L</sub> = 50pF	6	-	-	12	-	15	-	18	ns
Transition Times (Figure 1)	t <sub>TLH</sub> , t <sub>THL</sub>	C <sub>L</sub> = 50pF	2	-	-	75	-	95	18	110	ns
			4.5	-	-	15	-	19	-	22	ns
			6	-	-	13	-	16	-	19	ns
Input Capacitance	Cl	-				Se	ee Figure	3			pF
Power Dissipation Capacitance (Notes 2, 3)	C <sub>PD</sub>	-	5	=	14	-	-	-	-	-	pF

#### NOTES:

- 2.  $\ensuremath{\text{C}_{\text{PD}}}$  is used to determine the dynamic power consumption, per inverter.
- 3.  $P_D = V_{CC}^2 f_i (C_{PD} + C_L)$  where  $f_i$  = input frequency,  $C_L$  = output load capacitance,  $V_{CC}$  = supply voltage.

## Test Circuits and Waveforms

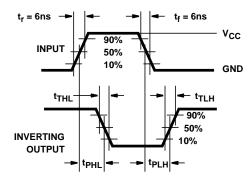


FIGURE 1. HC AND HCU TRANSITION TIMES AND PROPAGATION DELAY TIMES, COMBINATION LOGIC

# **Typical Performance Curves**

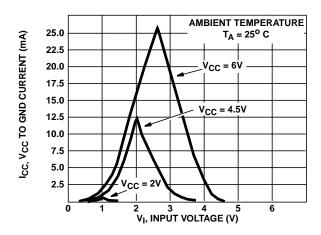


FIGURE 2. TYPICAL INVERTER SUPPLY CURRENT AS FUNCTION OF INPUT VOLTAGE

## CD74HCU04

# Typical Performance Curves (Continued)

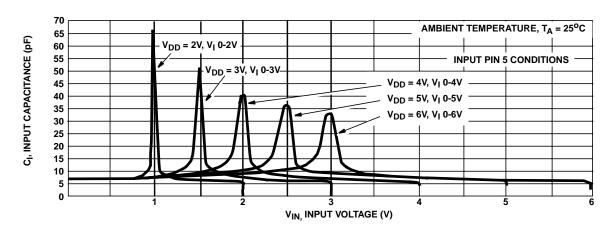


FIGURE 3. INPUT CAPACITANCE AS A FUNCTION OF INPUT VOLTAGE

www.ti.com 23-May-2025

### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/			Part marking
	(1)	(2)			(3)	Ball material	Peak reflow		(6)
						(4)	(5)		
CD74HCU04E	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	-55 to 125	CD74HCU04E
CD74HCU04E.A	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	-55 to 125	CD74HCU04E
CD74HCU04M	Obsolete	Production	SOIC (D)   14	-	-	Call TI	Call TI	-55 to 125	HCU04M
CD74HCU04M96	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HCU04M
CD74HCU04M96.A	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HCU04M
CD74HCU04M96E4	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HCU04M
CD74HCU04M96G4	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HCU04M
CD74HCU04PWR	Active	Production	TSSOP (PW)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HJU04
CD74HCU04PWR.A	Active	Production	TSSOP (PW)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HJU04

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

# PACKAGE OPTION ADDENDUM

www.ti.com 23-May-2025

and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF CD74HCU04:

Automotive : CD74HCU04-Q1

NOTE: Qualified Version Definitions:

Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 23-May-2025

### TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE




#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CD74HCU04M96	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
CD74HCU04PWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1



www.ti.com 23-May-2025

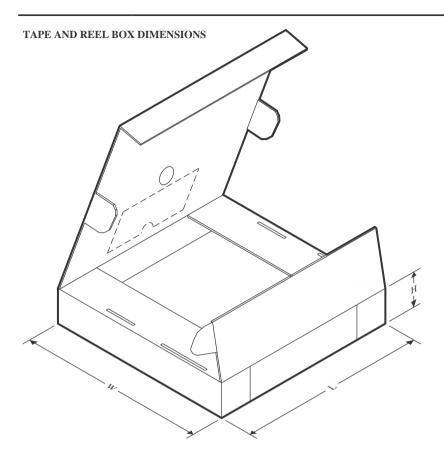

### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
CD74HCU04M96	SOIC	D	14	2500	356.0	356.0	35.0
CD74HCU04PWR	TSSOP	PW	14	2000	356.0	356.0	35.0

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 23-May-2025

### **TUBE**



\*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
CD74HCU04E	N	PDIP	14	25	506	13.97	11230	4.32
CD74HCU04E	N	PDIP	14	25	506	13.97	11230	4.32
CD74HCU04E.A	N	PDIP	14	25	506	13.97	11230	4.32
CD74HCU04E.A	N	PDIP	14	25	506	13.97	11230	4.32



SMALL OUTLINE INTEGRATED CIRCUIT



### NOTES:


- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm, per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
- 5. Reference JEDEC registration MS-012, variation AB.



SMALL OUTLINE INTEGRATED CIRCUIT

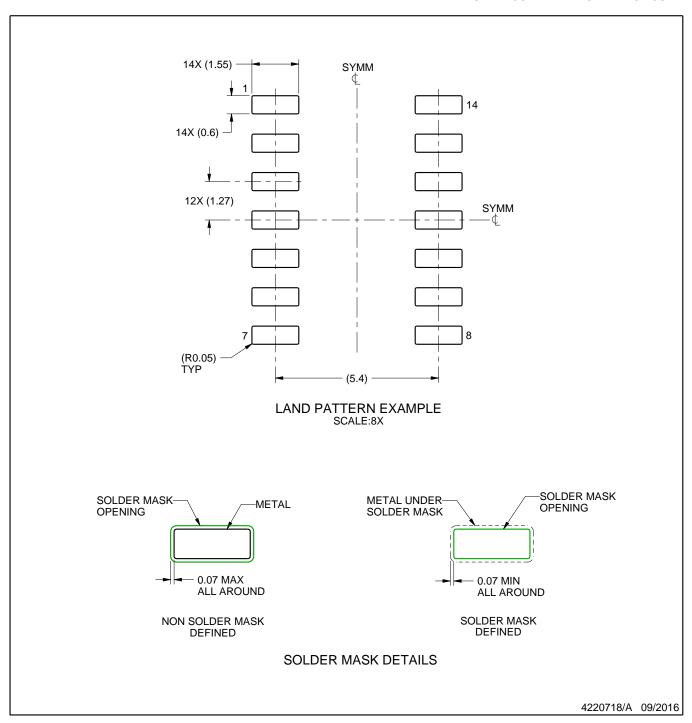

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



# N (R-PDIP-T\*\*)

# PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.





SMALL OUTLINE PACKAGE



### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2025. Texas Instruments Incorporated