
SGDS018 - FEBRUARY 2002

- Q Devices Meet Automotive Performance Requirements
- Customer-Specific Configuration Control Can Be Supported Along With Major-Change Approval
- Operating Range 2-V to 5.5-V V<sub>CC</sub>
- Latch-Up Performance Exceeds 250 mA Per JESD 17

#### description

The SN74AHC245Q octal bus transceiver is designed for asynchronous two-way communication between data buses. The control-function implementation minimizes external timing requirements.



This device allows data transmission from the A bus to the B bus or from the B bus to the A bus, depending on the logic level at the direction-control (DIR) input. The output-enable  $(\overline{OE})$  input can be used to disable the device so that the buses are effectively isolated.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

#### **ORDERING INFORMATION**

TA	PACK	AGE <sup>†</sup>	ORDERABLE PART NUMBER	TOP-SIDE MARKING
-40°C to 125°C	SOIC - DW	Tape and reel	SN74AHC245QDWR	AHC245Q
	TSSOP – PW	Tape and reel	SN74AHC245QPWR	HA245Q

<sup>†</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

## FUNCTION TABLE (each transceiver)


	`	
INP	UTS	OPERATION
OE	DIR	OPERATION
L	L	B data to A bus
L	Н	A data to B bus
Н	Χ	Isolation



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.




### logic symbol†

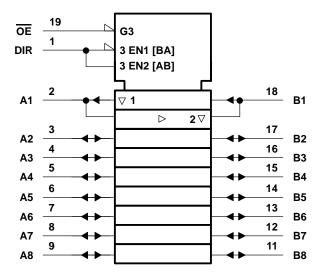

 $<sup>\</sup>ensuremath{^{\dagger}}$  This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

### logic diagram (positive logic)

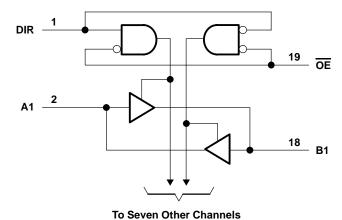

TEXAS INSTRUMENTS
POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

SGDS018 - FEBRUARY 2002

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V <sub>CC</sub>	$\dots$ -0.5 V to 7 V
Input voltage range, V <sub>I</sub> (see Note 1): Control inputs	
I/O, output voltage range, V <sub>O</sub> (see Note 1)	$.5 \text{ V to V}_{CC} + 0.5 \text{ V}$
Input clamp current, I <sub>IK</sub> (V <sub>I</sub> < 0): Control inputs	–20 mA
I/O, output clamp current, I <sub>OK</sub> (V <sub>O</sub> < 0 or V <sub>O</sub> > V <sub>CC</sub> )	±20 mA
Continuous output current, $I_O$ ( $V_O = 0$ to $V_{CC}$ )	±25 mA
Continuous current through V <sub>CC</sub> or GND	±75 mA
Package thermal impedance, θ <sub>JA</sub> (see Note 2): DW package	58°C/W
PW package	83°C/W
Storage temperature range, T <sub>stq</sub>	65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

2. The package thermal impedance is calculated in accordance with JESD 51-7.

#### recommended operating conditions (see Note 3)

			MIN	MAX	UNIT
VCC	Supply voltage		2	5.5	V
	V <sub>CC</sub> = 2 V		1.5		
$V_{IH}$	High-level input voltage	V <sub>CC</sub> = 3 V	2.1		V
		V <sub>CC</sub> = 5.5 V	3.85		
		V <sub>CC</sub> = 2 V		0.5	
$V_{IL}$	Low-level input voltage	V <sub>CC</sub> = 3 V		0.9	V
	V <sub>CC</sub> = 5.5 V			1.65	
٧ <sub>I</sub>	Input voltage	OE or DIR	0	5.5	V
٧o	Output voltage	A or B	0	VCC	V
		V <sub>CC</sub> = 2 V		-50	μΑ
ІОН	High-level output current	$V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$		-4	mA
		$V_{CC} = 5 V \pm 0.5 V$		-8	IIIA
		V <sub>CC</sub> = 2 V		50	μΑ
loL	Low-level output current	$V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$		4	m 1
		$V_{CC} = 5 V \pm 0.5 V$		8	mA
A+/A>.	$V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$			100	ns/V
Δt/Δv	Input transition rise or fall rate	$V_{CC} = 5 V \pm 0.5 V$		20	113/ V
TA	Operating free-air temperature		-40	125	°C

NOTE 3: All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.



NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

### SN74AHC245Q OCTAL BUS TRANSCEIVER WITH 3-STATE OUTPUTS

SGDS018 - FEBRUARY 2002

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	Vac	T	չ = 25°C	;	MIN	MAY	UNIT
	PARAMETER	TEST CONDITIONS	VCC	MIN	TYP	MAX	IVIIIV	0.1 0.1 0.1 0.5 0.5	UNIT
			2 V	1.9	2		1.9		
		I <sub>OH</sub> = -50 μA	3 V	2.9	3		2.9		
Vон			4.5 V	4.4	4.5		4.4		V
		I <sub>OH</sub> = -4 mA	3 V	2.58			2.48		
		I <sub>OH</sub> = -8 mA	4.5 V	3.94			3.8		
		2 V 0.1					0.1		
		I <sub>OL</sub> = 50 μA	3 V			0.1		0.1	
VOL			4.5 V			0.1		0.1	V
		I <sub>OL</sub> = 4 mA	3 V			0.36		0.5	
		I <sub>OL</sub> = 8 mA	4.5 V			0.36		0.5	
1.	A or B inputs	V. – F.F.V. or CND	5.5 V			±0.1		±1	
1 <sub>1</sub>	OE or DIR	V <sub>I</sub> = 5.5 V or GND	0 V to 5.5 V			±0.1		±1	μΑ
l <sub>OZ</sub> †		$V_O = V_{CC}$ or GND, $V_I (\overline{OE}) = V_{IL}$ or $V_{IH}$	5.5 V			±0.25		±2.5	μΑ
ICC		$V_I = V_{CC}$ or GND, $I_O = 0$	5.5 V	·		4		40	μΑ
Ci	OE or DIR	$V_I = V_{CC}$ or GND	5 V		2.5	10			pF
C <sub>io</sub>	A or B inputs	V <sub>I</sub> = V <sub>CC</sub> or GND	5 V		4				pF

<sup>†</sup> The parameter IOZ includes the input leakage current.

# switching characteristics over recommended operating free-air temperature range, $V_{\text{CC}}$ = 3.3 V $\pm$ 0.3 V (unless otherwise noted) (see Figure 1)

PARAMETER	FROM	то	LOAD	TΔ	= 25°C	;	MIN	MAX	UNIT
PARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	IVIIIV	IVIAA	ONLI
<sup>t</sup> PLH	A or B	B or A	C <sub>I</sub> = 15 pF		5.8	8.4	1	10	nc
<sup>t</sup> PHL	AUIB	B or A	CL = 15 pr		5.8	8.4	1	10	ns
<sup>t</sup> PZH	ŌĒ	A or B	C: - 15 pF		8.5	13.2	1	15.5	20
<sup>t</sup> PZL	OE	A or B	C <sub>L</sub> = 15 pF		8.5	13.2	1	15.5	ns
<sup>t</sup> PHZ	ŌĒ	A or B	C <sub>L</sub> = 15 pF		8.9	12.5	1	15.5	ns
<sup>t</sup> PLZ	OE				8.9	12.5	1	15.5	113
<sup>t</sup> PLH	A or B	B or A	C <sub>L</sub> = 50 pF		8.3	11.9	1	13.5	nc
<sup>t</sup> PHL	AUIB				8.3	11.9	1	13.5	ns
<sup>t</sup> PZH	ŌĒ	A or B	C: - 50 pF		11	16.7	1	19	ns
<sup>t</sup> PZL	OE	AUID	C <sub>L</sub> = 50 pF		11	16.7	1	19	110
<sup>t</sup> PHZ	ŌĒ	A or B	C: - F0 pF		11.5	15.8	1	18	no
t <sub>PLZ</sub>	OE .	AUID	C <sub>L</sub> = 50 pF		11.5	15.8	1	18	ns

SGDS018 - FEBRUARY 2002

# switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 5 V $\pm$ 0.5 V (unless otherwise noted) (see Figure 1)

PARAMETER	FROM	то	LOAD	TA	∖ = 25°C	;	MIN	MAX	UNIT
PARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	IVIIN	WAX	UNIT
<sup>t</sup> PLH	A or B	B or A	C <sub>I</sub> = 15 pF		4	5.5	1	6.5	ns
<sup>t</sup> PHL	AOIB	BUIA	C[ = 13 μ		4	5.5	1	6.5	110
<sup>t</sup> PZH	ŌĒ	A or B	C <sub>L</sub> = 15 pF		5.8	8.5	1	10	no
<sup>t</sup> PZL	OE	A or B	CL = 15 pr		5.8	8.5	1	10	ns
<sup>t</sup> PHZ	ŌĒ	A or B	C <sub>L</sub> = 15 pF		5.6	7.8	1	9.2	ns
t <sub>PLZ</sub>	OE				5.6	7.8	1	9.2	113
<sup>t</sup> PLH	A or B	B or A	C <sub>L</sub> = 50 pF		5.5	7.5	1	8.5	ns
<sup>t</sup> PHL	AUIB	BUIA			5.5	7.5	1	8.5	115
<sup>t</sup> PZH	ŌĒ	A or B	C: - 50 pF		7.3	10.6	1	12	no
t <sub>PZL</sub>	OE .	AUID	C <sub>L</sub> = 50 pF		7.3	10.6	1	12	ns
<sup>t</sup> PHZ	ŌĒ	A or B	C: - 50 pF		7	9.7	1	11	200
<sup>t</sup> PLZ	OE .	AUID	C <sub>L</sub> = 50 pF		7	9.7	1	11	ns

## noise characteristics, $V_{CC}$ = 5 V, $C_L$ = 50 pF, $T_A$ = 25°C (see Note 4)

	PARAMETER	MIN	TYP	MAX	UNIT
V <sub>OL(P)</sub>	Quiet output, maximum dynamic V <sub>OL</sub>		0.9		V
V <sub>OL(V)</sub>	Quiet output, minimum dynamic V <sub>OL</sub>		-0.9		V
V <sub>OH(V)</sub>	Quiet output, minimum dynamic V <sub>OH</sub>		4.3		V
V <sub>IH(D)</sub>	High-level dynamic input voltage	3.5			V
V <sub>IL(D)</sub>	Low-level dynamic input voltage			1.5	V


NOTE 4: Characteristics are for surface-mount packages only.

## operating characteristics, $V_{CC} = 5 \text{ V}$ , $T_A = 25^{\circ}\text{C}$

	PARAMETER	TEST CONDITIONS	TYP	UNIT
C <sub>pd</sub>	Power dissipation capacitance	No load, f = 1 MHz	14	pF



#### PARAMETER MEASUREMENT INFORMATION

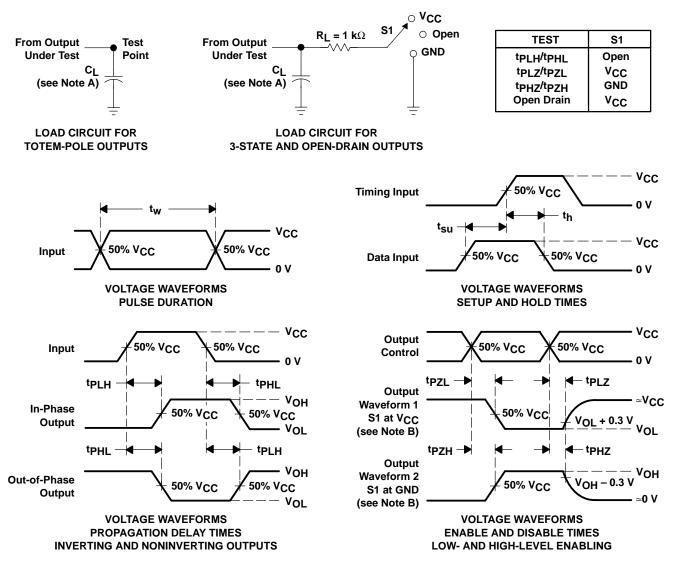

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_O = 50 \Omega$ ,  $t_f \leq 3$  ns.  $t_f \leq 3$  ns.
- D. The outputs are measured one at a time with one input transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms



31-Oct-2025

www.ti.com

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/	MSL rating/	Op temp (°C)	Part marking
	(1)	(2)			(3)	Ball material	Peak reflow		(6)
						(4)	(5)		
SN74AHC245QDWRG4Q1	Active	Production	SOIC (DW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-	AHC245Q1
SN74AHC245QDWRG4Q1.A	Active	Production	SOIC (DW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	AHC245Q1
SN74AHC245QPWR	Active	Production	TSSOP (PW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HA245Q
SN74AHC245QPWR.A	Active	Production	TSSOP (PW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HA245Q
SN74AHC245QPWRG4	Active	Production	TSSOP (PW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	=	HA245Q
SN74AHC245QPWRG4.A	Active	Production	TSSOP (PW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HA245Q

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



## **PACKAGE OPTION ADDENDUM**


www.ti.com 31-Oct-2025

## **PACKAGE MATERIALS INFORMATION**

www.ti.com 24-Jul-2025

#### TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74AHC245QDWRG4Q1	SOIC	DW	20	2000	330.0	24.4	10.8	13.3	2.7	12.0	24.0	Q1
SN74AHC245QPWR	TSSOP	PW	20	2000	330.0	16.4	6.95	7.0	1.4	8.0	16.0	Q1
SN74AHC245QPWRG4	TSSOP	PW	20	2000	330.0	16.4	6.95	7.0	1.4	8.0	16.0	Q1

www.ti.com 24-Jul-2025




#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74AHC245QDWRG4Q1	SOIC	DW	20	2000	356.0	356.0	45.0
SN74AHC245QPWR	TSSOP	PW	20	2000	353.0	353.0	32.0
SN74AHC245QPWRG4	TSSOP	PW	20	2000	353.0	353.0	32.0



SOIC

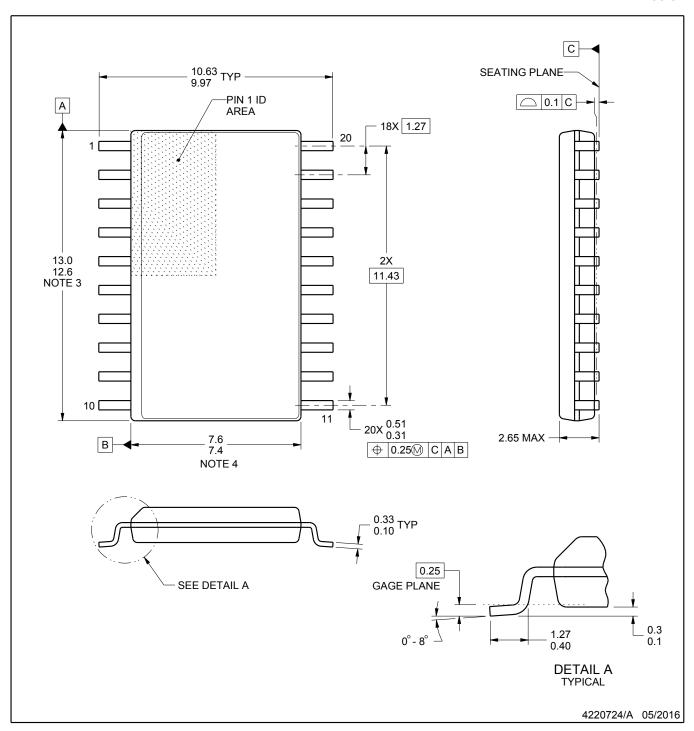

#### NOTES:


- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm per side.
- 5. Reference JEDEC registration MS-013.



SOIC

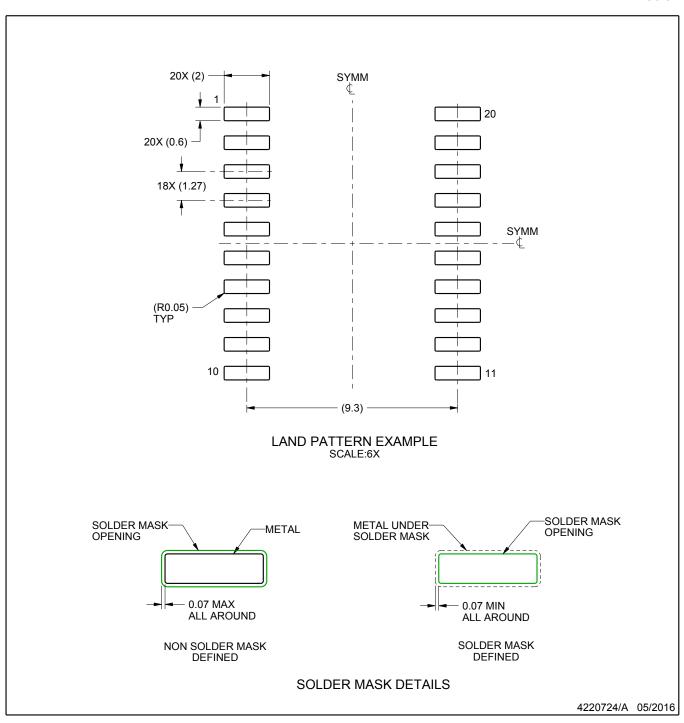


NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SOIC

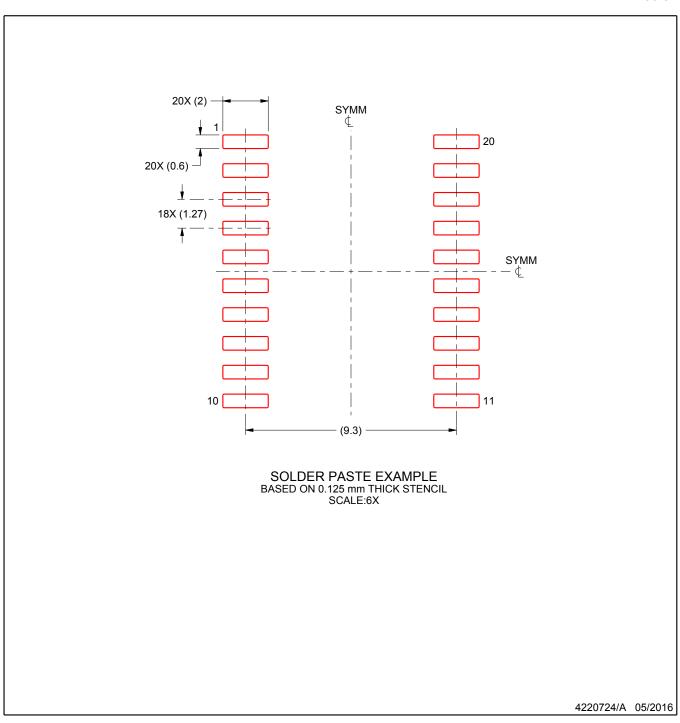


NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.





SMALL OUTLINE PACKAGE

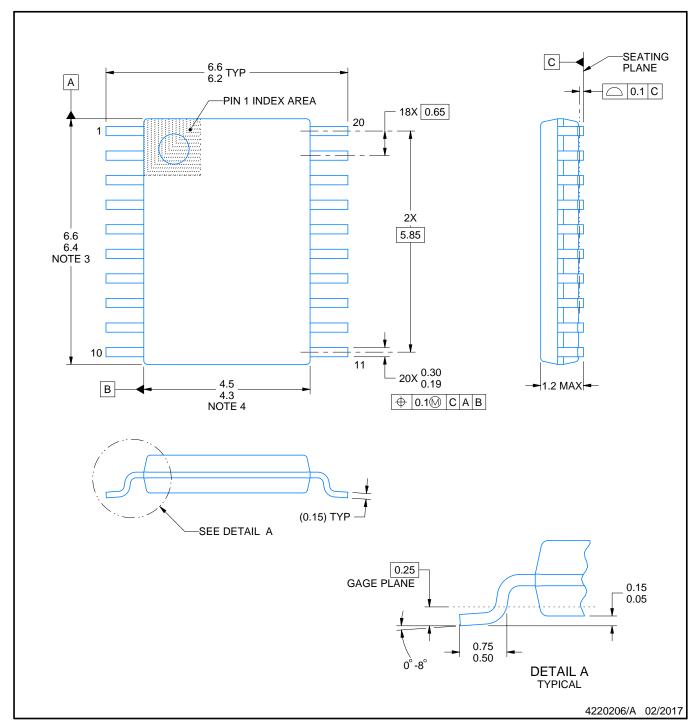

#### NOTES:


- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE

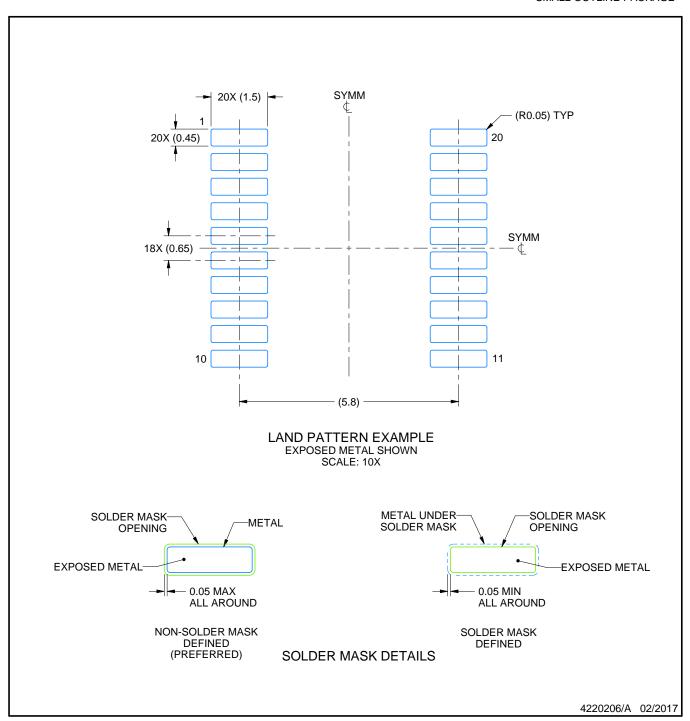


NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE

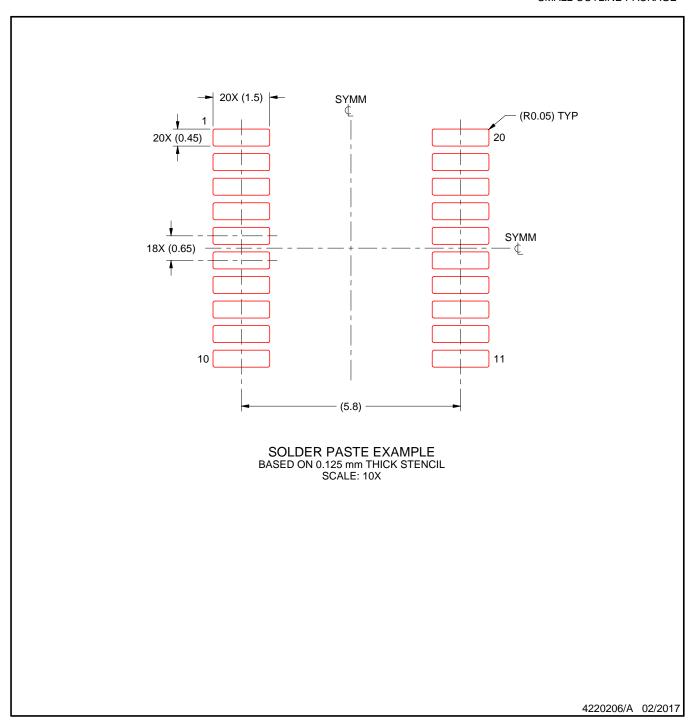

NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025