













# TPD2E2U06 Dual-Channel High-Speed ESD Protection Device

#### 1 Features

- IEC 61000-4-2 Level 4
  - ±25 kV (Contact discharge)
  - ±30 kV (Air-gap discharge)
- IEC 61000-4-5 Surge protection
  - 5.5-A Peak pulse current (8/20 µs Pulse)
- IO Capacitance 1.5 pF (Typ)
- DC Breakdown voltage 6.5 V (Min)
- Ultra-Low leakage current 10 nA (Max)
- Low ESD clamping voltage
- Industrial temperature range: –40°C to +125°C
- Small easy-to-route DRL and DCK package

# 2 Applications

- End Equipment
  - Set Top Box
  - Notebook
  - Server
  - Electronic Point of Sale (EPOS)
- Interfaces
  - USB 2.0
  - Ethernet
  - MIPI Bus
  - LVDS
  - I2C

## 3 Description


The TPD2E2U06 is a dual-channel low capacitance TVS diode ESD protection device. The device offers  $\pm 25$ -kV contact and  $\pm 30$ -kV air-gap ESD protection in accordance with the IEC 61000-4-2 standard. The 1.5-pF line capacitance of the TPD2E2U06 makes the device suitable for a wide range of applications. Typical application interfaces are USB 2.0, LVDS, and I<sup>2</sup>C<sup>TM</sup>.

### **Device Information**(1)

PART NUMBER	PACKAGE	BODY SIZE (NOM)		
TPD2E2U06DRL	SOT (5)	1.60 mm × 1.20 mm		
TPD2E2U06DCK	SC70 (3)	2.0 mm × 1.25 mm		

 For all available packages, see the orderable addendum at the end of the data sheet.

### **Simplified Schematic**

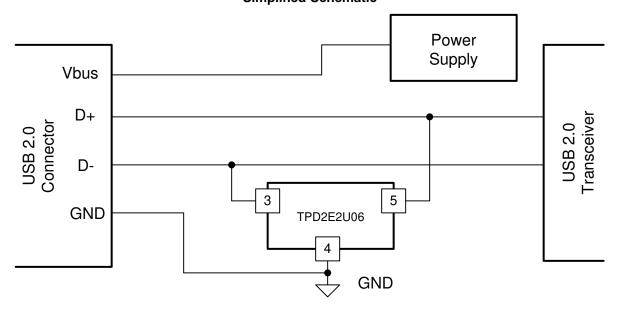



## **Table of Contents**

1 Fe	atures 1		7.3 Feature Description	8
2 An	pplications 1		7.4 Device Functional Modes	9
-	escription 1	8	Application and Implementation	10
	evision History2		8.1 Application Information	. 10
	n Configuration and Functions		8.2 Typical Application	. 10
-	ecifications	9	Power Supply Recommendations	11
•	1 Absolute Maximum Ratings	10	Layout	
6.2	5		10.1 Layout Guidelines	
6.3	· ·		10.2 Layout Example	. 12
6.4	, ,	11	Device and Documentation Support	12
6.5			11.1 Trademarks	. 12
	Typical Characteristics		11.2 Receiving Notification of Documentation Updates	: 12
	tailed Description8		11.3 Support Resources	. 12
7.			11.4 Glossary	. 12
	2 Functional Block Diagram 8	12	Mechanical, Packaging, and Orderable Information	12

# 4 Revision History

C	Changes from Revision B (May 2015) to Revision C						
•	Added DCK Package to the Pin Configuration and Functions section	3					
•	Added DCK Package to the Electrical Characteristics table	4					


### Changes from Revision A (June 2013) to Revision B


Page

 Added ESD Ratings table, Feature Description section, Device Functional Modes, Application and Implementation section, Power Supply Recommendations section, Layout section, Device and Documentation Support section, and Mechanical, Packaging, and Orderable Information section.



# 5 Pin Configuration and Functions





**Pin Functions** 

	PIN		1/0	DESCRIPTION
NAME	DRL	DCK	1/0	DESCRIPTION
IO1	3	1	I/O	The IO1 and IO2 pins are an ESD protected channel. Connect these pins to the
IO2	5	2	I/O	data line as close to the connector as possible.
NC	1, 2	_	-	This pin is not connected and is left floating, grounded, or connected to VCC.
GND	4	3	G	The GND (ground) pin is connected to ground.

# 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
I <sub>PP</sub>	Peak pulse current (tp = 8/20 μs)		5.5 <sup>(1)</sup>	Α
P <sub>PP</sub>	Peak pulse power (tp = 8/20 μs) DRL package		85 <sup>(1)</sup>	W
$P_{PP}$	Peak pulse power (tp = 8/20 μs) DCK package		75 <sup>(1)</sup>	W
	Operating temperature	-40	125	°C
	Storage temperature	<b>–65</b>	155	°C

(1) Measured at 25°C.

Copyright © 2013–2019, Texas Instruments Incorporated



### 6.2 ESD Ratings

			VALUE	UNIT
V <sub>(ESD)</sub> Electrostatic discharge		Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 (1)	±4000	
	Electrostatic discharge	Charged-device model (CDM), per JEDEC specification JESD22- crostatic discharge		V
	•	EC 61000-4-2 contact	±25000	
		EC 61000-4-2 air-gap	±30000	

<sup>(1)</sup> JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 500-V HBM is possible with the necessary precautions.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM MAX	UNIT
V <sub>IO</sub>	Input Pin Voltage	0	5.5	V
T <sub>A</sub>	Operating Free Air Temperature	-40	125	°C

#### 6.4 Thermal Information

		TPD2	E2U06	
	THERMAL METRIC <sup>(1)</sup>	DRL	DCK	UNIT
		5 PINS	3 PINS	=
$R_{\theta JA}$	Junction-to-ambient thermal resistance	286.8	308.3	
R <sub>θ</sub> JC(top)	Junction-to-case (top) thermal resistance	130.7	170.7	
$R_{\theta JB}$	Junction-to-board thermal resistance	104.8	89.2	°C/W
ΨЈТ	Junction-to-top characterization parameter	25.6	34.2	
ΨЈВ	Junction-to-board characterization parameter	104.3	88.6	

For more information about traditional and new thermal metrics, see the Semiconductor and IC package thermal metrics application report.

### 6.5 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN TY	P MAX	UNIT
$V_{RWM}$	Reverse stand-off voltage	I <sub>IO</sub> < 10 μA		5.5	V
$V_{CLAMP}$	IO to GND	I <sub>PP</sub> = 1 A, TLP <sup>(1)</sup>	9.	7	V
		$I_{PP} = 5 \text{ A}, TLP^{(1)}$	12.	4	V
$V_{CLAMP}$	GND to IO	I <sub>PP</sub> = 1 A, TLP <sup>(1)</sup>	1.	9	V
		$I_{PP} = 5 \text{ A}, TLP^{(1)}$		4	V
R <sub>DYN</sub>	Dynamic resistance DRL package	IO to GND <sup>(2)</sup>	0.	5	Ω
R <sub>DYN</sub>	Dynamic resistance DRL package	GND to IO <sup>(2)</sup>	0.2	5	Ω
R <sub>DYN</sub>	Dynamic resistance DCK package	IO to GND <sup>(2)</sup>	0.	6	Ω
R <sub>DYN</sub>	Dynamic resistance DCK package	GND to IO <sup>(2)</sup>	0.	4	Ω
CL	Line capacitance	f = 1 MHz, V <sub>BIAS</sub> = 2.5 V <sup>(3)</sup>	1.	5 1.9	pF
C <sub>CROSS</sub>	Channel-to-channel input capacitance	Pin 4 = 0 V, f = 1 MHz, V <sub>BIAS</sub> = 2.5 V, between channel pins <sup>(3)</sup>	0.0	2 0.03	pF

(1) Transmission Line Pulse with 10-ns rise time, 100-ns width.

(2) Extraction of R<sub>DYN</sub> Using least squares fit of TLP characteristics between I = 20 A and I = 30 A.

(3) Measured at 25°C.

<sup>(2)</sup> JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 250-V CDM is possible with the necessary precautions.



# **Electrical Characteristics (continued)**


over operating free-air temperature range (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$\Delta_{\text{CIO-TO-GND}}$	Variation of channel input capacitance	Pin 4 = 0 V, f = 1 MHz, V <sub>BIAS</sub> = 2.5 V, channel_x pin to GND – channel_y pin to GND <sup>(3)</sup>		0.03	0.1	pF
$V_{BR}$	Break-down voltage	I <sub>IO</sub> = 1 mA	6.5		8.5	V
I <sub>LEAK</sub>	Leakage current	V <sub>IO</sub> = 2.5 V		1	10	nA

Product Folder Links: TPD2E2U06




## 6.6 Typical Characteristics

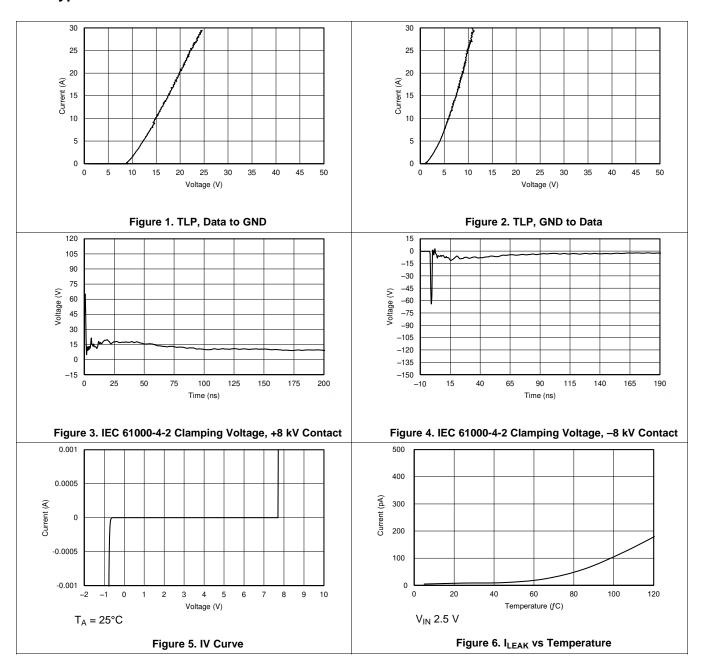



## **Typical Characteristics (continued)**

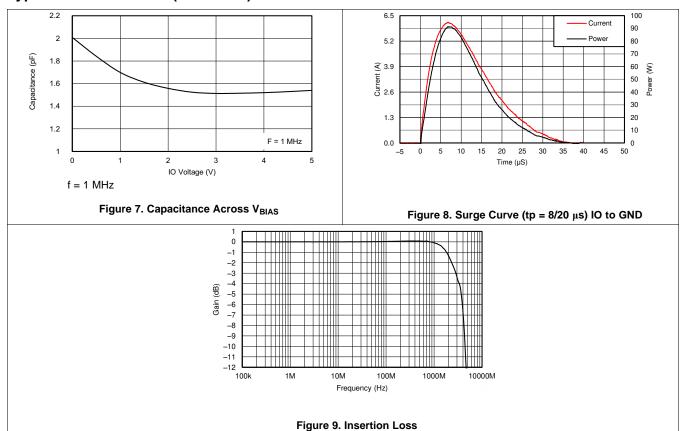

Copyright © 2013–2019, Texas Instruments Incorporated




### 7 Detailed Description

#### 7.1 Overview

The TPD2E2U06 is a dual-channel low capacitance TVS diode ESD protection device. The device offers ±25-kV contact and ±30-kV air-gap ESD protection in accordance with the IEC 61000-4-2 standard. The 1.5-pF line capacitance of the TPD2E2U06 makes the device suitable for a wide range of applications. Typical application interfaces are USB 2.0, LVDS, and I2C.

### 7.2 Functional Block Diagram



### 7.3 Feature Description

The TPD2E2U06 is a dual-channel low capacitance TVS diode ESD protection device. The device offers ±25-kV contact and ±30-kV air-gap ESD protection in accordance with the IEC 61000-4-2 standard. The 1.5-pF line capacitance of the TPD2E2U06 makes the device suitable for a wide range of applications. Typical application interfaces are USB 2.0, LVDS, and I2C.

#### 7.3.1 IEC 61000-4-2 Level 4

The I/O pins can withstand ESD events up to ±25-kV contact and ±30-kV air. An ESD/surge clamp diverts the current to ground.

### 7.3.2 IO Capacitance

The capacitance between each I/O pin to ground is 1.5 pF. These capacitances support data rates in excess of 1.5 Gbps.

### 7.3.3 DC Breakdown Voltage

The DC breakdown voltage of each I/O pin is a minimum of 6.5 V. This ensures that sensitive equipment is protected from surges above the reverse standoff voltage of 5.5 V.

#### 7.3.4 Ultra-Low Leakage Current

The I/O pins feature an ultra-low leakage current of 10 nA (Max) with a bias of 2.5 V.

### 7.3.5 Low ESD Clamping Voltage

The I/O pins feature an ESD clamp that is capable of clamping the voltage to 9.7 V (I<sub>PP</sub> = 1 A).

Submit Documentation Feedback

Copyright © 2013–2019, Texas Instruments Incorporated



### **Feature Description (continued)**

#### 7.3.6 Industrial Temperature Range

This device is designed to operate from -40°C to 125°C.

#### 7.3.7 Small Easy-to-Route Package

The layout of this device makes it simple and easy to add protection to an existing layout. The packages offers flow-through routing, requiring minimal modification to an existing layout.

### 7.4 Device Functional Modes

TPD2E2U06 is a passive integrated circuit that triggers when voltages are above V<sub>BR</sub> or below the lower diodes V<sub>f</sub> (-0.6 V). During ESD events, voltages as high as ±30 kV (air) can be directed to ground via the internal diode network. Once the voltages on the protected line fall below the trigger levels of TPD2E2U06 (usually within 10's of nano-seconds) the device reverts to passive.

Copyright © 2013-2019, Texas Instruments Incorporated



### 8 Application and Implementation

#### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 8.1 Application Information

TPD2E2U06 is a diode type TVS which is typically used to provide a path to ground for dissipating ESD events on hi-speed signal lines between a human interface connector and a system. As the current from ESD passes through the TVS, only a small voltage drop is present across the diode. This is the voltage presented to the protected IC. The low  $R_{\text{DYN}}$  of the triggered TVS holds this voltage,  $V_{\text{CLAMP}}$ , to a safe level for the protected IC.

### 8.2 Typical Application

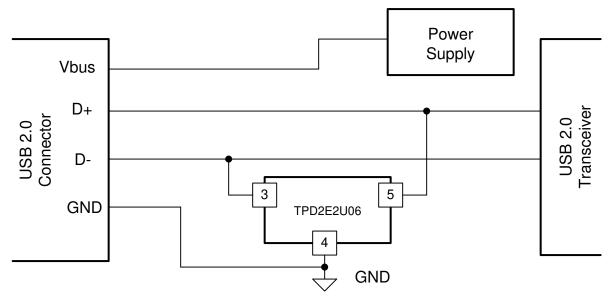


Figure 10. Typical USB Application Diagram

#### 8.2.1 Design Requirements

For this design example, one TPD2E2U06 device will be used in a USB 2.0 application. This will provide complete port protection.

Given the USB 2.0 application, the following parameters are known.

DESIGN PARAMETER	VALUE
Signal range on Pins 3 or 5	0 V to 3.3 V
Operating Frequency	240 MHz

### 8.2.2 Detailed Design Procedure

To begin the design process, some parameters must be decided upon; the designer needs to know the following:

- Signal range of all the protected lines
- Operating frequency



#### 8.2.2.1 Signal Range

The TPD2E2U06 has 2 identical protection channels for signal lines. The symmetry of the device provides flexibility when selecting which of the 2 I/O channels will protect which signal lines. Any I/O will support a signal range of 0 to 5.5 V.

#### 8.2.2.2 Operating Frequency

The TPD2E2U06 has a capacitance of 1.5 pF (Typ), supporting USB 2.0 data rates.

#### 8.2.3 Application Curves

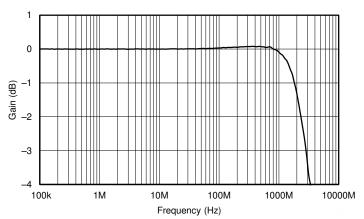


Figure 11. Insertion Loss Graph

### 9 Power Supply Recommendations

This device is a passive ESD protection device and there is no need to power it. Care should be taken to make sure that the maximum voltage specifications for each line are not violated.

### 10 Layout

### 10.1 Layout Guidelines

- The optimum placement is as close to the connector as possible.
  - EMI during an ESD event can couple from the trace being struck to other nearby unprotected traces, resulting in early system failures.
  - The PCB designer needs to minimize the possibility of EMI coupling by keeping any unprotected traces away from the protected traces which are between the TVS and the connector.
- Route the protected traces as straight as possible.
- Eliminate any sharp corners on the protected traces between the TVS and the connector by using rounded corners with the largest radii possible.
  - Electric fields tend to build up on corners, increasing EMI coupling.

Copyright © 2013–2019, Texas Instruments Incorporated

### 10.2 Layout Example

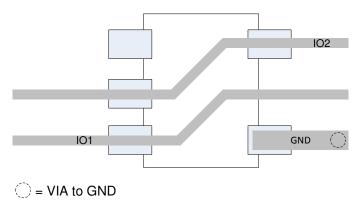


Figure 12. Routing with DRL Package

## 11 Device and Documentation Support

#### 11.1 Trademarks

E2E is a trademark of Texas Instruments. I<sup>2</sup>C is a trademark of NXP Semiconductors. All other trademarks are the property of their respective owners.

### 11.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

#### 11.3 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

### 11.4 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

## 12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

www.ti.com 10-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking
	(1)	(2)			(3)	(4)	(5)		(6)
TPD2E2U06DCKR	Active	Production	SC70 (DCK)   3	3000   LARGE T&R	Yes	NIPDAU   SN	Level-1-260C-UNLIM	-40 to 125	1GH
TPD2E2U06DCKR.B	Active	Production	SC70 (DCK)   3	3000   LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	1GH
TPD2E2U06DCKRG4	Active	Production	SC70 (DCK)   3	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	1GH
TPD2E2U06DCKRG4.B	Active	Production	SC70 (DCK)   3	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	1GH
TPD2E2U06DRLR	Active	Production	SOT-5X3 (DRL)   5	4000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	DT
TPD2E2U06DRLR.B	Active	Production	SOT-5X3 (DRL)   5	4000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	DT
TPD2E2U06DRLRG4	Active	Production	SOT-5X3 (DRL)   5	4000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	DT
TPD2E2U06DRLRG4.B	Active	Production	SOT-5X3 (DRL)   5	4000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	DT

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

# PACKAGE OPTION ADDENDUM

www.ti.com 10-Nov-2025

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF TPD2E2U06:

• Automotive : TPD2E2U06-Q1

NOTE: Qualified Version Definitions:

• Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 18-Jun-2025

### TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPD2E2U06DCKR	SC70	DCK	3	3000	180.0	8.4	2.3	2.75	1.2	4.0	8.0	Q3
TPD2E2U06DCKRG4	SC70	DCK	3	3000	178.0	9.0	2.4	2.5	1.2	4.0	8.0	Q3
TPD2E2U06DRLR	SOT-5X3	DRL	5	4000	180.0	8.4	1.98	1.78	0.69	4.0	8.0	Q3
TPD2E2U06DRLRG4	SOT-5X3	DRL	5	4000	180.0	8.4	1.98	1.78	0.69	4.0	8.0	Q3



www.ti.com 18-Jun-2025



### \*All dimensions are nominal

7 till dillitoriororio di o riorriiridi							
Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPD2E2U06DCKR	SC70	DCK	3	3000	210.0	185.0	35.0
TPD2E2U06DCKRG4	SC70	DCK	3	3000	180.0	180.0	18.0
TPD2E2U06DRLR	SOT-5X3	DRL	5	4000	183.0	183.0	20.0
TPD2E2U06DRLRG4	SOT-5X3	DRL	5	4000	183.0	183.0	20.0



PLASTIC SMALL OUTLINE



### NOTES:

- All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
   This drawing is subject to change without notice.
   This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
  4. Reference JEDEC registration MO-293 Variation UAAD-1



PLASTIC SMALL OUTLINE



NOTES: (continued)

- 5. Publication IPC-7351 may have alternate designs.
- 6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



PLASTIC SMALL OUTLINE




NOTES: (continued)

- 7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 8. Board assembly site may have different recommendations for stencil design.





SMALL OUTLINE TRANSISTOR SC70

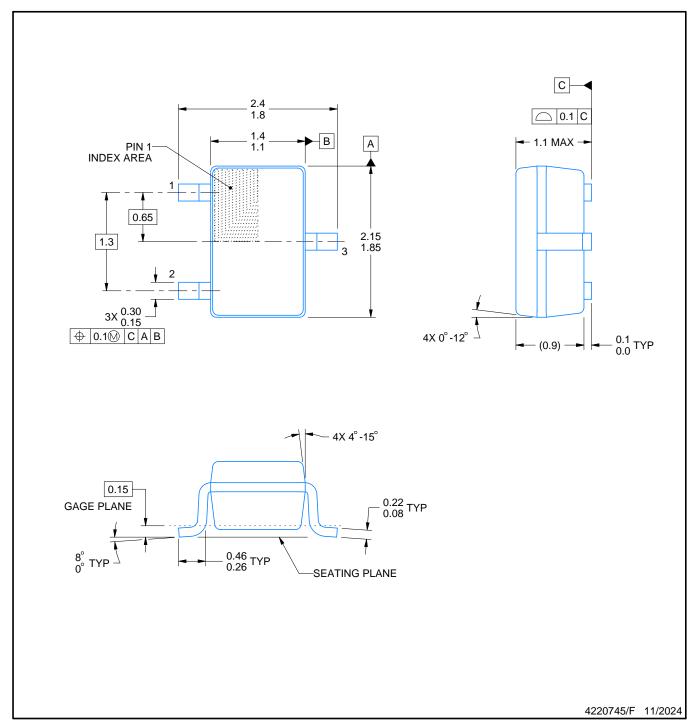

#### NOTES:


- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed
- 0.25mm per side



SMALL OUTLINE TRANSISTOR SC70

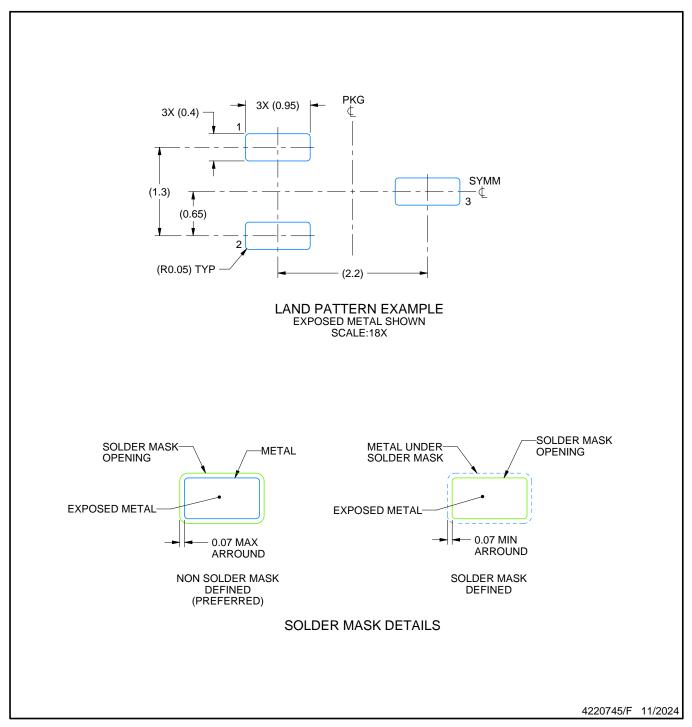


NOTES: (continued)

- 4. Publication IPC-7351 may have alternate designs.
- 5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE TRANSISTOR SC70

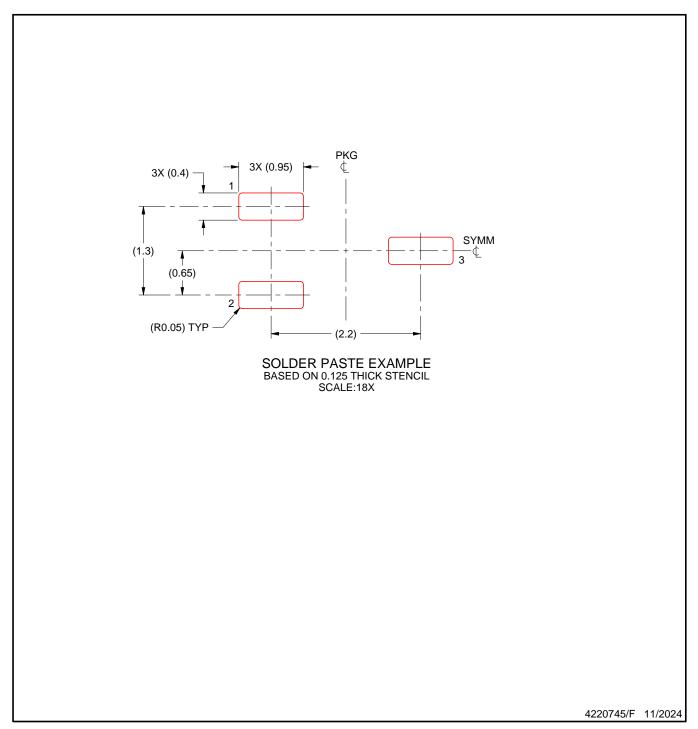

NOTES: (continued)

- 6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 7. Board assembly site may have different recommendations for stencil design.



### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025